




112 260 02 721 D | black

gin.o 2
Contour spotlight
LED | 920 lm 2700 K

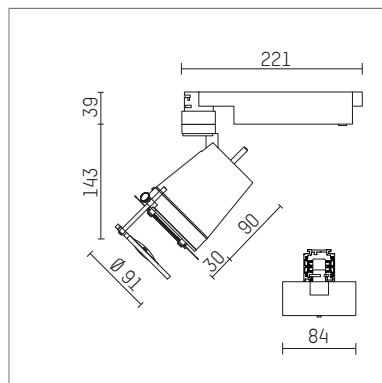

- Contour spotlight gin.o 2
- with 3 circuit DALI adapter
- for Hoffmeister control.x tracks
- circuit selection is possible while adapter is inserted into the track
- passive thermo management
- with LED 920 lm
- colour temperature: 2700 K
- colour rendering index: CRI >90
- L90 / B10 (50.000h)
- SDCM < 3
- total load: 14 W
- Contour spotlights
- fresnel lense, glass-lens focusable
- LED power unit integrated in adapter, electronic (DALI)
- dimmable
- dimming range: 100-0,5 %
- housing of die cast aluminium
- adapter of fibreglass reinforced thermoplastic
- framing attachment with holder metal, black
- length: 221 mm, width: 84 mm
- rotatable 360°, 90° tiltable
- weight: 1,5 kg
- protection rating: IP20
- protection class I
- maximum ambient temperature: 35 ° C
- certificates: manufactured according to DIN VDE 0711 / EN 60598
- 5 years Hoffmeister warranty
- colour: black
- 112 260 02 721 D
