neko
THINK DESIGN

2023 Collection
www.nekolighting.com

2023

neko
THINK DESIGN

NEKO LIGHTING AG
Kreuzstrasse 2
CH-8008 Zürich / Switzerland
+41 44 451 80 15
sales@nekolighting.com
www.nekolighting.com

CE CB ETL Intertek TÜV SÜD ISO9001

2023

THINK DESIGN

www.nekolighting.com

NEKO vereint europäisches Denken und chinesische Effizienz

Die Schweizer Firma NEKO LIGHTING bietet seit 2013 effiziente und qualitativ hochwertige LED Architekturbeleuchtung zu einem attraktiven Preis-Leistungsverhältnis. Kombiniert werden europäisches Denken und chinesische Effizienz zur gemeinsamen Firmenphilosophie „Think Design“.

Eigentümer ist Sven Speissegger (Schweiz), welcher über eine langjährige und umfangreiche Erfahrung im Beleuchtungsmarkt verfügt.

Firmensitz und Zentrale des Unternehmens sind in der Schweiz. Aktuell betreibt NEKO eine eigene Produktions- und Beschichtungsanlage in China.

In Deutschland, Frankreich, England, Nordamerika/Canada, Peking und Shanghai befinden sich im NEKO Besitz Vertriebsstützpunkte. Eigene Lagerhaltung ist in Deutschland und China vorhanden.

NEKO Leuchten werden exklusiv über ein Distributorennetz in zwischen mehr als 90 Ländern weltweit vertrieben.

Von Beginn an produzierte NEKO nachhaltige LED Leuchten. Für die Produkte setzt NEKO ausschließlich hochwertige LED-Chips namenhafter Hersteller, z. B. Osram, Samsung, Citizen ein. Die verwendeten Treiber besitzen das ENEC-Zeichen.

Jedes NEKO Produkt für den Innenbereich hat eine Garantie von 5 Jahren (NEKO Produkte für den Außenbereich haben 3 Jahre Garantie). 2019 investierte NEKO in die Produktionsanlage und in die lichttechnischen Labore in China. Die Expansion erforderte größere Räume und einen neuen Standort für die Firma.

NEKO
THINK DESIGN
www.nekolighting.com

NEKO: the union of European thinking and Chinese efficiency

NEKO: the union of European thinking and Chinese efficiency.
NEKO LIGHTING provides high quality as well as efficient LED-lighting solutions at a very competitive price/performance ratio since 2013. By uniting European thinking and Chinese efficiency NEKO created its corporate philosophy “Think Design”.

NEKO is owned by Sven Speissegger (Switzerland), with a long track record and extensive know-how in the lighting market.

NEKO with its registered and head office in Switzerland owns a production facility as well as a coating plant in China.

The corporation runs with NEKO owned offices in Germany, France, Great Britain, North America/Canada, Beijing and Shanghai.

NEKO lights are exclusively sold via a distributor network in more than 90 countries worldwide.

NEKO LED-lights were sustainably produced right from the beginning and are solely fitted with premium LED-Chips by renowned manufacturers such as Osram, Samsung and Citizen. All drivers installed come with ENEC-labeling.

Each and every NEKO interior lighting product with a 5-Year Warranty (exterior lighting products with a 3-Year Warranty). In 2019 NEKO expanded due to needing larger premises and a new site and invested in its production facility and lighting laboratories in China.

NEKO
THINK DESIGN
www.nekolighting.com

INDEX

MINUX Series NEW




MINUX 38 ■005-006
MINUX 44 ■007-008
MINUX 57 ■009-0010

SENSE 45 Series



S45R1 ■027-028
S45S1 ■029-030

SENSE 68 Series NEW



S68R1-G2 ■033-036
S68S1-G2 ■037-040

SENSE 100 Series NEW



S100R1-G2 ■045-048
S100HR1-G2 ■049-050
S100S1-G2 ■051-054
S100HS1-G2 ■055-056
S100R7-G2 ■057-058
S100HR7-G2 ■059-060
S100R2-G2 ■061-062
S100HR2-G2 ■063-064
S100S2-G2 ■065-066
S100HS2-G2 ■067-068
S100R3-G2 ■071
S100HR3-G2 ■072
S100S3-G2 ■073
S100HS3-G2 ■074

SENSE 125 Series NEW




S125R1-G2 ■077-078
S125S1-G2 ■079-080
S125R2-G2 ■081-082
S125S2-G2 ■083-084
S125R3-G2 ■085
S125S3-G2 ■086

SENSE 150 Series NEW



S150R1-G2 ■089-090
S150S1-G2 ■091-092
S150R2-G2 ■093-094
S150S2-G2 ■095-096
S150R3-G2 ■097
S150S3-G2 ■098

VISION Series NEW



VISION VF68 ■101-102
VISION VW68 ■103-104


TAKEO Pro Series NEW



T100 Pro ■111-112
T150 Pro ■113-114
T200 Pro ■115-116
T150C Pro ■117-118
TS100 Pro ■119
TS150 Pro ■120
TS200 Pro ■121-122

TAKEO Series

T75 ■125-126
T100 ■127-130
T150 ■131-134
T200 ■135-138
T150C ■139-140

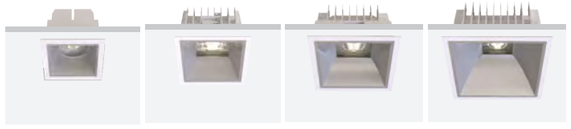

TS68 ■143-144
TS100 ■145
TS150 ■146
TS200 ■147-148

NEKO Code Introduction


[Code_Prefix]-[Electrical-optical Info.]-[Color Info]-[Accessories]

****	-	*	**	**	**	*	-	*	*	-	*
SSR1	-	9	30	28	13	D	-	W	S	-	H
Acronym of Model		CRI	CCT	Beam Angle	Power	Lighting Control		Fixture Color	Reflector / Decoration Ring Color		Accessories

SSR1-9302813D-WS-H
- SENSE100, Round Trim, Adjustable Version,
- CRI90, CCT3000K, Beam 28D, 13W, DALI Control,
- White Trim, Specular 2nd Reflector,
- with Honeycomb.

SLS3-940WW25A-WM
- SENSE150, Square Trim, Wall Washer,
- CRI90, CCT4000K, Wall Washer, 25W, 1-10V Control,
- White Trim, Matt 2nd Reflector.

CLUB LED Module



M3
■153-154



M4
■155-156



M4 Pro
■157-164

CLUB Trim Series



TA5



TA6



TA7



TA8



TRF1



TRF1-IP44



TSA1



TSA1-IP44



TSA2



TSA3



TSA1D
■165-194



TSA2D



TSA3D


SKYJACK Series



SKYJACK A68
■197-198



SKYJACK D
■199-200



SKYJACK F
■201



SKYJACK A145
■203

KENZO Series



K1X30
■207

K1X55
■208

K1X70
■209-210

FUSION Fixed



FUSION FF1
■221




FUSION FF2
■223




FUSION FF3
■225



FUSION FX4
■227



FUSION FF5
■229



FUSION FF10
■231

FUSION IP65 Series



FUSION FF2-IP65
■233



FUSION FF3-IP65
■234



FUSION FF5-IP65
■235



FUSION FF10-IP65
■236

FUSION Fixed Trimless



FUSION FFT5
■237



FUSION FFT10
■238

FUSION Adjustable



FUSION FA5
■239



FUSION FA10
■241

FUSION Wall Washer



FUSION FW5
■243



FUSION FW10
■245

FUSION General Light



FUSION FG5
■247



FUSION FG10
■248

FUSION Adjustable Spotlight



FUSION FS1
■253




FUSION FS2
■254



FUSION FS3
■255



FUSION FS6
■256



FUSION FF3 FS1
■257



FUSION FF6 FS2
■258

FUSION Fixed Higher Efficiency




FUSION FFE1
■260



FUSION FFE3
■261




FUSION FFE5
■262



FUSION FFE10
■263

FUSION Linear System

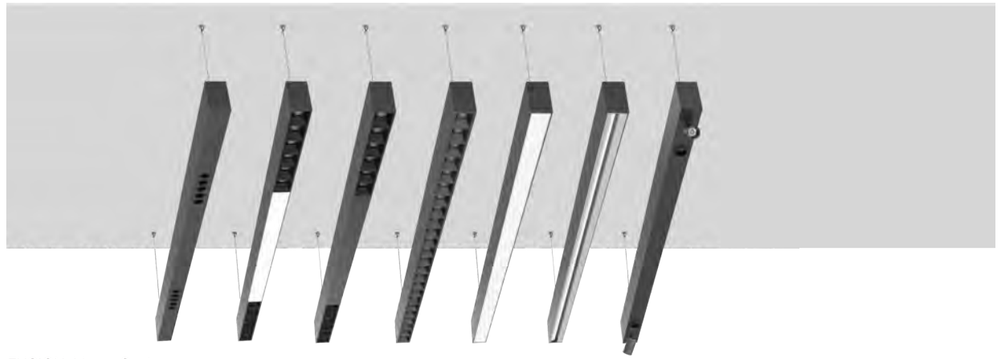

FUSION Linear System
■265-300

DASH 40 & DASH 50 Series ! NEW



Surface Mounted
■301-326

Pendant

Trim Recessed

Wall Mounted

SPACE 60 Linear System ! NEW



SPACE 60 Linear System
■327-338

MODULINE 26 Linear System ! NEW



MODULINE 26 Linear System
■339-402

GAME Ceiling Light Series



GAME
■413-420

SUGAR Ceiling Light Series



SUGAR
■425-440

GINGER & PEPPER Series



GINGER 400
■443-444

GINGER 600
■445

PEPPER 400
■447-448

MINT Ceiling Light Series ! NEW



MINT 280
■449-452

SKY Family Ceiling Light



SKYDRIVER SDRC
■455

SKYDRIVER SDSC
■456

SKYJOY Single SJSC
■457-458

SKYJOY Double SJDC
■459-460

SKYLINE SL5C
■461

MIU Series



MIU-C M
■465-466

MIU-C L
■467-468



MIU-P S
■471-472

MIU-P M
■473-474

MIU-P L
■475-476

BREEZE Series



BREEZE Single
■480

BREEZE Double
■481

BREEZE Triple
■482

VIBES Series

NEW



V1RC
■485

V2RC
■486

V1SC
■487

V2SC
■488



V1RR
■489

V2RR
■490

V1SR
■491

V2SR
■492

Ceiling Mounted PURE Series



PURE Art-C
■495

PURE S-C
■496

PURE Series Tracklight



PURE ART
■501

PURE S
■503-504

PURE M
■505-506

ROXY Series Tracklight



ROXY ART
■509-510

ROXY S
■511-512

ROXY K
■513-514

Zooming
ROXY Art-Z
■517

Zooming
ROXY S-Z
■518


INLINE Series Tracklight



INLINE ST
■523

INLINE SP
■524

KOI Series Wall Light

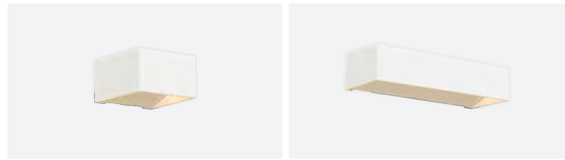


Small KOI
■529-530

Large KOI
■531

VANILLA Neon Flex Series

NEW

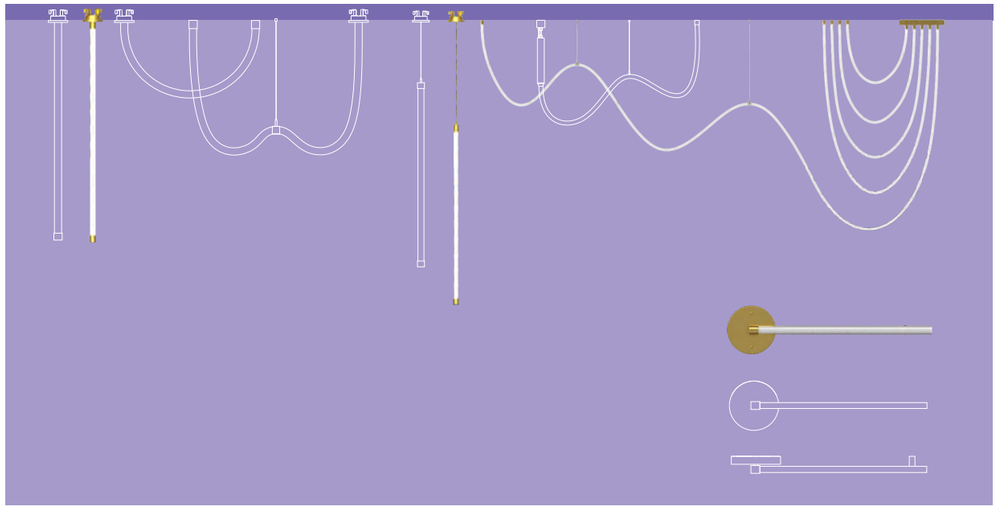

VANILLA Neon Flex Series
■533-572

INDEX

SEAPOINT Series



SEAPOINT
■577

LAKEPOINT Series NEW



LAKEPOINT Fixed
■579



LAKEPOINT Adjustable
■581

CARMEL Series



SKYSURFER SSRC
■583



CARMEL Round
■585



CARMEL Square
■585

CLIFTON Series



CLIFTON
■587

RIVA Series NEW



RIVA Round
■589



RIVA Square
■591

CAMPSBAY Series




CAMPSBAY Single
■593



CAMPSBAY Double
■593

LAGOON Series



LAGOON
■595

CRUZ D Series NEW



CRUZ D
■597

CAPRI Series NEW



CAPRI
■599

BAY Series



BAY
■601

ASCONA Series




ASCONA
■603

NICE Series NEW



NICE 250S & NICE 250D
■605



NICE 500S & NICE 500D
■607

St.Tropez Series



St.Tropez
■609

Capetown-Recessed Series




Capetown Round-Recessed
■611



Capetown Square-Recessed
■611

Capetown-Surface Series



Capetown Round-Surface
■613




Capetown Square-Surface
■613

CALIFORNIA Series



CALIFORNIA 12
■615

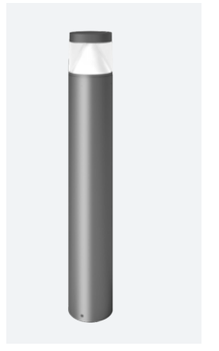

CALIFORNIA 16
■615

DURBAN Series



DURBAN
■617

POSITANO Series ! NEW



POSITANO 300
■619



POSITANO 600
■619

PORTOFINO Series



PORTOFINO S
■621



PORTOFINO M
■621



PORTOFINO L
■621



PORTOFINO Adjustable
■623

AFTER7 Series



AFTER7 Mini
■625



AFTER7 Maxi
■626

TERARACE Series



TERARACE Micro
■627



TERARACE Nano
■628



TERARACE Mini
■629




TERARACE Maxi
■630

NEKO / MINUX

Slim & Powerful Fixed Downlight




NEW

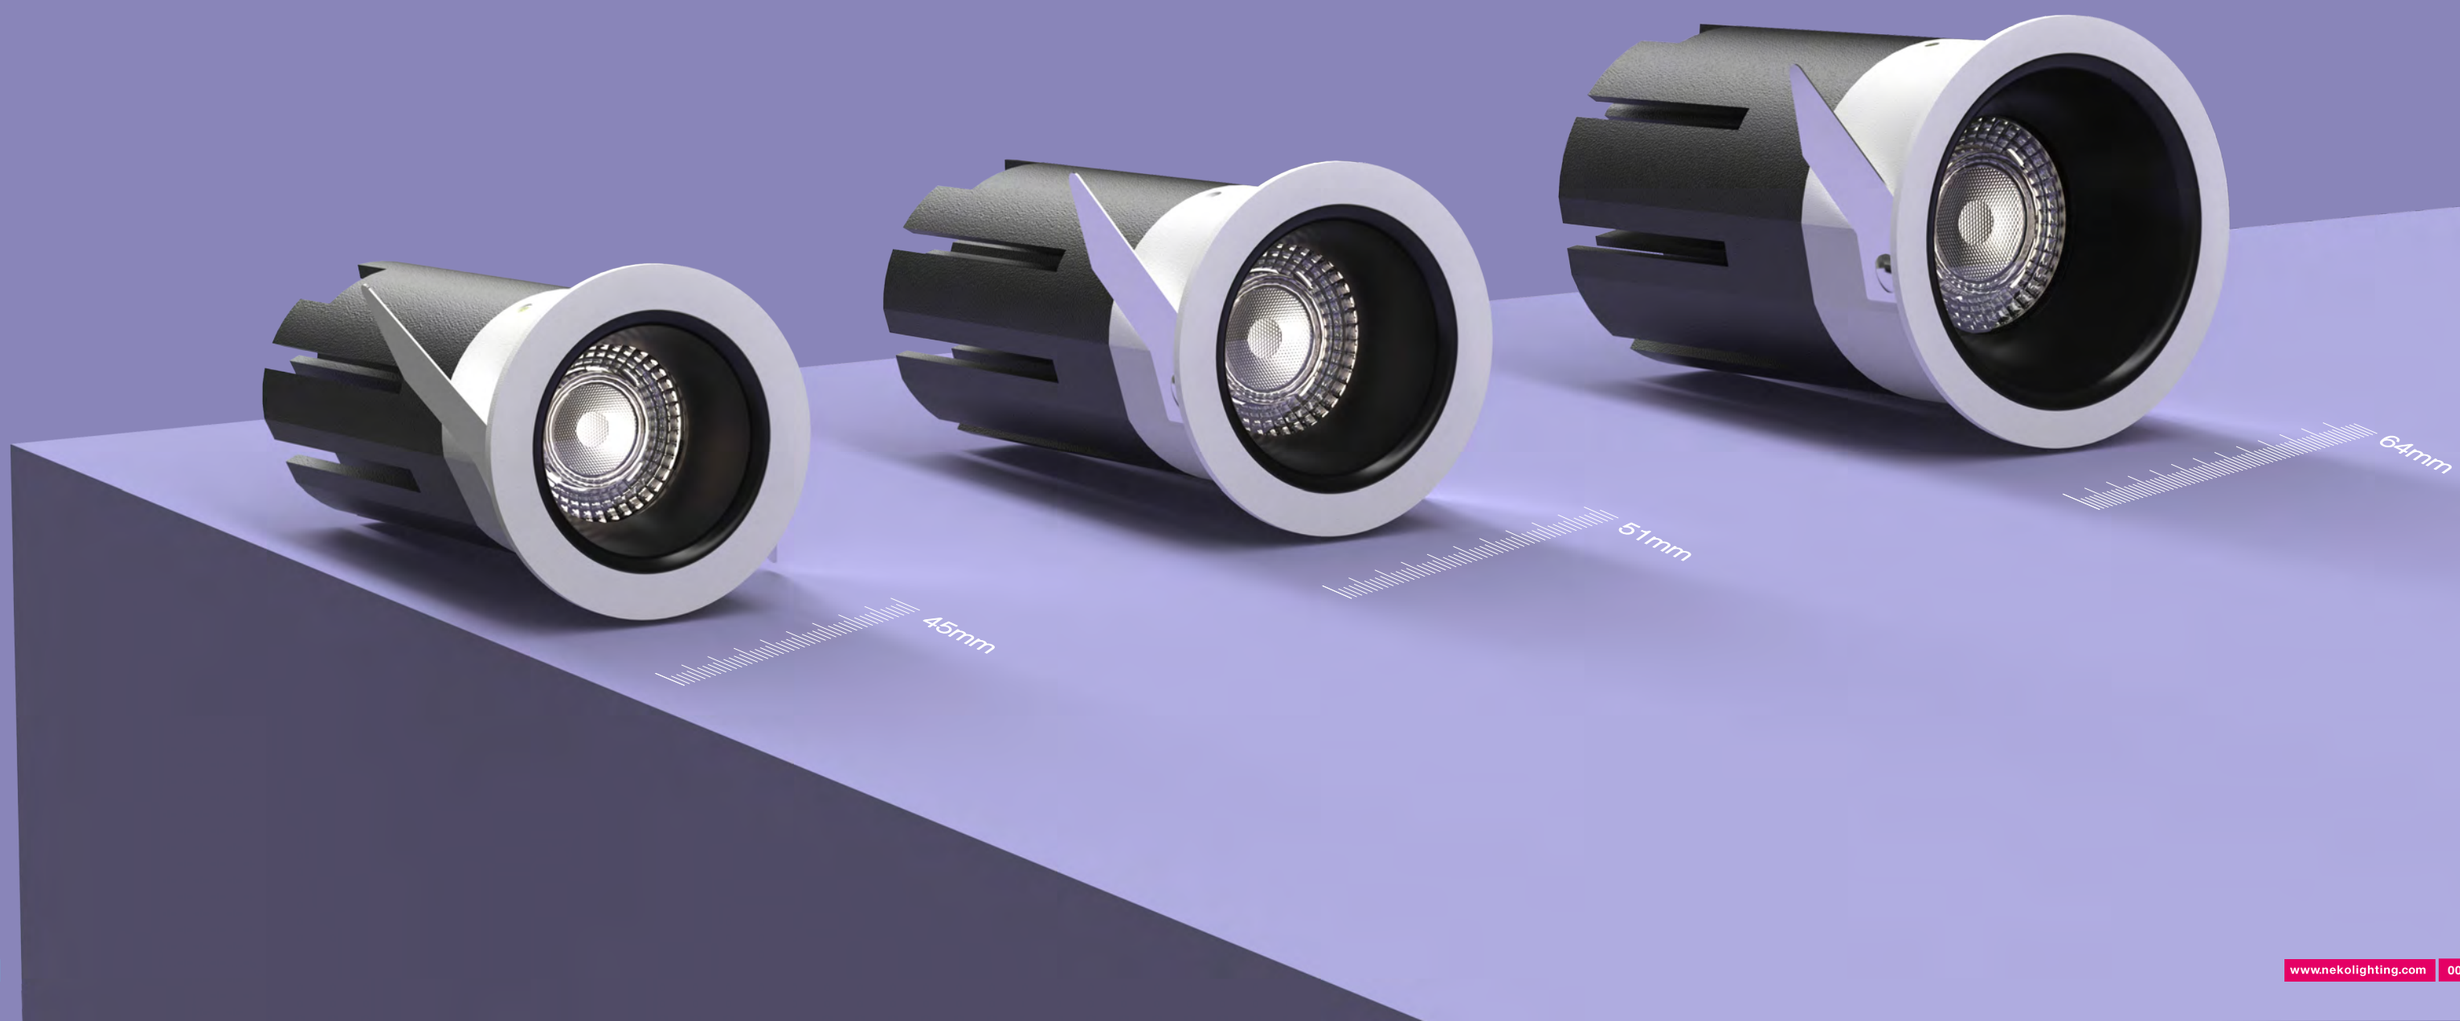

NEKO / MINUX

Slim & Powerful Fixed Downlight

NEW

Model No.	MINUX 38	MINUX 44	MINUX 57
Product Photo			
Dimension (mm)			
Cutout (mm)			
Wattage	6W	9W	13W
CCT	2700K/ 3000K/ 4000K	2700K/ 3000K/ 4000K	2700K/ 3000K/ 4000K
CRI	>90	>90	>90
Beam Angle	18°/ 38°/ 50°	20°/ 40°/ 50°	18°/ 36°/ 50°
Lumen Output	450lm @CRI90 3000K	800lm @CRI90 3000K	1050lm @CRI90 3000K
IP	IP54		IP54
Dimming	On/ Off, Phase Dim, 0/1-10V Dim, DALI Dim		On/ Off, Phase Dim, 0/1-10V Dim, DALI Dim
Accessory	 honeycomb		 honeycomb
Trimless Version	 		 
Reflector Color			
Trim Color	Standard: White Available: Black/ Customized		Standard: White Available: Black/ Customized
			

NEKO / MINUX 38

Slim & Powerful Fixed Downlight

NEW





6W | CRI90 | 2700K 3000K 4000K | 18° 38° 50° | CITIZEN 50,000h@L80B10 | UGR < 19 | IP54 | 5 YEARS GUARANTEE | CB | CE | ETL Intertek



LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
6 W	8 W	12 V	500 mA	90	2700K	18°	570lm	420lm	MIF3-9271806N-WM
						38°	570lm	420lm	MIF3-9273806N-WM
						50°	570lm	420lm	MIF3-9275006N-WM
					3000K	18°	600lm	450lm	MIF3-9301806N-WM
						38°	600lm	450lm	MIF3-9303806N-WM
						50°	600lm	450lm	MIF3-9305006N-WM
					4000K	18°	650lm	500lm	MIF3-9401806N-WM
						38°	650lm	500lm	MIF3-9403806N-WM
						50°	650lm	500lm	MIF3-9405006N-WM
6 W	8 W	12 V	500 mA	90	2700K	18°	570lm	420lm	MIF3-9271806N-WB
						38°	570lm	420lm	MIF3-9273806N-WB
						50°	570lm	420lm	MIF3-9275006N-WB
					3000K	18°	600lm	450lm	MIF3-9301806N-WB
						38°	600lm	450lm	MIF3-9303806N-WB
						50°	600lm	450lm	MIF3-9305006N-WB
					4000K	18°	650lm	500lm	MIF3-9401806N-WB
						38°	650lm	500lm	MIF3-9403806N-WB
						50°	650lm	500lm	MIF3-9405006N-WB
6 W	8 W	12 V	500 mA	90	2700K	18°	570lm	420lm	MIF3-9271806N-WC
						38°	570lm	420lm	MIF3-9273806N-WC
						50°	570lm	420lm	MIF3-9275006N-WC
					3000K	18°	600lm	450lm	MIF3-9301806N-WC
						38°	600lm	450lm	MIF3-9303806N-WC
						50°	600lm	450lm	MIF3-9305006N-WC
					4000K	18°	650lm	500lm	MIF3-9401806N-WC
						38°	650lm	500lm	MIF3-9403806N-WC
						50°	650lm	500lm	MIF3-9405006N-WC

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)



Matt Reflector



Black Reflector



Dark Light Reflector

Optional accessary



Honeycomb

Code for MIF3-9305006N-WM with Honeycomb
MIF3-9305006N-WM-H



White Reflector



Gold Reflector

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
6 W	8 W	12 V	500 mA	90	2700K	18°	570lm	420lm	MIF3-9271806N-WW
						38°	570lm	420lm	MIF3-9273806N-WW
						50°	570lm	420lm	MIF3-9275006N-WW
					3000K	18°	600lm	450lm	MIF3-9301806N-WW
						38°	600lm	450lm	MIF3-9303806N-WW
						50°	600lm	450lm	MIF3-9305006N-WW
					4000K	18°	650lm	500lm	MIF3-9401806N-WW
						38°	650lm	500lm	MIF3-9403806N-WW
						50°	650lm	500lm	MIF3-9405006N-WW
6 W	8 W	12 V	500 mA	90	2700K	18°	570lm	420lm	MIF3-9271806N-WG
						38°	570lm	420lm	MIF3-9273806N-WG
						50°	570lm	420lm	MIF3-9275006N-WG
					3000K	18°	600lm	450lm	MIF3-9301806N-WG
						38°	600lm	450lm	MIF3-9303806N-WG
						50°	600lm	450lm	MIF3-9305006N-WG
					4000K	18°	650lm	500lm	MIF3-9401806N-WG
						38°	650lm	500lm	MIF3-9403806N-WG
						50°	650lm	500lm	MIF3-9405006N-WG

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

Trimless Version available



Trimless code for MIF3-9405006N-WM → MIT3-9405006N-WM






Preinstall Trimless code for MIF3-9405006N-WM → MIE3-9405006N-WM



NEKO / MINUX 44


Slim & Powerful Fixed Downlight

NEW





9W | CRI90 | 2700K 3000K 4000K | 20° 40° 50° | CITIZEN 50,000h@L80B10 | UGR < 19 | IP54 | 5 YEARS GUARANTEE | CB | CE | ETL Intertek





Matt Reflector



Black Reflector



Dark Light Reflector

LED	Power System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
9 W	11 W	36 V	250 mA	90	2700K	20°	900lm	750lm	MIF4-9272009N-WM
						40°	900lm	750lm	MIF4-9274009N-WM
						50°	900lm	750lm	MIF4-9275009N-WM
					3000K	20°	950lm	800lm	MIF4-9302009N-WM
						40°	950lm	800lm	MIF4-9304009N-WM
						50°	950lm	800lm	MIF4-9305009N-WM
					4000K	20°	1050lm	900lm	MIF4-9402009N-WM
						40°	1050lm	900lm	MIF4-9404009N-WM
						50°	1050lm	900lm	MIF4-9405009N-WM
9 W	11 W	36 V	250 mA	90	2700K	20°	900lm	750lm	MIF4-9272009N-WB
						40°	900lm	750lm	MIF4-9274009N-WB
						50°	900lm	750lm	MIF4-9275009N-WB
					3000K	20°	950lm	800lm	MIF4-9302009N-WB
						40°	950lm	800lm	MIF4-9304009N-WB
						50°	950lm	800lm	MIF4-9305009N-WB
					4000K	20°	1050lm	900lm	MIF4-9402009N-WB
						40°	1050lm	900lm	MIF4-9404009N-WB
						50°	1050lm	900lm	MIF4-9405009N-WB
9 W	11 W	36 V	250 mA	90	2700K	20°	900lm	750lm	MIF4-9272009N-WC
						40°	900lm	750lm	MIF4-9274009N-WC
						50°	900lm	750lm	MIF4-9275009N-WC
					3000K	20°	950lm	800lm	MIF4-9302009N-WC
						40°	950lm	800lm	MIF4-9304009N-WC
						50°	950lm	800lm	MIF4-9305009N-WC
					4000K	20°	1050lm	900lm	MIF4-9402009N-WC
						40°	1050lm	900lm	MIF4-9404009N-WC
						50°	1050lm	900lm	MIF4-9405009N-WC

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

Optional accessary



Code for MIF4-9305009N-WM with Honeycomb
MIF4-9305009N-WM-H

Honeycomb



White Reflector



Gold Reflector

LED	Power System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
9 W	11 W	36 V	250 mA	90	2700K	20°	900lm	750lm	MIF4-9272009N-WW
						40°	900lm	750lm	MIF4-9274009N-WW
						50°	900lm	750lm	MIF4-9275009N-WW
					3000K	20°	950lm	800lm	MIF4-9302009N-WW
						40°	950lm	800lm	MIF4-9304009N-WW
						50°	950lm	800lm	MIF4-9305009N-WW
					4000K	20°	1050lm	900lm	MIF4-9402009N-WW
						40°	1050lm	900lm	MIF4-9404009N-WW
						50°	1050lm	900lm	MIF4-9405009N-WW
9 W	11 W	36 V	250 mA	90	2700K	20°	900lm	750lm	MIF4-9272009N-WG
						40°	900lm	750lm	MIF4-9274009N-WG
						50°	900lm	750lm	MIF4-9275009N-WG
					3000K	20°	950lm	800lm	MIF4-9302009N-WG
						40°	950lm	800lm	MIF4-9304009N-WG
						50°	950lm	800lm	MIF4-9305009N-WG
					4000K	20°	1050lm	900lm	MIF4-9402009N-WG
						40°	1050lm	900lm	MIF4-9404009N-WG
						50°	1050lm	900lm	MIF4-9405009N-WG

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

Trimless Version available



Trimless code for MIF4-9405009N-WM → MIT4-9405009N-WM






Preinstall Trimless code for MIF4-9405009N-WM → MIE4-9405009N-WM



NEKO / MINUX 57


Slim & Powerful Fixed Downlight

NEW





13W | CRI90 | 2700K 3000K 4000K | 18° 36° 50° | CITIZEN 50,000h@L80B10 | UGR < 19 | IP54 | 5 YEARS GUARANTEE | CB | CE | ETL Intertek





Matt Reflector



Black Reflector



Dark Light Reflector

LED	Power System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
13 W	15 W	36 V	350 mA	90	2700K	18°	1200lm	1000lm	MIF5-9271813N-WM
						36°	1200lm	1000lm	MIF5-9273613N-WM
						50°	1200lm	1000lm	MIF5-9275013N-WM
					3000K	18°	1300lm	1050lm	MIF5-9301813N-WM
						36°	1300lm	1050lm	MIF5-9303613N-WM
						50°	1300lm	1050lm	MIF5-9305013N-WM
					4000K	18°	1400lm	1150lm	MIF5-9401813N-WM
						36°	1400lm	1150lm	MIF5-9403613N-WM
						50°	1400lm	1150lm	MIF5-9405013N-WM
13 W	15 W	36 V	350 mA	90	2700K	18°	1200lm	1000lm	MIF5-9271813N-WB
						36°	1200lm	1000lm	MIF5-9273613N-WB
						50°	1200lm	1000lm	MIF5-9275013N-WB
					3000K	18°	1300lm	1050lm	MIF5-9301813N-WB
						36°	1300lm	1050lm	MIF5-9303613N-WB
						50°	1300lm	1050lm	MIF5-9305013N-WB
					4000K	18°	1400lm	1150lm	MIF5-9401813N-WB
						36°	1400lm	1150lm	MIF5-9403613N-WB
						50°	1400lm	1150lm	MIF5-9405013N-WB
13 W	15 W	36 V	350 mA	90	2700K	18°	1200lm	1000lm	MIF5-9271813N-WC
						36°	1200lm	1000lm	MIF5-9273613N-WC
						50°	1200lm	1000lm	MIF5-9275013N-WC
					3000K	18°	1300lm	1050lm	MIF5-9301813N-WC
						36°	1300lm	1050lm	MIF5-9303613N-WC
						50°	1300lm	1050lm	MIF5-9305013N-WC
					4000K	18°	1400lm	1150lm	MIF5-9401813N-WC
						36°	1400lm	1150lm	MIF5-9403613N-WC
						50°	1400lm	1150lm	MIF5-9405013N-WC

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

Optional accessary



Honeycomb

Code for MIF5-9305013N-WM with Honeycomb
MIF5-9305013N-WM-H



White Reflector



Gold Reflector


LED	Power System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
13 W	15 W	36 V	350 mA	90	2700K	20°	1200lm	1000lm	MIF5-9271813N-WW
						40°	1200lm	1000lm	MIF5-9273613N-WW
						50°	1200lm	1000lm	MIF5-9275013N-WW
					3000K	20°	1300lm	1050lm	MIF5-9301813N-WW
						40°	1300lm	1050lm	MIF5-9303613N-WW
						50°	1300lm	1050lm	MIF5-9305013N-WW
					4000K	20°	1400lm	1150lm	MIF5-9401813N-WW
						40°	1400lm	1150lm	MIF5-9403613N-WW
						50°	1400lm	1150lm	MIF5-9405013N-WW
13 W	15 W	36 V	350 mA	90	2700K	20°	1200lm	1000lm	MIF5-9271813N-WG
						40°	1200lm	1000lm	MIF5-9273613N-WG
						50°	1200lm	1000lm	MIF5-9275013N-WG
					3000K	20°	1300lm	1050lm	MIF5-9301813N-WG
						40°	1300lm	1050lm	MIF5-9303613N-WG
						50°	1300lm	1050lm	MIF5-9305013N-WG
					4000K	20°	1400lm	1150lm	MIF5-9401813N-WG
						40°	1400lm	1150lm	MIF5-9403613N-WG
						50°	1400lm	1150lm	MIF5-9405013N-WG

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

Trimless Version available




Trimless code for MIF5-9405013N-WM → MIT5-9405013N-WM





Preinstall Trimless code for MIF5-9405013N-WM → MIE5-9405013N-WM



NEKO / SENSE
Project: House Residence in Ramat Hasharon, Israel

NEKO / SENSE
Project: MICHAEL KORS,Hongkong





NEKO / SENSE

Modular Design
Adjustable Downlight

NEW



S45R1
4W 330lm-380lm



S68R1-G2
7.5W 620lm-720lm
11W 800lm-950lm



S100R1-G2
13W 1150lm-1450lm
18W 1700lm-2000lm



S100HR1-G2
25W 2000lm-2300lm




S125R1-G2
18W 1500lm-1800lm
25W 2100lm-2400lm



S150R1-G2
25W 2200lm-2500lm
38W 3400lm-3900lm



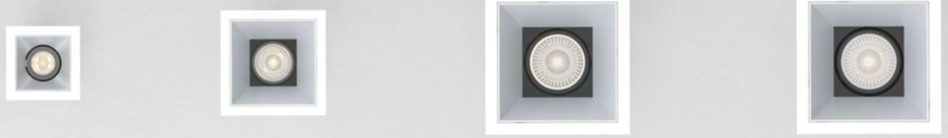

S45S1
4W 330lm-380lm



S68S1-G2
7.5W 600lm-720lm
11W 800lm-950lm



S100S1-G2
13W 1150lm-1450lm
18W 1700lm-2000lm



S100HS1-G2
25W 2000lm-2300lm





S125S1-G2
18W 1500lm-1800lm
25W 2100lm-2400lm






S150S1-G2
25W 2200lm-2500lm
38W 3400lm-3900lm



NEKO / SENSE
Modular Design
Fixed Downlight

NEW

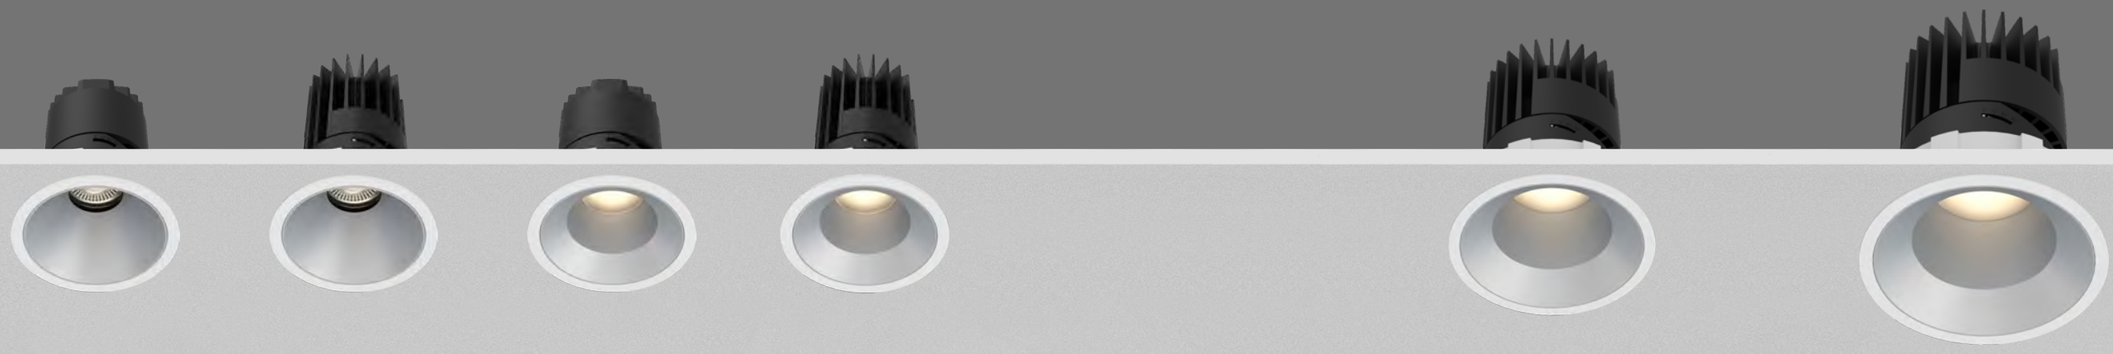

S100R7-G2

13W 950lm-1100lm
18W 1300lm-1500lm



S100HR7-G2

25W 1500lm-1900lm



S100R2-G2

13W 1000lm-1200lm
18W 1500lm-1700lm



S100S2-G2



S100HR2-G2

25W 1900lm-2200lm



S100HS2-G2



S125R2-G2

18W 1400lm-1600lm
25W 2000lm-2300lm



S125S2-G2




S150R2-G2

25W 2100lm-2400lm
38W 3100lm-3500lm




S150S2-G2





White



White



Black



Black

Modular Design
Wall Washer Downlight

NEW



S100R3-G2

13W 650lm-750lm
18W 850lm-1000lm

100

96x96




S100HR3-G2


25W 1000lm-1200lm

100

96x96



S100S3-G2



S100HS3-G2




S125R3-G2

18W 850lm-1000lm
25W 1100lm-1300lm

125

122x122



S150R3-G2



S150S3-G2

25W 1100lm-1300lm
38W 1600lm-1800lm

150

147x147



White



White



Black



















Black

SENSE
LED DOWNLIGHT SYSTEM

NEW













Adjustable

Model No.	S45R1	S68R1-G2	S100R1-G2	S100HR1-G2	S125R1-G2	S150R1-G2	S45S1-G2	S68S1-G21	S100S1-G2	S100HS1-G2	S125S1-G2	S150S1-G2
Product Photo												
Dimension (mm)												
Cutout (mm)												
Wattage	4W	8.5W/ 7.5W/ 11W	7W / 13W / 18W	25W	18W / 25W	25W / 38W	4W	8.5W / 7.5W/ 11W	7W / 13W / 18W	25W	18W / 25W	25W / 38W
CCT Optional	2700K/ 3000K/ 4000K	2700K/ 3000K/ 4000K Dim to Warn/ Tunable White	2700K/ 3000K/ 4000K Tunable White	2700K/ 3000K/ 4000K	2700K/ 3000K/ 4000K Tunable White	2700K/ 3000K/ 4000K Tunable White	2700K/ 3000K/ 4000K	2700K/ 3000K/ 4000K Dim to Warn/ Tunable White	2700K/ 3000K/ 4000K Tunable White	2700K/ 3000K/ 4000K	2700K/ 3000K/ 4000K Tunable White	2700K/ 3000K/ 4000K Tunable White
CRI	>90	>90	>90	>90	>90	>90	>90	>90	>90	>90	>90	>90
Beam Angle	18°/ 24°/ 35°/ 50°	12°/ 18°/ 30°/ 40°/ 55°	10°/ 18°/ 30°/ 40°/ 45°	18°/ 30°/ 40°/ 45°	20°/ 38°/ 50°	18°/ 36°/ 50°	18°/ 24°/ 35°/ 50°	12°/ 18°/ 30°/ 40°/ 55°	10°/ 18°/ 30°/ 40°/ 45°	18°/ 30°/ 40°/ 45°	20°/ 38°/ 50°	18°/ 36°/ 50°
Lumen Output	350lm @4W 3000K	800lm @11W 3000K	1800lm @18W 3000K	2100lm @25W 3000K	2200lm @25W 3000K	3600lm @38W 3000K	350lm @4W 3000K	800lm @11W 3000K	1800lm @18W 3000K	2100lm @25W 3000K	2200lm @25W 3000K	3600lm @38W 3000K
IP	IP20	IP54					IP20	IP54				
Dimming	On/ Off, Phase Dim, 0/1-10V Dim, DALI Dim						On/ Off, Phase Dim, 0/1-10V Dim, DALI Dim					
Accessory	 Honeycomb	 Honeycomb Diffusion Cover	 Honeycomb	 Linear Spread Filter	 Diffusion Filter	 Honeycomb	 Honeycomb	 Honeycomb Diffusion Cover	 Honeycomb	 Linear Spread Filter	 Diffusion Filter	 Honeycomb
Trimless Version	Not Available						Not Available					
Reflector Color	 Matt White Black	 Specular Dark Light Matt White Black Gold					 Matt White Black	 Specular Dark Light Matt White Black Gold				
Trim Color	Standard: White Available: Black/ Customized						Standard: White Available: Black/ Customized					
												

SENSE
LED DOWNLIGHT SYSTEM

NEW











Fixed

Model No.	S100R7-G2	S100HR7-G2	S100R2-G2	S100HR2-G2	S125R2-G2	S150R2-G2	S100S2-G2	S100HS2-G2	S125S2-G2	S150S2-G2
Product Photo										
Dimension (mm)										
Cutout (mm)										
Wattage	13W / 18W	25W	13W / 18W	25W	18W / 25W	25W / 38W	13W / 18W	25W	18W / 25W	25W / 38W
CCT Optional	2700K/ 3000K/ 4000K Dim to Warm/ Tunable White	2700K/ 3000K/ 4000K	2700K/ 3000K/ 4000K Dim to Warm/ Tunable White	2700K/ 3000K/ 4000K	2700K/ 3000K/ 4000K Tunable White	2700K/ 3000K/ 4000K Tunable White	2700K/ 3000K/ 4000K Dim to Warm/ Tunable White	2700K/ 3000K/ 4000K	2700K/ 3000K/ 4000K Tunable White	2700K/ 3000K/ 4000K Tunable White
CRI	>90	>90	>90	>90	>90	>90	>90	>90	>90	>90
Beam Angle	20°/ 36°/ 45°	20°/ 36°/ 45°	20°/ 36°/ 45°	20°/ 36°/ 45°	24°/ 36°/ 45°	24°/ 36°/ 45°	20°/ 36°/ 45°	20°/ 36°/ 45°	24°/ 36°/ 45°	24°/ 36°/ 45°
Lumen Output	1400lm @18W 3000K	1800lm @25W 3000K	1600lm @18W 3000K	2000lm @25W 3000K	2100lm @25W 3000K	3300lm @38W 3000K	1600lm @18W 3000K	2000lm @25W 3000K	2100lm @25W 3000K	3300lm @38W 3000K
IP	IP54						IP54			
Dimming	On/ Off, Phase Dim, 0/1-10V Dim, DALI Dim						On/ Off, Phase Dim, 0/1-10V Dim, DALI Dim			
Accessory										
Trimless Version										
Reflector Color										
Trim Color	Standard: White Available: Black/ Customized						Standard: White Available: Black/ Customized			
										

SENSE
LED DOWNLIGHT SYSTEM

NEW


Wall Washer

Model No.	S100R3-G2	S100HR3-G2	S125R3-G2	S150R3-G2	S100S3-G2	S100HS3-G2	S125S3-G2	S150S3-G2
Product Photo								
Dimension (mm)								
Cutout (mm)								
Wattage	13W / 18W	25W	18W / 25W	25W / 38W	13W / 18W	25W	18W / 25W	25W / 38W
CCT Optional	2700K/ 3000K/ 4000K Dim to Warm/ Tunable White	2700K/ 3000K/ 4000K	2700K/ 3000K/ 4000K Tunable White	2700K/ 3000K/ 4000K Tunable White	2700K/ 3000K/ 4000K Dim to Warm/ Tunable White	2700K/ 3000K/ 4000K	2700K/ 3000K/ 4000K Tunable White	2700K/ 3000K/ 4000K Tunable White
CRI	>90	>90	>90	>90	>90	>90	>90	>90
Beam Angle	Wall Washer	Wall Washer	Wall Washer	Wall Washer	Wall Washer	Wall Washer	Wall Washer	Wall Washer
Lumen Output	900lm @18W 3000K	1100lm @25W 3000K	1200lm @25W 3000K	1700lm @38W 3000K	900lm @18W 3000K	1100lm @25W 3000K	1200lm @25W 3000K	1700lm @38W 3000K
IP	IP54				IP54			
Dimming	On/ Off, Phase Dim, 0/1-10V Dim, DALI Dim				On/ Off, Phase Dim, 0/1-10V Dim, DALI Dim			
Accessory								
Trimless Version								
Reflector Color								
Trim Color	Standard: White Available: Black/ Customized				Standard: White Available: Black/ Customized			
								


NEKO / SENSE 45 / S45R1

Adjustable LED Downlight





4W | CRI90 | 2700K 3000K 4000K | 18° 24° 35° 50° | CREE 50,000h@L80B10 | UGR < 19 | IP20 | 5 YEARS GUARANTEE | CB | CE | Intertek



LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
4	W	6 W	12 V	350 mA	90	2700K	18°	480lm	330lm	SUR1-9271804N-WM
							24°	480lm	330lm	SUR1-9272404N-WM
							35°	480lm	330lm	SUR1-9273504N-WM
							50°	480lm	330lm	SUR1-9275004N-WM
						3000K	18°	500lm	350lm	SUR1-9301804N-WM
							24°	500lm	350lm	SUR1-9302404N-WM
							35°	500lm	350lm	SUR1-9303504N-WM
							50°	500lm	350lm	SUR1-9305004N-WM
						4000K	18°	550lm	380lm	SUR1-9401804N-WM
							24°	550lm	380lm	SUR1-9402404N-WM
							35°	550lm	380lm	SUR1-9403504N-WM
							50°	550lm	380lm	SUR1-9405004N-WM



Matt Reflector

LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
4	W	6 W	12 V	350 mA	90	2700K	18°	480lm	330lm	SUR1-9271804N-WW
							24°	480lm	330lm	SUR1-9272404N-WW
							35°	480lm	330lm	SUR1-9273504N-WW
							50°	480lm	330lm	SUR1-9275004N-WW
						3000K	18°	500lm	350lm	SUR1-9301804N-WW
							24°	500lm	350lm	SUR1-9302404N-WW
							35°	500lm	350lm	SUR1-9303504N-WW
							50°	500lm	350lm	SUR1-9305004N-WW
						4000K	18°	550lm	380lm	SUR1-9401804N-WW
							24°	550lm	380lm	SUR1-9402404N-WW
							35°	550lm	380lm	SUR1-9403504N-WW
							50°	550lm	380lm	SUR1-9405004N-WW



White Reflector

LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
4	W	6 W	12 V	350 mA	90	2700K	18°	480lm	330lm	SUR1-9271804N-WB
							24°	480lm	330lm	SUR1-9272404N-WB
							35°	480lm	330lm	SUR1-9273504N-WB
							50°	480lm	330lm	SUR1-9275004N-WB
						3000K	18°	500lm	350lm	SUR1-9301804N-WB
							24°	500lm	350lm	SUR1-9302404N-WB
							35°	500lm	350lm	SUR1-9303504N-WB
							50°	500lm	350lm	SUR1-9305004N-WB
						4000K	18°	550lm	380lm	SUR1-9401804N-WB
							24°	550lm	380lm	SUR1-9402404N-WB
							35°	550lm	380lm	SUR1-9403504N-WB
							50°	550lm	380lm	SUR1-9405004N-WB



Black Reflector

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

Optional accessary



Honeycomb

Code for SUR1-9302404N-WM with **H**oneycomb
SUR1-9302404N-WM-**H**

Ultra Tiny




NEKO / SENSE 45 / S45S1

Adjustable LED Downlight



4W | CRI90 | 2700K 3000K 4000K | 18° 24° 35° 50° | CREE 50,000h@L80B10 | UGR < 19 | IP20 | 5 YEARS GUARANTEE | CB | CE | ETL Intertek



LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
4	W	6 W	12 V	350 mA	90	2700K	18°	480lm	330lm	SUS1-9271804N-WM
							24°	480lm	330lm	SUS1-9272404N-WM
							35°	480lm	330lm	SUS1-9273504N-WM
							50°	480lm	330lm	SUS1-9275004N-WM
						3000K	18°	500lm	350lm	SUS1-9301804N-WM
							24°	500lm	350lm	SUS1-9302404N-WM
							35°	500lm	350lm	SUS1-9303504N-WM
							50°	500lm	350lm	SUS1-9305004N-WM
						4000K	18°	550lm	380lm	SUS1-9401804N-WM
							24°	550lm	380lm	SUS1-9402404N-WM
							35°	550lm	380lm	SUS1-9403504N-WM
							50°	550lm	380lm	SUS1-9405004N-WM



Matt Reflector

LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
4	W	6 W	12 V	350 mA	90	2700K	18°	480lm	330lm	SUS1-9271804N-WW
							24°	480lm	330lm	SUS1-9272404N-WW
							35°	480lm	330lm	SUS1-9273504N-WW
							50°	480lm	330lm	SUS1-9275004N-WW
						3000K	18°	500lm	350lm	SUS1-9301804N-WW
							24°	500lm	350lm	SUS1-9302404N-WW
							35°	500lm	350lm	SUS1-9303504N-WW
							50°	500lm	350lm	SUS1-9305004N-WW
						4000K	18°	550lm	380lm	SUS1-9401804N-WW
							24°	550lm	380lm	SUS1-9402404N-WW
							35°	550lm	380lm	SUS1-9403504N-WW
							50°	550lm	380lm	SUS1-9405004N-WW



White Reflector

LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
4	W	6 W	12 V	350 mA	90	2700K	18°	480lm	330lm	SUS1-9271804N-WB
							24°	480lm	330lm	SUS1-9272404N-WB
							35°	480lm	330lm	SUS1-9273504N-WB
							50°	480lm	330lm	SUS1-9275004N-WB
						3000K	18°	500lm	350lm	SUS1-9301804N-WB
							24°	500lm	350lm	SUS1-9302404N-WB
							35°	500lm	350lm	SUS1-9303504N-WB
							50°	500lm	350lm	SUS1-9305004N-WB
						4000K	18°	550lm	380lm	SUS1-9401804N-WB
							24°	550lm	380lm	SUS1-9402404N-WB
							35°	550lm	380lm	SUS1-9403504N-WB
							50°	550lm	380lm	SUS1-9405004N-WB



Black Reflector

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

Optional accessary



Honeycomb

Code for SUS1-9302404N-WM with **H**oneycomb
SUS1-9302404N-WM-**H**



NEW

LED Engine



S68G2 LED Engine

Accessory



Honeycomb




Diffusion Cover

Trim




Round Trim



Round Trimless



Square Trim



Square Trimless

Reflector



Black Dark Light Gold White Specular Matt



Black Dark Light Gold White Specular Matt

Model



S68R1-G2



S68RT1-G2




S68RT1-EI-G2




S68S1-G2



S68ST1-G2




S68ST1-EI-G2

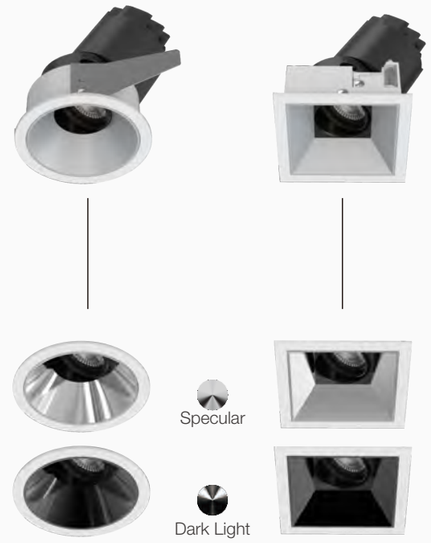

NEKO / SENSE 68 / S68R1-G2

Adjustable LED Downlight

NEW







2700K 6500K Tunable White

See Details @www.nekolighting.com

7.5W 11W | CRI90 | 2700K 3000K 4000K | 18° 30° 40° 55° | CITIZEN 50,000h@L80B10 | UGR < 19 | IP54 | 5 YEARS GUARANTEE | CB | CE | ETL Intertek







Specular Reflector

LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
7.5 W		9 W	31 V	250 mA	90	2700K	18°	850lm	620lm	STR1G2-9271808N-WS
							30°	850lm	620lm	STR1G2-9273008N-WS
							40°	850lm	620lm	STR1G2-9274008N-WS
							55°	850lm	620lm	STR1G2-9275508N-WS
						3000K	18°	900lm	650lm	STR1G2-9301808N-WS
							30°	900lm	650lm	STR1G2-9303008N-WS
							40°	900lm	650lm	STR1G2-9304008N-WS
							55°	900lm	650lm	STR1G2-9305508N-WS
						4000K	18°	1000lm	700lm	STR1G2-9401808N-WS
							30°	1000lm	700lm	STR1G2-9403008N-WS
							40°	1000lm	700lm	STR1G2-9404008N-WS
							55°	1000lm	700lm	STR1G2-9405508N-WS
11 W		13 W	31 V	350 mA	90	2700K	18°	1100lm	770lm	STR1G2-9271811N-WS
							30°	1100lm	770lm	STR1G2-9273011N-WS
							40°	1100lm	770lm	STR1G2-9274011N-WS
							55°	1100lm	770lm	STR1G2-9275511N-WS
						3000K	18°	1200lm	800lm	STR1G2-9301811N-WS
							30°	1200lm	800lm	STR1G2-9303011N-WS
							40°	1200lm	800lm	STR1G2-9304011N-WS
							55°	1200lm	800lm	STR1G2-9305511N-WS
						4000K	18°	1300lm	850lm	STR1G2-9401811N-WS
							30°	1300lm	850lm	STR1G2-9403011N-WS
							40°	1300lm	850lm	STR1G2-9404011N-WS
							55°	1300lm	850lm	STR1G2-9405511N-WS



Matt Reflector

LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
7.5 W		9 W	31 V	250 mA	90	2700K	18°	850lm	620lm	STR1G2-9271808N-WM
							30°	850lm	620lm	STR1G2-9273008N-WM
							40°	850lm	620lm	STR1G2-9274008N-WM
							55°	850lm	620lm	STR1G2-9275508N-WM
						3000K	18°	900lm	650lm	STR1G2-9301808N-WM
							30°	900lm	650lm	STR1G2-9303008N-WM
							40°	900lm	650lm	STR1G2-9304008N-WM
							55°	900lm	650lm	STR1G2-9305508N-WM
						4000K	18°	1000lm	700lm	STR1G2-9401808N-WM
							30°	1000lm	700lm	STR1G2-9403008N-WM
							40°	1000lm	700lm	STR1G2-9404008N-WM
							55°	1000lm	700lm	STR1G2-9405508N-WM
11 W		13 W	31 V	350 mA	90	2700K	18°	1100lm	770lm	STR1G2-9271811N-WM
							30°	1100lm	770lm	STR1G2-9273011N-WM
							40°	1100lm	770lm	STR1G2-9274011N-WM
							55°	1100lm	770lm	STR1G2-9275511N-WM
						3000K	18°	1200lm	800lm	STR1G2-9301811N-WM
							30°	1200lm	800lm	STR1G2-9303011N-WM
							40°	1200lm	800lm	STR1G2-9304011N-WM
							55°	1200lm	800lm	STR1G2-9305511N-WM
						4000K	18°	1300lm	850lm	STR1G2-9401811N-WM
							30°	1300lm	850lm	STR1G2-9403011N-WM
							40°	1300lm	850lm	STR1G2-9404011N-WM
							55°	1300lm	850lm	STR1G2-9405511N-WM

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)



Black Reflector

LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
7.5 W		9 W	31 V	250 mA	90	2700K	18°	850lm	620lm	STR1G2-9271808N-WB
							30°	850lm	620lm	STR1G2-9273008N-WB
							40°	850lm	620lm	STR1G2-9274008N-WB
							55°	850lm	620lm	STR1G2-9275508N-WB
						3000K	18°	900lm	650lm	STR1G2-9301808N-WB
							30°	900lm	650lm	STR1G2-9303008N-WB
							40°	900lm	650lm	STR1G2-9304008N-WB
							55°	900lm	650lm	STR1G2-9305508N-WB
						4000K	18°	1000lm	700lm	STR1G2-9401808N-WB
							30°	1000lm	700lm	STR1G2-9403008N-WB
							40°	1000lm	700lm	STR1G2-9404008N-WB
							55°	1000lm	700lm	STR1G2-9405508N-WB
11 W		13 W	31 V	350 mA	90	2700K	18°	1100lm	770lm	STR1G2-9271811N-WB
							30°	1100lm	770lm	STR1G2-9273011N-WB
							40°	1100lm	770lm	STR1G2-9274011N-WB
							55°	1100lm	770lm	STR1G2-9275511N-WB
						3000K	18°	1200lm	800lm	STR1G2-9301811N-WB
							30°	1200lm	800lm	STR1G2-9303011N-WB
							40°	1200lm	800lm	STR1G2-9304011N-WB
							55°	1200lm	800lm	STR1G2-9305511N-WB
						4000K	18°	1300lm	850lm	STR1G2-9401811N-WB
							30°	1300lm	850lm	STR1G2-9403011N-WB
							40°	1300lm	850lm	STR1G2-9404011N-WB
							55°	1300lm	850lm	STR1G2-9405511N-WB



Dark Light Reflector

LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
7.5 W		9 W	31 V	250 mA	90	2700K	18°	850lm	620lm	STR1G2-9271808N-WC
							30°	850lm	620lm	STR1G2-9273008N-WC
							40°	850lm	620lm	STR1G2-9274008N-WC
							55°	850lm	620lm	STR1G2-9275508N-WC
						3000K	18°	900lm	650lm	STR1G2-9301808N-WC
							30°	900lm	650lm	STR1G2-9303008N-WC
							40°	900lm	650lm	STR1G2-9304008N-WC
							55°	900lm	650lm	STR1G2-9305508N-WC
						4000K	18°	1000lm	700lm	STR1G2-9401808N-WC
							30°	1000lm	700lm	STR1G2-9403008N-WC
							40°	1000lm	700lm	STR1G2-9404008N-WC
							55°	1000lm	700lm	STR1G2-9405508N-WC
11 W		13 W	31 V	350 mA	90	2700K	18°	1100lm	770lm	STR1G2-9271811N-WC
							30°	1100lm	770lm	STR1G2-9273011N-WC
							40°	1100lm	770lm	STR1G2-9274011N-WC
							55°	1100lm	770lm	STR1G2-9275511N-WC
						3000K	18°	1200lm	800lm	STR1G2-9301811N-WC
							30°	1200lm	800lm	STR1G2-9303011N-WC
							40°	1200lm	800lm	STR1G2-9304011N-WC
							55°	1200lm	800lm	STR1G2-9305511N-WC
						4000K	18°	1300lm	850lm	STR1G2-9401811N-WC
							30°	1300lm	850lm	STR1G2-9403011N-WC
							40°	1300lm	850lm	STR1G2-9404011N-WC
							55°	1300lm	850lm	STR1G2-9405511N-WC



White Reflector

LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
7.5 W		9 W	31 V	250 mA	90	2700K	18°	850lm	620lm	STR1G2-9271808N-WW
							30°	850lm	620lm	STR1G2-9273008N-WW
							40°	850lm	620lm	STR1G2-9274008N-WW
							55°	850lm	620lm	STR1G2-9275508N-WW
						3000K	18°	900lm	650lm	STR1G2-9301808N-WW
							30°	900lm	650lm	STR1G2-9303008N-WW
							40°	900lm	650lm	STR1G2-9304008N-WW
							55°	900lm	650lm	STR1G2-9305508N-WW
						4000K	18°	1000lm	700lm	STR1G2-9401808N-WW
							30°	1000lm	700lm	STR1G2-9403008N-WW
							40°	1000lm	700lm	STR1G2-9404008N-WW
							55°	1000lm	700lm	STR1G2-9405508N-WW
11 W		13 W	31 V	350 mA	90	2700K	18°	1100lm	770lm	STR1G2-9271811N-WW
							30°	1100lm	770lm	STR1G2-9273011N-WW
							40°	1100lm	770lm	STR1G2-9274011N-WW
							55°	1100lm	770lm	STR1G2-9275511N-WW
						3000K	18°	1200lm	800lm	STR1G2-9301811N-WW
							30°	1200lm	800lm	STR1G2-9303011N-WW
							40°	1200lm	800lm	STR1G2-9304011N-WW
							55°	1200lm	800lm	STR1G2-9305511N-WW
						4000K	18°	1300lm	850lm	STR1G2-9401811N-WW
							30°	1300lm	850lm	STR1G2-9403011N-WW
							40°	1300lm	850lm	STR1G2-9404011N-WW
							55°	1300lm	850lm	STR1G2-9405511N-WW

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

Optional accessary




Honeycomb

Code for STR1G2-9304008N-WM with Honeycomb
STR1G2-9304008N-WM-H

NEKO / SENSE 68 / S68R1-G2

Adjustable LED Downlight

NEW







2700K 6500K
Tunable White

See Details @www.nekolighting.com

7.5W 11W | CRI90 | 2700K 3000K 4000K | 18° 30° 40° 55° | CITIZEN 50,000h@L80B10 | UGR < 19 | IP54 | 5 YEARS GUARANTEE | CB | CE | ETL Intertek







Gold Reflector

LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
7.5	W	9 W	31 V	250 mA	90	2700K	18°	850lm	620lm	STR1G2-9271808N-WG
							30°	850lm	620lm	STR1G2-9273008N-WG
							40°	850lm	620lm	STR1G2-9274008N-WG
							55°	850lm	620lm	STR1G2-9275508N-WG
						3000K	18°	900lm	650lm	STR1G2-9301808N-WG
							30°	900lm	650lm	STR1G2-9303008N-WG
							40°	900lm	650lm	STR1G2-9304008N-WG
							55°	900lm	650lm	STR1G2-9305508N-WG
						4000K	18°	1000lm	700lm	STR1G2-9401808N-WG
							30°	1000lm	700lm	STR1G2-9403008N-WG
							40°	1000lm	700lm	STR1G2-9404008N-WG
							55°	1000lm	700lm	STR1G2-9405508N-WG
11	W	13 W	31 V	350 mA	90	2700K	18°	1100lm	770lm	STR1G2-9271811N-WG
							30°	1100lm	770lm	STR1G2-9273011N-WG
							40°	1100lm	770lm	STR1G2-9274011N-WG
							55°	1100lm	770lm	STR1G2-9275511N-WG
						3000K	18°	1200lm	800lm	STR1G2-9301811N-WG
							30°	1200lm	800lm	STR1G2-9303011N-WG
							40°	1200lm	800lm	STR1G2-9304011N-WG
							55°	1200lm	800lm	STR1G2-9305511N-WG
						4000K	18°	1300lm	850lm	STR1G2-9401811N-WG
							30°	1300lm	850lm	STR1G2-9403011N-WG
							40°	1300lm	850lm	STR1G2-9404011N-WG
							55°	1300lm	850lm	STR1G2-9405511N-WG

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

Trimless Version available




Trimless code for STR1G2-9304008N-WM → STR**3**G2-9304008N-WM







Trimless code for STR1G2-9304008N-WM → **E**TR1G2-9304008N-WM



6W | CRI90 | 2700K 3000K 4000K | 12° | CITIZEN 50,000h@L80B10 | UGR < 19 | IP54 | 5 YEARS GUARANTEE | CB | CE | ETL Intertek







Specular Reflector

LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
6	W	8 W	12 V	500 mA	90	2700K	12°	670lm	350lm	STR1G2-9271206N-WS
						3000K	12°	700lm	400lm	STR1G2-9301206N-WS
						4000K	12°	750lm	450lm	STR1G2-9401206N-WS



Matt Reflector

LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
6	W	8 W	12 V	500 mA	90	2700K	12°	670lm	350lm	STR1G2-9271206N-WM
						3000K	12°	700lm	400lm	STR1G2-9301206N-WM
						4000K	12°	750lm	450lm	STR1G2-9401206N-WM



Black Reflector

LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
6	W	8 W	12 V	500 mA	90	2700K	12°	670lm	350lm	STR1G2-9271206N-WB
						3000K	12°	700lm	400lm	STR1G2-9301206N-WB
						4000K	12°	750lm	450lm	STR1G2-9401206N-WB



Dark Light Reflector

LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
6	W	8 W	12 V	500 mA	90	2700K	12°	670lm	350lm	STR1G2-9271206N-WC
						3000K	12°	700lm	400lm	STR1G2-9301206N-WC
						4000K	12°	750lm	450lm	STR1G2-9401206N-WC



white Reflector

LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
6	W	8 W	12 V	500 mA	90	2700K	12°	670lm	350lm	STR1G2-9271206N-WW
						3000K	12°	700lm	400lm	STR1G2-9301206N-WW
						4000K	12°	750lm	450lm	STR1G2-9401206N-WW



Gold Reflector

LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
6	W	8 W	12 V	500 mA	90	2700K	12°	670lm	350lm	STR1G2-9271206N-WG
						3000K	12°	700lm	400lm	STR1G2-9301206N-WG
						4000K	12°	750lm	450lm	STR1G2-9401206N-WG

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

Optional accessary




Honeycomb

Code for STR1G2-9301206N-WM with **H**oneycomb
STR1G2-9301206N-WM-**H**

NEKO / SENSE 68 / S68S1-G2

Adjustable LED Downlight

NEW




2700K 6500K Tunable White

See Details @www.nekolighting.com

7.5W 11W | CRI90 | 2700K 3000K 4000K | 18° 30° 40° 55° | CITIZEN 50,000h@L80B10 | UGR < 19 | IP54 | 5 YEARS GUARANTEE | CB | CE | ETL Intertek







Specular Reflector

LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
7.5 W		9 W	31 V	250 mA	90	2700K	18°	850lm	620lm	STS1G2-9271808N-WS
							30°	850lm	620lm	STS1G2-9273008N-WS
							40°	850lm	620lm	STS1G2-9274008N-WS
							55°	850lm	620lm	STS1G2-9275508N-WS
						3000K	18°	900lm	650lm	STS1G2-9301808N-WS
							30°	900lm	650lm	STS1G2-9303008N-WS
							40°	900lm	650lm	STS1G2-9304008N-WS
							55°	900lm	650lm	STS1G2-9305508N-WS
						4000K	18°	1000lm	700lm	STS1G2-9401808N-WS
							30°	1000lm	700lm	STS1G2-9403008N-WS
							40°	1000lm	700lm	STS1G2-9404008N-WS
							55°	1000lm	700lm	STS1G2-9405508N-WS
11 W		13 W	31 V	350 mA	90	2700K	18°	1100lm	770lm	STS1G2-9271811N-WS
							30°	1100lm	770lm	STS1G2-9273011N-WS
							40°	1100lm	770lm	STS1G2-9274011N-WS
							55°	1100lm	770lm	STS1G2-9275511N-WS
						3000K	18°	1200lm	800lm	STS1G2-9301811N-WS
							30°	1200lm	800lm	STS1G2-9303011N-WS
							40°	1200lm	800lm	STS1G2-9304011N-WS
							55°	1200lm	800lm	STS1G2-9305511N-WS
						4000K	18°	1300lm	850lm	STS1G2-9401811N-WS
							30°	1300lm	850lm	STS1G2-9403011N-WS
							40°	1300lm	850lm	STS1G2-9404011N-WS
							55°	1300lm	850lm	STS1G2-9405511N-WS



Matt Reflector

LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
7.5 W		9 W	31 V	250 mA	90	2700K	18°	850lm	620lm	STS1G2-9271808N-WM
							30°	850lm	620lm	STS1G2-9273008N-WM
							40°	850lm	620lm	STS1G2-9274008N-WM
							55°	850lm	620lm	STS1G2-9275508N-WM
						3000K	18°	900lm	650lm	STS1G2-9301808N-WM
							30°	900lm	650lm	STS1G2-9303008N-WM
							40°	900lm	650lm	STS1G2-9304008N-WM
							55°	900lm	650lm	STS1G2-9305508N-WM
						4000K	18°	1000lm	700lm	STS1G2-9401808N-WM
							30°	1000lm	700lm	STS1G2-9403008N-WM
							40°	1000lm	700lm	STS1G2-9404008N-WM
							55°	1000lm	700lm	STS1G2-9405508N-WM
11 W		13 W	31 V	350 mA	90	2700K	18°	1100lm	770lm	STS1G2-9271811N-WM
							30°	1100lm	770lm	STS1G2-9273011N-WM
							40°	1100lm	770lm	STS1G2-9274011N-WM
							55°	1100lm	770lm	STS1G2-9275511N-WM
						3000K	18°	1200lm	800lm	STS1G2-9301811N-WM
							30°	1200lm	800lm	STS1G2-9303011N-WM
							40°	1200lm	800lm	STS1G2-9304011N-WM
							55°	1200lm	800lm	STS1G2-9305511N-WM
						4000K	18°	1300lm	850lm	STS1G2-9401811N-WM
							30°	1300lm	850lm	STS1G2-9403011N-WM
							40°	1300lm	850lm	STS1G2-9404011N-WM
							55°	1300lm	850lm	STS1G2-9405511N-WM

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)



Black Reflector

LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
7.5 W		9 W	31 V	250 mA	90	2700K	18°	850lm	620lm	STS1G2-9271808N-WB
							30°	850lm	620lm	STS1G2-9273008N-WB
							40°	850lm	620lm	STS1G2-9274008N-WB
							55°	850lm	620lm	STS1G2-9275508N-WB
						3000K	18°	900lm	650lm	STS1G2-9301808N-WB
							30°	900lm	650lm	STS1G2-9303008N-WB
							40°	900lm	650lm	STS1G2-9304008N-WB
							55°	900lm	650lm	STS1G2-9305508N-WB
						4000K	18°	1000lm	700lm	STS1G2-9401808N-WB
							30°	1000lm	700lm	STS1G2-9403008N-WB
							40°	1000lm	700lm	STS1G2-9404008N-WB
							55°	1000lm	700lm	STS1G2-9405508N-WB
11 W		13 W	31 V	350 mA	90	2700K	18°	1100lm	770lm	STS1G2-9271811N-WB
							30°	1100lm	770lm	STS1G2-9273011N-WB
							40°	1100lm	770lm	STS1G2-9274011N-WB
							55°	1100lm	770lm	STS1G2-9275511N-WB
						3000K	18°	1200lm	800lm	STS1G2-9301811N-WB
							30°	1200lm	800lm	STS1G2-9303011N-WB
							40°	1200lm	800lm	STS1G2-9304011N-WB
							55°	1200lm	800lm	STS1G2-9305511N-WB
						4000K	18°	1300lm	850lm	STS1G2-9401811N-WB
							30°	1300lm	850lm	STS1G2-9403011N-WB
							40°	1300lm	850lm	STS1G2-9404011N-WB
							55°	1300lm	850lm	STS1G2-9405511N-WB



Dark Light Reflector

LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
7.5 W		9 W	31 V	250 mA	90	2700K	18°	850lm	620lm	STS1G2-9271808N-WC
							30°	850lm	620lm	STS1G2-9273008N-WC
							40°	850lm	620lm	STS1G2-9274008N-WC
							55°	850lm	620lm	STS1G2-9275508N-WC
						3000K	18°	900lm	650lm	STS1G2-9301808N-WC
							30°	900lm	650lm	STS1G2-9303008N-WC
							40°	900lm	650lm	STS1G2-9304008N-WC
							55°	900lm	650lm	STS1G2-9305508N-WC
						4000K	18°	1000lm	700lm	STS1G2-9401808N-WC
							30°	1000lm	700lm	STS1G2-9403008N-WC
							40°	1000lm	700lm	STS1G2-9404008N-WC
							55°	1000lm	700lm	STS1G2-9405508N-WC
11 W		13 W	31 V	350 mA	90	2700K	18°	1100lm	770lm	STS1G2-9271811N-WC
							30°	1100lm	770lm	STS1G2-9273011N-WC
							40°	1100lm	770lm	STS1G2-9274011N-WC
							55°	1100lm	770lm	STS1G2-9275511N-WC
						3000K	18°	1200lm	800lm	STS1G2-9301811N-WC
							30°	1200lm	800lm	STS1G2-9303011N-WC
							40°	1200lm	800lm	STS1G2-9304011N-WC
							55°	1200lm	800lm	STS1G2-9305511N-WC
						4000K	18°	1300lm	850lm	STS1G2-9401811N-WC
							30°	1300lm	850lm	STS1G2-9403011N-WC
							40°	1300lm	850lm	STS1G2-9404011N-WC
							55°	1300lm	850lm	STS1G2-9405511N-WC



White Reflector

LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
7.5 W		9 W	31 V	250 mA	90	2700K	18°	850lm	620lm	STS1G2-9271808N-WW
							30°	850lm	620lm	STS1G2-9273008N-WW
							40°	850lm	620lm	STS1G2-9274008N-WW
							55°	850lm	620lm	STS1G2-9275508N-WW
						3000K	18°	900lm	650lm	STS1G2-9301808N-WW
							30°	900lm	650lm	STS1G2-9303008N-WW
							40°	900lm	650lm	STS1G2-9304008N-WW
							55°	900lm	650lm	STS1G2-9305508N-WW
						4000K	18°	1000lm	700lm	STS1G2-9401808N-WW
							30°	1000lm	700lm	STS1G2-9403008N-WW
							40°	1000lm	700lm	STS1G2-9404008N-WW
							55°	1000lm	700lm	STS1G2-9405508N-WW
11 W		13 W	31 V	350 mA	90	2700K	18°	1100lm	770lm	STS1G2-9271811N-WW
							30°	1100lm	770lm	STS1G2-9273011N-WW
							40°	1100lm	770lm	STS1G2-9274011N-WW
							55°	1100lm	770lm	STS1G2-9275511N-WW
						3000K	18°	1200lm	800lm	STS1G2-9301811N-WW
							30°	1200lm	800lm	STS1G2-9303011N-WW
							40°	1200lm	800lm	STS1G2-9304011N-WW
							55°	1200lm	800lm	STS1G2-9305511N-WW
						4000K	18°	1300lm	850lm	STS1G2-9401811N-WW
							30°	1300lm	850lm	STS1G2-9403011N-WW
							40°	1300lm	850lm	STS1G2-9404011N-WW
							55°	1300lm	850lm	STS1G2-9405511N-WW

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

Optional accessary




Honeycomb

Code for STS1G2-9304008N-WM with Honeycomb
STS1G2-9304008N-WM-H

NEKO / SENSE 68 / S68S1-G2

Adjustable LED Downlight


NEW



Tunable White

See Details @www.nekolighting.com

7.5W 11W | CRI90 | 2700K 3000K 4000K | 18° 30° 40° 55° | CITIZEN 50,000h@L80B10 | UGR < 19 | IP54 | 5 YEARS GUARANTEE | CB | CE | Intertek



LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
7.5	W	9 W	31 V	250 mA	90	2700K	18°	850lm	620lm	STS1G2-9271808N-WG
							30°	850lm	620lm	STS1G2-9273008N-WG
							40°	850lm	620lm	STS1G2-9274008N-WG
							55°	850lm	620lm	STS1G2-9275508N-WG
						3000K	18°	900lm	650lm	STS1G2-9301808N-WG
							30°	900lm	650lm	STS1G2-9303008N-WG
							40°	900lm	650lm	STS1G2-9304008N-WG
							55°	900lm	650lm	STS1G2-9305508N-WG
						4000K	18°	1000lm	700lm	STS1G2-9401808N-WG
							30°	1000lm	700lm	STS1G2-9403008N-WG
							40°	1000lm	700lm	STS1G2-9404008N-WG
							55°	1000lm	700lm	STS1G2-9405508N-WG
11	W	13 W	31 V	350 mA	90	2700K	18°	1100lm	770lm	STS1G2-9271811N-WG
							30°	1100lm	770lm	STS1G2-9273011N-WG
							40°	1100lm	770lm	STS1G2-9274011N-WG
							55°	1100lm	770lm	STS1G2-9275511N-WG
						3000K	18°	1200lm	800lm	STS1G2-9301811N-WG
							30°	1200lm	800lm	STS1G2-9303011N-WG
							40°	1200lm	800lm	STS1G2-9304011N-WG
							55°	1200lm	800lm	STS1G2-9305511N-WG
						4000K	18°	1300lm	850lm	STS1G2-9401811N-WG
							30°	1300lm	850lm	STS1G2-9403011N-WG
							40°	1300lm	850lm	STS1G2-9404011N-WG
							55°	1300lm	850lm	STS1G2-9405511N-WG



Gold Reflector

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

Trimless Version available



Trimless code for STS1G2-9304008N-WM → STS3G2-9304008N-WM






Trimless code for STS1G2-9304008N-WM → ETS1G2-9304008N-WM



6W | CRI90 | 2700K 3000K 4000K | 12° | CITIZEN 50,000h@L80B10 | UGR < 19 | IP54 | 5 YEARS GUARANTEE | CB | CE | Intertek





Specular Reflector

LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
6	W	8 W	12 V	500 mA	90	2700K	12°	670lm	350lm	STS1G2-9271206N-WS
						3000K	12°	700lm	400lm	STS1G2-9301206N-WS
						4000K	12°	750lm	450lm	STS1G2-9401206N-WS



Matt Reflector

LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
6	W	8 W	12 V	500 mA	90	2700K	12°	670lm	350lm	STS1G2-9271206N-WM
						3000K	12°	700lm	400lm	STS1G2-9301206N-WM
						4000K	12°	750lm	450lm	STS1G2-9401206N-WM



Black Reflector

LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
6	W	8 W	12 V	500 mA	90	2700K	12°	670lm	350lm	STS1G2-9271206N-WB
						3000K	12°	700lm	400lm	STS1G2-9301206N-WB
						4000K	12°	750lm	450lm	STS1G2-9401206N-WB



Dark Light Reflector

LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
6	W	8 W	12 V	500 mA	90	2700K	12°	670lm	350lm	STS1G2-9271206N-WC
						3000K	12°	700lm	400lm	STS1G2-9301206N-WC
						4000K	12°	750lm	450lm	STS1G2-9401206N-WC



White Reflector

LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
6	W	8 W	12 V	500 mA	90	2700K	12°	670lm	350lm	STS1G2-9271206N-WW
						3000K	12°	700lm	400lm	STS1G2-9301206N-WW
						4000K	12°	750lm	450lm	STS1G2-9401206N-WW



Gold Reflector

LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
6	W	8 W	12 V	500 mA	90	2700K	12°	670lm	350lm	STS1G2-9271206N-WG
						3000K	12°	700lm	400lm	STS1G2-9301206N-WG
						4000K	12°	750lm	450lm	STS1G2-9401206N-WG

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

Optional accessary



Honeycomb

Code for STS1G2-9301206N-WM with Honeycomb
STS1G2-9301206N-WM-H

NEKO / SENSE
Project: Mist Hot Spring Hotel Xuchang,China







NEKO / SENSE 100

Modular Design

NEW

NEW



S100G2 LED Engine

Adjustable/ Fixed/ Wall Washer

NEW




S100HG2 LED Engine

Adjustable/ Fixed/ Wall Washer

Trim




Round Trim



Round Trimless



Square Trim



Square Trimless

Accessory



Honeycomb



Linear Spread Filter



Diffusion Filter



Honeycomb



Linear Spread Filter



Diffusion Filter

Reflector



Round Adjustable



Round Fixed
(Horn Type)

NEW



Round Fixed



Round-Wall Washer
(Matt Only)

Anti-Glare Ring



(Straight Type)



(Curve Type,Option)

NEW

Second Accessory



(Option)

Model



S100R1-G2



S100R1-G2-CA



S100R7-G2



S100R2-G2



S100R3-G2



Square Adjustable



(Straight Type)



(Curve Type,Option)

NEW



(Option)



S100S1-G2



S100S1-G2-CA



Square Fixed



Square Wall Washer
(Matt Only)



S100S2-G2



S100S3-G2

Secondary Reflector




Specular Dark Light Matt White Black Gold

NEKO / SENSE 100 / S100R1-G2

Adjustable LED Downlight

NEW







Tunable White

See Details @www.nekolighting.com

13W 18W | CRI90 | 2700K 3000K 4000K | 18° 30° 40° 45° | CITIZEN 50,000h@L80B10 | UGR < 19 | IP54 | 5 YEARS GUARANTEE | CB | CE | Intertek





LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
13 W		15 W	36 V	350 mA	90	2700K	18°	1400lm	1050lm	SSR1G2-9271813N-WS
							30°	1400lm	1150lm	SSR1G2-9273013N-WS
							40°	1400lm	1150lm	SSR1G2-9274013N-WS
							45°	1400lm	1050lm	SSR1G2-9274513N-WS
						3000K	18°	1500lm	1150lm	SSR1G2-9301813N-WS
							30°	1500lm	1250lm	SSR1G2-9303013N-WS
							40°	1500lm	1250lm	SSR1G2-9304013N-WS
							45°	1500lm	1150lm	SSR1G2-9304513N-WS
						4000K	18°	1600lm	1250lm	SSR1G2-9401813N-WS
							30°	1600lm	1350lm	SSR1G2-9403013N-WS
							40°	1600lm	1350lm	SSR1G2-9404013N-WS
							45°	1600lm	1250lm	SSR1G2-9404513N-WS
18 W		21 W	36 V	500 mA	90	2700K	18°	1900lm	1500lm	SSR1G2-9271818N-WS
							30°	1900lm	1700lm	SSR1G2-9273018N-WS
							40°	1900lm	1700lm	SSR1G2-9274018N-WS
							45°	1900lm	1500lm	SSR1G2-9274518N-WS
						3000K	18°	2000lm	1600lm	SSR1G2-9301818N-WS
							30°	2000lm	1800lm	SSR1G2-9303018N-WS
							40°	2000lm	1800lm	SSR1G2-9304018N-WS
							45°	2000lm	1600lm	SSR1G2-9304518N-WS
						4000K	18°	2200lm	1700lm	SSR1G2-9401818N-WS
							30°	2200lm	1900lm	SSR1G2-9403018N-WS
							40°	2200lm	1900lm	SSR1G2-9404018N-WS
							45°	2200lm	1700lm	SSR1G2-9404518N-WS



Specular Reflector

LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
13 W		15 W	36 V	350 mA	90	2700K	18°	1400lm	1050lm	SSR1G2-9271813N-WM
							30°	1400lm	1150lm	SSR1G2-9273013N-WM
							40°	1400lm	1150lm	SSR1G2-9274013N-WM
							45°	1400lm	1050lm	SSR1G2-9274513N-WM
						3000K	18°	1500lm	1150lm	SSR1G2-9301813N-WM
							30°	1500lm	1250lm	SSR1G2-9303013N-WM
							40°	1500lm	1250lm	SSR1G2-9304013N-WM
							45°	1500lm	1150lm	SSR1G2-9304513N-WM
						4000K	18°	1600lm	1250lm	SSR1G2-9401813N-WM
							30°	1600lm	1350lm	SSR1G2-9403013N-WM
							40°	1600lm	1350lm	SSR1G2-9404013N-WM
							45°	1600lm	1250lm	SSR1G2-9404513N-WM
18 W		21 W	36 V	500 mA	90	2700K	18°	1900lm	1500lm	SSR1G2-9271818N-WM
							30°	1900lm	1700lm	SSR1G2-9273018N-WM
							40°	1900lm	1700lm	SSR1G2-9274018N-WM
							45°	1900lm	1500lm	SSR1G2-9274518N-WM
						3000K	18°	2000lm	1600lm	SSR1G2-9301818N-WM
							30°	2000lm	1800lm	SSR1G2-9303018N-WM
							40°	2000lm	1800lm	SSR1G2-9304018N-WM
							45°	2000lm	1600lm	SSR1G2-9304518N-WM
						4000K	18°	2200lm	1700lm	SSR1G2-9401818N-WM
							30°	2200lm	1900lm	SSR1G2-9403018N-WM
							40°	2200lm	1900lm	SSR1G2-9404018N-WM
							45°	2200lm	1700lm	SSR1G2-9404518N-WM



Matt Reflector

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)



Black Reflector



Dark Light Reflector



White Reflector

LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
13 W		15 W	36 V	350 mA	90	2700K	18°	1400lm	1050lm	SSR1G2-9271813N-WB
							30°	1400lm	1150lm	SSR1G2-9273013N-WB
							40°	1400lm	1150lm	SSR1G2-9274013N-WB
							55°	1400lm	1050lm	SSR1G2-9274513N-WB
						3000K	18°	1500lm	1150lm	SSR1G2-9301813N-WB
							30°	1500lm	1250lm	SSR1G2-9303013N-WB
							40°	1500lm	1250lm	SSR1G2-9304013N-WB
							55°	1500lm	1150lm	SSR1G2-9304513N-WB
						4000K	18°	1600lm	1250lm	SSR1G2-9401813N-WB
							30°	1600lm	1350lm	SSR1G2-9403013N-WB
							40°	1600lm	1350lm	SSR1G2-9404013N-WB
							55°	1600lm	1250lm	SSR1G2-9404513N-WB
18 W		21 W	36 V	500 mA	90	2700K	18°	1900lm	1500lm	SSR1G2-9271818N-WB
							30°	1900lm	1700lm	SSR1G2-9273018N-WB
							40°	1900lm	1700lm	SSR1G2-9274018N-WB
							55°	1900lm	1500lm	SSR1G2-9274518N-WB
						3000K	18°	2000lm	1600lm	SSR1G2-9301818N-WB
							30°	2000lm	1800lm	SSR1G2-9303018N-WB
							40°	2000lm	1800lm	SSR1G2-9304018N-WB
							55°	2000lm	1600lm	SSR1G2-9304518N-WB
						4000K	18°	2200lm	1700lm	SSR1G2-9401818N-WB
							30°	2200lm	1900lm	SSR1G2-9403018N-WB
							40°	2200lm	1900lm	SSR1G2-9404018N-WB
							55°	2200lm	1700lm	SSR1G2-9404518N-WB
13 W		15 W	36 V	350 mA	90	2700K	18°	1400lm	1050lm	SSR1G2-9271813N-WC
							30°	1400lm	1150lm	SSR1G2-9273013N-WC
							40°	1400lm	1150lm	SSR1G2-9274013N-WC
							55°	1400lm	1050lm	SSR1G2-9274513N-WC
						3000K	18°	1500lm	1150lm	SSR1G2-9301813N-WC
							30°	1500lm	1250lm	SSR1G2-9303013N-WC
							40°	1500lm	1250lm	SSR1G2-9304013N-WC
							55°	1500lm	1150lm	SSR1G2-9304513N-WC
						4000K	18°	1600lm	1250lm	SSR1G2-9401813N-WC
							30°	1600lm	1350lm	SSR1G2-9403013N-WC
							40°	1600lm	1350lm	SSR1G2-9404013N-WC
							55°	1600lm	1250lm	SSR1G2-9404513N-WC
18 W		21 W	36 V	500 mA	90	2700K	18°	1900lm	1500lm	SSR1G2-9271818N-WC
							30°	1900lm	1700lm	SSR1G2-9273018N-WC
							40°	1900lm	1700lm	SSR1G2-9274018N-WC
							55°	1900lm	1500lm	SSR1G2-9274518N-WC
						3000K	18°	2000lm	1600lm	SSR1G2-9301818N-WC
							30°	2000lm	1800lm	SSR1G2-9303018N-WC
							40°	2000lm	1800lm	SSR1G2-9304018N-WC
							55°	2000lm	1600lm	SSR1G2-9304518N-WC
						4000K	18°	2200lm	1700lm	SSR1G2-9401818N-WC
							30°	2200lm	1900lm	SSR1G2-9403018N-WC
							40°	2200lm	1900lm	SSR1G2-9404018N-WC
							55°	2200lm	1700lm	SSR1G2-9404518N-WC
13 W		15 W	36 V	350 mA	90	2700K	18°	1400lm	1050lm	SSR1G2-9271813N-WW
							30°	1400lm	1150lm	SSR1G2-9273013N-WW
							40°	1400lm	1150lm	SSR1G2-9274013N-WW
							55°	1400lm	1050lm	SSR1G2-9274513N-WW
						3000K	18°	1500lm	1150lm	SSR1G2-9301813N-WW
							30°	1500lm	1250lm	SSR1G2-9303013N-WW
							40°	1500lm	1250lm	SSR1G2-9304013N-WW
							55°	1500lm	1150lm	SSR1G2-9304513N-WW
						4000K	18°	1600lm	1250lm	SSR1G2-9401813N-WW
							30°	1600lm	1350lm	SSR1G2-9403013N-WW
							40°	1600lm	1350lm	SSR1G2-9404013N-WW
							55°	1600lm	1250lm	SSR1G2-9404513N-WW
18 W		21 W	36 V	500 mA	90	2700K	18°	1900lm	1500lm	SSR1G2-9271818N-WW
							30°	1900lm	1700lm	SSR1G2-9273018N-WW
							40°	1900lm	1700lm	SSR1G2-9274018N-WW
							55°	1900lm	1500lm	SSR1G2-9274518N-WW
						3000K	18°	2000lm	1600lm	SSR1G2-9301818N-WW
							30°	2000lm	1800lm	SSR1G2-9303018N-WW
							40°	2000lm	1800lm	SSR1G2-9304018N-WW
							55°	2000lm	1600lm	SSR1G2-9304518N-WW
						4000K	18°	2200lm	1700lm	SSR1G2-9401818N-WW
							30°	2200lm	1900lm	SSR1G2-9403018N-WW
							40°	2200lm	1900lm	SSR1G2-9404018N-WW
							55°	2200lm	1700lm	SSR1G2-9404518N-WW

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

Optional accessary




Honeycomb

Code for SSR1G2-9304018N-WM with Honeycomb
SSR1G2-9304018N-WM-**H**

NEKO / SENSE 100 / S100R1-G2

Adjustable LED Downlight

NEW






2700K 6500K Tunable White

See Details @www.nekolighting.com

13W 18W | CRI90 | 2700K 3000K 4000K | 18° 30° 40° 45° | CITIZEN 50,000h@L80B10 | UGR < 19 | IP54 | 5 YEARS GUARANTEE | CB | CE | ETL Intertek

100 | 1-25mm Ceiling Thickness





Gold Reflector


LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
13	W	15 W	36 V	350 mA	90	2700K	18°	1400lm	1050lm	SSR1G2-9271813N-WG
							30°	1400lm	1150lm	SSR1G2-9273013N-WG
							40°	1400lm	1150lm	SSR1G2-9274013N-WG
							45°	1400lm	1050lm	SSR1G2-9274513N-WG
						3000K	18°	1500lm	1150lm	SSR1G2-9301813N-WG
							30°	1500lm	1250lm	SSR1G2-9303013N-WG
							40°	1500lm	1250lm	SSR1G2-9304013N-WG
							45°	1500lm	1150lm	SSR1G2-9304513N-WG
						4000K	18°	1600lm	1250lm	SSR1G2-9401813N-WG
							30°	1600lm	1350lm	SSR1G2-9403013N-WG
							40°	1600lm	1350lm	SSR1G2-9404013N-WG
							45°	1600lm	1250lm	SSR1G2-9404513N-WG
18	W	21 W	36 V	500 mA	90	2700K	18°	1900lm	1500lm	SSR1G2-9271818N-WG
							30°	1900lm	1700lm	SSR1G2-9273018N-WG
							40°	1900lm	1700lm	SSR1G2-9274018N-WG
							45°	1900lm	1500lm	SSR1G2-9274518N-WG
						3000K	18°	2000lm	1600lm	SSR1G2-9301818N-WG
							30°	2000lm	1800lm	SSR1G2-9303018N-WG
							40°	2000lm	1800lm	SSR1G2-9304018N-WG
							45°	2000lm	1600lm	SSR1G2-9304518N-WG
						4000K	18°	2200lm	1700lm	SSR1G2-9401818N-WG
							30°	2200lm	1900lm	SSR1G2-9403018N-WG
							40°	2200lm	1900lm	SSR1G2-9404018N-WG
							45°	2200lm	1700lm	SSR1G2-9404518N-WG

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

Trimless Version available




Trimless code for SSR1G2-9304013N-WM→ SSR4G2-9304013N-WM






Trimless code for SSR1G2-9304013N-WM → ESR1G2-9304013N-WM



7W | CRI90 | 2700K 3000K 4000K | 10° | CITIZEN 50,000h@L80B10 | UGR < 19 | IP54 | 5 YEARS GUARANTEE | CB | CE | ETL Intertek

100 | 1-25mm Ceiling Thickness





Specular Reflector

LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
7	W	9 W	36 V	200 mA	90	2700K	10°	800lm	520lm	SSR1G2-9271007N-WS
						3000K	10°	850lm	550lm	SSR1G2-9301007N-WS
						4000K	10°	900lm	600lm	SSR1G2-9401007N-WS



Matt Reflector

LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
7	W	9 W	36 V	200 mA	90	2700K	10°	800lm	520lm	SSR1G2-9271007N-WM
						3000K	10°	850lm	550lm	SSR1G2-9301007N-WM
						4000K	10°	900lm	600lm	SSR1G2-9401007N-WM



Black Reflector

LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
7	W	9 W	36 V	200 mA	90	2700K	10°	800lm	520lm	SSR1G2-9271007N-WB
						3000K	10°	850lm	550lm	SSR1G2-9301007N-WB
						4000K	10°	900lm	600lm	SSR1G2-9401007N-WB



Dark Light Reflector

LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
7	W	9 W	36 V	200 mA	90	2700K	10°	800lm	520lm	SSR1G2-9271007N-WC
						3000K	10°	850lm	550lm	SSR1G2-9301007N-WC
						4000K	10°	900lm	600lm	SSR1G2-9401007N-WC



white Reflector

LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
7	W	9 W	36 V	200 mA	90	2700K	10°	800lm	520lm	SSR1G2-9271007N-WW
						3000K	10°	850lm	550lm	SSR1G2-9301007N-WW
						4000K	10°	900lm	600lm	SSR1G2-9401007N-WW



Gold Reflector

LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
7	W	9 W	36 V	200 mA	90	2700K	10°	800lm	520lm	SSR1G2-9271007N-WG
						3000K	10°	850lm	550lm	SSR1G2-9301007N-WG
						4000K	10°	900lm	600lm	SSR1G2-9401007N-WG

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

Optional accessary




Honeycomb

Code for SSR1G2-9301009N-WM with Honeycomb
SSR1G2-9301009N-WM-**H**

NEKO / SENSE 100H / S100HR1-G2

Adjustable LED Downlight

NEW

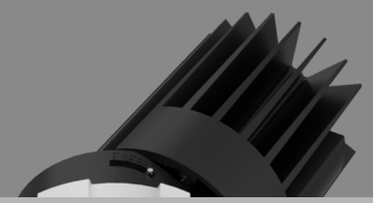



25W | CRI90 | 2700K 3000K 4000K | 18° 30° 40° 45° | CITIZEN 50,000h@L80B10 | UGR < 19 | IP54 | 5 YEARS GUARANTEE | CB | CE | ETL Intertek





Specular Reflector



Matt Reflector



Black Reflector

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
25 W	28 W	36 V	700 mA	90	2700K	18°	2400lm	1800lm	SHR1G2-9271825N-WS
						30°	2400lm	2000lm	SHR1G2-9273025N-WS
						40°	2400lm	2000lm	SHR1G2-9274025N-WS
						45°	2400lm	1800lm	SHR1G2-9274525N-WS
					3000K	18°	2600lm	1900lm	SHR1G2-9301825N-WS
						30°	2600lm	2100lm	SHR1G2-9303025N-WS
						40°	2600lm	2100lm	SHR1G2-9304025N-WS
						45°	2600lm	1900lm	SHR1G2-9304525N-WS
					4000K	18°	2800lm	1900lm	SHR1G2-9401825N-WS
						30°	2800lm	2200lm	SHR1G2-9403025N-WS
						40°	2800lm	2200lm	SHR1G2-9404025N-WS
						45°	2800lm	1900lm	SHR1G2-9404525N-WS
25 W	28 W	36 V	700 mA	90	2700K	18°	2400lm	1800lm	SHR1G2-9271825N-WM
						30°	2400lm	2000lm	SHR1G2-9273025N-WM
						40°	2400lm	2000lm	SHR1G2-9274025N-WM
						45°	2400lm	1800lm	SHR1G2-9274525N-WM
					3000K	18°	2600lm	1900lm	SHR1G2-9301825N-WM
						30°	2600lm	2100lm	SHR1G2-9303025N-WM
						40°	2600lm	2100lm	SHR1G2-9304025N-WM
						45°	2600lm	1900lm	SHR1G2-9304525N-WM
					4000K	18°	2800lm	1900lm	SHR1G2-9401825N-WM
						30°	2800lm	2200lm	SHR1G2-9403025N-WM
						40°	2800lm	2200lm	SHR1G2-9404025N-WM
						45°	2800lm	1900lm	SHR1G2-9404525N-WM
25 W	28 W	36 V	700 mA	90	2700K	18°	2400lm	1800lm	SHR1G2-9271825N-WB
						30°	2400lm	2000lm	SHR1G2-9273025N-WB
						40°	2400lm	2000lm	SHR1G2-9274025N-WB
						45°	2400lm	1800lm	SHR1G2-9274525N-WB
					3000K	18°	2600lm	1900lm	SHR1G2-9301825N-WB
						30°	2600lm	2100lm	SHR1G2-9303025N-WB
						40°	2600lm	2100lm	SHR1G2-9304025N-WB
						45°	2600lm	1900lm	SHR1G2-9304525N-WB
					4000K	18°	2800lm	1900lm	SHR1G2-9401825N-WB
						30°	2800lm	2200lm	SHR1G2-9403025N-WB
						40°	2800lm	2200lm	SHR1G2-9404025N-WB
						45°	2800lm	1900lm	SHR1G2-9404525N-WB

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

Optional accessary



Honeycomb

Code for SHR1G2-9304025N-WM with **H**oneycomb
SHR1G2-9304025N-WM-**H**



Dark Light Reflector



White Reflector



Gold Reflector


LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
25 W	28 W	36 V	700 mA	90	2700K	18°	2400lm	1800lm	SHR1G2-9271825N-WW
						30°	2400lm	2000lm	SHR1G2-9273025N-WW
						40°	2400lm	2000lm	SHR1G2-9274025N-WW
						45°	2400lm	1800lm	SHR1G2-9274525N-WW
					3000K	18°	2600lm	1900lm	SHR1G2-9301825N-WW
						30°	2600lm	2100lm	SHR1G2-9303025N-WW
						40°	2600lm	2100lm	SHR1G2-9304025N-WW
						45°	2600lm	1900lm	SHR1G2-9304525N-WW
					4000K	18°	2800lm	1900lm	SHR1G2-9401825N-WW
						30°	2800lm	2200lm	SHR1G2-9403025N-WW
						40°	2800lm	2200lm	SHR1G2-9404025N-WW
						45°	2800lm	1900lm	SHR1G2-9404525N-WW
25 W	28 W	36 V	700 mA	90	2700K	18°	2400lm	1800lm	SHR1G2-9271825N-WG
						30°	2400lm	2000lm	SHR1G2-9273025N-WG
						40°	2400lm	2000lm	SHR1G2-9274025N-WG
						45°	2400lm	1800lm	SHR1G2-9274525N-WG
					3000K	18°	2600lm	1900lm	SHR1G2-9301825N-WG
						30°	2600lm	2100lm	SHR1G2-9303025N-WG
						40°	2600lm	2100lm	SHR1G2-9304025N-WG
						45°	2600lm	1900lm	SHR1G2-9304525N-WG
					4000K	18°	2800lm	1900lm	SHR1G2-9401825N-WG
						30°	2800lm	2200lm	SHR1G2-9403025N-WG
						40°	2800lm	2200lm	SHR1G2-9404025N-WG
						45°	2800lm	1900lm	SHR1G2-9404525N-WG

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

Trimless Version available




Trimless code for SHR1G2-9303525N-WM→ SHR**4**G2-9303525N-WM






Trimless code for SHR1G2-9303525N-WM→**E**HR2G2-9303525N-WM



NEKO / SENSE 100 / S100S1-G2

Adjustable LED Downlight

NEW

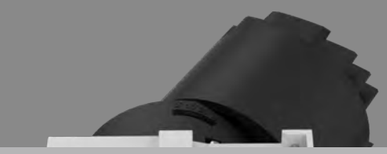





2700K 6500K Tunable White

See Details @www.nekolighting.com

13W 18W | CRI90 | 2700K 3000K 4000K | 18° 30° 40° 45° | CITIZEN 50,000h@L80B10 | UGR < 19 | IP54 | 5 YEARS GUARANTEE | CB | CE | Intertek





LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
13 W		15 W	36 V	350 mA	90	2700K	18°	1400lm	1050lm	SSS1G2-9271813N-WS
							30°	1400lm	1150lm	SSS1G2-9273013N-WS
							40°	1400lm	1150lm	SSS1G2-9274013N-WS
							45°	1400lm	1050lm	SSS1G2-9274513N-WS
						3000K	18°	1500lm	1150lm	SSS1G2-9301813N-WS
							30°	1500lm	1250lm	SSS1G2-9303013N-WS
							40°	1500lm	1250lm	SSS1G2-9304013N-WS
							45°	1500lm	1150lm	SSS1G2-9304513N-WS
						4000K	18°	1600lm	1250lm	SSS1G2-9401813N-WS
							30°	1600lm	1350lm	SSS1G2-9403013N-WS
							40°	1600lm	1350lm	SSS1G2-9404013N-WS
							45°	1600lm	1250lm	SSS1G2-9404513N-WS
18 W		21 W	36 V	500 mA	90	2700K	18°	1900lm	1500lm	SSS1G2-9271818N-WS
							30°	1900lm	1700lm	SSS1G2-9273018N-WS
							40°	1900lm	1700lm	SSS1G2-9274018N-WS
							45°	1900lm	1500lm	SSS1G2-9274518N-WS
						3000K	18°	2000lm	1600lm	SSS1G2-9301818N-WS
							30°	2000lm	1800lm	SSS1G2-9303018N-WS
							40°	2000lm	1800lm	SSS1G2-9304018N-WS
							45°	2000lm	1600lm	SSS1G2-9304518N-WS
						4000K	18°	2200lm	1700lm	SSS1G2-9401818N-WS
							30°	2200lm	1900lm	SSS1G2-9403018N-WS
							40°	2200lm	1900lm	SSS1G2-9404018N-WS
							45°	2200lm	1700lm	SSS1G2-9404518N-WS



Specular Reflector

LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
13 W		15 W	36 V	350 mA	90	2700K	18°	1400lm	1050lm	SSS1G2-9271813N-WM
							30°	1400lm	1150lm	SSS1G2-9273013N-WM
							40°	1400lm	1150lm	SSS1G2-9274013N-WM
							45°	1400lm	1050lm	SSS1G2-9274513N-WM
						3000K	18°	1500lm	1150lm	SSS1G2-9301813N-WM
							30°	1500lm	1250lm	SSS1G2-9303013N-WM
							40°	1500lm	1250lm	SSS1G2-9304013N-WM
							45°	1500lm	1150lm	SSS1G2-9304513N-WM
						4000K	18°	1600lm	1250lm	SSS1G2-9401813N-WM
							30°	1600lm	1350lm	SSS1G2-9403013N-WM
							40°	1600lm	1350lm	SSS1G2-9404013N-WM
							45°	1600lm	1250lm	SSS1G2-9404513N-WM
18 W		21 W	36 V	500 mA	90	2700K	18°	1900lm	1500lm	SSS1G2-9271818N-WM
							30°	1900lm	1700lm	SSS1G2-9273018N-WM
							40°	1900lm	1700lm	SSS1G2-9274018N-WM
							45°	1900lm	1500lm	SSS1G2-9274518N-WM
						3000K	18°	2000lm	1600lm	SSS1G2-9301818N-WM
							30°	2000lm	1800lm	SSS1G2-9303018N-WM
							40°	2000lm	1800lm	SSS1G2-9304018N-WM
							45°	2000lm	1600lm	SSS1G2-9304518N-WM
						4000K	18°	2200lm	1700lm	SSS1G2-9401818N-WM
							30°	2200lm	1900lm	SSS1G2-9403018N-WM
							40°	2200lm	1900lm	SSS1G2-9404018N-WM
							45°	2200lm	1700lm	SSS1G2-9404518N-WM



Matt Reflector

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)



Black Reflector

LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
13 W		15 W	36 V	350 mA	90	2700K	18°	1400lm	1050lm	SSS1G2-9271813N-WB
							30°	1400lm	1150lm	SSS1G2-9273013N-WB
							40°	1400lm	1150lm	SSS1G2-9274013N-WB
							55°	1400lm	1050lm	SSS1G2-9274513N-WB
						3000K	18°	1500lm	1150lm	SSS1G2-9301813N-WB
							30°	1500lm	1250lm	SSS1G2-9303013N-WB
							40°	1500lm	1250lm	SSS1G2-9304013N-WB
							55°	1500lm	1150lm	SSS1G2-9304513N-WB
						4000K	18°	1600lm	1250lm	SSS1G2-9401813N-WB
							30°	1600lm	1350lm	SSS1G2-9403013N-WB
							40°	1600lm	1350lm	SSS1G2-9404013N-WB
							55°	1600lm	1250lm	SSS1G2-9404513N-WB
18 W		21 W	36 V	500 mA	90	2700K	18°	1900lm	1500lm	SSS1G2-9271818N-WB
							30°	1900lm	1700lm	SSS1G2-9273018N-WB
							40°	1900lm	1700lm	SSS1G2-9274018N-WB
							55°	1900lm	1500lm	SSS1G2-9274518N-WB
						3000K	18°	2000lm	1600lm	SSS1G2-9301818N-WB
							30°	2000lm	1800lm	SSS1G2-9303018N-WB
							40°	2000lm	1800lm	SSS1G2-9304018N-WB
							55°	2000lm	1600lm	SSS1G2-9304518N-WB
						4000K	18°	2200lm	1700lm	SSS1G2-9401818N-WB
							30°	2200lm	1900lm	SSS1G2-9403018N-WB
							40°	2200lm	1900lm	SSS1G2-9404018N-WB
							55°	2200lm	1700lm	SSS1G2-9404518N-WB



Dark Light Reflector

LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
13 W		15 W	36 V	350 mA	90	2700K	18°	1400lm	1050lm	SSS1G2-9271813N-WC
							30°	1400lm	1150lm	SSS1G2-9273013N-WC
							40°	1400lm	1150lm	SSS1G2-9274013N-WC
							55°	1400lm	1050lm	SSS1G2-9274513N-WC
						3000K	18°	1500lm	1150lm	SSS1G2-9301813N-WC
							30°	1500lm	1250lm	SSS1G2-9303013N-WC
							40°	1500lm	1250lm	SSS1G2-9304013N-WC
							55°	1500lm	1150lm	SSS1G2-9304513N-WC
						4000K	18°	1600lm	1250lm	SSS1G2-9401813N-WC
							30°	1600lm	1350lm	SSS1G2-9403013N-WC
							40°	1600lm	1350lm	SSS1G2-9404013N-WC
							55°	1600lm	1250lm	SSS1G2-9404513N-WC
18 W		21 W	36 V	500 mA	90	2700K	18°	1900lm	1500lm	SSS1G2-9271818N-WC
							30°	1900lm	1700lm	SSS1G2-9273018N-WC
							40°	1900lm	1700lm	SSS1G2-9274018N-WC
							55°	1900lm	1500lm	SSS1G2-9274518N-WC
						3000K	18°	2000lm	1600lm	SSS1G2-9301818N-WC
							30°	2000lm	1800lm	SSS1G2-9303018N-WC
							40°	2000lm	1800lm	SSS1G2-9304018N-WC
							55°	2000lm	1600lm	SSS1G2-9304518N-WC
						4000K	18°	2200lm	1700lm	SSS1G2-9401818N-WC
							30°	2200lm	1900lm	SSS1G2-9403018N-WC
							40°	2200lm	1900lm	SSS1G2-9404018N-WC
							55°	2200lm	1700lm	SSS1G2-9404518N-WC



White Reflector

LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
13 W		15 W	36 V	350 mA	90	2700K	18°	1400lm	1050lm	SSS1G2-9271813N-WW
							30°	1400lm	1150lm	SSS1G2-9273013N-WW
							40°	1400lm	1150lm	SSS1G2-9274013N-WW
							55°	1400lm	1050lm	SSS1G2-9274513N-WW
						3000K	18°	1500lm	1150lm	SSS1G2-9301813N-WW
							30°	1500lm	1250lm	SSS1G2-9303013N-WW
							40°	1500lm	1250lm	SSS1G2-9304013N-WW
							55°	1500lm	1150lm	SSS1G2-9304513N-WW
						4000K	18°	1600lm	1250lm	SSS1G2-9401813N-WW
							30°	1600lm	1350lm	SSS1G2-9403013N-WW
							40°	1600lm	1350lm	SSS1G2-9404013N-WW
							55°	1600lm	1250lm	SSS1G2-9404513N-WW
18 W		21 W	36 V	500 mA	90	2700K	18°	1900lm	1500lm	SSS1G2-9271818N-WW
							30°	1900lm	1700lm	SSS1G2-9273018N-WW
							40°	1900lm	1700lm	SSS1G2-9274018N-WW
							55°	1900lm	1500lm	SSS1G2-9274518N-WW
						3000K	18°	2000lm	1600lm	SSS1G2-9301818N-WW
							30°	2000lm	1800lm	SSS1G2-9303018N-WW
							40°	2000lm	1800lm	SSS1G2-9304018N-WW
							55°	2000lm	1600lm	SSS1G2-9304518N-WW
						4000K	18°	2200lm	1700lm	SSS1G2-9401818N-WW
							30°	2200lm	1900lm	SSS1G2-9403018N-WW
							40°	2200lm	1900lm	SSS1G2-9404018N-WW
							55°	2200lm	1700lm	SSS1G2-9404518N-WW

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

Optional accessary




Honeycomb

Code for SSS1G2-9304018N-WM with **H**oneycomb
SSS1G2-9304018N-WM-**H**

NEKO / SENSE 100 / S100S1-G2

Adjustable LED Downlight

NEW

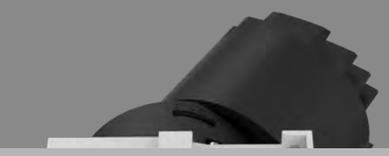





2700K 6500K Tunable White

See Details @www.nekolighting.com

13W 18W | CRI90 | 2700K 3000K 4000K | 18° 30° 40° 45° | CITIZEN 50,000h@L80B10 | UGR < 19 | IP54 | 5 YEARS GUARANTEE | CB | CE | ETL Intertek





LED	Power System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
13 W	15 W	36 V	350 mA	90	2700K	18°	1400lm	1050lm	SSS1G2-9271813N-WG
						30°	1400lm	1150lm	SSS1G2-9273013N-WG
						40°	1400lm	1150lm	SSS1G2-9274013N-WG
						45°	1400lm	1050lm	SSS1G2-9274513N-WG
					3000K	18°	1500lm	1150lm	SSS1G2-9301813N-WG
						30°	1500lm	1250lm	SSS1G2-9303013N-WG
						40°	1500lm	1250lm	SSS1G2-9304013N-WG
						45°	1500lm	1150lm	SSS1G2-9304513N-WG
					4000K	18°	1600lm	1250lm	SSS1G2-9401813N-WG
						30°	1600lm	1350lm	SSS1G2-9403013N-WG
						40°	1600lm	1350lm	SSS1G2-9404013N-WG
						45°	1600lm	1250lm	SSS1G2-9404513N-WG
18 W	21 W	36 V	500 mA	90	2700K	18°	1900lm	1500lm	SSS1G2-9271818N-WG
						30°	1900lm	1700lm	SSS1G2-9273018N-WG
						40°	1900lm	1700lm	SSS1G2-9274018N-WG
						45°	1900lm	1500lm	SSS1G2-9274518N-WG
					3000K	18°	2000lm	1600lm	SSS1G2-9301818N-WG
						30°	2000lm	1800lm	SSS1G2-9303018N-WG
						40°	2000lm	1800lm	SSS1G2-9304018N-WG
						45°	2000lm	1600lm	SSS1G2-9304518N-WG
					4000K	18°	2200lm	1700lm	SSS1G2-9401818N-WG
						30°	2200lm	1900lm	SSS1G2-9403018N-WG
						40°	2200lm	1900lm	SSS1G2-9404018N-WG
						45°	2200lm	1700lm	SSS1G2-9404518N-WG




Gold Reflector

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

Trimless Version available




Trimless code for SSS1G2-9304025N-WM → SSS**4**G2-9304025N-WM






Trimless code for SSS1G2-9304025N-WM → **E**SS1G2-9304025N-WM



7W | CRI90 | 2700K 3000K 4000K | 10° | CITIZEN 50,000h@L80B10 | UGR < 19 | IP54 | 5 YEARS GUARANTEE | CB | CE | ETL Intertek





Specular Reflector

LED	Power System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
7 W	9 W	36 V	200 mA	90	2700K	10°	800lm	520lm	SSS1G2-9271007N-WS
					3000K	10°	850lm	550lm	SSS1G2-9301007N-WS
					4000K	10°	900lm	600lm	SSS1G2-9401007N-WS



Matt Reflector

LED	Power System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
7 W	9 W	36 V	200 mA	90	2700K	10°	800lm	520lm	SSS1G2-9271007N-WM
					3000K	10°	850lm	550lm	SSS1G2-9301007N-WM
					4000K	10°	900lm	600lm	SSS1G2-9401007N-WM



Black Reflector

LED	Power System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
7 W	9 W	36 V	200 mA	90	2700K	10°	800lm	520lm	SSS1G2-9271007N-WB
					3000K	10°	850lm	550lm	SSS1G2-9301007N-WB
					4000K	10°	900lm	600lm	SSS1G2-9401007N-WB



Dark Light Reflector

LED	Power System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
7 W	9 W	36 V	200 mA	90	2700K	10°	800lm	520lm	SSS1G2-9271007N-WC
					3000K	10°	850lm	550lm	SSS1G2-9301007N-WC
					4000K	10°	900lm	600lm	SSS1G2-9401007N-WC



white Reflector

LED	Power System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
7 W	9 W	36 V	200 mA	90	2700K	10°	800lm	520lm	SSS1G2-9271007N-WW
					3000K	10°	850lm	550lm	SSS1G2-9301007N-WW
					4000K	10°	900lm	600lm	SSS1G2-9401007N-WW



Gold Reflector

LED	Power System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
7 W	9 W	36 V	200 mA	90	2700K	10°	800lm	520lm	SSS1G2-9271007N-WG
					3000K	10°	850lm	550lm	SSS1G2-9301007N-WG
					4000K	10°	900lm	600lm	SSS1G2-9401007N-WG

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

Optional accessary




Honeycomb

Code for SSS1G2-9301007N-WM with **H**oneycomb
SSS1G2-9301007N-WM-**H**

NEKO / SENSE 100H / S100HS1-G2


Adjustable LED Downlight


NEW

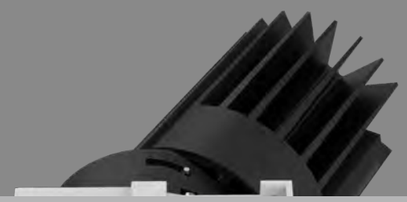



25W | CRI90 | 2700K 3000K 4000K | 18° 30° 40° 45° | CITIZEN 50,000h@L80B10 | UGR < 19 | IP54 | 5 YEARS GUARANTEE | CB | CE | Intertek







Specular Reflector

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
25 W	28 W	36 V	700 mA	90	2700K	18°	2400lm	1800lm	SHS1G2-9271825N-WS
						30°	2400lm	2000lm	SHS1G2-9273025N-WS
						40°	2400lm	2000lm	SHS1G2-9274025N-WS
						45°	2400lm	1800lm	SHS1G2-9274525N-WS
					3000K	18°	2600lm	1900lm	SHS1G2-9301825N-WS
						30°	2600lm	2100lm	SHS1G2-9303025N-WS
						40°	2600lm	2100lm	SHS1G2-9304025N-WS
						45°	2600lm	1900lm	SHS1G2-9304525N-WS
					4000K	18°	2800lm	1900lm	SHS1G2-9401825N-WS
						30°	2800lm	2200lm	SHS1G2-9403025N-WS
						40°	2800lm	2200lm	SHS1G2-9404025N-WS
						45°	2800lm	1900lm	SHS1G2-9404525N-WS



Matt Reflector

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
25 W	28 W	36 V	700 mA	90	2700K	18°	2400lm	1800lm	SHS1G2-9271825N-WM
						30°	2400lm	2000lm	SHS1G2-9273025N-WM
						40°	2400lm	2000lm	SHS1G2-9274025N-WM
						45°	2400lm	1800lm	SHS1G2-9274525N-WM
					3000K	18°	2600lm	1900lm	SHS1G2-9301825N-WM
						30°	2600lm	2100lm	SHS1G2-9303025N-WM
						40°	2600lm	2100lm	SHS1G2-9304025N-WM
						45°	2600lm	1900lm	SHS1G2-9304525N-WM
					4000K	18°	2800lm	1900lm	SHS1G2-9401825N-WM
						30°	2800lm	2200lm	SHS1G2-9403025N-WM
						40°	2800lm	2200lm	SHS1G2-9404025N-WM
						45°	2800lm	1900lm	SHS1G2-9404525N-WM



Black Reflector

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
25 W	28 W	36 V	700 mA	90	2700K	18°	2400lm	1800lm	SHS1G2-9271825N-WB
						30°	2400lm	2000lm	SHS1G2-9273025N-WB
						40°	2400lm	2000lm	SHS1G2-9274025N-WB
						45°	2400lm	1800lm	SHS1G2-9274525N-WB
					3000K	18°	2600lm	1900lm	SHS1G2-9301825N-WB
						30°	2600lm	2100lm	SHS1G2-9303025N-WB
						40°	2600lm	2100lm	SHS1G2-9304025N-WB
						45°	2600lm	1900lm	SHS1G2-9304525N-WB
					4000K	18°	2800lm	1900lm	SHS1G2-9401825N-WB
						30°	2800lm	2200lm	SHS1G2-9403025N-WB
						40°	2800lm	2200lm	SHS1G2-9404025N-WB
						45°	2800lm	1900lm	SHS1G2-9404525N-WB

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

Optional accessary



Honeycomb

Code for SHS1G2-9304025N-WM with Honeycomb
SHS1G2-9304025N-WM-H



Dark Light Reflector

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
25 W	28 W	36 V	700 mA	90	2700K	18°	2400lm	1800lm	SHS1G2-9271825N-WC
						30°	2400lm	2000lm	SHS1G2-9273025N-WC
						40°	2400lm	2000lm	SHS1G2-9274025N-WC
						45°	2400lm	1800lm	SHS1G2-9274525N-WC
					3000K	18°	2600lm	1900lm	SHS1G2-9301825N-WC
						30°	2600lm	2100lm	SHS1G2-9303025N-WC
						40°	2600lm	2100lm	SHS1G2-9304025N-WC
						45°	2600lm	1900lm	SHS1G2-9304525N-WC
					4000K	18°	2800lm	1900lm	SHS1G2-9401825N-WC
						30°	2800lm	2200lm	SHS1G2-9403025N-WC
						40°	2800lm	2200lm	SHS1G2-9404025N-WC
						45°	2800lm	1900lm	SHS1G2-9404525N-WC



White Reflector

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
25 W	28 W	36 V	700 mA	90	2700K	18°	2400lm	1800lm	SHS1G2-9271825N-WW
						30°	2400lm	2000lm	SHS1G2-9273025N-WW
						40°	2400lm	2000lm	SHS1G2-9274025N-WW
						45°	2400lm	1800lm	SHS1G2-9274525N-WW
					3000K	18°	2600lm	1900lm	SHS1G2-9301825N-WW
						30°	2600lm	2100lm	SHS1G2-9303025N-WW
						40°	2600lm	2100lm	SHS1G2-9304025N-WW
						45°	2600lm	1900lm	SHS1G2-9304525N-WW
					4000K	18°	2800lm	1900lm	SHS1G2-9401825N-WW
						30°	2800lm	2200lm	SHS1G2-9403025N-WW
						40°	2800lm	2200lm	SHS1G2-9404025N-WW
						45°	2800lm	1900lm	SHS1G2-9404525N-WW



Gold Reflector

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
25 W	28 W	36 V	700 mA	90	2700K	18°	2400lm	1800lm	SHS1G2-9271825N-WG
						30°	2400lm	2000lm	SHS1G2-9273025N-WG
						40°	2400lm	2000lm	SHS1G2-9274025N-WG
						45°	2400lm	1800lm	SHS1G2-9274525N-WG
					3000K	18°	2600lm	1900lm	SHS1G2-9301825N-WG
						30°	2600lm	2100lm	SHS1G2-9303025N-WG
						40°	2600lm	2100lm	SHS1G2-9304025N-WG
						45°	2600lm	1900lm	SHS1G2-9304525N-WG
					4000K	18°	2800lm	1900lm	SHS1G2-9401825N-WG
						30°	2800lm	2200lm	SHS1G2-9403025N-WG
						40°	2800lm	2200lm	SHS1G2-9404025N-WG
						45°	2800lm	1900lm	SHS1G2-9404525N-WG

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

Trimless Version available




Trimless code for SHS1G2-9304025N-WM → SHS4G2-9304025N-WM





Trimless code for SHS1G2-9304025N-WM → EHS1G2-9304025N-WM



NEKO / SENSE 100 / S100R7-G2

Fixed LED Downlight

NEW






2700K 6500K Tunable White

See Details @www.nekolighting.com

13W 18W | CRI90 | 2700K 3000K 4000K | 20° 36° 45° | CITIZEN 50,000h@L80B10 | UGR < 19 | IP54 | 5 YEARS GUARANTEE | CB | CE | Intertek





LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
13	W	15 W	36 V	350 mA	90	2700K	20°	1400lm	800lm	SSR7G2-9272013N-WS
							36°	1400lm	950lm	SSR7G2-9273613N-WS
							45°	1400lm	950lm	SSR7G2-9274513N-WS
						3000K	20°	1500lm	850lm	SSR7G2-9302013N-WS
							36°	1500lm	1000lm	SSR7G2-9303613N-WS
							45°	1500lm	1000lm	SSR7G2-9304513N-WS
						4000K	20°	1600lm	950lm	SSR7G2-9402013N-WS
							36°	1600lm	1100lm	SSR7G2-9403613N-WS
							45°	1600lm	1100lm	SSR7G2-9404513N-WS
18	W	21 W	36 V	500 mA	90	2700K	20°	1900lm	1100lm	SSR7G2-9272018N-WS
							36°	1900lm	1300lm	SSR7G2-9273618N-WS
							45°	1900lm	1300lm	SSR7G2-9274518N-WS
						3000K	20°	2000lm	1200lm	SSR7G2-9302018N-WS
							36°	2000lm	1400lm	SSR7G2-9303618N-WS
							45°	2000lm	1400lm	SSR7G2-9304518N-WS
						4000K	20°	2200lm	1300lm	SSR7G2-9402018N-WS
							36°	2200lm	1500lm	SSR7G2-9403618N-WS
							45°	2200lm	1500lm	SSR7G2-9404518N-WS
13	W	15 W	36 V	350 mA	90	2700K	20°	1400lm	800lm	SSR7G2-9272013N-WM
							36°	1400lm	950lm	SSR7G2-9273613N-WM
							45°	1400lm	950lm	SSR7G2-9274513N-WM
						3000K	20°	1500lm	850lm	SSR7G2-9302013N-WM
							36°	1500lm	1000lm	SSR7G2-9303613N-WM
							45°	1500lm	1000lm	SSR7G2-9304513N-WM
						4000K	20°	1600lm	950lm	SSR7G2-9402013N-WM
							36°	1600lm	1100lm	SSR7G2-9403613N-WM
							45°	1600lm	1100lm	SSR7G2-9404513N-WM
18	W	21 W	36 V	500 mA	90	2700K	20°	1900lm	1100lm	SSR7G2-9272018N-WM
							36°	1900lm	1300lm	SSR7G2-9273618N-WM
							45°	1900lm	1300lm	SSR7G2-9274518N-WM
						3000K	20°	2000lm	1200lm	SSR7G2-9302018N-WM
							36°	2000lm	1400lm	SSR7G2-9303618N-WM
							45°	2000lm	1400lm	SSR7G2-9304518N-WM
						4000K	20°	2200lm	1300lm	SSR7G2-9402018N-WM
							36°	2200lm	1500lm	SSR7G2-9403618N-WM
							45°	2200lm	1500lm	SSR7G2-9404518N-WM



Specular Reflector



Matt Reflector

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

Optional accessary



Honeycomb

Code for SSR7G2-9304018N-WM with Honeycomb
SSR7G2-9304018N-WM-**H**



Black Reflector



Dark Light Reflector



White Reflector



Gold Reflector

LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
13	W	15 W	36 V	350 mA	90	2700K	20°	1400lm	800lm	SSR7G2-9272013N-WB
							36°	1400lm	950lm	SSR7G2-9273613N-WB
							45°	1400lm	950lm	SSR7G2-9274513N-WB
						3000K	20°	1500lm	850lm	SSR7G2-9302013N-WB
							36°	1500lm	1000lm	SSR7G2-9303613N-WB
							45°	1500lm	1000lm	SSR7G2-9304513N-WB
						4000K	20°	1600lm	950lm	SSR7G2-9402013N-WB
							36°	1600lm	1100lm	SSR7G2-9403613N-WB
							45°	1600lm	1100lm	SSR7G2-9404513N-WB
18	W	21 W	36 V	500 mA	90	2700K	20°	1900lm	1100lm	SSR7G2-9272018N-WB
							36°	1900lm	1300lm	SSR7G2-9273618N-WB
							45°	1900lm	1300lm	SSR7G2-9274518N-WB
						3000K	20°	2000lm	1200lm	SSR7G2-9302018N-WB
							36°	2000lm	1400lm	SSR7G2-9303618N-WB
							45°	2000lm	1400lm	SSR7G2-9304518N-WB
						4000K	20°	2200lm	1300lm	SSR7G2-9402018N-WB
							36°	2200lm	1500lm	SSR7G2-9403618N-WB
							45°	2200lm	1500lm	SSR7G2-9404518N-WB
13	W	15 W	36 V	350 mA	90	2700K	20°	1400lm	800lm	SSR7G2-9272013N-WC
							36°	1400lm	950lm	SSR7G2-9273613N-WC
							45°	1400lm	950lm	SSR7G2-9274513N-WC
						3000K	20°	1500lm	850lm	SSR7G2-9302013N-WC
							36°	1500lm	1000lm	SSR7G2-9303613N-WC
							45°	1500lm	1000lm	SSR7G2-9304513N-WC
						4000K	20°	1600lm	950lm	SSR7G2-9402013N-WC
							36°	1600lm	1100lm	SSR7G2-9403613N-WC
							45°	1600lm	1100lm	SSR7G2-9404513N-WC
18	W	21 W	36 V	500 mA	90	2700K	20°	1900lm	1100lm	SSR7G2-9272018N-WC
							36°	1900lm	1300lm	SSR7G2-9273618N-WC
							45°	1900lm	1300lm	SSR7G2-9274518N-WC
						3000K	20°	2000lm	1200lm	SSR7G2-9302018N-WC
							36°	2000lm	1400lm	SSR7G2-9303618N-WC
							45°	2000lm	1400lm	SSR7G2-9304518N-WC
						4000K	20°	2200lm	1300lm	SSR7G2-9402018N-WC
							36°	2200lm	1500lm	SSR7G2-9403618N-WC
							45°	2200lm	1500lm	SSR7G2-9404518N-WC
13	W	15 W	36 V	350 mA	90	2700K	20°	1400lm	800lm	SSR7G2-9272013N-WW
							36°	1400lm	950lm	SSR7G2-9273613N-WW
							45°	1400lm	950lm	SSR7G2-9274513N-WW
						3000K	20°	1500lm	850lm	SSR7G2-9302013N-WW
							36°	1500lm	1000lm	SSR7G2-9303613N-WW
							45°	1500lm	1000lm	SSR7G2-9304513N-WW
						4000K	20°	1600lm	950lm	SSR7G2-9402013N-WW
							36°	1600lm	1100lm	SSR7G2-9403613N-WW
							45°	1600lm	1100lm	SSR7G2-9404513N-WW
18	W	21 W	36 V	500 mA	90	2700K	20°	1900lm	1100lm	SSR7G2-9272018N-WW
							36°	1900lm	1300lm	SSR7G2-9273618N-WW
							45°	1900lm	1300lm	SSR7G2-9274518N-WW
						3000K	20°	2000lm	1200lm	SSR7G2-9302018N-WW
							36°	2000lm	1400lm	SSR7G2-9303618N-WW
							45°	2000lm	1400lm	SSR7G2-9304518N-WW
						4000K	20°	2200lm	1300lm	SSR7G2-9402018N-WW
							36°	2200lm	1500lm	SSR7G2-9403618N-WW
							45°	2200lm	1500lm	SSR7G2-9404518N-WW
13	W	15 W	36 V	350 mA	90	2700K	20°	1400lm	800lm	SSR7G2-9272013N-WG
							36°	1400lm	950lm	SSR7G2-9273613N-WG
							45°	1400lm	950lm	SSR7G2-9274513N-WG
						3000K	20°	1500lm	850lm	SSR7G2-9302013N-WG
							36°	1500lm	1000lm	SSR7G2-9303613N-WG
							45°	1500lm	1000lm	SSR7G2-9304513N-WG
						4000K	20°	1600lm	950lm	SSR7G2-9402013N-WG
							36°	1600lm	1100lm	SSR7G2-9403613N-WG
							45°	1600lm	1100lm	SSR7G2-9404513N-WG
18	W	21 W	36 V	500 mA	90	2700K	20°	1900lm	1100lm	SSR7G2-9272018N-WG
							36°	1900lm	1300lm	SSR7G2-9273618N-WG
							45°	1900lm	1300lm	SSR7G2-9274518N-WG
						3000K	20°	2000lm	1200lm	SSR7G2-9302018N-WG
							36°	2000lm	1400lm	SSR7G2-9303618N-WG
							45°	2000lm	1400lm	SSR7G2-9304518N-WG
						4000K	20°	2200lm	1300lm	SSR7G2-9402018N-WG
							36°	2200lm	1500lm	SSR7G2-9403618N-WG
							45°	2200lm	1500lm	SSR7G2-9404518N-WG

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

Trimless Version available




Trimless code for SSR7G2-9304013N-WM → SSR**8**G2-9304013N-WM






Trimless code for SSR7G2-9304013N-WM → **E**SR7G2-9304013N-WM



NEKO / SENSE 100 / S100HR7-G2

Fixed LED Downlight


NEW





25W | CRI90 | 2700K 3000K 4000K | 20° 36° 45° | CITIZEN 50,000h@L80B10 | UGR < 19 | IP54 | 5 YEARS GUARANTEE | CB | CE | Intertek

100 | 1-25mm Ceiling Thickness





Specular Reflector

LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
25 W		28 W	36 V	700 mA	90	2700K	20°	2400lm	1500lm	SHR7G2-9272025N-WS
							36°	2400lm	1700lm	SHR7G2-9273625N-WS
							45°	2400lm	1700lm	SHR7G2-9274525N-WS
						3000K	20°	2600lm	1600lm	SHR7G2-9302025N-WS
							36°	2600lm	1800lm	SHR7G2-9303625N-WS
							45°	2600lm	1800lm	SHR7G2-9304525N-WS
						4000K	20°	2800lm	1700lm	SHR7G2-9402025N-WS
							36°	2800lm	1900lm	SHR7G2-9403625N-WS
							45°	2800lm	1900lm	SHR7G2-9404525N-WS



Matt Reflector

LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
25 W		28 W	36 V	700 mA	90	2700K	20°	2400lm	1500lm	SHR7G2-9272025N-WM
							36°	2400lm	1700lm	SHR7G2-9273625N-WM
							45°	2400lm	1700lm	SHR7G2-9274525N-WM
						3000K	20°	2600lm	1600lm	SHR7G2-9302025N-WM
							36°	2600lm	1800lm	SHR7G2-9303625N-WM
							45°	2600lm	1800lm	SHR7G2-9304525N-WM
						4000K	20°	2800lm	1700lm	SHR7G2-9402025N-WM
							36°	2800lm	1900lm	SHR7G2-9403625N-WM
							45°	2800lm	1900lm	SHR7G2-9404525N-WM



Black Reflector

LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
25 W		28 W	36 V	700 mA	90	2700K	20°	2400lm	1500lm	SHR7G2-9272025N-WB
							36°	2400lm	1700lm	SHR7G2-9273625N-WB
							45°	2400lm	1700lm	SHR7G2-9274525N-WB
						3000K	20°	2600lm	1600lm	SHR7G2-9302025N-WB
							36°	2600lm	1800lm	SHR7G2-9303625N-WB
							45°	2600lm	1800lm	SHR7G2-9304525N-WB
						4000K	20°	2800lm	1700lm	SHR7G2-9402025N-WB
							36°	2800lm	1900lm	SHR7G2-9403625N-WB
							45°	2800lm	1900lm	SHR7G2-9404525N-WB

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

Optional accessary



Honeycomb

Code for SHR7G2-9304525N-WM with Honeycomb
SHR7G2-9304525N-WM-**H**



Dark Light Reflector

LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
25 W		28 W	36 V	700 mA	90	2700K	20°	2400lm	1500lm	SHR7G2-9272025N-WC
							36°	2400lm	1700lm	SHR7G2-9273625N-WC
							45°	2400lm	1700lm	SHR7G2-9274525N-WC
						3000K	20°	2600lm	1600lm	SHR7G2-9302025N-WC
							36°	2600lm	1800lm	SHR7G2-9303625N-WC
							45°	2600lm	1800lm	SHR7G2-9304525N-WC
						4000K	20°	2800lm	1700lm	SHR7G2-9402025N-WC
							36°	2800lm	1900lm	SHR7G2-9403625N-WC
							45°	2800lm	1900lm	SHR7G2-9404525N-WC



White Reflector

LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
25 W		28 W	36 V	700 mA	90	2700K	20°	2400lm	1500lm	SHR7G2-9272025N-WW
							36°	2400lm	1700lm	SHR7G2-9273625N-WW
							45°	2400lm	1700lm	SHR7G2-9274525N-WW
						3000K	20°	2600lm	1600lm	SHR7G2-9302025N-WW
							36°	2600lm	1800lm	SHR7G2-9303625N-WW
							45°	2600lm	1800lm	SHR7G2-9304525N-WW
						4000K	20°	2800lm	1700lm	SHR7G2-9402025N-WW
							36°	2800lm	1900lm	SHR7G2-9403625N-WW
							45°	2800lm	1900lm	SHR7G2-9404525N-WW



Gold Reflector


LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
25 W		28 W	36 V	700 mA	90	2700K	20°	2400lm	1500lm	SHR7G2-9272025N-WG
							36°	2400lm	1700lm	SHR7G2-9273625N-WG
							45°	2400lm	1700lm	SHR7G2-9274525N-WG
						3000K	20°	2600lm	1600lm	SHR7G2-9302025N-WG
							36°	2600lm	1800lm	SHR7G2-9303625N-WG
							45°	2600lm	1800lm	SHR7G2-9304525N-WG
						4000K	20°	2800lm	1700lm	SHR7G2-9402025N-WG
							36°	2800lm	1900lm	SHR7G2-9403625N-WG
							45°	2800lm	1900lm	SHR7G2-9404525N-WG

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

Trimless Version available




Trimless code for SHR7G2-9304525N-WM → SHR**8**G2-9304525N-WM





Trimless code for SHR7G2-9304525N-WM → **E**HR7G2-9304525N-WM



NEKO / SENSE 100 / S100R2-G2

Fixed LED Downlight

NEW





2700K 6500K Tunable White

See Details @www.nekolighting.com

13W 18W | CRI90 | 2700K 3000K 4000K | 20° 36° 45° | CITIZEN 50,000h@L80B10 | UGR < 19 | IP54 | 5 YEARS GUARANTEE | CB | CE | Intertek

100 | 1-25mm Ceiling Thickness | 131 | Ø110



Specular Reflector

LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
13	W	15 W	36 V	350 mA	90	2700K	20°	1400lm	950lm	SSR2G2-9272013N-WS
							36°	1400lm	1000lm	SSR2G2-9273613N-WS
							45°	1400lm	1000lm	SSR2G2-9274513N-WS
						3000K	20°	1500lm	1000lm	SSR2G2-9302013N-WS
							36°	1500lm	1100lm	SSR2G2-9303613N-WS
							45°	1500lm	1100lm	SSR2G2-9304513N-WS
						4000K	20°	1600lm	1100lm	SSR2G2-9402013N-WS
							36°	1600lm	1200lm	SSR2G2-9403613N-WS
							45°	1600lm	1200lm	SSR2G2-9404513N-WS
18	W	21 W	36 V	500 mA	90	2700K	20°	1900lm	1300lm	SSR2G2-9272018N-WS
							36°	1900lm	1500lm	SSR2G2-9273618N-WS
							45°	1900lm	1500lm	SSR2G2-9274518N-WS
						3000K	20°	2000lm	1400lm	SSR2G2-9302018N-WS
							36°	2000lm	1600lm	SSR2G2-9303618N-WS
							45°	2000lm	1600lm	SSR2G2-9304518N-WS
						4000K	20°	2200lm	1500lm	SSR2G2-9402018N-WS
							36°	2200lm	1700lm	SSR2G2-9403618N-WS
							45°	2200lm	1700lm	SSR2G2-9404518N-WS



Matt Reflector

LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
13	W	15 W	36 V	350 mA	90	2700K	20°	1400lm	950lm	SSR2G2-9272013N-WM
							36°	1400lm	1000lm	SSR2G2-9273613N-WM
							45°	1400lm	1000lm	SSR2G2-9274513N-WM
						3000K	20°	1500lm	1000lm	SSR2G2-9302013N-WM
							36°	1500lm	1100lm	SSR2G2-9303613N-WM
							45°	1500lm	1100lm	SSR2G2-9304513N-WM
						4000K	20°	1600lm	1100lm	SSR2G2-9402013N-WM
							36°	1600lm	1200lm	SSR2G2-9403613N-WM
							45°	1600lm	1200lm	SSR2G2-9404513N-WM
18	W	21 W	36 V	500 mA	90	2700K	20°	1900lm	1300lm	SSR2G2-9272018N-WM
							36°	1900lm	1500lm	SSR2G2-9273618N-WM
							45°	1900lm	1500lm	SSR2G2-9274518N-WM
						3000K	20°	2000lm	1400lm	SSR2G2-9302018N-WM
							36°	2000lm	1600lm	SSR2G2-9303618N-WM
							45°	2000lm	1600lm	SSR2G2-9304518N-WM
						4000K	20°	2200lm	1500lm	SSR2G2-9402018N-WM
							36°	2200lm	1700lm	SSR2G2-9403618N-WM
							45°	2200lm	1700lm	SSR2G2-9404518N-WM

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

Optional accessary



Honeycomb

Code for SSR2G2-9303618N-WM with **H**oneycomb
SSR2G2-9303618N-WM-**H**



Black Reflector



Dark Light Reflector



White Reflector



White Reflector

LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
13	W	15 W	36 V	350 mA	90	2700K	20°	1400lm	950lm	SSR2G2-9272013N-WC
							36°	1400lm	1000lm	SSR2G2-9273613N-WC
							45°	1400lm	1000lm	SSR2G2-9274513N-WC
						3000K	20°	1500lm	1000lm	SSR2G2-9302013N-WC
							36°	1500lm	1100lm	SSR2G2-9303613N-WC
							45°	1500lm	1100lm	SSR2G2-9304513N-WC
						4000K	20°	1600lm	1100lm	SSR2G2-9402013N-WC
							36°	1600lm	1200lm	SSR2G2-9403613N-WC
							45°	1600lm	1200lm	SSR2G2-9404513N-WC
18	W	21 W	36 V	500 mA	90	2700K	20°	1900lm	1300lm	SSR2G2-9272018N-WC
							36°	1900lm	1500lm	SSR2G2-9273618N-WC
							45°	1900lm	1500lm	SSR2G2-9274518N-WC
						3000K	20°	2000lm	1400lm	SSR2G2-9302018N-WC
							36°	2000lm	1600lm	SSR2G2-9303618N-WC
							45°	2000lm	1600lm	SSR2G2-9304518N-WC
						4000K	20°	2200lm	1500lm	SSR2G2-9402018N-WC
							36°	2200lm	1700lm	SSR2G2-9403618N-WC
							45°	2200lm	1700lm	SSR2G2-9404518N-WC
13	W	15 W	36 V	350 mA	90	2700K	20°	1400lm	950lm	SSR2G2-9272013N-WW
							36°	1400lm	1000lm	SSR2G2-9273613N-WW
							45°	1400lm	1000lm	SSR2G2-9274513N-WW
						3000K	20°	1500lm	1000lm	SSR2G2-9302013N-WW
							36°	1500lm	1100lm	SSR2G2-9303613N-WW
							45°	1500lm	1100lm	SSR2G2-9304513N-WW
						4000K	20°	1600lm	1100lm	SSR2G2-9402013N-WW
							36°	1600lm	1200lm	SSR2G2-9403613N-WW
							45°	1600lm	1200lm	SSR2G2-9404513N-WW
18	W	21 W	36 V	500 mA	90	2700K	20°	1900lm	1300lm	SSR2G2-9272018N-WW
							36°	1900lm	1500lm	SSR2G2-9273618N-WW
							45°	1900lm	1500lm	SSR2G2-9274518N-WW
						3000K	20°	2000lm	1400lm	SSR2G2-9302018N-WW
							36°	2000lm	1600lm	SSR2G2-9303618N-WW
							45°	2000lm	1600lm	SSR2G2-9304518N-WW
						4000K	20°	2200lm	1500lm	SSR2G2-9402018N-WW
							36°	2200lm	1700lm	SSR2G2-9403618N-WW
							45°	2200lm	1700lm	SSR2G2-9404518N-WW
13	W	15 W	36 V	350 mA	90	2700K	20°	1400lm	950lm	SSR2G2-9272013N-WG
							36°	1400lm	1000lm	SSR2G2-9273613N-WG
							45°	1400lm	1000lm	SSR2G2-9274513N-WG
						3000K	20°	1500lm	1000lm	SSR2G2-9302013N-WG
							36°	1500lm	1100lm	SSR2G2-9303613N-WG
							45°	1500lm	1100lm	SSR2G2-9304513N-WG
						4000K	20°	1600lm	1100lm	SSR2G2-9402013N-WG
							36°	1600lm	1200lm	SSR2G2-9403613N-WG
							45°	1600lm	1200lm	SSR2G2-9404513N-WG
18	W	21 W	36 V	500 mA	90	2700K	20°	1900lm	1300lm	SSR2G2-9272018N-WG
							36°	1900lm	1500lm	SSR2G2-9273618N-WG
							45°	1900lm	1500lm	SSR2G2-9274518N-WG
						3000K	20°	2000lm	1400lm	SSR2G2-9302018N-WG
							36°	2000lm	1600lm	SSR2G2-9303618N-WG
							45°	2000lm	1600lm	SSR2G2-9304518N-WG
						4000K	20°	2200lm	1500lm	SSR2G2-9402018N-WG
							36°	2200lm	1700lm	SSR2G2-9403618N-WG
							45°	2200lm	1700lm	SSR2G2-9404518N-WG

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

Trimless Version available



Trimless code for SSR2G2-9303618N-WM → SSR**5**G2-9303618N-WM

12.5-25mm Ceiling Thickness | 100 | 131 | Ø96 | Ø202




Trimless code for SSR2G2-9303618N-WM → **E**SR2G2-9303618N-WM

1-25mm Ceiling Thickness | 108 | 131 | Ø96 | Ø148

NEKO / SENSE 100H / S100HR2-G2

Fixed LED Downlight


NEW





25W | CRI90 | 2700K 3000K 4000K | 20° 36° 45° | CITIZEN 50,000h@L80B10 | UGR < 19 | IP54 | 5 YEARS GUARANTEE | CB | CE | ETL Intertek







Specular Reflector

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
25 W	28 W	36 V	700 mA	90	2700K	20°	2400lm	1700lm	SHR2G2-9272025N-WS
						36°	2400lm	1900lm	SHR2G2-9273625N-WS
						45°	2400lm	1900lm	SHR2G2-9274525N-WS
					3000K	20°	2600lm	1800lm	SHR2G2-9302025N-WS
						36°	2600lm	2000lm	SHR2G2-9303625N-WS
						45°	2600lm	2000lm	SHR2G2-9304525N-WS
					4000K	20°	2800lm	1900lm	SHR2G2-9402025N-WS
						36°	2800lm	2100lm	SHR2G2-9403625N-WS
						45°	2800lm	2100lm	SHR2G2-9404525N-WS



Matt Reflector

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
25 W	28 W	36 V	700 mA	90	2700K	20°	2400lm	1700lm	SHR2G2-9272025N-WM
						36°	2400lm	1900lm	SHR2G2-9273625N-WM
						45°	2400lm	1900lm	SHR2G2-9274525N-WM
					3000K	20°	2600lm	1800lm	SHR2G2-9302025N-WM
						36°	2600lm	2000lm	SHR2G2-9303625N-WM
						45°	2600lm	2000lm	SHR2G2-9304525N-WM
					4000K	20°	2800lm	1900lm	SHR2G2-9402025N-WM
						36°	2800lm	2100lm	SHR2G2-9403625N-WM
						45°	2800lm	2100lm	SHR2G2-9404525N-WM



Black Reflector

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
25 W	28 W	36 V	700 mA	90	2700K	20°	2400lm	1700lm	SHR2G2-9272025N-WB
						36°	2400lm	1900lm	SHR2G2-9273625N-WB
						45°	2400lm	1900lm	SHR2G2-9274525N-WB
					3000K	20°	2600lm	1800lm	SHR2G2-9302025N-WB
						36°	2600lm	2000lm	SHR2G2-9303625N-WB
						45°	2600lm	2000lm	SHR2G2-9304525N-WB
					4000K	20°	2800lm	1900lm	SHR2G2-9402025N-WB
						36°	2800lm	2100lm	SHR2G2-9403625N-WB
						45°	2800lm	2100lm	SHR2G2-9404525N-WB

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

Optional accessary



Honeycomb

Code for SHR7G2-9304525N-WM with Honeycomb
SHR7G2-9304525N-WM-**H**



Dark Light Reflector

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
25 W	28 W	36 V	700 mA	90	2700K	20°	2400lm	1700lm	SHR2G2-9272025N-WC
						36°	2400lm	1900lm	SHR2G2-9273625N-WC
						45°	2400lm	1900lm	SHR2G2-9274525N-WC
					3000K	20°	2600lm	1800lm	SHR2G2-9302025N-WC
						36°	2600lm	2000lm	SHR2G2-9303625N-WC
						45°	2600lm	2000lm	SHR2G2-9304525N-WC
					4000K	20°	2800lm	1900lm	SHR2G2-9402025N-WC
						36°	2800lm	2100lm	SHR2G2-9403625N-WC
						45°	2800lm	2100lm	SHR2G2-9404525N-WC



White Reflector

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
25 W	28 W	36 V	700 mA	90	2700K	20°	2400lm	1700lm	SHR2G2-9272025N-WW
						36°	2400lm	1900lm	SHR2G2-9273625N-WW
						45°	2400lm	1900lm	SHR2G2-9274525N-WW
					3000K	20°	2600lm	1800lm	SHR2G2-9302025N-WW
						36°	2600lm	2000lm	SHR2G2-9303625N-WW
						45°	2600lm	2000lm	SHR2G2-9304525N-WW
					4000K	20°	2800lm	1900lm	SHR2G2-9402025N-WW
						36°	2800lm	2100lm	SHR2G2-9403625N-WW
						45°	2800lm	2100lm	SHR2G2-9404525N-WW



Gold Reflector


LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
25 W	28 W	36 V	700 mA	90	2700K	20°	2400lm	1700lm	SHR2G2-9272025N-WG
						36°	2400lm	1900lm	SHR2G2-9273625N-WG
						45°	2400lm	1900lm	SHR2G2-9274525N-WG
					3000K	20°	2600lm	1800lm	SHR2G2-9302025N-WG
						36°	2600lm	2000lm	SHR2G2-9303625N-WG
						45°	2600lm	2000lm	SHR2G2-9304525N-WG
					4000K	20°	2800lm	1900lm	SHR2G2-9402025N-WG
						36°	2800lm	2100lm	SHR2G2-9403625N-WG
						45°	2800lm	2100lm	SHR2G2-9404525N-WG

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

Trimless Version available




Trimless code for SHR2G2-9304525N-WM → SHR**5**G2-9304525N-WM






Trimless code for SHR2G2-9304525N-WM → **E**HR2G2-9304525N-WM



NEKO / SENSE 100 / S100S2-G2

Fixed LED Downlight

NEW

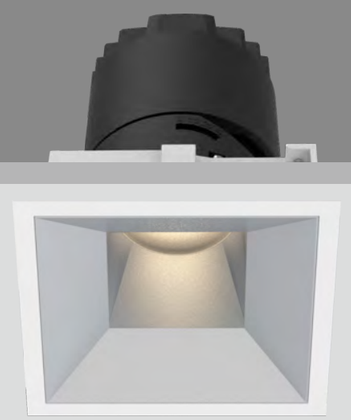

Tunable White

See Details @www.nekolighting.com

13W 18W | CRI90 | 2700K 3000K 4000K | 20° 36° 45° | CITIZEN 50,000h@L80B10 | UGR < 19 | IP54 | 5 YEARS GUARANTEE | CB | CE | Intertek





Specular Reflector

LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
13	W	15 W	36 V	350 mA	90	2700K	20°	1400lm	950lm	SSS2G2-9272013N-WS
							36°	1400lm	1000lm	SSS2G2-9273613N-WS
							45°	1400lm	1000lm	SSS2G2-9274513N-WS
						3000K	20°	1500lm	1000lm	SSS2G2-9302013N-WS
							36°	1500lm	1100lm	SSS2G2-9303613N-WS
							45°	1500lm	1100lm	SSS2G2-9304513N-WS
						4000K	20°	1600lm	1100lm	SSS2G2-9402013N-WS
							36°	1600lm	1200lm	SSS2G2-9403613N-WS
							45°	1600lm	1200lm	SSS2G2-9404513N-WS
18	W	21 W	36 V	500 mA	90	2700K	20°	1900lm	1300lm	SSS2G2-9272018N-WS
							36°	1900lm	1500lm	SSS2G2-9273618N-WS
							45°	1900lm	1500lm	SSS2G2-9274518N-WS
						3000K	20°	2000lm	1400lm	SSS2G2-9302018N-WS
							36°	2000lm	1600lm	SSS2G2-9303618N-WS
							45°	2000lm	1600lm	SSS2G2-9304518N-WS
						4000K	20°	2200lm	1500lm	SSS2G2-9402018N-WS
							36°	2200lm	1700lm	SSS2G2-9403618N-WS
							45°	2200lm	1700lm	SSS2G2-9404518N-WS



Matt Reflector

LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
13	W	15 W	36 V	350 mA	90	2700K	20°	1400lm	950lm	SSS2G2-9272013N-WM
							36°	1400lm	1000lm	SSS2G2-9273613N-WM
							45°	1400lm	1000lm	SSS2G2-9274513N-WM
						3000K	20°	1500lm	1000lm	SSS2G2-9302013N-WM
							36°	1500lm	1100lm	SSS2G2-9303613N-WM
							45°	1500lm	1100lm	SSS2G2-9304513N-WM
						4000K	20°	1600lm	1100lm	SSS2G2-9402013N-WM
							36°	1600lm	1200lm	SSS2G2-9403613N-WM
							45°	1600lm	1200lm	SSS2G2-9404513N-WM
18	W	21 W	36 V	500 mA	90	2700K	20°	1900lm	1300lm	SSS2G2-9272018N-WM
							36°	1900lm	1500lm	SSS2G2-9273618N-WM
							45°	1900lm	1500lm	SSS2G2-9274518N-WM
						3000K	20°	2000lm	1400lm	SSS2G2-9302018N-WM
							36°	2000lm	1600lm	SSS2G2-9303618N-WM
							45°	2000lm	1600lm	SSS2G2-9304518N-WM
						4000K	20°	2200lm	1500lm	SSS2G2-9402018N-WM
							36°	2200lm	1700lm	SSS2G2-9403618N-WM
							45°	2200lm	1700lm	SSS2G2-9404518N-WM


Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

Optional accessary




Honeycomb

Code for SSS2G2-9303618N-WM with Honeycomb
SSS2G2-9303618N-WM-H



Black Reflector

LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
13	W	15 W	36 V	350 mA	90	2700K	20°	1400lm	950lm	SSS2G2-9272013N-WB
							36°	1400lm	1000lm	SSS2G2-9273613N-WB
							45°	1400lm	1000lm	SSS2G2-9274513N-WB
						3000K	20°	1500lm	1000lm	SSS2G2-9302013N-WB
							36°	1500lm	1100lm	SSS2G2-9303613N-WB
							45°	1500lm	1100lm	SSS2G2-9304513N-WB
						4000K	20°	1600lm	1100lm	SSS2G2-9402013N-WB
							36°	1600lm	1200lm	SSS2G2-9403613N-WB
							45°	1600lm	1200lm	SSS2G2-9404513N-WB
18	W	21 W	36 V	500 mA	90	2700K	20°	1900lm	1300lm	SSS2G2-9272018N-WB
							36°	1900lm	1500lm	SSS2G2-9273618N-WB
							45°	1900lm	1500lm	SSS2G2-9274518N-WB
						3000K	20°	2000lm	1400lm	SSS2G2-9302018N-WB
							36°	2000lm	1600lm	SSS2G2-9303618N-WB
							45°	2000lm	1600lm	SSS2G2-9304518N-WB
						4000K	20°	2200lm	1500lm	SSS2G2-9402018N-WB
							36°	2200lm	1700lm	SSS2G2-9403618N-WB
							45°	2200lm	1700lm	SSS2G2-9404518N-WB



Dark Light Reflector

LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
13	W	15 W	36 V	350 mA	90	2700K	20°	1400lm	950lm	SSS2G2-9272013N-WC
							36°	1400lm	1000lm	SSS2G2-9273613N-WC
							45°	1400lm	1000lm	SSS2G2-9274513N-WC
						3000K	20°	1500lm	1000lm	SSS2G2-9302013N-WC
							36°	1500lm	1100lm	SSS2G2-9303613N-WC
							45°	1500lm	1100lm	SSS2G2-9304513N-WC
						4000K	20°	1600lm	1100lm	SSS2G2-9402013N-WC
							36°	1600lm	1200lm	SSS2G2-9403613N-WC
							45°	1600lm	1200lm	SSS2G2-9404513N-WC
18	W	21 W	36 V	500 mA	90	2700K	20°	1900lm	1300lm	SSS2G2-9272018N-WC
							36°	1900lm	1500lm	SSS2G2-9273618N-WC
							45°	1900lm	1500lm	SSS2G2-9274518N-WC
						3000K	20°	2000lm	1400lm	SSS2G2-9302018N-WC
							36°	2000lm	1600lm	SSS2G2-9303618N-WC
							45°	2000lm	1600lm	SSS2G2-9304518N-WC
						4000K	20°	2200lm	1500lm	SSS2G2-9402018N-WC
							36°	2200lm	1700lm	SSS2G2-9403618N-WC
							45°	2200lm	1700lm	SSS2G2-9404518N-WC



White Reflector

LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
13	W	15 W	36 V	350 mA	90	2700K	20°	1400lm	950lm	SSS2G2-9272013N-WW
							36°	1400lm	1000lm	SSS2G2-9273613N-WW
							45°	1400lm	1000lm	SSS2G2-9274513N-WW
						3000K	20°	1500lm	1000lm	SSS2G2-9302013N-WW
							36°	1500lm	1100lm	SSS2G2-9303613N-WW
							45°	1500lm	1100lm	SSS2G2-9304513N-WW
						4000K	20°	1600lm	1100lm	SSS2G2-9402013N-WW
							36°	1600lm	1200lm	SSS2G2-9403613N-WW
							45°	1600lm	1200lm	SSS2G2-9404513N-WW
18	W	21 W	36 V	500 mA	90	2700K	20°	1900lm	1300lm	SSS2G2-9272018N-WW
							36°	1900lm	1500lm	SSS2G2-9273618N-WW
							45°	1900lm	1500lm	SSS2G2-9274518N-WW
						3000K	20°	2000lm	1400lm	SSS2G2-9302018N-WW
							36°	2000lm	1600lm	SSS2G2-9303618N-WW
							45°	2000lm	1600lm	SSS2G2-9304518N-WW
						4000K	20°	2200lm	1500lm	SSS2G2-9402018N-WW
							36°	2200lm	1700lm	SSS2G2-9403618N-WW
							45°	2200lm	1700lm	SSS2G2-9404518N-WW



White Reflector


LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
13	W	15 W	36 V	350 mA	90	2700K	20°	1400lm	950lm	SSS2G2-9272013N-WG
							36°	1400lm	1000lm	SSS2G2-9273613N-WG
							45°	1400lm	1000lm	SSS2G2-9274513N-WG
						3000K	20°	1500lm	1000lm	SSS2G2-9302013N-WG
							36°	1500lm	1100lm	SSS2G2-9303613N-WG
							45°	1500lm	1100lm	SSS2G2-9304513N-WG
						4000K	20°	1600lm	1100lm	SSS2G2-9402013N-WG
							36°	1600lm	1200lm	SSS2G2-9403613N-WG
							45°	1600lm	1200lm	SSS2G2-9404513N-WG
18	W	21 W	36 V	500 mA	90	2700K	20°	1900lm	1300lm	SSS2G2-9272018N-WG
							36°	1900lm	1500lm	SSS2G2-9273618N-WG
							45°	1900lm	1500lm	SSS2G2-9274518N-WG
						3000K	20°	2000lm	1400lm	SSS2G2-9302018N-WG
							36°	2000lm	1600lm	SSS2G2-9303618N-WG
							45°	2000lm	1600lm	SSS2G2-9304518N-WG
						4000K	20°	2200lm	1500lm	SSS2G2-9402018N-WG
							36°	2200lm	1700lm	SSS2G2-9403618N-WG
							45°	2200lm	1700lm	SSR2G2-9404518N-WG

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

Trimless Version available




Trimless code for SSS2G2-9303618N-WM → SSS5G2-9303618N-WM






Trimless code for SSS2G2-9303618N-WM → ESS2G2-9303618N-WM



NEKO / SENSE 100H / S100HS2-G2

Fixed LED Downlight

NEW

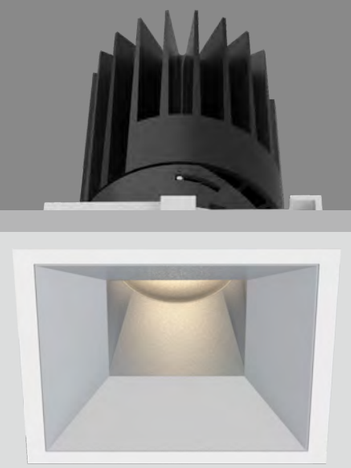

25W | CRI90 | 2700K 3000K 4000K | 20° 36° 45° | CITIZEN 50,000h@L80B10 | UGR < 19 | IP54 | 5 YEARS GUARANTEE | CB | CE | ENEC | cETLus Intertek





Specular Reflector

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
25 W	28 W	36 V	700 mA	90	2700K	20°	2400lm	1700lm	SHS2G2-9272025N-WS
						36°	2400lm	1900lm	SHS2G2-9273625N-WS
						45°	2400lm	1900lm	SHS2G2-9274525N-WS
					3000K	20°	2600lm	1800lm	SHS2G2-9302025N-WS
						36°	2600lm	2000lm	SHS2G2-9303625N-WS
						45°	2600lm	2000lm	SHS2G2-9304525N-WS
					4000K	20°	2800lm	1900lm	SHS2G2-9402025N-WS
						36°	2800lm	2100lm	SHS2G2-9403625N-WS
						45°	2800lm	2100lm	SHS2G2-9404525N-WS



Matt Reflector

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
25 W	28 W	36 V	700 mA	90	2700K	20°	2400lm	1700lm	SHS2G2-9272025N-WM
						36°	2400lm	1900lm	SHS2G2-9273625N-WM
						45°	2400lm	1900lm	SHS2G2-9274525N-WM
					3000K	20°	2600lm	1800lm	SHS2G2-9302025N-WM
						36°	2600lm	2000lm	SHS2G2-9303625N-WM
						45°	2600lm	2000lm	SHS2G2-9304525N-WM
					4000K	20°	2800lm	1900lm	SHS2G2-9402025N-WM
						36°	2800lm	2100lm	SHS2G2-9403625N-WM
						45°	2800lm	2100lm	SHS2G2-9404525N-WM



Black Reflector

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
25 W	28 W	36 V	700 mA	90	2700K	20°	2400lm	1700lm	SHS2G2-9272025N-WB
						36°	2400lm	1900lm	SHS2G2-9273625N-WB
						45°	2400lm	1900lm	SHS2G2-9274525N-WB
					3000K	20°	2600lm	1800lm	SHS2G2-9302025N-WB
						36°	2600lm	2000lm	SHS2G2-9303625N-WB
						45°	2600lm	2000lm	SHS2G2-9304525N-WB
					4000K	20°	2800lm	1900lm	SHS2G2-9402025N-WB
						36°	2800lm	2100lm	SHS2G2-9403625N-WB
						45°	2800lm	2100lm	SHS2G2-9404525N-WB


Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

Optional accessary



Honeycomb

Code for SHS2G2-9304525N-WM with Honeycomb
SHS2G2-9304525N-WM-**H**



Dark Light Reflector

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
25 W	28 W	36 V	700 mA	90	2700K	20°	2400lm	1700lm	SHS2G2-9272025N-WC
						36°	2400lm	1900lm	SHS2G2-9273625N-WC
						45°	2400lm	1900lm	SHS2G2-9274525N-WC
					3000K	20°	2600lm	1800lm	SHS2G2-9302025N-WC
						36°	2600lm	2000lm	SHS2G2-9303625N-WC
						45°	2600lm	2000lm	SHS2G2-9304525N-WC
					4000K	20°	2800lm	1900lm	SHS2G2-9402025N-WC
						36°	2800lm	2100lm	SHS2G2-9403625N-WC
						45°	2800lm	2100lm	SHS2G2-9404525N-WC



White Reflector

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
25 W	28 W	36 V	700 mA	90	2700K	20°	2400lm	1700lm	SHS2G2-9272025N-WW
						36°	2400lm	1900lm	SHS2G2-9273625N-WW
						45°	2400lm	1900lm	SHS2G2-9274525N-WW
					3000K	20°	2600lm	1800lm	SHS2G2-9302025N-WW
						36°	2600lm	2000lm	SHS2G2-9303625N-WW
						45°	2600lm	2000lm	SHS2G2-9304525N-WW
					4000K	20°	2800lm	1900lm	SHS2G2-9402025N-WW
						36°	2800lm	2100lm	SHS2G2-9403625N-WW
						45°	2800lm	2100lm	SHS2G2-9404525N-WW



Gold Reflector

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
25 W	28 W	36 V	700 mA	90	2700K	20°	2400lm	1700lm	SHS2G2-9272025N-WG
						36°	2400lm	1900lm	SHS2G2-9273625N-WG
						45°	2400lm	1900lm	SHS2G2-9274525N-WG
					3000K	20°	2600lm	1800lm	SHS2G2-9302025N-WG
						36°	2600lm	2000lm	SHS2G2-9303625N-WG
						45°	2600lm	2000lm	SHS2G2-9304525N-WG
					4000K	20°	2800lm	1900lm	SHS2G2-9402025N-WG
						36°	2800lm	2100lm	SHS2G2-9403625N-WG
						45°	2800lm	2100lm	SHS2G2-9404525N-WG

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

Trimless Version available



Trimless code for SHS2G2-9304525N-WM → SHS**5**G2-9304525N-WM






Trimless code for SHS2G2-9304525N-WM → **E**HS2G2-9304525N-WM






NEKO / SENSE 100 / S100R3-G2
Wall Washer LED Downlight

NEW






2700K 6500K Tunable White

See Details @www.nekolighting.com

13W 18W | CRI90 | 2700K 3000K 4000K | CITIZEN 50,000h@L80B10 | IP54 | 5 YEARS GUARANTEE | CB | CE | Intertek





Matt Reflector


LED Power	System power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
13 W	15 W	36 V	350 mA	90	2700K	Wall Washer	1400lm	650lm	SSR3G2-927WW13N-WM
					3000K	Wall Washer	1500lm	680lm	SSR3G2-930WW13N-WM
					4000K	Wall Washer	1600lm	750lm	SSR3G2-940WW13N-WM
18 W	21 W	36 V	500 mA	90	2700K	Wall Washer	1900lm	850lm	SSR3G2-927WW18N-WM
					3000K	Wall Washer	2000lm	900lm	SSR3G2-930WW18N-WM
					4000K	Wall Washer	2200lm	1000lm	SSR3G2-940WW18N-WM

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

Trimless Version available




Trimless code for SSR3G2-930WW13N-WM → SSR**6**G2-930WW13N-WM






Trimless code for SSR3G2-930WW13N-WM → **E**SR3G2-930WW13N-WM







NEKO / SENSE 100H / S100HR3-G2
Wall Washer LED Downlight

NEW





25W | CRI90 | 2700K 3000K 4000K | CITIZEN 50,000h@L80B10 | IP54 | 5 YEARS GUARANTEE | CB | CE | Intertek





Matt Reflector


LED Power	System power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
25 W	28 W	36 V	700 mA	90	2700K	Wall Washer	2400lm	1000lm	SHR3G2-927WW25N-WM
					3000K	Wall Washer	2600lm	1100lm	SHR3G2-930WW25N-WM
					4000K	Wall Washer	2800lm	1200lm	SHR3G2-940WW25N-WM

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

Trimless Version available




Trimless code for SHR3G2-930WW25N-WM → SHR**6**G2-930WW25N-WM






Trimless code for SHR3G2-930WW25N-WM → **E**HR3G2-930WW25N-WM






NEKO / SENSE 100 / S100S3 G2
Wall Washer LED Downlight

NEW






2700K 6500K Tunable White

See Details @www.nekolighting.com

13W 18W | CRI90 | 2700K 3000K 4000K | CITIZEN 50,000h@L80B10 | IP54 | 5 YEARS GUARANTEE | CB | CE | Intertek





Matt Reflector

LED	Power	System power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
13	W	15 W	36 V	350 mA	90	2700K	Wall Washer	1400lm	650lm	SSS3G2-927WW13N-WM
						3000K	Wall Washer	1500lm	680lm	SSS3G2-930WW13N-WM
						4000K	Wall Washer	1600lm	750lm	SSS3G2-940WW13N-WM
18	W	21 W	36 V	500 mA	90	2700K	Wall Washer	1900lm	850lm	SSS3G2-927WW18N-WM
						3000K	Wall Washer	2000lm	900lm	SSS3G2-930WW18N-WM
						4000K	Wall Washer	2200lm	1000lm	SSS3G2-940WW18N-WM

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

Trimless Version available




Trimless code for SSS3G2-930WW13N-WM → SSS**6**G2-930WW13N-WM






Trimless code for SSS3G2-930WW13N-WM → **E**SS3G2-930WW13N-WM




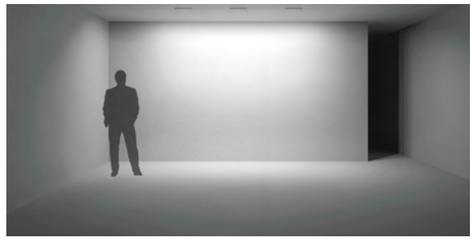


NEKO / SENSE 100H / S100HS3-G2
Wall Washer LED Downlight

NEW





25W | CRI90 | 2700K 3000K 4000K | CITIZEN 50,000h@L80B10 | IP54 | 5 YEARS GUARANTEE | CB | CE | Intertek





Matt Reflector

LED	Power	System power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
25	W	28 W	36 V	700 mA	90	2700K	Wall Washer	2400lm	1000lm	SHS3G2-927WW25N-WM
						3000K	Wall Washer	2600lm	1100lm	SHS3G2-930WW25N-WM
						4000K	Wall Washer	2800lm	1200lm	SHS3G2-940WW25N-WM

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

Trimless Version available




Trimless code for SHS3G2-930WW13N-WM → SHS**6**G2-930WW13N-WM





Trimless code for SHS3G2-930WW13N-WM → **E**HS3G2-930WW13N-WM



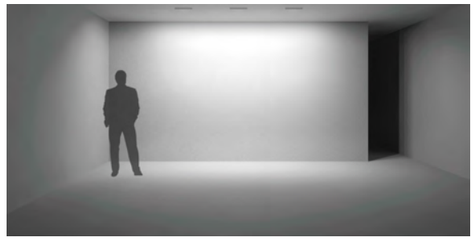




NEKO / SENSE 125 / S125R1-G2

Adjustable LED Downlight

NEW

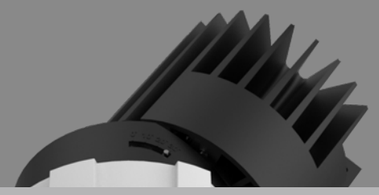




2700K 6500K Tunable White

See Details @www.nekolighting.com

18W 25W | CRI90 | 2700K 3000K 4000K | 20° 38° 50° | CITIZEN 50,000h@L80B10 | UGR < 19 | IP54 | 5 YEARS GUARANTEE | CB | CE | ETL Intertek



LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
18 W		21 W	36 V	500 mA	90	2700K	20°	1900lm	1500lm	SMR1G2-9272018N-WS
							38°	1900lm	1500lm	SMR1G2-9273818N-WS
							50°	1900lm	1300lm	SMR1G2-9275018N-WS
						3000K	20°	2000lm	1600lm	SMR1G2-9302018N-WS
							38°	2000lm	1600lm	SMR1G2-9303818N-WS
							50°	2000lm	1400lm	SMR1G2-9305018N-WS
						4000K	20°	2200lm	1700lm	SMR1G2-9402018N-WS
							38°	2200lm	1700lm	SMR1G2-9403818N-WS
							50°	2200lm	1500lm	SMR1G2-9405018N-WS
25 W		28 W	36 V	700 mA	90	2700K	20°	2400lm	2100lm	SMR1G2-9272025N-WS
							38°	2400lm	2100lm	SMR1G2-9273825N-WS
							50°	2400lm	1900lm	SMR1G2-9275025N-WS
						3000K	20°	2600lm	2200lm	SMR1G2-9302025N-WS
							38°	2600lm	2200lm	SMR1G2-9303825N-WS
							50°	2600lm	2000lm	SMR1G2-9305025N-WS
						4000K	20°	2800lm	2400lm	SMR1G2-9402025N-WS
							38°	2800lm	2400lm	SMR1G2-9403825N-WS
							50°	2800lm	2200lm	SMR1G2-9405025N-WS
18 W		21 W	36 V	500 mA	90	2700K	20°	1900lm	1500lm	SMR1G2-9272018N-WM
							38°	1900lm	1500lm	SMR1G2-9273818N-WM
							50°	1900lm	1300lm	SMR1G2-9275018N-WM
						3000K	20°	2000lm	1600lm	SMR1G2-9302018N-WM
							38°	2000lm	1600lm	SMR1G2-9303818N-WM
							50°	2000lm	1400lm	SMR1G2-9305018N-WM
						4000K	20°	2200lm	1700lm	SMR1G2-9402018N-WM
							38°	2200lm	1700lm	SMR1G2-9403818N-WM
							50°	2200lm	1500lm	SMR1G2-9405018N-WM
25 W		28 W	36 V	700 mA	90	2700K	20°	2400lm	2100lm	SMR1G2-9272025N-WM
							38°	2400lm	2100lm	SMR1G2-9273825N-WM
							50°	2400lm	1900lm	SMR1G2-9275025N-WM
						3000K	20°	2600lm	2200lm	SMR1G2-9302025N-WM
							38°	2600lm	2200lm	SMR1G2-9303825N-WM
							50°	2600lm	2000lm	SMR1G2-9305025N-WM
						4000K	20°	2800lm	2400lm	SMR1G2-9402025N-WM
							38°	2800lm	2400lm	SMR1G2-9403825N-WM
							50°	2800lm	2200lm	SMR1G2-9405025N-WM

Specular Reflector

Matt Reflector

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

Optional accessary



Honeycomb

Code for SMR1G2-9405025N-WM with **H**oneycomb
SMR1G2-9405025N-WM-**H**



Black Reflector



Dark Light Reflector



White Reflector



Gold Reflector


LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
18 W		21 W	36 V	500 mA	90	2700K	20°	1900lm	1500lm	SMR1G2-9272018N-WB
							38°	1900lm	1500lm	SMR1G2-9273818N-WB
							50°	1900lm	1300lm	SMR1G2-9275018N-WB
						3000K	20°	2000lm	1600lm	SMR1G2-9302018N-WB
							38°	2000lm	1600lm	SMR1G2-9303818N-WB
							50°	2000lm	1400lm	SMR1G2-9305018N-WB
						4000K	20°	2200lm	1700lm	SMR1G2-9402018N-WB
							38°	2200lm	1700lm	SMR1G2-9403818N-WB
							50°	2200lm	1500lm	SMR1G2-9405018N-WB
25 W		28 W	36 V	700 mA	90	2700K	20°	2400lm	2100lm	SMR1G2-9272025N-WB
							38°	2400lm	2100lm	SMR1G2-9273825N-WB
							50°	2400lm	1900lm	SMR1G2-9275025N-WB
						3000K	20°	2600lm	2200lm	SMR1G2-9302025N-WB
							38°	2600lm	2200lm	SMR1G2-9303825N-WB
							50°	2600lm	2000lm	SMR1G2-9305025N-WB
						4000K	20°	2800lm	2400lm	SMR1G2-9402025N-WB
							38°	2800lm	2400lm	SMR1G2-9403825N-WB
							50°	2800lm	2200lm	SMR1G2-9405025N-WB
18 W		21 W	36 V	500 mA	90	2700K	20°	1900lm	1500lm	SMR1G2-9272018N-WC
							38°	1900lm	1500lm	SMR1G2-9273818N-WC
							50°	1900lm	1300lm	SMR1G2-9275018N-WC
						3000K	20°	2000lm	1600lm	SMR1G2-9302018N-WC
							38°	2000lm	1600lm	SMR1G2-9303818N-WC
							50°	2000lm	1400lm	SMR1G2-9305018N-WC
						4000K	20°	2200lm	1700lm	SMR1G2-9402018N-WC
							38°	2200lm	1700lm	SMR1G2-9403818N-WC
							50°	2200lm	1500lm	SMR1G2-9405018N-WC
25 W		28 W	36 V	700 mA	90	2700K	20°	2400lm	2100lm	SMR1G2-9272025N-WC
							38°	2400lm	2100lm	SMR1G2-9273825N-WC
							50°	2400lm	1900lm	SMR1G2-9275025N-WC
						3000K	20°	2600lm	2200lm	SMR1G2-9302025N-WC
							38°	2600lm	2200lm	SMR1G2-9303825N-WC
							50°	2600lm	2000lm	SMR1G2-9305025N-WC
						4000K	20°	2800lm	2400lm	SMR1G2-9402025N-WC
							38°	2800lm	2400lm	SMR1G2-9403825N-WC
							50°	2800lm	2200lm	SMR1G2-9405025N-WC
18 W		21 W	36 V	500 mA	90	2700K	20°	1900lm	1500lm	SMR1G2-9272018N-WW
							38°	1900lm	1500lm	SMR1G2-9273818N-WW
							50°	1900lm	1300lm	SMR1G2-9275018N-WW
						3000K	20°	2000lm	1600lm	SMR1G2-9302018N-WW
							38°	2000lm	1600lm	SMR1G2-9303818N-WW
							50°	2000lm	1400lm	SMR1G2-9305018N-WW
						4000K	20°	2200lm	1700lm	SMR1G2-9402018N-WW
							38°	2200lm	1700lm	SMR1G2-9403818N-WW
							50°	2200lm	1500lm	SMR1G2-9405018N-WW
25 W		28 W	36 V	700 mA	90	2700K	20°	2400lm	2100lm	SMR1G2-9272025N-WW
							38°	2400lm	2100lm	SMR1G2-9273825N-WW
							50°	2400lm	1900lm	SMR1G2-9275025N-WW
						3000K	20°	2600lm	2200lm	SMR1G2-9302025N-WW
							38°	2600lm	2200lm	SMR1G2-9303825N-WW
							50°	2600lm	2000lm	SMR1G2-9305025N-WW
						4000K	20°	2800lm	2400lm	SMR1G2-9402025N-WW
							38°	2800lm	2400lm	SMR1G2-9403825N-WW
							50°	2800lm	2200lm	SMR1G2-9405025N-WW
18 W		21 W	36 V	500 mA	90	2700K	20°	1900lm	1500lm	SMR1G2-9272018N-WG
							38°	1900lm	1500lm	SMR1G2-9273818N-WG
							50°	1900lm	1300lm	SMR1G2-9275018N-WG
						3000K	20°	2000lm	1600lm	SMR1G2-9302018N-WG
							38°	2000lm	1600lm	SMR1G2-9303818N-WG
							50°	2000lm	1400lm	SMR1G2-9305018N-WG
						4000K	20°	2200lm	1700lm	SMR1G2-9402018N-WG
							38°	2200lm	1700lm	SMR1G2-9403818N-WG
							50°	2200lm	1500lm	SMR1G2-9405018N-WG
25 W		28 W	36 V	700 mA	90	2700K	20°	2400lm	2100lm	SMR1G2-9272025N-WG
							38°	2400lm	2100lm	SMR1G2-9273825N-WG
							50°	2400lm	1900lm	SMR1G2-9275025N-WG
						3000K	20°	2600lm	2200lm	SMR1G2-9302025N-WG
							38°	2600lm	2200lm	SMR1G2-9303825N-WG
							50°	2600lm	2000lm	SMR1G2-9305025N-WG
						4000K	20°	2800lm	2400lm	SMR1G2-9402025N-WG
							38°	2800lm	2400lm	SMR1G2-9403825N-WG
							50°	2800lm	2200lm	SMR1G2-9405025N-WG

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

Trimless Version available




Trimless code for SMR1G2-9305025N-WM → SMR**4**G2-9304025N-WM






Trimless code for SMR1G2-9305025N-WM → **E**MR1G2-9305025N-WM



NEKO / SENSE 125 / S125S1-G2

Adjustable LED Downlight

NEW

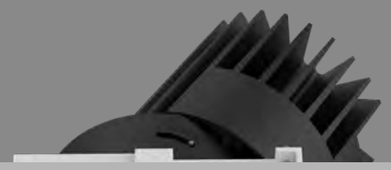




2700K 6500K Tunable White

See Details @www.nekolighting.com

18W 25W | CRI90 | 2700K 3000K 4000K | 20° 38° 50° | CITIZEN 50,000h@L80B10 | UGR < 19 | IP54 | 5 YEARS GUARANTEE | CB | CE | Intertek



LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
18	W	21 W	36 V	500 mA	90	2700K	20°	1900lm	1500lm	SMS1G2-9272018N-WS
							38°	1900lm	1500lm	SMS1G2-9273818N-WS
							50°	1900lm	1300lm	SMS1G2-9275018N-WS
						3000K	20°	2000lm	1600lm	SMS1G2-9302018N-WS
							38°	2000lm	1600lm	SMS1G2-9303818N-WS
							50°	2000lm	1400lm	SMS1G2-9305018N-WS
						4000K	20°	2200lm	1700lm	SMS1G2-9402018N-WS
							38°	2200lm	1700lm	SMS1G2-9403818N-WS
							50°	2200lm	1500lm	SMS1G2-9405018N-WS
25	W	28 W	36 V	700 mA	90	2700K	20°	2400lm	2100lm	SMS1G2-9272025N-WS
							38°	2400lm	2100lm	SMS1G2-9273825N-WS
							50°	2400lm	1900lm	SMS1G2-9275025N-WS
						3000K	20°	2600lm	2200lm	SMS1G2-9302025N-WS
							38°	2600lm	2200lm	SMS1G2-9303825N-WS
							50°	2600lm	2000lm	SMS1G2-9305025N-WS
						4000K	20°	2800lm	2400lm	SMS1G2-9402025N-WS
							38°	2800lm	2400lm	SMS1G2-9403825N-WS
							50°	2800lm	2200lm	SMS1G2-9405025N-WS
18	W	21 W	36 V	500 mA	90	2700K	20°	1900lm	1500lm	SMS1G2-9272018N-WM
							38°	1900lm	1500lm	SMS1G2-9273818N-WM
							50°	1900lm	1300lm	SMS1G2-9275018N-WM
						3000K	20°	2000lm	1600lm	SMS1G2-9302018N-WM
							38°	2000lm	1600lm	SMS1G2-9303818N-WM
							50°	2000lm	1400lm	SMS1G2-9305018N-WM
						4000K	20°	2200lm	1700lm	SMS1G2-9402018N-WM
							38°	2200lm	1700lm	SMS1G2-9403818N-WM
							50°	2200lm	1500lm	SMS1G2-9405018N-WM
25	W	28 W	36 V	700 mA	90	2700K	20°	2400lm	2100lm	SMS1G2-9272025N-WM
							38°	2400lm	2100lm	SMS1G2-9273825N-WM
							50°	2400lm	1900lm	SMS1G2-9275025N-WM
						3000K	20°	2600lm	2200lm	SMS1G2-9302025N-WM
							38°	2600lm	2200lm	SMS1G2-9303825N-WM
							50°	2600lm	2000lm	SMS1G2-9305025N-WM
						4000K	20°	2800lm	2400lm	SMS1G2-9402025N-WM
							38°	2800lm	2400lm	SMS1G2-9403825N-WM
							50°	2800lm	2200lm	SMS1G2-9405025N-WM

Specular Reflector



Matt Reflector

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

Optional accessary



Honeycomb
HCSR68

Code for SMS1G2-9405025N-WM with Honeycomb
SMS1G2-9405025N-WM-H



Black Reflector



Dark Light Reflector



White Reflector




Gold Reflector

LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
18	W	21 W	36 V	500 mA	90	2700K	20°	1900lm	1500lm	SMS1G2-9272018N-WB
							38°	1900lm	1500lm	SMS1G2-9273818N-WB
							50°	1900lm	1300lm	SMS1G2-9275018N-WB
						3000K	20°	2000lm	1600lm	SMS1G2-9302018N-WB
							38°	2000lm	1600lm	SMS1G2-9303818N-WB
							50°	2000lm	1400lm	SMS1G2-9305018N-WB
						4000K	20°	2200lm	1700lm	SMS1G2-9402018N-WB
							38°	2200lm	1700lm	SMS1G2-9403818N-WB
							50°	2200lm	1500lm	SMS1G2-9405018N-WB
25	W	28 W	36 V	700 mA	90	2700K	20°	2400lm	2100lm	SMS1G2-9272025N-WB
							38°	2400lm	2100lm	SMS1G2-9273825N-WB
							50°	2400lm	1900lm	SMS1G2-9275025N-WB
						3000K	20°	2600lm	2200lm	SMS1G2-9302025N-WB
							38°	2600lm	2200lm	SMS1G2-9303825N-WB
							50°	2600lm	2000lm	SMS1G2-9305025N-WB
						4000K	20°	2800lm	2400lm	SMS1G2-9402025N-WB
							38°	2800lm	2400lm	SMS1G2-9403825N-WB
							50°	2800lm	2200lm	SMS1G2-9405025N-WB
18	W	21 W	36 V	500 mA	90	2700K	20°	1900lm	1500lm	SMS1G2-9272018N-WC
							38°	1900lm	1500lm	SMS1G2-9273818N-WC
							50°	1900lm	1300lm	SMS1G2-9275018N-WC
						3000K	20°	2000lm	1600lm	SMS1G2-9302018N-WC
							38°	2000lm	1600lm	SMS1G2-9303818N-WC
							50°	2000lm	1400lm	SMS1G2-9305018N-WC
						4000K	20°	2200lm	1700lm	SMS1G2-9402018N-WC
							38°	2200lm	1700lm	SMS1G2-9403818N-WC
							50°	2200lm	1500lm	SMS1G2-9405018N-WC
25	W	28 W	36 V	700 mA	90	2700K	20°	2400lm	2100lm	SMS1G2-9272025N-WC
							38°	2400lm	2100lm	SMS1G2-9273825N-WC
							50°	2400lm	1900lm	SMS1G2-9275025N-WC
						3000K	20°	2600lm	2200lm	SMS1G2-9302025N-WC
							38°	2600lm	2200lm	SMS1G2-9303825N-WC
							50°	2600lm	2000lm	SMS1G2-9305025N-WC
						4000K	20°	2800lm	2400lm	SMS1G2-9402025N-WC
							38°	2800lm	2400lm	SMS1G2-9403825N-WC
							50°	2800lm	2200lm	SMS1G2-9405025N-WC
18	W	21 W	36 V	500 mA	90	2700K	20°	1900lm	1500lm	SMS1G2-9272018N-WW
							38°	1900lm	1500lm	SMS1G2-9273818N-WW
							50°	1900lm	1300lm	SMS1G2-9275018N-WW
						3000K	20°	2000lm	1600lm	SMS1G2-9302018N-WW
							38°	2000lm	1600lm	SMS1G2-9303818N-WW
							50°	2000lm	1400lm	SMS1G2-9305018N-WW
						4000K	20°	2200lm	1700lm	SMS1G2-9402018N-WW
							38°	2200lm	1700lm	SMS1G2-9403818N-WW
							50°	2200lm	1500lm	SMS1G2-9405018N-WW
25	W	28 W	36 V	700 mA	90	2700K	20°	2400lm	2100lm	SMS1G2-9272025N-WW
							38°	2400lm	2100lm	SMS1G2-9273825N-WW
							50°	2400lm	1900lm	SMS1G2-9275025N-WW
						3000K	20°	2600lm	2200lm	SMS1G2-9302025N-WW
							38°	2600lm	2200lm	SMS1G2-9303825N-WW
							50°	2600lm	2000lm	SMS1G2-9305025N-WW
						4000K	20°	2800lm	2400lm	SMS1G2-9402025N-WW
							38°	2800lm	2400lm	SMS1G2-9403825N-WW
							50°	2800lm	2200lm	SMS1G2-9405025N-WW
18	W	21 W	36 V	500 mA	90	2700K	20°	1900lm	1500lm	SMS1G2-9272018N-WG
							38°	1900lm	1500lm	SMS1G2-9273818N-WG
							50°	1900lm	1300lm	SMS1G2-9275018N-WG
						3000K	20°	2000lm	1600lm	SMS1G2-9302018N-WG
							38°	2000lm	1600lm	SMS1G2-9303818N-WG
							50°	2000lm	1400lm	SMS1G2-9305018N-WG
						4000K	20°	2200lm	1700lm	SMS1G2-9402018N-WG
							38°	2200lm	1700lm	SMS1G2-9403818N-WG
							50°	2200lm	1500lm	SMS1G2-9405018N-WG
25	W	28 W	36 V	700 mA	90	2700K	20°	2400lm	2100lm	SMS1G2-9272025N-WG
							38°	2400lm	2100lm	SMS1G2-9273825N-WG
							50°	2400lm	1900lm	SMS1G2-9275025N-WG
						3000K	20°	2600lm	2200lm	SMS1G2-9302025N-WG
							38°	2600lm	2200lm	SMS1G2-9303825N-WG
							50°	2600lm	2000lm	SMS1G2-9305025N-WG
						4000K	20°	2800lm	2400lm	SMS1G2-9402025N-WG
							38°	2800lm	2400lm	SMS1G2-9403825N-WG
							50°	2800lm	2200lm	SMS1G2-9405025N-WG

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

Trimless Version available




Trimless code for SMS1G2-9305025N-WM → SMS**4**G2-9304025N-WM






Trimless code for SMS1G2-9305025N-WM → **E**MS1G2-9305025N-WM




NEKO / SENSE 125 / S125R2-G2

Fixed LED Downlink

NEW




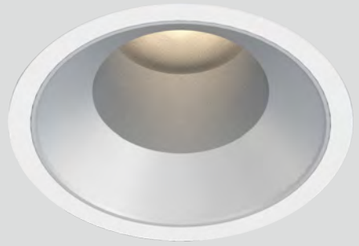

2700K 6500K Tunable White

See Details @www.nekolighting.com

18W 25W | CRI90 | 2700K 3000K 4000K | 24° 36° 45° | CITIZEN 50,000h@L80B10 | UGR < 19 | IP54 | 5 YEARS GUARANTEE | CB | CE | ENEC | ETL Intertek



LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
18	W	21 W	36 V	500 mA	90	2700K	24°	1900lm	1400lm	SMR2G2-9272018N-WS
							36°	1900lm	1400lm	SMR2G2-9273618N-WS
							45°	1900lm	1200lm	SMR2G2-9274518N-WS
						3000K	24	2000lm	1500lm	SMR2G2-9302018N-WS
							36°	2000lm	1500lm	SMR2G2-9303618N-WS
							45°	2000lm	1300lm	SMR2G2-9304518N-WS
						4000K	24°	2200lm	1600lm	SMR2G2-9402018N-WS
							36°	2200lm	1600lm	SMR2G2-9403618N-WS
							45°	2200lm	1400lm	SMR2G2-9404518N-WS
25	W	28 W	36 V	700 mA	90	2700K	24°	2400lm	2000lm	SMR2G2-9272025N-WS
							36°	2400lm	2000lm	SMR2G2-9273525N-WS
							45°	2400lm	1800lm	SMR2G2-9274525N-WS
						3000K	24°	2600lm	2100lm	SMR2G2-9302025N-WS
							36°	2600lm	2100lm	SMR2G2-9303625N-WS
							45°	2600lm	1900lm	SMR2G2-9304525N-WS
						4000K	24°	2800lm	2300lm	SMR2G2-9402025N-WS
							36°	2800lm	2300lm	SMR2G2-9403625N-WS
							45°	2800lm	2050lm	SMR2G2-9404525N-WS



Specular Reflector

LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
18	W	21 W	36 V	500 mA	90	2700K	24°	1900lm	1400lm	SMR2G2-9272018N-WM
							36°	1900lm	1400lm	SMR2G2-9273618N-WM
							45°	1900lm	1200lm	SMR2G2-9274518N-WM
						3000K	24	2000lm	1500lm	SMR2G2-9302018N-WM
							36°	2000lm	1500lm	SMR2G2-9303618N-WM
							45°	2000lm	1300lm	SMR2G2-9304518N-WM
						4000K	24°	2200lm	1600lm	SMR2G2-9402018N-WM
							36°	2200lm	1600lm	SMR2G2-9403618N-WM
							45°	2200lm	1400lm	SMR2G2-9404518N-WM
25	W	28 W	36 V	700 mA	90	2700K	24°	2400lm	2000lm	SMR2G2-9272025N-WM
							36°	2400lm	2000lm	SMR2G2-9273525N-WM
							45°	2400lm	1800lm	SMR2G2-9274525N-WM
						3000K	24°	2600lm	2100lm	SMR2G2-9302025N-WM
							36°	2600lm	2100lm	SMR2G2-9303625N-WM
							45°	2600lm	1900lm	SMR2G2-9304525N-WM
						4000K	24°	2800lm	2300lm	SMR2G2-9402025N-WM
							36°	2800lm	2300lm	SMR2G2-9403625N-WM
							45°	2800lm	2050lm	SMR2G2-9404525N-WM



Matt Reflector

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

Optional accessary



Honeycomb

Code for SMR2G2-9404525N-WM with **H**oneycomb
SMR2G2-9404525N-WM-**H**



Black Reflector

LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
18	W	21 W	36 V	500 mA	90	2700K	24°	1900lm	1400lm	SMR2G2-9272018N-WB
							36°	1900lm	1400lm	SMR2G2-9273618N-WB
							45°	1900lm	1200lm	SMR2G2-9274518N-WB
						3000K	24	2000lm	1500lm	SMR2G2-9302018N-WB
							36°	2000lm	1500lm	SMR2G2-9303618N-WB
							45°	2000lm	1300lm	SMR2G2-9304518N-WB
						4000K	24°	2200lm	1600lm	SMR2G2-9402018N-WB
							36°	2200lm	1600lm	SMR2G2-9403618N-WB
							45°	2200lm	1400lm	SMR2G2-9404518N-WB
25	W	28 W	36 V	700 mA	90	2700K	24°	2400lm	2000lm	SMR2G2-9272025N-WB
							36°	2400lm	2000lm	SMR2G2-9273525N-WB
							45°	2400lm	1800lm	SMR2G2-9274525N-WB
						3000K	24°	2600lm	2100lm	SMR2G2-9302025N-WB
							36°	2600lm	2100lm	SMR2G2-9303625N-WB
							45°	2600lm	1900lm	SMR2G2-9304525N-WB
						4000K	24°	2800lm	2300lm	SMR2G2-9402025N-WB
							36°	2800lm	2300lm	SMR2G2-9403625N-WB
							45°	2800lm	2050lm	SMR2G2-9404525N-WB



Dark Light Reflector

LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
18	W	21 W	36 V	500 mA	90	2700K	24°	1900lm	1400lm	SMR2G2-9272018N-WC
							36°	1900lm	1400lm	SMR2G2-9273618N-WC
							45°	1900lm	1200lm	SMR2G2-9274518N-WC
						3000K	24	2000lm	1500lm	SMR2G2-9302018N-WC
							36°	2000lm	1500lm	SMR2G2-9303618N-WC
							45°	2000lm	1300lm	SMR2G2-9304518N-WC
						4000K	24°	2200lm	1600lm	SMR2G2-9402018N-WC
							36°	2200lm	1600lm	SMR2G2-9403618N-WC
							45°	2200lm	1400lm	SMR2G2-9404518N-WC
25	W	28 W	36 V	700 mA	90	2700K	24°	2400lm	2000lm	SMR2G2-9272025N-WC
							36°	2400lm	2000lm	SMR2G2-9273525N-WC
							45°	2400lm	1800lm	SMR2G2-9274525N-WC
						3000K	24°	2600lm	2100lm	SMR2G2-9302025N-WC
							36°	2600lm	2100lm	SMR2G2-9303625N-WC
							45°	2600lm	1900lm	SMR2G2-9304525N-WC
						4000K	24°	2800lm	2300lm	SMR2G2-9402025N-WC
							36°	2800lm	2300lm	SMR2G2-9403625N-WC
							45°	2800lm	2050lm	SMR2G2-9404525N-WC



White Reflector

LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
18	W	21 W	36 V	500 mA	90	2700K	24°	1900lm	1500lm	SMR2G2-9272018N-WW
							36°	1900lm	1500lm	SMR2G2-9273618N-WW
							45°	1900lm	1300lm	SMR2G2-9274518N-WW
						3000K	24	2000lm	1600lm	SMR2G2-9302018N-WW
							36°	2000lm	1600lm	SMR2G2-9303618N-WW
							45°	2000lm	1400lm	SMR2G2-9304518N-WW
						4000K	24°	2200lm	1700lm	SMR2G2-9402018N-WW
							36°	2200lm	1700lm	SMR2G2-9403618N-WW
							45°	2200lm	1500lm	SMR2G2-9404518N-WW
25	W	28 W	36 V	700 mA	90	2700K	24°	2400lm	2100lm	SMR2G2-9272025N-WW
							36°	2400lm	2100lm	SMR2G2-9273525N-WW
							45°	2400lm	1900lm	SMR2G2-9274525N-WW
						3000K	24°	2600lm	2200lm	SMR2G2-9302025N-WW
							36°	2600lm	2200lm	SMR2G2-9303625N-WW
							45°	2600lm	2000lm	SMR2G2-9304525N-WW
						4000K	24°	2800lm	2400lm	SMR2G2-9402025N-WW
							36°	2800lm	2400lm	SMR2G2-9403625N-WW
							45°	2800lm	2200lm	SMR2G2-9404525N-WW



Gold Reflector


LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
18	W	21 W	36 V	500 mA	90	2700K	24°	1900lm	1500lm	SMR2G2-9272018N-WG
							36°	1900lm	1500lm	SMR2G2-9273618N-WG
							45°	1900lm	1300lm	SMR2G2-9274518N-WG
						3000K	24	2000lm	1600lm	SMR2G2-9302018N-WG
							36°	2000lm	1600lm	SMR2G2-9303618N-WG
							45°	2000lm	1400lm	SMR2G2-9304518N-WG
						4000K	24°	2200lm	1700lm	SMR2G2-9402018N-WG
							36°	2200lm	1700lm	SMR2G2-9403618N-WG
							45°	2200lm	1500lm	SMR2G2-9404518N-WG
25	W	28 W	36 V	700 mA	90	2700K	24°	2400lm	2100lm	SMR2G2-9272025N-WG
							36°	2400lm	2100lm	SMR2G2-9273525N-WG
							45°	2400lm	1900lm	SMR2G2-9274525N-WG
						3000K	24°	2600lm	2200lm	SMR2G2-9302025N-WG
							36°	2600lm	2200lm	SMR2G2-9303625N-WG
							45°	2600lm	2000lm	SMR2G2-9304525N-WG
						4000K	24°	2800lm	2400lm	SMR2G2-9402025N-WG
							36°	2800lm	2400lm	SMR2G2-9403625N-WG
							45°	2800lm	2200lm	SMR2G2-9404525N-WG

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

Trimless Version available




Trimless code for SMR2G2-9304525N-WM → SMR**5**G2-9304525N-WM






Trimless code for SMR2G2-9304525N-WM → **E**MR2G2-9304525N-WM




NEKO / SENSE 125 / S125S2-G2

Fixed LED Downlight

NEW



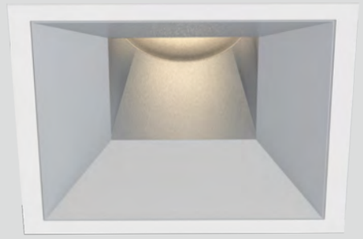

2700K 6500K Tunable White

See Details @www.nekolighting.com

18W 25W | CRI90 | 2700K 3000K 4000K | 24° 36° 45° | CITIZEN 50,000h@L80B10 | UGR < 19 | IP54 | 5 YEARS GUARANTEE | CB | CE | ENEC | ETL Intertek





Specular Reflector

LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
18	W	21 W	36 V	500 mA	90	2700K	24°	1900lm	1400lm	SMS2G2-9272018N-WS
							36°	1900lm	1400lm	SMS2G2-9273618N-WS
							45°	1900lm	1200lm	SMS2G2-9274518N-WS
						3000K	24	2000lm	1500lm	SMS2G2-9302018N-WS
							36°	2000lm	1500lm	SMS2G2-9303618N-WS
							45°	2000lm	1300lm	SMS2G2-9304518N-WS
						4000K	24°	2200lm	1600lm	SMS2G2-9402018N-WS
							36°	2200lm	1600lm	SMS2G2-9403618N-WS
							45°	2200lm	1400lm	SMS2G2-9404518N-WS
25	W	28 W	36 V	700 mA	90	2700K	24°	2400lm	2000lm	SMS2G2-9272025N-WS
							36°	2400lm	2000lm	SMS2G2-9273525N-WS
							45°	2400lm	1800lm	SMS2G2-9274525N-WS
						3000K	24°	2600lm	2100lm	SMS2G2-9302025N-WS
							36°	2600lm	2100lm	SMS2G2-9303625N-WS
							45°	2600lm	1900lm	SMS2G2-9304525N-WS
						4000K	24°	2800lm	2300lm	SMS2G2-9402025N-WS
							36°	2800lm	2300lm	SMS2G2-9403625N-WS
							45°	2800lm	2050lm	SMS2G2-9404525N-WS



Matt Reflector

LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
18	W	21 W	36 V	500 mA	90	2700K	24°	1900lm	1400lm	SMS2G2-9272018N-WM
							36°	1900lm	1400lm	SMS2G2-9273618N-WM
							45°	1900lm	1200lm	SMS2G2-9274518N-WM
						3000K	24	2000lm	1500lm	SMS2G2-9302018N-WM
							36°	2000lm	1500lm	SMS2G2-9303618N-WM
							45°	2000lm	1300lm	SMS2G2-9304518N-WM
						4000K	24°	2200lm	1600lm	SMS2G2-9402018N-WM
							36°	2200lm	1600lm	SMS2G2-9403618N-WM
							45°	2200lm	1400lm	SMS2G2-9404518N-WM
25	W	28 W	36 V	700 mA	90	2700K	24°	2400lm	2000lm	SMS2G2-9272025N-WM
							36°	2400lm	2000lm	SMS2G2-9273525N-WM
							45°	2400lm	1800lm	SMS2G2-9274525N-WM
						3000K	24°	2600lm	2100lm	SMS2G2-9302025N-WM
							36°	2600lm	2100lm	SMS2G2-9303625N-WM
							45°	2600lm	1900lm	SMS2G2-9304525N-WM
						4000K	24°	2800lm	2300lm	SMS2G2-9402025N-WM
							36°	2800lm	2300lm	SMS2G2-9403625N-WM
							45°	2800lm	2050lm	SMS2G2-9404525N-WM

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

Optional accessary



Honeycomb

Code for SMS2G2-9404525N-WM with Honeycomb
SMS2G2-9404525N-WM-H



Black Reflector

LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
18	W	21 W	36 V	500 mA	90	2700K	24°	1900lm	1400lm	SMS2G2-9272018N-WB
							36°	1900lm	1400lm	SMS2G2-9273618N-WB
							45°	1900lm	1200lm	SMS2G2-9274518N-WB
						3000K	24	2000lm	1500lm	SMS2G2-9302018N-WB
							36°	2000lm	1500lm	SMS2G2-9303618N-WB
							45°	2000lm	1300lm	SMS2G2-9304518N-WB
						4000K	24°	2200lm	1600lm	SMS2G2-9402018N-WB
							36°	2200lm	1600lm	SMS2G2-9403618N-WB
							45°	2200lm	1400lm	SMS2G2-9404518N-WB
25	W	28 W	36 V	700 mA	90	2700K	24°	2400lm	2000lm	SMS2G2-9272025N-WB
							36°	2400lm	2000lm	SMS2G2-9273525N-WB
							45°	2400lm	1800lm	SMS2G2-9274525N-WB
						3000K	24°	2600lm	2100lm	SMS2G2-9302025N-WB
							36°	2600lm	2100lm	SMS2G2-9303625N-WB
							45°	2600lm	1900lm	SMS2G2-9304525N-WB
						4000K	24°	2800lm	2300lm	SMS2G2-9402025N-WB
							36°	2800lm	2300lm	SMS2G2-9403625N-WB
							45°	2800lm	2050lm	SMS2G2-9404525N-WB



Dark Light Reflector

LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
18	W	21 W	36 V	500 mA	90	2700K	24°	1900lm	1400lm	SMS2G2-9272018N-WC
							36°	1900lm	1400lm	SMS2G2-9273618N-WC
							45°	1900lm	1200lm	SMS2G2-9274518N-WC
						3000K	24	2000lm	1500lm	SMS2G2-9302018N-WC
							36°	2000lm	1500lm	SMS2G2-9303618N-WC
							45°	2000lm	1300lm	SMS2G2-9304518N-WC
						4000K	24°	2200lm	1600lm	SMS2G2-9402018N-WC
							36°	2200lm	1600lm	SMS2G2-9403618N-WC
							45°	2200lm	1400lm	SMS2G2-9404518N-WC
25	W	28 W	36 V	700 mA	90	2700K	24°	2400lm	2000lm	SMS2G2-9272025N-WC
							36°	2400lm	2000lm	SMS2G2-9273525N-WC
							45°	2400lm	1800lm	SMS2G2-9274525N-WC
						3000K	24°	2600lm	2100lm	SMS2G2-9302025N-WC
							36°	2600lm	2100lm	SMS2G2-9303625N-WC
							45°	2600lm	1900lm	SMS2G2-9304525N-WC
						4000K	24°	2800lm	2300lm	SMS2G2-9402025N-WC
							36°	2800lm	2300lm	SMS2G2-9403625N-WC
							45°	2800lm	2050lm	SMS2G2-9404525N-WC



White Reflector

LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
18	W	21 W	36 V	500 mA	90	2700K	24°	1900lm	1500lm	SMS2G2-9272018N-WW
							36°	1900lm	1500lm	SMS2G2-9273618N-WW
							45°	1900lm	1300lm	SMS2G2-9274518N-WW
						3000K	24	2000lm	1600lm	SMS2G2-9302018N-WW
							36°	2000lm	1600lm	SMS2G2-9303618N-WW
							45°	2000lm	1400lm	SMS2G2-9304518N-WW
						4000K	24°	2200lm	1700lm	SMS2G2-9402018N-WW
							36°	2200lm	1700lm	SMS2G2-9403618N-WW
							45°	2200lm	1500lm	SMS2G2-9404518N-WW
25	W	28 W	36 V	700 mA	90	2700K	24°	2400lm	2100lm	SMS2G2-9272025N-WW
							36°	2400lm	2100lm	SMS2G2-9273525N-WW
							45°	2400lm	1900lm	SMS2G2-9274525N-WW
						3000K	24°	2600lm	2200lm	SMS2G2-9302025N-WW
							36°	2600lm	2200lm	SMS2G2-9303625N-WW
							45°	2600lm	2000lm	SMS2G2-9304525N-WW
						4000K	24°	2800lm	2400lm	SMS2G2-9402025N-WW
							36°	2800lm	2400lm	SMS2G2-9403625N-WW
							45°	2800lm	2200lm	SMS2G2-9404525N-WW



Gold Reflector

LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
18	W	21 W	36 V	500 mA	90	2700K	24°	1900lm	1500lm	SMS2G2-9272018N-WG
							36°	1900lm	1500lm	SMS2G2-9273618N-WG
							45°	1900lm	1300lm	SMS2G2-9274518N-WG
						3000K	24	2000lm	1600lm	SMS2G2-9302018N-WG
							36°	2000lm	1600lm	SMS2G2-9303618N-WG
							45°	2000lm	1400lm	SMS2G2-9304518N-WG
						4000K	24°	2200lm	1700lm	SMS2G2-9402018N-WG
							36°	2200lm	1700lm	SMS2G2-9403618N-WG
							45°	2200lm	1500lm	SMS2G2-9404518N-WG
25	W	28 W	36 V	700 mA	90	2700K	24°	2400lm	2100lm	SMS2G2-9272025N-WG
							36°	2400lm	2100lm	SMS2G2-9273525N-WG
							45°	2400lm	1900lm	SMS2G2-9274525N-WG
						3000K	24°	2600lm	2200lm	SMS2G2-9302025N-WG
							36°	2600lm	2200lm	SMS2G2-9303625N-WG
							45°	2600lm	2000lm	SMS2G2-9304525N-WG
						4000K	24°	2800lm	2400lm	SMS2G2-9402025N-WG
							36°	2800lm	2400lm	SMS2G2-9403625N-WG
							45°	2800lm	2200lm	SMS2G2-9404525N-WG

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

Trimless Version available




Trimless code for SMS2G2-9304525N-WM → SMS**5**G2-9304525N-WM







Trimless code for SMS2G2-9304525N-WM → **E**MS2G2-9304525N-WM



NEKO / SENSE 125 / S125R3-G2
Wall Washer LED Downlight

NEW




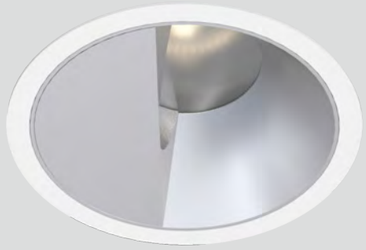

2700K 6500K Tunable White

See Details @www.nekolighting.com

18W 25W | CRI90 | 2700K 3000K 4000K | CITIZEN 50,000h@L80B10 | IP54 | 5 YEARS GUARANTEE | CB | CE | ETL Intertek





Matt Reflector


LED	Power	System power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
18	W	21 W	36 V	500 mA	90	2700K	Wall Washer	1900lm	850lm	SMR3G2-927WW18N-WM
						3000K	Wall Washer	2000lm	900lm	SMR3G2-930WW18N-WM
						4000K	Wall Washer	2200lm	1000lm	SMR3G2-940WW18N-WM
25	W	28 W	36 V	700 mA	90	2700K	Wall Washer	2400lm	1100lm	SMR3G2-927WW25N-WM
						3000K	Wall Washer	2600lm	1200lm	SMR3G2-930WW25N-WM
						4000K	Wall Washer	2800lm	1300lm	SMR3G2-940WW25N-WM

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

Trimless Version available





Trimless code for SMR3G2-930WW18N-WM → SMR6G2-930WW18N-WM






Trimless code for SMR3G2-930WW18N-WM → EMR3G2-930WW18N-WM




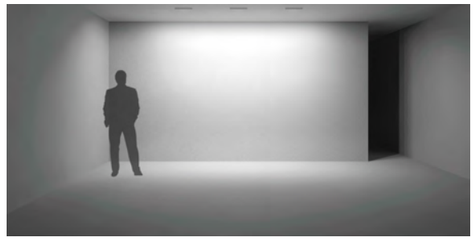

NEKO / SENSE 125 / S125S3-G2
Wall Washer LED Downlight

NEW

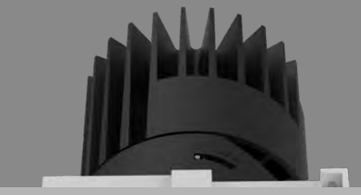


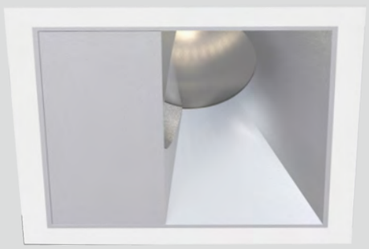

2700K 6500K Tunable White

See Details @www.nekolighting.com

18W 25W | CRI90 | 2700K 3000K 4000K | CITIZEN 50,000h@L80B10 | IP54 | 5 YEARS GUARANTEE | CB | CE | ETL Intertek





Matt Reflector


LED	Power	System power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
18	W	21 W	36 V	500 mA	90	2700K	Wall Washer	1900lm	850lm	SMS3G2-927WW18N-WM
						3000K	Wall Washer	2000lm	900lm	SMS3G2-930WW18N-WM
						4000K	Wall Washer	2200lm	1000lm	SMS3G2-940WW18N-WM
25	W	28 W	36 V	700 mA	90	2700K	Wall Washer	2400lm	1100lm	SMS3G2-927WW25N-WM
						3000K	Wall Washer	2600lm	1200lm	SMS3G2-930WW25N-WM
						4000K	Wall Washer	2800lm	1300lm	SMS3G2-940WW25N-WM

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

Trimless Version available





Trimless code for SMS3G2-930WW18N-WM → SMS6G2-930WW18N-WM





Trimless code for SMS3G2-930WW18N-WM → EMS3G2-930WW18N-WM



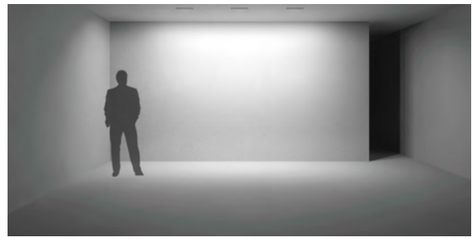


NEKO / SENSE
Project: InterContinental Hefei,China



NEKO / SENSE 150 / S150R1-G2

Adjustable LED Downlight

NEW

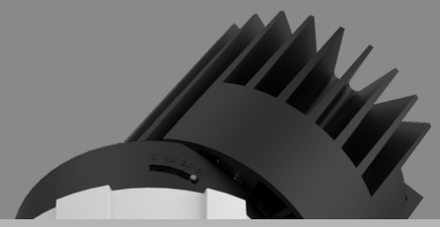





2700K 6500K Tunable White

See Details @www.nekolighting.com

25W 38W | CRI90 | 2700K 3000K 4000K | 18° 36° 50° | CITIZEN 50,000h@L80B10 | UGR < 19 | IP54 | 5 YEARS GUARANTEE | CB | CE | ENEC | ETL Intertek





LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
25 W		28 W	36 V	700 mA	90	2700K	18°	2500lm	2100lm	SLR1G2-9271825N-WS
							36°	2500lm	2300lm	SLR1G2-9273625N-WS
							50°	2500lm	1800lm	SLR1G2-9275025N-WS
						3000K	18°	2700lm	2200lm	SLR1G2-9301825N-WS
							36°	2700lm	2400lm	SLR1G2-9303625N-WS
							50°	2700lm	1900lm	SLR1G2-9305025N-WS
						4000K	18°	2900lm	2400lm	SLR1G2-9401825N-WS
							36°	2900lm	2600lm	SLR1G2-9403625N-WS
							50°	2900lm	2100lm	SLR1G2-9405025N-WS
38 W		42 W	36 V	1050 mA	90	2700K	18°	3500lm	3100lm	SLR1G2-9271838N-WS
							36°	3500lm	3400lm	SLR1G2-9273638N-WS
							50°	3500lm	2650lm	SLR1G2-9275038N-WS
						3000K	18°	3700lm	3300lm	SLR1G2-9301838N-WS
							36°	3700lm	3600lm	SLR1G2-9303638N-WS
							50°	3700lm	2800lm	SLR1G2-9305038N-WS
						4000K	18°	4000lm	3600lm	SLR1G2-9401838N-WS
							36°	4000lm	3900lm	SLR1G2-9403638N-WS
							50°	4000lm	3000lm	SLR1G2-9405038N-WS

Specular Reflector

LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
25 W		28 W	36 V	700 mA	90	2700K	18°	2500lm	2100lm	SLR1G2-9271825N-WM
							36°	2500lm	2300lm	SLR1G2-9273625N-WM
							50°	2500lm	1800lm	SLR1G2-9275025N-WM
						3000K	18°	2700lm	2200lm	SLR1G2-9301825N-WM
							36°	2700lm	2400lm	SLR1G2-9303625N-WM
							50°	2700lm	1900lm	SLR1G2-9305025N-WM
						4000K	18°	2900lm	2400lm	SLR1G2-9401825N-WM
							36°	2900lm	2600lm	SLR1G2-9403625N-WM
							50°	2900lm	2100lm	SLR1G2-9405025N-WM
38 W		42 W	36 V	1050 mA	90	2700K	18°	3500lm	3100lm	SLR1G2-9271838N-WM
							36°	3500lm	3400lm	SLR1G2-9273638N-WM
							50°	3500lm	2650lm	SLR1G2-9275038N-WM
						3000K	18°	3700lm	3300lm	SLR1G2-9301838N-WM
							36°	3700lm	3600lm	SLR1G2-9303638N-WM
							50°	3700lm	2800lm	SLR1G2-9305038N-WM
						4000K	18°	4000lm	3600lm	SLR1G2-9401838N-WM
							36°	4000lm	3900lm	SLR1G2-9403638N-WM
							50°	4000lm	3000lm	SLR1G2-9405038N-WM

Matt Reflector

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

Optional accessary



Honeycomb

Code for SLR1G2-9405025N-WM with Honeycomb
SLR1G2-9405025N-WM-H



Black Reflector



Dark Light Reflector



White Reflector



Gold Reflector


LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
25 W		28 W	36 V	700 mA	90	2700K	18°	2500lm	2100lm	SLR1G2-9271825N-WC
							36°	2500lm	2300lm	SLR1G2-9273625N-WC
							50°	2500lm	1800lm	SLR1G2-9275025N-WC
						3000K	18°	2700lm	2200lm	SLR1G2-9301825N-WC
							36°	2700lm	2400lm	SLR1G2-9303625N-WC
							50°	2700lm	1900lm	SLR1G2-9305025N-WC
						4000K	18°	2900lm	2400lm	SLR1G2-9401825N-WC
							36°	2900lm	2600lm	SLR1G2-9403625N-WC
							50°	2900lm	2100lm	SLR1G2-9405025N-WC
38 W		42 W	36 V	1050 mA	90	2700K	18°	3500lm	3100lm	SLR1G2-9271838N-WC
							36°	3500lm	3400lm	SLR1G2-9273638N-WC
							50°	3500lm	2650lm	SLR1G2-9275038N-WC
						3000K	18°	3700lm	3300lm	SLR1G2-9301838N-WC
							36°	3700lm	3600lm	SLR1G2-9303638N-WC
							50°	3700lm	2800lm	SLR1G2-9305038N-WC
						4000K	18°	4000lm	3600lm	SLR1G2-9401838N-WC
							36°	4000lm	3900lm	SLR1G2-9403638N-WC
							50°	4000lm	3000lm	SLR1G2-9405038N-WC
25 W		28 W	36 V	700 mA	90	2700K	18°	2500lm	2100lm	SLR1G2-9271825N-WW
							36°	2500lm	2300lm	SLR1G2-9273625N-WW
							50°	2500lm	1800lm	SLR1G2-9275025N-WW
						3000K	18°	2700lm	2200lm	SLR1G2-9301825N-WW
							36°	2700lm	2400lm	SLR1G2-9303625N-WW
							50°	2700lm	1900lm	SLR1G2-9305025N-WW
						4000K	18°	2900lm	2400lm	SLR1G2-9401825N-WW
							36°	2900lm	2600lm	SLR1G2-9403625N-WW
							50°	2900lm	2100lm	SLR1G2-9405025N-WW
38 W		42 W	36 V	1050 mA	90	2700K	18°	3500lm	3100lm	SLR1G2-9271838N-WW
							36°	3500lm	3400lm	SLR1G2-9273638N-WW
							50°	3500lm	2650lm	SLR1G2-9275038N-WW
						3000K	18°	3700lm	3300lm	SLR1G2-9301838N-WW
							36°	3700lm	3600lm	SLR1G2-9303638N-WW
							50°	3700lm	2800lm	SLR1G2-9305038N-WW
						4000K	18°	4000lm	3600lm	SLR1G2-9401838N-WW
							36°	4000lm	3900lm	SLR1G2-9403638N-WW
							50°	4000lm	3000lm	SLR1G2-9405038N-WW
25 W		28 W	36 V	700 mA	90	2700K	18°	2500lm	2100lm	SLR1G2-9271825N-WG
							36°	2500lm	2300lm	SLR1G2-9273625N-WG
							50°	2500lm	1800lm	SLR1G2-9275025N-WG
						3000K	18°	2700lm	2200lm	SLR1G2-9301825N-WG
							36°	2700lm	2400lm	SLR1G2-9303625N-WG
							50°	2700lm	1900lm	SLR1G2-9305025N-WG
						4000K	18°	2900lm	2400lm	SLR1G2-9401825N-WG
							36°	2900lm	2600lm	SLR1G2-9403625N-WG
							50°	2900lm	2100lm	SLR1G2-9405025N-WG
38 W		42 W	36 V	1050 mA	90	2700K	18°	3500lm	3100lm	SLR1G2-9271838N-WG
							36°	3500lm	3400lm	SLR1G2-9273638N-WG
							50°	3500lm	2650lm	SLR1G2-9275038N-WG
						3000K	18°	3700lm	3300lm	SLR1G2-9301838N-WG
							36°	3700lm	3600lm	SLR1G2-9303638N-WG
							50°	3700lm	2800lm	SLR1G2-9305038N-WG
						4000K	18°	4000lm	3600lm	SLR1G2-9401838N-WG
							36°	4000lm	3900lm	SLR1G2-9403638N-WG
							50°	4000lm	3000lm	SLR1G2-9405038N-WG

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

Trimless Version available




Trimless code for SLR1G2-9305025N-WM → SLR**4**G2-9305025N-WM






Trimless code for SLR1G2-9305025N-WM → **E**LR1G2-9305025N-WM




NEKO / SENSE 150 / S150S1-G2

Adjustable LED Downlight

NEW

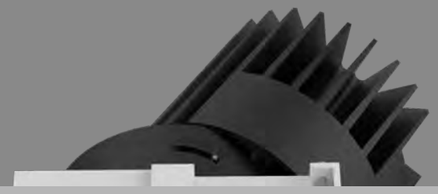


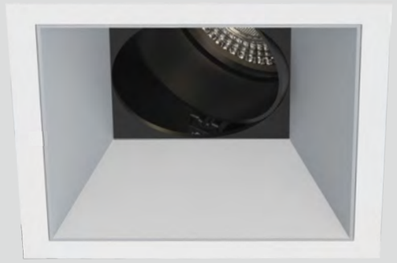

Tunable White

See Details @www.nekolighting.com

25W 38W | CRI90 | 2700K 3000K 4000K | 18° 36° 50° | CITIZEN 50,000h@L80B10 | UGR < 19 | IP54 | 5 YEARS GUARANTEE | CB | CE | Intertek



LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
25	W	28 W	36 V	700 mA	90	2700K	18°	2500lm	2100lm	SLS1G2-9271825N-WS
							36°	2500lm	2300lm	SLS1G2-9273625N-WS
							50°	2500lm	1800lm	SLS1G2-9275025N-WS
						3000K	18°	2700lm	2200lm	SLS1G2-9301825N-WS
							36°	2700lm	2400lm	SLS1G2-9303625N-WS
							50°	2700lm	1900lm	SLS1G2-9305025N-WS
						4000K	18°	2900lm	2400lm	SLS1G2-9401825N-WS
							36°	2900lm	2600lm	SLS1G2-9403625N-WS
							50°	2900lm	2100lm	SLS1G2-9405025N-WS
38	W	42 W	36 V	1050 mA	90	2700K	18°	3500lm	3100lm	SLS1G2-9271838N-WS
							36°	3500lm	3400lm	SLS1G2-9273638N-WS
							50°	3500lm	2650lm	SLS1G2-9275038N-WS
						3000K	18°	3700lm	3300lm	SLS1G2-9301838N-WS
							36°	3700lm	3600lm	SLS1G2-9303638N-WS
							50°	3700lm	2800lm	SLS1G2-9305038N-WS
						4000K	18°	4000lm	3600lm	SLS1G2-9401838N-WS
							36°	4000lm	3900lm	SLS1G2-9403638N-WS
							50°	4000lm	3000lm	SLS1G2-9405038N-WS
25	W	28 W	36 V	700 mA	90	2700K	18°	2500lm	2100lm	SLS1G2-9271825N-WM
							36°	2500lm	2300lm	SLS1G2-9273625N-WM
							50°	2500lm	1800lm	SLS1G2-9275025N-WM
						3000K	18°	2700lm	2200lm	SLS1G2-9301825N-WM
							36°	2700lm	2400lm	SLS1G2-9303625N-WM
							50°	2700lm	1900lm	SLS1G2-9305025N-WM
						4000K	18°	2900lm	2400lm	SLS1G2-9401825N-WM
							36°	2900lm	2600lm	SLS1G2-9403625N-WM
							50°	2900lm	2100lm	SLS1G2-9405025N-WM
38	W	42 W	36 V	1050 mA	90	2700K	18°	3500lm	3100lm	SLS1G2-9271838N-WM
							36°	3500lm	3400lm	SLS1G2-9273638N-WM
							50°	3500lm	2650lm	SLS1G2-9275038N-WM
						3000K	18°	3700lm	3300lm	SLS1G2-9301838N-WM
							36°	3700lm	3600lm	SLS1G2-9303638N-WM
							50°	3700lm	2800lm	SLS1G2-9305038N-WM
						4000K	18°	4000lm	3600lm	SLS1G2-9401838N-WM
							36°	4000lm	3900lm	SLS1G2-9403638N-WM
							50°	4000lm	3000lm	SLS1G2-9405038N-WM



Specular Reflector



Matt Reflector

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

Optional accessary



Honeycomb

Code for SLS1G2-9405025N-WM with Honeycomb
SLS1G2-9405025N-WM-**H**



Black Reflector



Dark Light Reflector



White Reflector



Gold Reflector


LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
25	W	28 W	36 V	700 mA	90	2700K	18°	2500lm	2100lm	SLS1G2-9271825N-WB
							36°	2500lm	2300lm	SLS1G2-9273625N-WB
							50°	2500lm	1800lm	SLS1G2-9275025N-WB
						3000K	18°	2700lm	2200lm	SLS1G2-9301825N-WB
							36°	2700lm	2400lm	SLS1G2-9303625N-WB
							50°	2700lm	1900lm	SLS1G2-9305025N-WB
						4000K	18°	2900lm	2400lm	SLS1G2-9401825N-WB
							36°	2900lm	2600lm	SLS1G2-9403625N-WB
							50°	2900lm	2100lm	SLS1G2-9405025N-WB
38	W	42 W	36 V	1050 mA	90	2700K	18°	3500lm	3100lm	SLS1G2-9271838N-WB
							36°	3500lm	3400lm	SLS1G2-9273638N-WB
							50°	3500lm	2650lm	SLS1G2-9275038N-WB
						3000K	18°	3700lm	3300lm	SLS1G2-9301838N-WB
							36°	3700lm	3600lm	SLS1G2-9303638N-WB
							50°	3700lm	2800lm	SLS1G2-9305038N-WB
						4000K	18°	4000lm	3600lm	SLS1G2-9401838N-WB
							36°	4000lm	3900lm	SLS1G2-9403638N-WB
							50°	4000lm	3000lm	SLS1G2-9405038N-WB
25	W	28 W	36 V	700 mA	90	2700K	18°	2500lm	2100lm	SLS1G2-9271825N-WC
							36°	2500lm	2300lm	SLS1G2-9273625N-WC
							50°	2500lm	1800lm	SLS1G2-9275025N-WC
						3000K	18°	2700lm	2200lm	SLS1G2-9301825N-WC
							36°	2700lm	2400lm	SLS1G2-9303625N-WC
							50°	2700lm	1900lm	SLS1G2-9305025N-WC
						4000K	18°	2900lm	2400lm	SLS1G2-9401825N-WC
							36°	2900lm	2600lm	SLS1G2-9403625N-WC
							50°	2900lm	2100lm	SLS1G2-9405025N-WC
38	W	42 W	36 V	1050 mA	90	2700K	18°	3500lm	3100lm	SLS1G2-9271838N-WC
							36°	3500lm	3400lm	SLS1G2-9273638N-WC
							50°	3500lm	2650lm	SLS1G2-9275038N-WC
						3000K	18°	3700lm	3300lm	SLS1G2-9301838N-WC
							36°	3700lm	3600lm	SLS1G2-9303638N-WC
							50°	3700lm	2800lm	SLS1G2-9305038N-WC
						4000K	18°	4000lm	3600lm	SLS1G2-9401838N-WC
							36°	4000lm	3900lm	SLS1G2-9403638N-WC
							50°	4000lm	3000lm	SLS1G2-9405038N-WC
25	W	28 W	36 V	700 mA	90	2700K	18°	2500lm	2100lm	SLS1G2-9271825N-WW
							36°	2500lm	2300lm	SLS1G2-9273625N-WW
							50°	2500lm	1800lm	SLS1G2-9275025N-WW
						3000K	18°	2700lm	2200lm	SLS1G2-9301825N-WW
							36°	2700lm	2400lm	SLS1G2-9303625N-WW
							50°	2700lm	1900lm	SLS1G2-9305025N-WW
						4000K	18°	2900lm	2400lm	SLS1G2-9401825N-WW
							36°	2900lm	2600lm	SLS1G2-9403625N-WW
							50°	2900lm	2100lm	SLS1G2-9405025N-WW
38	W	42 W	36 V	1050 mA	90	2700K	18°	3500lm	3100lm	SLS1G2-9271838N-WW
							36°	3500lm	3400lm	SLS1G2-9273638N-WW
							50°	3500lm	2650lm	SLS1G2-9275038N-WW
						3000K	18°	3700lm	3300lm	SLS1G2-9301838N-WW
							36°	3700lm	3600lm	SLS1G2-9303638N-WW
							50°	3700lm	2800lm	SLS1G2-9305038N-WW
						4000K	18°	4000lm	3600lm	SLS1G2-9401838N-WW
							36°	4000lm	3900lm	SLS1G2-9403638N-WW
							50°	4000lm	3000lm	SLS1G2-9405038N-WW
25	W	28 W	36 V	700 mA	90	2700K	18°	2500lm	2100lm	SLS1G2-9271825N-WG
							36°	2500lm	2300lm	SLS1G2-9273625N-WG
							50°	2500lm	1800lm	SLS1G2-9275025N-WG
						3000K	18°	2700lm	2200lm	SLS1G2-9301825N-WG
							36°	2700lm	2400lm	SLS1G2-9303625N-WG
							50°	2700lm	1900lm	SLS1G2-9305025N-WG
						4000K	18°	2900lm	2400lm	SLS1G2-9401825N-WG
							36°	2900lm	2600lm	SLS1G2-9403625N-WG
							50°	2900lm	2100lm	SLS1G2-9405025N-WG
38	W	42 W	36 V	1050 mA	90	2700K	18°	3500lm	3100lm	SLS1G2-9271838N-WG
							36°	3500lm	3400lm	SLS1G2-9273638N-WG
							50°	3500lm	2650lm	SLS1G2-9275038N-WG
						3000K	18°	3700lm	3300lm	SLS1G2-9301838N-WG
							36°	3700lm	3600lm	SLS1G2-9303638N-WG
							50°	3700lm	2800lm	SLS1G2-9305038N-WG
						4000K	18°	4000lm	3600lm	SLS1G2-9401838N-WG
							36°	4000lm	3900lm	SLS1G2-9403638N-WG
							50°	4000lm	3000lm	SLS1G2-9405038N-WG

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

Trimless Version available




Trimless code for SLS1G2-9305025N-WM → SLS**4**G2-9305025N-WM

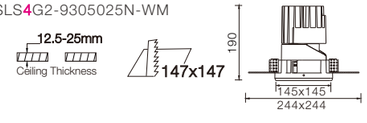




Trimless code for SLS1G2-9305025N-WM → **E**LS1G2-9305025N-WM

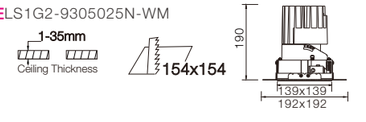


NEKO / SENSE 150 / S150R2-G2

Fixed LED Downlight

NEW




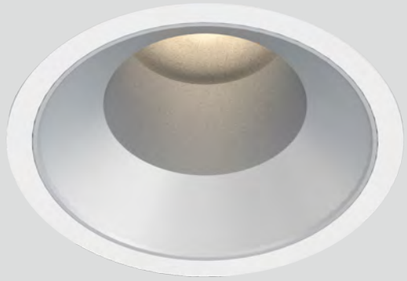

Tunable White

See Details @www.nekolighting.com

25W 38W | CRI90 | 2700K 3000K 4000K | 24° 36° 45° | CITIZEN 50,000h@L80B10 | UGR < 19 | IP54 | 5 YEARS GUARANTEE | CB | CE | Intertek



LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
25	W	28 W	36 V	700 mA	90	2700K	24°	2500lm	2100lm	SLR2G2-9272425N-WS
							36°	2500lm	2100lm	SLR2G2-9273625N-WS
							45°	2500lm	1700lm	SLR2G2-9274525N-WS
						3000K	24°	2700lm	2200lm	SLR2G2-9302425N-WS
							36°	2700lm	2200lm	SLR2G2-9303625N-WS
							45°	2700lm	1800lm	SLR2G2-9304525N-WS
						4000K	24°	2900lm	2400lm	SLR2G2-9402425N-WS
							36°	2900lm	2400lm	SLR2G2-9403625N-WS
							45°	2900lm	1900lm	SLR2G2-9404525N-WS
38	W	42 W	36 V	1050 mA	90	2700K	24°	3500lm	3100lm	SLR2G2-9272438N-WS
							36°	3500lm	3100lm	SLR2G2-9273638N-WS
							45°	3500lm	2500lm	SLR2G2-9274538N-WS
						3000K	24°	3700lm	3300lm	SLR2G2-9302438N-WS
							36°	3700lm	3300lm	SLR2G2-9303638N-WS
							45°	3700lm	2600lm	SLR2G2-9304538N-WS
						4000K	24°	4000lm	3600lm	SLR2G2-9402438N-WS
							36°	4000lm	3600lm	SLR2G2-9403638N-WS
							45°	4000lm	2800lm	SLR2G2-9404538N-WS
25	W	28 W	36 V	700 mA	90	2700K	24°	2500lm	2100lm	SLR2G2-9272425N-WM
							36°	2500lm	2100lm	SLR2G2-9273625N-WM
							45°	2500lm	1700lm	SLR2G2-9274525N-WM
						3000K	24°	2700lm	2200lm	SLR2G2-9302425N-WM
							36°	2700lm	2200lm	SLR2G2-9303625N-WM
							45°	2700lm	1800lm	SLR2G2-9304525N-WM
						4000K	24°	2900lm	2400lm	SLR2G2-9402425N-WM
							36°	2900lm	2400lm	SLR2G2-9403625N-WM
							45°	2900lm	1900lm	SLR2G2-9404525N-WM
38	W	42 W	36 V	1050 mA	90	2700K	24°	3500lm	3100lm	SLR2G2-9272438N-WM
							36°	3500lm	3100lm	SLR2G2-9273638N-WM
							45°	3500lm	2500lm	SLR2G2-9274538N-WM
						3000K	24°	3700lm	3300lm	SLR2G2-9302438N-WM
							36°	3700lm	3300lm	SLR2G2-9303638N-WM
							45°	3700lm	2600lm	SLR2G2-9304538N-WM
						4000K	24°	4000lm	3600lm	SLR2G2-9402438N-WM
							36°	4000lm	3600lm	SLR2G2-9403638N-WM
							45°	4000lm	2800lm	SLR2G2-9404538N-WM



Specular Reflector



Matt Reflector

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

Optional accessary



Honeycomb

Code for SLR2G2-9404525N-WM with Honeycomb
SLR2G2-9404525N-WM-H



Black Reflector



Dark Light Reflector



White Reflector



Gold Reflector


LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
25	W	28 W	36 V	700 mA	90	2700K	24°	2500lm	2100lm	SLR2G2-9272425N-WB
							36°	2500lm	2100lm	SLR2G2-9273625N-WB
							45°	2500lm	1700lm	SLR2G2-9274525N-WB
						3000K	24°	2700lm	2200lm	SLR2G2-9302425N-WB
							36°	2700lm	2200lm	SLR2G2-9303625N-WB
							45°	2700lm	1800lm	SLR2G2-9304525N-WB
						4000K	24°	2900lm	2400lm	SLR2G2-9402425N-WB
							36°	2900lm	2400lm	SLR2G2-9403625N-WB
							45°	2900lm	1900lm	SLR2G2-9404525N-WB
38	W	42 W	36 V	1050 mA	90	2700K	24°	3500lm	3100lm	SLR2G2-9272438N-WB
							36°	3500lm	3100lm	SLR2G2-9273638N-WB
							45°	3500lm	2500lm	SLR2G2-9274538N-WB
						3000K	24°	3700lm	3300lm	SLR2G2-9302438N-WB
							36°	3700lm	3300lm	SLR2G2-9303638N-WB
							45°	3700lm	2600lm	SLR2G2-9304538N-WB
						4000K	24°	4000lm	3600lm	SLR2G2-9402438N-WB
							36°	4000lm	3600lm	SLR2G2-9403638N-WB
							45°	4000lm	2800lm	SLR2G2-9404538N-WB
25	W	28 W	36 V	700 mA	90	2700K	24°	2500lm	2100lm	SLR2G2-9272425N-WC
							36°	2500lm	2100lm	SLR2G2-9273625N-WC
							45°	2500lm	1700lm	SLR2G2-9274525N-WC
						3000K	24°	2700lm	2200lm	SLR2G2-9302425N-WC
							36°	2700lm	2200lm	SLR2G2-9303625N-WC
							45°	2700lm	1800lm	SLR2G2-9304525N-WC
						4000K	24°	2900lm	2400lm	SLR2G2-9402425N-WC
							36°	2900lm	2400lm	SLR2G2-9403625N-WC
							45°	2900lm	1900lm	SLR2G2-9404525N-WC
38	W	42 W	36 V	1050 mA	90	2700K	24°	3500lm	3100lm	SLR2G2-9272438N-WC
							36°	3500lm	3100lm	SLR2G2-9273638N-WC
							45°	3500lm	2500lm	SLR2G2-9274538N-WC
						3000K	24°	3700lm	3300lm	SLR2G2-9302438N-WC
							36°	3700lm	3300lm	SLR2G2-9303638N-WC
							45°	3700lm	2600lm	SLR2G2-9304538N-WC
						4000K	24°	4000lm	3600lm	SLR2G2-9402438N-WC
							36°	4000lm	3600lm	SLR2G2-9403638N-WC
							45°	4000lm	2800lm	SLR2G2-9404538N-WC
25	W	28 W	36 V	700 mA	90	2700K	24°	2500lm	2100lm	SLR2G2-9272425N-WW
							36°	2500lm	2100lm	SLR2G2-9273625N-WW
							45°	2500lm	1700lm	SLR2G2-9274525N-WW
						3000K	24°	2700lm	2200lm	SLR2G2-9302425N-WW
							36°	2700lm	2200lm	SLR2G2-9303625N-WW
							45°	2700lm	1800lm	SLR2G2-9304525N-WW
						4000K	24°	2900lm	2400lm	SLR2G2-9402425N-WW
							36°	2900lm	2400lm	SLR2G2-9403625N-WW
							45°	2900lm	1900lm	SLR2G2-9404525N-WW
38	W	42 W	36 V	1050 mA	90	2700K	24°	3500lm	3100lm	SLR2G2-9272438N-WW
							36°	3500lm	3100lm	SLR2G2-9273638N-WW
							45°	3500lm	2500lm	SLR2G2-9274538N-WW
						3000K	24°	3700lm	3300lm	SLR2G2-9302438N-WW
							36°	3700lm	3300lm	SLR2G2-9303638N-WW
							45°	3700lm	2600lm	SLR2G2-9304538N-WW
						4000K	24°	4000lm	3600lm	SLR2G2-9402438N-WW
							36°	4000lm	3600lm	SLR2G2-9403638N-WW
							45°	4000lm	2800lm	SLR2G2-9404538N-WW
25	W	28 W	36 V	700 mA	90	2700K	24°	2500lm	2100lm	SLR2G2-9272425N-WG
							36°	2500lm	2100lm	SLR2G2-9273625N-WG
							45°	2500lm	1700lm	SLR2G2-9274525N-WG
						3000K	24°	2700lm	2200lm	SLR2G2-9302425N-WG
							36°	2700lm	2200lm	SLR2G2-9303625N-WG
							45°	2700lm	1800lm	SLR2G2-9304525N-WG
						4000K	24°	2900lm	2400lm	SLR2G2-9402425N-WG
							36°	2900lm	2400lm	SLR2G2-9403625N-WG
							45°	2900lm	1900lm	SLR2G2-9404525N-WG
38	W	42 W	36 V	1050 mA	90	2700K	24°	3500lm	3100lm	SLR2G2-9272438N-WG
							36°	3500lm	3100lm	SLR2G2-9273638N-WG
							45°	3500lm	2500lm	SLR2G2-9274538N-WG
						3000K	24°	3700lm	3300lm	SLR2G2-9302438N-WG
							36°	3700lm	3300lm	SLR2G2-9303638N-WG
							45°	3700lm	2600lm	SLR2G2-9304538N-WG
						4000K	24°	4000lm	3600lm	SLR2G2-9402438N-WG
							36°	4000lm	3600lm	SLR2G2-9403638N-WG
							45°	4000lm	2800lm	SLR2G2-9404538N-WG

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

Trimless Version available




Trimless code for SLR2G2-9304525N-WM → SLR**5**G2-9304525N-WM






Trimless code for SLR2G2-9304525N-WM → **E**LR2G2-9304525N-WM



NEKO / SENSE 150 / S150S2-G2

Fixed LED Downlight

NEW

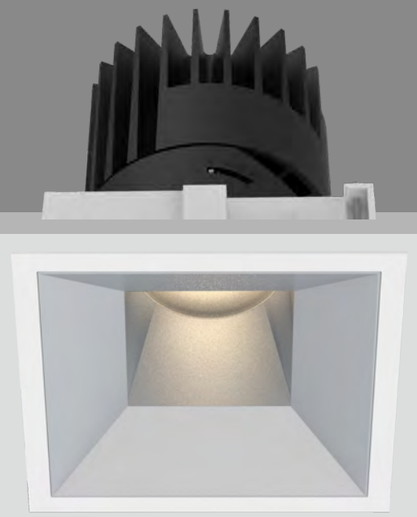

2700K 6500K Tunable White

See Details @www.nekolighting.com

25W 38W | CRI90 | 2700K 3000K 4000K | 24° 36° 45° | CITIZEN 50,000h@L80B10 | UGR < 19 | IP54 | 5 YEARS GUARANTEE | CB | CE | ENEC | ETL Intertek





Specular Reflector



Matt Reflector

LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
25	W	28 W	36 V	700 mA	90	2700K	24°	2500lm	2100lm	SLS2G2-9272425N-WS
							36°	2500lm	2100lm	SLS2G2-9273625N-WS
							45°	2500lm	1700lm	SLS2G2-9274525N-WS
						3000K	24°	2700lm	2200lm	SLS2G2-9302425N-WS
							36°	2700lm	2200lm	SLS2G2-9303625N-WS
							45°	2700lm	1800lm	SLS2G2-9304525N-WS
						4000K	24°	2900lm	2400lm	SLS2G2-9402425N-WS
							36°	2900lm	2400lm	SLS2G2-9403625N-WS
							45°	2900lm	1900lm	SLS2G2-9404525N-WS
38	W	42 W	36 V	1050 mA	90	2700K	24°	3500lm	3100lm	SLS2G2-9272438N-WS
							36°	3500lm	3100lm	SLS2G2-9273638N-WS
							45°	3500lm	2500lm	SLS2G2-9274538N-WS
						3000K	24°	3700lm	3300lm	SLS2G2-9302438N-WS
							36°	3700lm	3300lm	SLS2G2-9303638N-WS
							45°	3700lm	2600lm	SLS2G2-9304538N-WS
						4000K	24°	4000lm	3600lm	SLS2G2-9402438N-WS
							36°	4000lm	3600lm	SLS2G2-9403638N-WS
							45°	4000lm	2800lm	SLS2G2-9404538N-WS
25	W	28 W	36 V	700 mA	90	2700K	24°	2500lm	2100lm	SLS2G2-9272425N-WM
							36°	2500lm	2100lm	SLS2G2-9273625N-WM
							45°	2500lm	1700lm	SLS2G2-9274525N-WM
						3000K	24°	2700lm	2200lm	SLS2G2-9302425N-WM
							36°	2700lm	2200lm	SLS2G2-9303625N-WM
							45°	2700lm	1800lm	SLS2G2-9304525N-WM
						4000K	24°	2900lm	2400lm	SLS2G2-9402425N-WM
							36°	2900lm	2400lm	SLS2G2-9403625N-WM
							45°	2900lm	1900lm	SLS2G2-9404525N-WM
38	W	42 W	36 V	1050 mA	90	2700K	24°	3500lm	3100lm	SLS2G2-9272438N-WM
							36°	3500lm	3100lm	SLS2G2-9273638N-WM
							45°	3500lm	2500lm	SLS2G2-9274538N-WM
						3000K	24°	3700lm	3300lm	SLS2G2-9302438N-WM
							36°	3700lm	3300lm	SLS2G2-9303638N-WM
							45°	3700lm	2600lm	SLS2G2-9304538N-WM
						4000K	24°	4000lm	3600lm	SLS2G2-9402438N-WM
							36°	4000lm	3600lm	SLS2G2-9403638N-WM
							45°	4000lm	2800lm	SLS2G2-9404538N-WM

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

Optional accessary




Honeycomb

Code for SLS2G2-9404525N-WM with Honeycomb
SLS2G2-9404525N-WM-**H**



Black Reflector



Dark Light Reflector



White Reflector



Gold Reflector


LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
25	W	28 W	36 V	700 mA	90	2700K	24°	2500lm	2100lm	SLS2G2-9272425N-WB
							36°	2500lm	2100lm	SLS2G2-9273625N-WB
							45°	2500lm	1700lm	SLS2G2-9274525N-WB
						3000K	24°	2700lm	2200lm	SLS2G2-9302425N-WB
							36°	2700lm	2200lm	SLS2G2-9303625N-WB
							45°	2700lm	1800lm	SLS2G2-9304525N-WB
						4000K	24°	2900lm	2400lm	SLS2G2-9402425N-WB
							36°	2900lm	2400lm	SLS2G2-9403625N-WB
							45°	2900lm	1900lm	SLS2G2-9404525N-WB
38	W	42 W	36 V	1050 mA	90	2700K	24°	3500lm	3100lm	SLS2G2-9272438N-WB
							36°	3500lm	3100lm	SLS2G2-9273638N-WB
							45°	3500lm	2500lm	SLS2G2-9274538N-WB
						3000K	24°	3700lm	3300lm	SLS2G2-9302438N-WB
							36°	3700lm	3300lm	SLS2G2-9303638N-WB
							45°	3700lm	2600lm	SLS2G2-9304538N-WB
						4000K	24°	4000lm	3600lm	SLS2G2-9402438N-WB
							36°	4000lm	3600lm	SLS2G2-9403638N-WB
							45°	4000lm	2800lm	SLS2G2-9404538N-WB
25	W	28 W	36 V	700 mA	90	2700K	24°	2500lm	2100lm	SLS2G2-9272425N-WC
							36°	2500lm	2100lm	SLS2G2-9273625N-WC
							45°	2500lm	1700lm	SLS2G2-9274525N-WC
						3000K	24°	2700lm	2200lm	SLS2G2-9302425N-WC
							36°	2700lm	2200lm	SLS2G2-9303625N-WC
							45°	2700lm	1800lm	SLS2G2-9304525N-WC
						4000K	24°	2900lm	2400lm	SLS2G2-9402425N-WC
							36°	2900lm	2400lm	SLS2G2-9403625N-WC
							45°	2900lm	1900lm	SLS2G2-9404525N-WC
38	W	42 W	36 V	1050 mA	90	2700K	24°	3500lm	3100lm	SLS2G2-9272438N-WC
							36°	3500lm	3100lm	SLS2G2-9273638N-WC
							45°	3500lm	2500lm	SLS2G2-9274538N-WC
						3000K	24°	3700lm	3300lm	SLS2G2-9302438N-WC
							36°	3700lm	3300lm	SLS2G2-9303638N-WC
							45°	3700lm	2600lm	SLS2G2-9304538N-WC
						4000K	24°	4000lm	3600lm	SLS2G2-9402438N-WC
							36°	4000lm	3600lm	SLS2G2-9403638N-WC
							45°	4000lm	2800lm	SLS2G2-9404538N-WC
25	W	28 W	36 V	700 mA	90	2700K	24°	2500lm	2100lm	SLS2G2-9272425N-WW
							36°	2500lm	2100lm	SLS2G2-9273625N-WW
							45°	2500lm	1700lm	SLS2G2-9274525N-WW
						3000K	24°	2700lm	2200lm	SLS2G2-9302425N-WW
							36°	2700lm	2200lm	SLS2G2-9303625N-WW
							45°	2700lm	1800lm	SLS2G2-9304525N-WW
						4000K	24°	2900lm	2400lm	SLS2G2-9402425N-WW
							36°	2900lm	2400lm	SLS2G2-9403625N-WW
							45°	2900lm	1900lm	SLS2G2-9404525N-WW
38	W	42 W	36 V	1050 mA	90	2700K	24°	3500lm	3100lm	SLS2G2-9272438N-WW
							36°	3500lm	3100lm	SLS2G2-9273638N-WW
							45°	3500lm	2500lm	SLS2G2-9274538N-WW
						3000K	24°	3700lm	3300lm	SLS2G2-9302438N-WW
							36°	3700lm	3300lm	SLS2G2-9303638N-WW
							45°	3700lm	2600lm	SLS2G2-9304538N-WW
						4000K	24°	4000lm	3600lm	SLS2G2-9402438N-WW
							36°	4000lm	3600lm	SLS2G2-9403638N-WW
							45°	4000lm	2800lm	SLS2G2-9404538N-WW
25	W	28 W	36 V	700 mA	90	2700K	24°	2500lm	2100lm	SLS2G2-9272425N-WG
							36°	2500lm	2100lm	SLS2G2-9273625N-WG
							45°	2500lm	1700lm	SLS2G2-9274525N-WG
						3000K	24°	2700lm	2200lm	SLS2G2-9302425N-WG
							36°	2700lm	2200lm	SLS2G2-9303625N-WG
							45°	2700lm	1800lm	SLS2G2-9304525N-WG
						4000K	24°	2900lm	2400lm	SLS2G2-9402425N-WG
							36°	2900lm	2400lm	SLS2G2-9403625N-WG
							45°	2900lm	1900lm	SLS2G2-9404525N-WG
38	W	42 W	36 V	1050 mA	90	2700K	24°	3500lm	3100lm	SLS2G2-9272438N-WG
							36°	3500lm	3100lm	SLS2G2-9273638N-WG
							45°	3500lm	2500lm	SLS2G2-9274538N-WG
						3000K	24°	3700lm	3300lm	SLS2G2-9302438N-WG
							36°	3700lm	3300lm	SLS2G2-9303638N-WG
							45°	3700lm	2600lm	SLS2G2-9304538N-WG
						4000K	24°	4000lm	3600lm	SLS2G2-9402438N-WG
							36°	4000lm	3600lm	SLS2G2-9403638N-WG
							45°	4000lm	2800lm	SLS2G2-9404538N-WG

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

Trimless Version available




Trimless code for SLS2G2-9304525N-WM → SLS**5**G2-9304525N-WM






Trimless code for SLS2G2-9304525N-WM → **E**LRS2G2-9304525N-WM

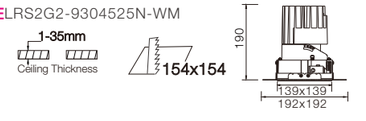


NEKO / SENSE 150 / S150R3-G2

Wall Washer LED Downlight

NEW




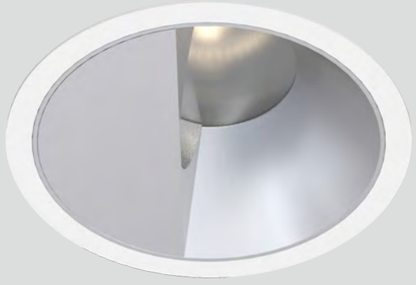

2700K 6500K Tunable White

See Details @www.nekolighting.com

25W 38W | CRI90 | 2700K 3000K 4000K | CITIZEN 50,000h@L80B10 | IP54 | 5 YEARS GUARANTEE | CB | CE | ETL Intertek





Matt Reflector


LED	Power	System power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
25	W	28 W	36 V	700 mA	90	2700K	Wall Washer	2500lm	1100lm	SLR3G2-927WW25N-WM
						3000K	Wall Washer	2700lm	1200lm	SLR3G2-930WW25N-WM
						4000K	Wall Washer	2900lm	1300lm	SLR3G2-940WW25N-WM
38	W	42 W	36 V	1050 mA	90	2700K	Wall Washer	3500lm	1600lm	SLR3G2-927WW38N-WM
						3000K	Wall Washer	3700lm	1700lm	SLR3G2-930WW38N-WM
						4000K	Wall Washer	4000lm	1800lm	SLR3G2-940WW38N-WM

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

Trimless Version available





Trimless code for SLR3G2-930WW25N-WM → SLR**6**G2-930WW25N-WM





Trimless code for SLR3G2-930WW25N-WM → **E**LR3G2-930WW25N-WM




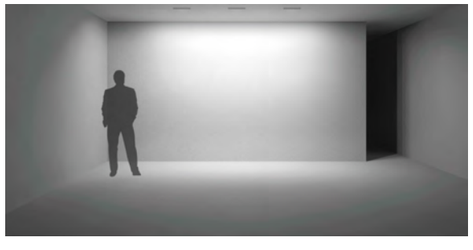


NEKO / SENSE 150 / S150S3-G2

Wall Washer LED Downlight

NEW

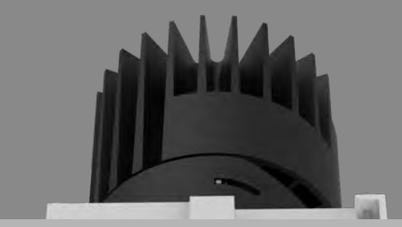


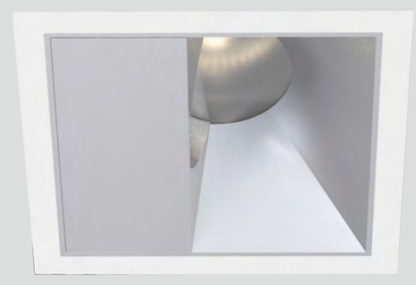

2700K 6500K Tunable White

See Details @www.nekolighting.com

25W 38W | CRI90 | 2700K 3000K 4000K | CITIZEN 50,000h@L80B10 | IP54 | 5 YEARS GUARANTEE | CB | CE | ETL Intertek






Matt Reflector


LED	Power	System power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
25	W	28 W	36 V	700 mA	90	2700K	Wall Washer	2500lm	1100lm	SLS3G2-927WW25N-WM
						3000K	Wall Washer	2700lm	1200lm	SLS3G2-930WW25N-WM
						4000K	Wall Washer	2900lm	1300lm	SLS3G2-940WW25N-WM
38	W	42 W	36 V	1050 mA	90	2700K	Wall Washer	3500lm	1600lm	SLS3G2-927WW38N-WM
						3000K	Wall Washer	3700lm	1700lm	SLS3G2-930WW38N-WM
						4000K	Wall Washer	4000lm	1800lm	SLS3G2-940WW38N-WM

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

Trimless Version available





Trimless code for SLS3G2-930WW25N-WM → SLS**6**G2-930WW25N-WM

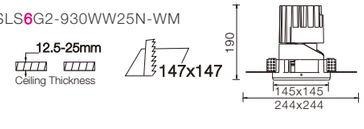




Trimless code for SLS3G2-930WW25N-WM → **E**LS3G2-930WW25N-WM



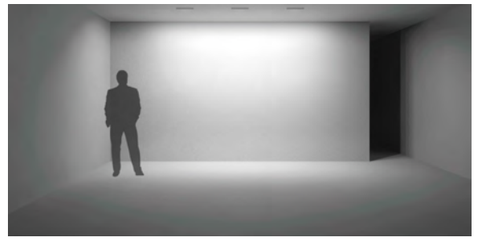

NEW

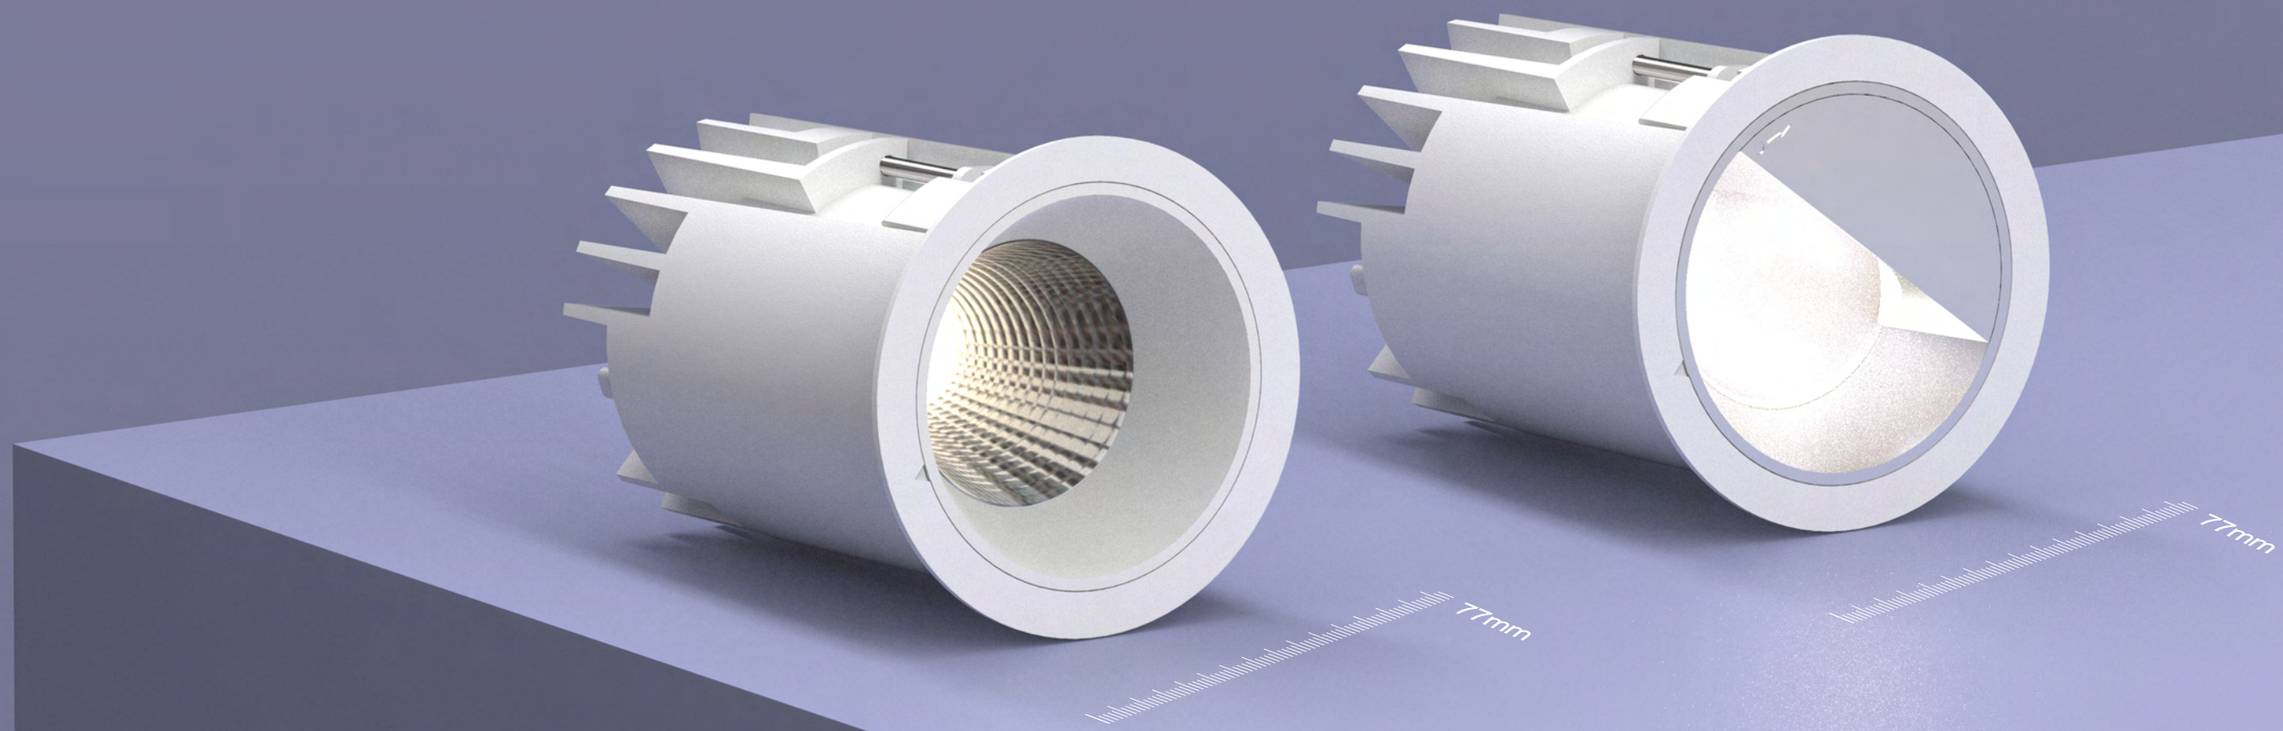


NEKO / VISION / VF68

Fixed Downlight

NEW





13W 18W | CRI90 | 2700K 3000K 4000K | 18° 40° | CITIZEN 50,000h@L80B10 | UGR < 19 | IP20 | 5 YEARS GUARANTEE | CB | CE | ETL Intertek





Specular Reflector




Matt Reflector



Black Reflector

LED	Power System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
13 W	15 W	36 V	350 mA	90	2700K	18°	1400lm	1100lm	VF68-9271813N-WS
						40°	1400lm	1100lm	VF68-9274013N-WS
					3000K	18°	1500lm	1200lm	VF68-9301813N-WS
						40°	1500lm	1200lm	VF68-9304013N-WS
					4000K	18°	1600lm	1300lm	VF68-9401813N-WS
						40°	1600lm	1300lm	VF68-9404013N-WS
18W	21 W	36 V	500 mA	90	2700K	18°	1900lm	1500lm	VF68-9271818N-WS
						40°	1900lm	1500lm	VF68-9274018N-WS
					3000K	18°	2000lm	1600lm	VF68-9301818N-WS
						40°	2000lm	1600lm	VF68-9304018N-WS
					4000K	18°	2200lm	1700lm	VF68-9401818N-WS
						40°	2200lm	1700lm	VF68-9404018N-WS
13 W	15 W	36 V	350 mA	90	2700K	18°	1400lm	1100lm	VF68-9271813N-WM
						40°	1400lm	1100lm	VF68-9274013N-WM
					3000K	18°	1500lm	1200lm	VF68-9301813N-WM
						40°	1500lm	1200lm	VF68-9304013N-WM
					4000K	18°	1600lm	1300lm	VF68-9401813N-WM
						40°	1600lm	1300lm	VF68-9404013N-WM
18W	21 W	36 V	500 mA	90	2700K	18°	1900lm	1500lm	VF68-9271818N-WM
						40°	1900lm	1500lm	VF68-9274018N-WM
					3000K	18°	2000lm	1600lm	VF68-9301818N-WM
						40°	2000lm	1600lm	VF68-9304018N-WM
					4000K	18°	2200lm	1700lm	VF68-9401818N-WM
						40°	2200lm	1700lm	VF68-9404018N-WM
13 W	15 W	36 V	350 mA	90	2700K	18°	1400lm	1100lm	VF68-9271813N-WB
						40°	1400lm	1100lm	VF68-9274013N-WB
					3000K	18°	1500lm	1200lm	VF68-9301813N-WB
						40°	1500lm	1200lm	VF68-9304013N-WB
					4000K	18°	1600lm	1300lm	VF68-9401813N-WB
						40°	1600lm	1300lm	VF68-9404013N-WB
18W	21 W	36 V	500 mA	90	2700K	18°	1900lm	1500lm	VF68-9271818N-WB
						40°	1900lm	1500lm	VF68-9274018N-WB
					3000K	18°	2000lm	1600lm	VF68-9301818N-WB
						40°	2000lm	1600lm	VF68-9304018N-WB
					4000K	18°	2200lm	1700lm	VF68-9401818N-WB
						40°	2200lm	1700lm	VF68-9404018N-WB

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

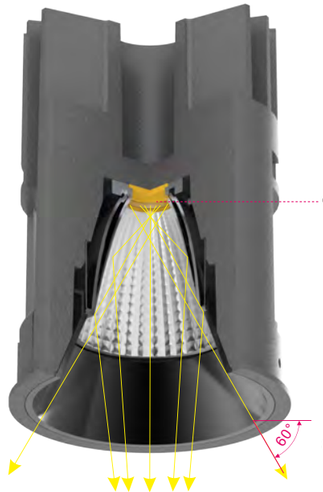



Chrome Black Reflector



White Reflector



Gold Reflector

13 W	15 W	36 V	350 mA	90	2700K	18°	1400lm	1100lm	VF68-9271813N-WC
						40°	1400lm	1100lm	VF68-9274013N-WC
					3000K	18°	1500lm	1200lm	VF68-9301813N-WC
						40°	1500lm	1200lm	VF68-9304013N-WC
					4000K	18°	1600lm	1300lm	VF68-9401813N-WC
						40°	1600lm	1300lm	VF68-9404013N-WC
18W	21 W	36 V	500 mA	90	2700K	18°	1900lm	1500lm	VF68-9271818N-WC
						40°	1900lm	1500lm	VF68-9274018N-WC
					3000K	18°	2000lm	1600lm	VF68-9301818N-WC
						40°	2000lm	1600lm	VF68-9304018N-WC
					4000K	18°	2200lm	1700lm	VF68-9401818N-WC
						40°	2200lm	1700lm	VF68-94040138N-WC
13 W	15 W	36 V	350 mA	90	2700K	18°	1400lm	1100lm	VF68-9271813N-WW
						40°	1400lm	1100lm	VF68-9274013N-WW
					3000K	18°	1500lm	1200lm	VF68-9301813N-WW
						40°	1500lm	1200lm	VF68-9304013N-WW
					4000K	18°	1600lm	1300lm	VF68-9401813N-WW
						40°	1600lm	1300lm	VF68-9404013N-WW
18W	21 W	36 V	500 mA	90	2700K	18°	1900lm	1500lm	VF68-9271818N-WW
						40°	1900lm	1500lm	VF68-9274018N-WW
					3000K	18°	2000lm	1600lm	VF68-9301818N-WW
						40°	2000lm	1600lm	VF68-9304018N-WW
					4000K	18°	2200lm	1700lm	VF68-9401818N-WW
						40°	2200lm	1700lm	VF68-9404018N-WW
13 W	15 W	36 V	350 mA	90	2700K	18°	1400lm	1100lm	VF68-9271813N-WG
						40°	1400lm	1100lm	VF68-9274013N-WG
					3000K	18°	1500lm	1200lm	VF68-9301813N-WG
						40°	1500lm	1200lm	VF68-9304013N-WG
					4000K	18°	1600lm	1300lm	VF68-9401813N-WG
						40°	1600lm	1300lm	VF68-9404013N-WG
18W	21 W	36 V	500 mA	90	2700K	18°	1900lm	1500lm	VF68-9271818N-WG
						40°	1900lm	1500lm	VF68-9274018N-WG
					3000K	18°	2000lm	1600lm	VF68-9301818N-WG
						40°	2000lm	1600lm	VF68-9304018N-WG
					4000K	18°	2200lm	1700lm	VF68-9401818N-WG
						40°	2200lm	1700lm	VF68-9404018N-WG

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

NEKO / VISION / VW68

Wall Washer Downlight


NEW





13W 18W | CRI90 | 2700K 3000K 4000K | CITIZEN 50,000h@L80B10 | UGR < 19 | IP 20 | 5 YEARS GUARANTEE | CB | CE | ETL Intertek







Matt Reflector

LED	Power	System power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
13	W	15 W	36 V	350 mA	90	2700K	Wall Washer	1400lm	780lm	VW68-927WW13N-WM
						3000K	Wall Washer	1500lm	820lm	VW68-930WW13N-WM
						4000K	Wall Washer	1600lm	870lm	VW68-940WW13N-WM
18	W	21 W	36 V	500 mA	90	2700K	Wall Washer	1900lm	1050lm	VW68-927WW18N-WM
						3000K	Wall Washer	2000lm	1100lm	VW68-930WW18N-WM
						4000K	Wall Washer	2200lm	1170lm	VW68-940WW18N-WM

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)






NEKO / **TAKEO Pro & TAKEO**
Fixed LED Downlight
Project: Office, Netherlands



NEKO/ TAKEO Pro & TAKEO

Fixed LED Downlight

Interchangeable Design
Super Eye Comfort
UGR<19
IP54
High Efficiency

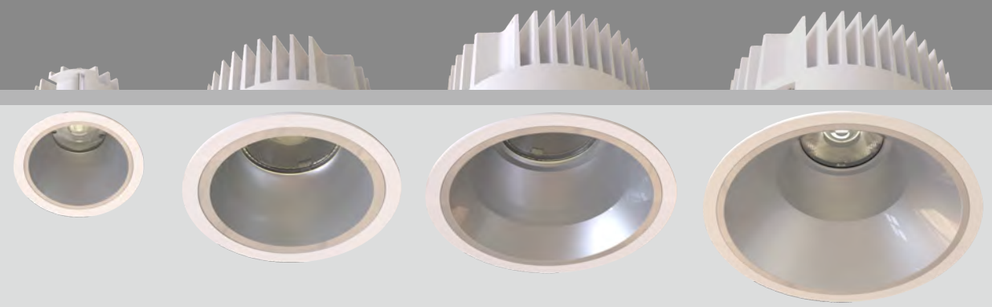



3``

TAKEO T75
7.5W 750lm-800lm
11W 950lm-1050lm



4``

TAKEO T100
9W 1100lm-1200lm
13W 1500lm-1600lm
18W 1900lm-2100lm



6``

TAKEO T150
18W 2300lm-2500lm
25W 3100lm-3400lm



8``


TAKEO T200
25W 2900lm-3100lm
38W 4400lm-4800lm
52W 5400lm-5900lm


NEW

TAKEO T100 Pro
8.5W 1200lm-1300lm
12W 1600lm-1700lm
17W 2250lm-2400lm

TAKEO T150 Pro
17W 2600lm-2800lm
24W 3500lm-3800lm


TAKEO T200 Pro
24W 3500lm-3800lm
36W 5000lm-5300lm
51W 6300lm-6700lm

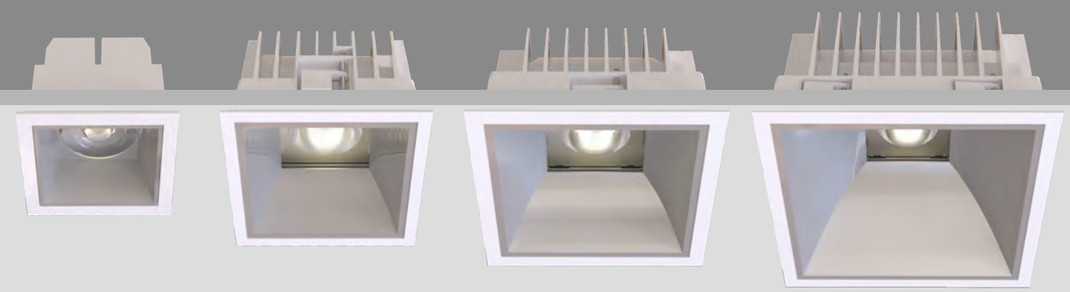




3``

TAKEO TS68
7.5W 700lm-750lm
11W 900lm-950lm



4``

TAKEO TS100
9W 900lm-1000lm
13W 1200lm-1300lm



6``

TAKEO TS150
18W 1800lm-2000lm
25W 2400lm-2600lm



8``

TAKEO TS200
25W 2300lm-2500lm
38W 3300lm-3600lm

NEW

TAKEO TS100 Pro
8.5W 1000lm-1100lm
12W 1350lm-1500lm

TAKEO TS150 Pro
17W 2050lm-2200lm
24W 2800lm-3000lm


TAKEO TS200 Pro
24W 2800lm-3000lm
36W 3900lm-4200lm



White



Black







White



Black

TAKEO Pro & TAKEO

LED DOWNLIGHT SYSTEM

Model No.	T75	T100 / T100 Pro	T150 / T150 Pro	T200 / T200 Pro	T150-C / T150 Pro-C	TS68	TS100 / TS100 Pro	TS150 / TS150 Pro	TS200 / TS200 Pro
Product Photo									
Dimension (mm)									
Cutout (mm)					Ceiling Mounted				
TAKEO TAKEO Pro	7.5W/ 11W	9W/ 13W/ 18W 8.5W/ 12W/ 17W	18W/ 25W 17W/ 24W	25W/ 38W/ 52W 24W/ 36W/ 51W	18W/ 25W 17W/ 24W	7.5W/ 11W	9W/ 13W 8.5W/ 12W	18W/ 25W 17W/ 24W	25W/ 38W 24W/ 36W
CCT	2700K/ 3000K/ 4000K	2700K/ 3000K/ 4000K Dim to Wam/ Tunable White	2700K/ 3000K/ 4000K Tunable White	2700K/ 3000K/ 4000K Tunable White	2700K/ 3000K/ 4000K	2700K/ 3000K/ 4000K	2700K/ 3000K/ 4000K Dim to Wam/ Tunable White	2700K/ 3000K/ 4000K Tunable White	2700K/ 3000K/ 4000K Tunable White
CRI	>90	>90	>90	>90	>90	>80/ >90	>90	>90	>90
Beam Angle	30°/ 50°	30°/ 50°	30°/ 60°(65°)	30°/ 60°(65°)	30°/ 60°(65°)	25°/60°	60°	70°	70°
Lumen Output TAKEO TAKEO Pro	950lm @CRI80 3000K	1900lm @CRI80 3000K 2250lm @CRI80 3000K	3100lm @CRI80 3000K 3500lm @CRI80 3000K	5400lm @CRI80 3000K 6300lm @CRI80 3000K	3100lm @CRI80 3000K 3500lm @CRI80 3000K	900lm @CRI80 3000K	1200lm @CRI80 3000K 1350lm @CRI80 3000K	2400lm @CRI80 3000K 2800lm @CRI80 3000K	3100lm @CRI80 3000K 3900lm @CRI80 3000K
Reflector Color									
housing Color	White/ Black				White/ Black				
IP	IP54				IP20	IP54			
Dimming	On/ Off, Phase Dim, 0/1-10V Dim, DALI Dim				On/ Off, Phase Dim, 0/1-10V Dim, DALI Dim				
Accessory									


NEKO / TAKEO Pro / T100 Pro

Fixed LED Downlight


Super Eye Comfort

Higher Efficiency

NEW



8.5W 12W 17W | CRI80 CRI90 | 2700K 3000K 4000K | 30° 50° | CITIZEN 50,000h@L80B10 | UGR < 19 | IP54 | 5 YEARS GUARANTEE | CB | CE | ETL Intertek





Matt Reflector

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
8.5 W	10 W	34 V	250 mA	80	2700K	30°	1300lm	1150lm	TS4-8273009N-WM
						50°	1300lm	1050lm	TS4-8275009N-WM
					3000K	30°	1400lm	1200lm	TS4-8303009N-WM
						50°	1400lm	1100lm	TS4-8305009N-WM
					4000K	30°	1500lm	1300lm	TS4-8403009N-WM
						50°	1500lm	1200lm	TS4-8405009N-WM
12 W	14 W	34 V	350 mA	80	2700K	30°	1800lm	1500lm	TS4-8273012N-WM
						50°	1800lm	1400lm	TS4-8275012N-WM
					3000K	30°	1900lm	1600lm	TS4-8303012N-WM
						50°	1900lm	1500lm	TS4-8305012N-WM
					4000K	30°	2050lm	1700lm	TS4-8403012N-WM
						50°	2050lm	1600lm	TS4-8405012N-WM
17 W	20 W	36 V	500 mA	80	2700K	30°	2500lm	2150lm	TS4-8273017N-WM
						50°	2500lm	1900lm	TS4-8275017N-WM
					3000K	30°	2600lm	2250lm	TS4-8303017N-WM
						50°	2600lm	2000lm	TS4-8305017N-WM
					4000K	30°	2800lm	2400lm	TS4-8403017N-WM
						50°	2800lm	2200lm	TS4-8405017N-WM



White Reflector

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
8.5 W	10 W	34 V	250 mA	80	2700K	30°	1300lm	1150lm	TS4-8273009N-WW
						50°	1300lm	1050lm	TS4-8275009N-WW
					3000K	30°	1400lm	1200lm	TS4-8303009N-WW
						50°	1400lm	1100lm	TS4-8305009N-WW
					4000K	30°	1500lm	1300lm	TS4-8403009N-WW
						50°	1500lm	1200lm	TS4-8405009N-WW
12 W	14 W	34 V	350 mA	80	2700K	30°	1800lm	1500lm	TS4-8273012N-WW
						50°	1800lm	1400lm	TS4-8275012N-WW
					3000K	30°	1900lm	1600lm	TS4-8303012N-WW
						50°	1900lm	1500lm	TS4-8305012N-WW
					4000K	30°	2050lm	1700lm	TS4-8403012N-WW
						50°	2050lm	1600lm	TS4-8405012N-WW
17 W	20 W	36 V	500 mA	80	2700K	30°	2500lm	2150lm	TS4-8273017N-WW
						50°	2500lm	1900lm	TS4-8275017N-WW
					3000K	30°	2600lm	2250lm	TS4-8303017N-WW
						50°	2600lm	2000lm	TS4-8305017N-WW
					4000K	30°	2800lm	2400lm	TS4-8403017N-WW
						50°	2800lm	2200lm	TS4-8405017N-WW

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)



Black Reflector

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
8.5 W	10 W	34 V	250 mA	80	2700K	30°	1300lm	1150lm	TS4-8273009N-WB
						50°	1300lm	1050lm	TS4-8275009N-WB
					3000K	30°	1400lm	1200lm	TS4-8303009N-WB
						50°	1400lm	1100lm	TS4-8305009N-WB
					4000K	30°	1500lm	1300lm	TS4-8403009N-WB
						50°	1500lm	1200lm	TS4-8405009N-WB
12 W	14 W	34 V	350 mA	80	2700K	30°	1800lm	1500lm	TS4-8273012N-WB
						50°	1800lm	1400lm	TS4-8275012N-WB
					3000K	30°	1900lm	1600lm	TS4-8303012N-WB
						50°	1900lm	1500lm	TS4-8305012N-WB
					4000K	30°	2050lm	1700lm	TS4-8403012N-WB
						50°	2050lm	1600lm	TS4-8405012N-WB
17 W	20 W	36 V	500 mA	80	2700K	30°	2500lm	2150lm	TS4-8273017N-WB
						50°	2500lm	1900lm	TS4-8275017N-WB
					3000K	30°	2600lm	2250lm	TS4-8303017N-WB
						50°	2600lm	2000lm	TS4-8305017N-WB
					4000K	30°	2800lm	2400lm	TS4-8403017N-WB
						50°	2800lm	2200lm	TS4-8405017N-WB


Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)


NEKO / TAKEO Pro / T150 Pro

Fixed LED Downlight

Super Eye Comfort
Higher Efficiency

NEW



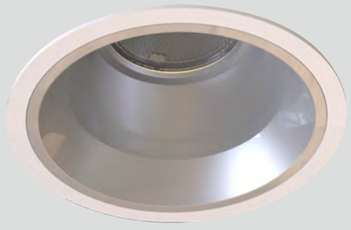



17W 24W | CRI80 CRI90 | 2700K 3000K 4000K | 30° 65° | CITIZEN 50,000h@L80B10 | UGR < 19 | IP54 | 5 YEARS GUARANTEE | CB | CE | ETL Intertek





Matt Reflector

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
17 W	19 W	36 V	500 mA	80	2700K	30°	3000lm	2450lm	TM4-8273017N-WM
						65°	3000lm	2000lm	TM4-8276517N-WM
					3000K	30°	3200lm	2600lm	TM4-8303017N-WM
						65°	3200lm	2100lm	TM4-8306517N-WM
					4000K	30°	3500lm	2800lm	TM4-8403017N-WM
						65°	3500lm	2300lm	TM4-8406517N-WM
24 W	26 W	36 V	700 mA	80	2700K	30°	4000lm	3300lm	TM4-8273024N-WM
						65°	4000lm	2700lm	TM4-8276524N-WM
					3000K	30°	4200lm	3500lm	TM4-8303024N-WM
						65°	4200lm	2850lm	TM4-8306524N-WM
					4000K	30°	4500lm	3800lm	TM4-8403024N-WM
						65°	4500lm	3000lm	TM4-8406524N-WM



White Reflector

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
17 W	19 W	36 V	500 mA	80	2700K	30°	3000lm	2450lm	TM4-8273017N-WW
						65°	3000lm	2000lm	TM4-8276517N-WW
					3000K	30°	3200lm	2600lm	TM4-8303017N-WW
						65°	3200lm	2100lm	TM4-8306517N-WW
					4000K	30°	3500lm	2800lm	TM4-8403017N-WW
						65°	3500lm	2300lm	TM4-8406517N-WW
24 W	26 W	36 V	700 mA	80	2700K	30°	4000lm	3300lm	TM4-8273024N-WW
						65°	4000lm	2700lm	TM4-8276524N-WW
					3000K	30°	4200lm	3500lm	TM4-8303024N-WW
						65°	4200lm	2850lm	TM4-8306524N-WW
					4000K	30°	4500lm	3800lm	TM4-8403024N-WW
						65°	4500lm	3000lm	TM4-8406524N-WW

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)



Black Reflector

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
17 W	19 W	36 V	500 mA	80	2700K	30°	3000lm	2450lm	TM4-8273017N-WB
						65°	3000lm	2000lm	TM4-8276517N-WB
					3000K	30°	3200lm	2600lm	TM4-8303017N-WB
						65°	3200lm	2100lm	TM4-8306517N-WB
					4000K	30°	3500lm	2800lm	TM4-8403017N-WB
						65°	3500lm	2300lm	TM4-8406517N-WB
24 W	26 W	36 V	700 mA	80	2700K	30°	4000lm	3300lm	TM4-8273024N-WB
						65°	4000lm	2700lm	TM4-8276524N-WB
					3000K	30°	4200lm	3500lm	TM4-8303024N-WB
						65°	4200lm	2850lm	TM4-8306524N-WB
					4000K	30°	4500lm	3800lm	TM4-8403024N-WB
						65°	4500lm	3000lm	TM4-8406524N-WB


Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

NEKO / TAKEO Pro / T200 Pro

Fixed LED Downlight


Super Eye Comfort
Higher Efficiency

NEW

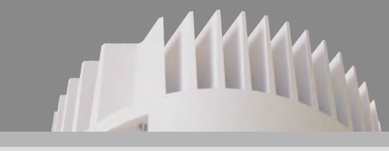



24W 36W 51W | CRI80 CRI90 | 2700K 3000K 4000K | 18° 30° 65° | CITIZEN 50,000h@L80B10 | UGR < 19 | IP54 | 5 YEARS GUARANTEE | CB | CE | c ETL us Intertek





Matt Reflector

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
24 W	26 W	34 V	700 mA	80	2700K	18°	4200lm	3200lm	TL4-8271824N-WM
						30°	4200lm	3300lm	TL4-8273024N-WM
						65°	4200lm	2700lm	TL4-8276524N-WM
					3000K	18°	4400lm	3400lm	TL4-8301824N-WM
						30°	4400lm	3500lm	TL4-8303024N-WM
						65°	4400lm	2900lm	TL4-8306524N-WM
					4000K	18°	4700lm	3700lm	TL4-8401824N-WM
						30°	4700lm	3800lm	TL4-8403024N-WM
						65°	4700lm	3100lm	TL4-8406524N-WM
36 W	40 W	34 V	1050 mA	80	2700K	18°	5600lm	4600lm	TL4-8271836N-WM
						30°	5600lm	4800lm	TL4-8273036N-WM
						65°	5600lm	4000lm	TL4-8276536N-WM
					3000K	18°	6000lm	4800lm	TL4-8301836N-WM
						30°	6000lm	5000lm	TL4-8303036N-WM
						65°	6000lm	4200lm	TL4-8306536N-WM
					4000K	18°	6500lm	5100lm	TL4-8401836N-WM
						30°	6500lm	5300lm	TL4-8403036N-WM
						65°	6500lm	4500lm	TL4-8406536N-WM
51 W	55 W	36 V	1400 mA	80	2700K	18°	7000lm	5700lm	TL4-8271851N-WM
						30°	7000lm	6000lm	TL4-8273051N-WM
						65°	7000lm	5000lm	TL4-8276551N-WM
					3000K	18°	7400lm	5900lm	TL4-8301851N-WM
						30°	7400lm	6300lm	TL4-8303051N-WM
						65°	7400lm	5200lm	TL4-8306551N-WM
					4000K	18°	8000lm	6300lm	TL4-8401851N-WM
						30°	8000lm	6700lm	TL4-8403051N-WM
						65°	8000lm	5500lm	TL4-8406551N-WM

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)



White Reflector



Black Reflector

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
24 W	26 W	34 V	700 mA	80	2700K	18°	4200lm	3200lm	TL4-8271824N-WB
						30°	4200lm	3300lm	TL4-8273024N-WB
						65°	4200lm	2700lm	TL4-8276524N-WB
					3000K	18°	4400lm	3400lm	TL4-8301824N-WB
						30°	4400lm	3500lm	TL4-8303024N-WB
						65°	4400lm	2900lm	TL4-8306524N-WB
					4000K	18°	4700lm	3700lm	TL4-8401824N-WB
						30°	4700lm	3800lm	TL4-8403024N-WB
						65°	4700lm	3100lm	TL4-8406524N-WB
36 W	40 W	34 V	1050 mA	80	2700K	18°	5600lm	4600lm	TL4-8271836N-WB
						30°	5600lm	4800lm	TL4-8273036N-WB
						65°	5600lm	4000lm	TL4-8276536N-WB
					3000K	18°	6000lm	4800lm	TL4-8301836N-WB
						30°	6000lm	5000lm	TL4-8303036N-WB
						65°	6000lm	4200lm	TL4-8306536N-WB
					4000K	18°	6500lm	5100lm	TL4-8401836N-WB
						30°	6500lm	5300lm	TL4-8403036N-WB
						65°	6500lm	4500lm	TL4-8406536N-WB
51 W	55 W	36 V	1400 mA	80	2700K	18°	7000lm	5700lm	TL4-8271851N-WB
						30°	7000lm	6000lm	TL4-8273051N-WB
						65°	7000lm	5000lm	TL4-8276551N-WB
					3000K	18°	7400lm	5900lm	TL4-8301851N-WB
						30°	7400lm	6300lm	TL4-8303051N-WB
						65°	7400lm	5200lm	TL4-8306551N-WB
					4000K	18°	8000lm	6300lm	TL4-8401851N-WB
						30°	8000lm	6700lm	TL4-8403051N-WB
						65°	8000lm	5500lm	TL4-8406551N-WB

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

NEKO / TAKEO Pro/ T150C Pro

NEW

TAKEO150 ProCeiling Light

Super Eye Comfort
Higher Efficiency



17W 24W | CRI80 CRI90 | 2700K 3000K 4000K | 30° 65° | CITIZEN 50,000h@L80B10 | UGR < 19 | IP54 | 5 YEARS GUARANTEE | CB CE



LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
17 W	19 W	36 V	500 mA	80	2700K	30°	3000lm	2450lm	TMC4-8273017N-WM
						65°	3000lm	2000lm	TMC4-8276517N-WM
					3000K	30°	3200lm	2600lm	TMC4-8303017N-WM
						65°	3200lm	2100lm	TMC4-8306517N-WM
					4000K	30°	3500lm	2800lm	TMC4-8403017N-WM
						65°	3500lm	2300lm	TMC4-8406517N-WM
24 W	26 W	36 V	700 mA	80	2700K	30°	4000lm	3300lm	TMC4-8273024N-WM
						65°	4000lm	2700lm	TMC4-8276524N-WM
					3000K	30°	4200lm	3500lm	TMC4-8303024N-WM
						65°	4200lm	2850lm	TMC4-8306524N-WM
					4000K	30°	4500lm	3800lm	TMC4-8403024N-WM
						65°	4500lm	3000lm	TMC4-8406524N-WM



Matt Reflector

17 W	19 W	36 V	500 mA	80	2700K	30°	3000lm	2450lm	TMC4-8273017N-WB
						65°	3000lm	2000lm	TMC4-8276517N-WB
					3000K	30°	3200lm	2600lm	TMC4-8303017N-WB
						65°	3200lm	2100lm	TMC4-8306517N-WB
					4000K	30°	3500lm	2800lm	TMC4-8403017N-WB
						65°	3500lm	2300lm	TMC4-8406517N-WB
24 W	26 W	36 V	700 mA	80	2700K	30°	4000lm	3300lm	TMC4-8273024N-WB
						65°	4000lm	2700lm	TMC4-8276524N-WB
					3000K	30°	4200lm	3500lm	TMC4-8303024N-WB
						65°	4200lm	2850lm	TMC4-8306524N-WB
					4000K	30°	4500lm	3800lm	TMC4-8403024N-WB
						65°	4500lm	3000lm	TMC4-8406524N-WB



Matt Reflector

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)






Black Reflector | White Reflector | Matt Reflector

NEKO / TAKEO Pro/ TS100 Pro

Fixed LED Downlight

Super Eye Comfort
Higher Efficiency



8.5W 12W | CRI80 CRI90 | 2700K 3000K 4000K | 60° | CITIZEN 50,000h@L80B10 | UGR < 19 | IP54 | 5 YEARS GUARANTEE | CB | CE | ETL Intertek

100x100 | 1-30mm Ceiling Thickness | 79 | 110x110

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
8.5 W	10 W	34 V	250 mA	80	2700K	60°	1300lm	950lm	TSS4-8276008N-WM
					3000K	60°	1400lm	1000lm	TSS4-8306008N-WM
					4000K	60°	1500lm	1100lm	TSS4-8406008N-WM
12 W	14 W	34 V	350 mA	80	2700K	60°	1800lm	1250lm	TSS4-8276012N-WM
					3000K	60°	1900lm	1350lm	TSS4-8306012N-WM
					4000K	60°	2050lm	1500lm	TSS4-8406012N-WM



Matt Reflector

8.5 W	10 W	34 V	250 mA	80	2700K	60°	1300lm	950lm	TSS4-8276008N-WW
					3000K	60°	1400lm	1000lm	TSS4-8306008N-WW
					4000K	60°	1500lm	1100lm	TSS4-8406008N-WW
12 W	14 W	34 V	350 mA	80	2700K	60°	1800lm	1250lm	TSS4-8276012N-WW
					3000K	60°	1900lm	1350lm	TSS4-8306012N-WW
					4000K	60°	2050lm	1500lm	TSS4-8406012N-WW



White Reflector

8.5 W	10 W	34 V	250 mA	80	2700K	60°	1300lm	950lm	TSS4-8276008N-WB
					3000K	60°	1400lm	1000lm	TSS4-8306008N-WB
					4000K	60°	1500lm	1100lm	TSS4-8406008N-WB
12 W	14 W	34 V	350 mA	80	2700K	60°	1800lm	1250lm	TSS4-8276012N-WB
					3000K	60°	1900lm	1350lm	TSS4-8306012N-WB
					4000K	60°	2050lm	1500lm	TSS4-8406012N-WB




Black Reflector

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

NEKO / TAKEO Pro/ TS150 Pro

Fixed LED Downlight

Super Eye Comfort
Higher Efficiency



17W 24W | CRI80 CRI90 | 2700K 3000K 4000K | 70° | CITIZEN 50,000h@L80B10 | UGR < 19 | IP54 | 5 YEARS GUARANTEE | CB | CE | ETL Intertek

150x150 | 1-25mm Ceiling Thickness | 100 | 167x167

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
17 W	19 W	36 V	500 mA	80	2700K	70°	3000lm	1900lm	TSM4-8277017N-WM
					3000K	70°	3200lm	2050lm	TSM4-8307017N-WM
					4000K	70°	3500lm	2200lm	TSM4-8407017N-WM
24 W	26 W	36 V	700 mA	80	2700K	70°	4000lm	2700lm	TSM4-8277024N-WM
					3000K	70°	4200lm	2800lm	TSM4-8307024N-WM
					4000K	70°	4500lm	3000lm	TSM4-8407024N-WM



Matt Reflector

17 W	19 W	36 V	500 mA	80	2700K	70°	3000lm	1900lm	TSM4-8277017N-WW
					3000K	70°	3200lm	2050lm	TSM4-8307017N-WW
					4000K	70°	3500lm	2200lm	TSM4-8407017N-WW
24 W	26 W	36 V	700 mA	80	2700K	70°	4000lm	2700lm	TSM4-8277024N-WW
					3000K	70°	4200lm	2800lm	TSM4-8307024N-WW
					4000K	70°	4500lm	3000lm	TSM4-8407024N-WW



White Reflector

17 W	19 W	36 V	500 mA	80	2700K	70°	3000lm	1900lm	TSM4-8277017N-WB
					3000K	70°	3200lm	2050lm	TSM4-8307017N-WB
					4000K	70°	3500lm	2200lm	TSM4-8407017N-WB
24 W	26 W	36 V	700 mA	80	2700K	70°	4000lm	2700lm	TSM4-8277024N-WB
					3000K	70°	4200lm	2800lm	TSM4-8307024N-WB
					4000K	70°	4500lm	3000lm	TSM4-8407024N-WB



Black Reflector

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

NEKO / TAKEO Pro/ TS200 Pro

Fixed LED Downlight


Super Eye Comfort
Higher Efficiency

NEW




24W 36W | CRI80 CRI90 | 2700K 3000K 4000K | 70° | CITIZEN 50,000h@L80B10 | UGR < 19 | IP54 | 5 YEARS GUARANTEE | CB | CE | ETL Intertek

200x200 | 1-25mm Ceiling Thickness | 132 | 220x220




Matt Reflector

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
24 W	26 W	34V	700 mA	80	2700K	70°	4200lm	2700lm	TSL4-8277024N-WM
					3000K	70°	4400lm	2800lm	TSL4-8307024N-WM
					4000K	70°	4700lm	3000lm	TSL4-8407024N-WM
36 W	40 W	34 V	1050 mA	80	2700K	70°	5600lm	3700lm	TSL4-8277036N-WM
					3000K	70°	6000lm	3900lm	TSL4-8307036N-WM
					4000K	70°	6500lm	4200lm	TSL4-8407036N-WM



White Reflector


24 W	26 W	34V	700 mA	80	2700K	70°	4200lm	2700lm	TSL4-8277024N-WW
					3000K	70°	4400lm	2800lm	TSL4-8307024N-WW
					4000K	70°	4700lm	3000lm	TSL4-8407024N-WW
36 W	40 W	34 V	1050 mA	80	2700K	70°	5600lm	3700lm	TSL4-8277036N-WW
					3000K	70°	6000lm	3900lm	TSL4-8307036N-WW
					4000K	70°	6500lm	4200lm	TSL4-8407036N-WW



Black Reflector

24 W	26 W	34V	700 mA	80	2700K	70°	4200lm	2700lm	TSL4-8277024N-WB
					3000K	70°	4400lm	2800lm	TSL4-8307024N-WB
					4000K	70°	4700lm	3000lm	TSL4-8407024N-WB
36 W	40 W	34 V	1050 mA	80	2700K	70°	5600lm	3700lm	TSL4-8277036N-WB
					3000K	70°	6000lm	3900lm	TSL4-8307036N-WB
					4000K	70°	6500lm	4200lm	TSL4-8407036N-WB

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

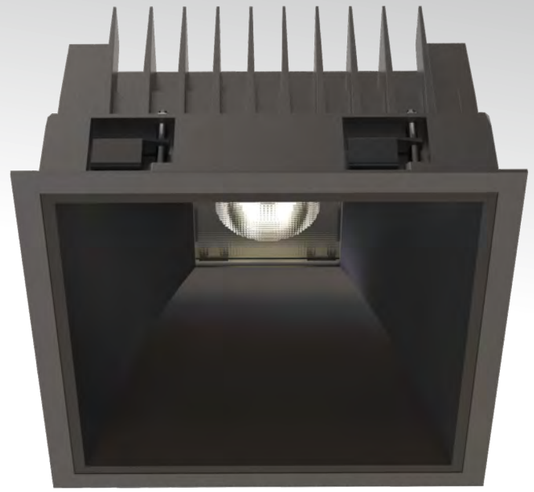

Black Housing Available for TAKEO Series

NEKO / TAKEO
Fixed LED Downlight
Project: Office, Netherlands


NEKO / TAKEO / T75

Fixed LED Downlight


Super Eye Comfort

High Efficiency





11W 7.5W | CRI80 CRI90 | 2700K 3000K 4000K | 25° 50° | CITIZEN 50,000h@L80B10 | UGR < 19 | IP54 | 5 YEARS GUARANTEE | CB | CE | ETL Intertek





Matt Reflector

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
7.5 W	9 W	31 V	250 mA	80	2700K	25°	1000lm	720lm	TT1-8272508N-WM
						50°	1000lm	720lm	TT1-8275008N-WM
					3000K	25°	1100lm	750lm	TT1-8302508N-WM
						50°	1100lm	750lm	TT1-8305008N-WM
					4000K	25°	1200lm	800lm	TT1-8402508N-WM
						50°	1200lm	800lm	TT1-8405008N-WM
11 W	13 W	31 V	350 mA	80	2700K	25°	1300lm	900lm	TT2-8272511N-WM
						50°	1300lm	900lm	TT2-8275011N-WM
					3000K	25°	1400lm	950lm	TT2-8302511N-WM
						50°	1400lm	950lm	TT2-8305011N-WM
					4000K	25°	1500lm	1050lm	TT2-8402511N-WM
						50°	1500lm	1050lm	TT2-8405011N-WM



White Reflector

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
7.5 W	9 W	31 V	250 mA	80	2700K	25°	1000lm	720lm	TT1-8272508N-WW
						50°	1000lm	720lm	TT1-8275008N-WW
					3000K	25°	1100lm	750lm	TT1-8302508N-WW
						50°	1100lm	750lm	TT1-8305008N-WW
					4000K	25°	1200lm	800lm	TT1-8402508N-WW
						50°	1200lm	800lm	TT1-8405008N-WW
11 W	13 W	31 V	350 mA	80	2700K	25°	1300lm	900lm	TT2-8272511N-WW
						50°	1300lm	900lm	TT2-8275011N-WW
					3000K	25°	1400lm	950lm	TT2-8302511N-WW
						50°	1400lm	950lm	TT2-8305011N-WW
					4000K	25°	1500lm	1050lm	TT2-8402511N-WW
						50°	1500lm	1050lm	TT2-8405011N-WW

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

Project: Carita Project in Paris, France





Black Reflector


LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
7.5 W	9 W	31 V	250 mA	80	2700K	25°	1000lm	720lm	TT1-8272508N-WB
						50°	1000lm	720lm	TT1-8275008N-WB
					3000K	25°	1100lm	750lm	TT1-8302508N-WB
						50°	1100lm	750lm	TT1-8305008N-WB
					4000K	25°	1200lm	800lm	TT1-8402508N-WB
						50°	1200lm	800lm	TT1-8405008N-WB
11 W	13 W	31 V	350 mA	80	2700K	25°	1300lm	900lm	TT2-8272511N-WB
						50°	1300lm	900lm	TT2-8275011N-WB
					3000K	25°	1400lm	950lm	TT2-8302511N-WB
						50°	1400lm	950lm	TT2-8305011N-WB
					4000K	25°	1500lm	1050lm	TT2-8402511N-WB
						50°	1500lm	1050lm	TT2-8405011N-WB

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

NEKO / TAKEO / T100

Fixed LED Downlight

Super Eye Comfort
High Efficiency



13W / 9W | 18W Available In Different LED Chip | CRI80 / CRI90 | 2700K / 3000K / 4000K | 30° / 50° | CITIZEN 50,000h@L80B10 | UGR < 19 | IP54 | 5 YEARS GUARANTEE | CB | CE | ETL Intertek





Matt Reflector

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
9 W	11 W	36 V	250 mA	80	2700K	30°	1200lm	1050lm	TS1-8273009N-WM
						50°	1200lm	950lm	TS1-8275009N-WM
					3000K	30°	1300lm	1100lm	TS1-8303009N-WM
						50°	1300lm	1000lm	TS1-8305009N-WM
					4000K	30°	1400lm	1200lm	TS1-8403009N-WM
						50°	1400lm	1100lm	TS1-8405009N-WM
13 W	15 W	36 V	350 mA	80	2700K	30°	1700lm	1450lm	TS2-8273013N-WM
						50°	1700lm	1250lm	TS2-8275013N-WM
					3000K	30°	1800lm	1500lm	TS2-8303013N-WM
						50°	1800lm	1300lm	TS2-8305013N-WM
					4000K	30°	1900lm	1600lm	TS2-8403013N-WM
						50°	1900lm	1400lm	TS2-8405013N-WM



White Reflector

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
9 W	11 W	36 V	250 mA	80	2700K	30°	1200lm	1050lm	TS1-8273009N-WW
						50°	1200lm	950lm	TS1-8275009N-WW
					3000K	30°	1300lm	1100lm	TS1-8303009N-WW
						50°	1300lm	1000lm	TS1-8305009N-WW
					4000K	30°	1400lm	1200lm	TS1-8403009N-WW
						50°	1400lm	1100lm	TS1-8405009N-WW
13 W	15 W	36 V	350 mA	80	2700K	30°	1700lm	1450lm	TS2-8273013N-WW
						50°	1700lm	1250lm	TS2-8275013N-WW
					3000K	30°	1800lm	1500lm	TS2-8303013N-WW
						50°	1800lm	1300lm	TS2-8305013N-WW
					4000K	30°	1900lm	1600lm	TS2-8403013N-WW
						50°	1900lm	1400lm	TS2-8405013N-WW



Black Reflector

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
9 W	11 W	36 V	250 mA	80	2700K	30°	1200lm	1050lm	TS1-8273009N-WB
						50°	1200lm	950lm	TS1-8275009N-WB
					3000K	30°	1300lm	1100lm	TS1-8303009N-WB
						50°	1300lm	1000lm	TS1-8305009N-WB
					4000K	30°	1400lm	1200lm	TS1-8403009N-WB
						50°	1400lm	1100lm	TS1-8405009N-WB
13 W	15 W	36 V	350 mA	80	2700K	30°	1700lm	1450lm	TS2-8273013N-WB
						50°	1700lm	1250lm	TS2-8275013N-WB
					3000K	30°	1800lm	1500lm	TS2-8303013N-WB
						50°	1800lm	1300lm	TS2-8305013N-WB
					4000K	30°	1900lm	1600lm	TS2-8403013N-WB
						50°	1900lm	1400lm	TS2-8405013N-WB

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)



T100-18W
Matt Reflector

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
18 W	21 W	36 V	500 mA	80	2700K	30°	2000lm	1800lm	TS3-8273018N-WM
						50°	2000lm	1500lm	TS3-8275018N-WM
					3000K	30°	2200lm	1900lm	TS3-8303018N-WM
						50°	2200lm	1600lm	TS3-8305018N-WM
					4000K	30°	2400lm	2000lm	TS3-8403018N-WM
						50°	2400lm	1700lm	TS3-8405018N-WM
				90	2700K	30°	1800lm	1550lm	TS3-9273018N-WM
						50°	1800lm	1300lm	TS3-9275018N-WM
					3000K	30°	1900lm	1650lm	TS3-9303018N-WM
						50°	1900lm	1400lm	TS3-9305013N-WM
					4000K	30°	2100lm	1800lm	TS3-9403018N-WM
						50°	2100lm	1500lm	TS3-9405018N-WM



T100-18W
White Reflector

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
18 W	21 W	36 V	500 mA	80	2700K	30°	2000lm	1800lm	TS3-8273018N-WW
						50°	2000lm	1500lm	TS3-8275018N-WW
					3000K	30°	2200lm	1900lm	TS3-8303018N-WW
						50°	2200lm	1600lm	TS3-8305018N-WW
					4000K	30°	2400lm	2000lm	TS3-8403018N-WW
						50°	2400lm	1700lm	TS3-8405018N-WW
				90	2700K	30°	1800lm	1550lm	TS3-9273018N-WW
						50°	1800lm	1300lm	TS3-9275018N-WW
					3000K	30°	1900lm	1650lm	TS3-9303018N-WW
						50°	1900lm	1400lm	TS3-9305018N-WW
					4000K	30°	2100lm	1800lm	TS3-9403018N-WW
						50°	2100lm	1500lm	TS3-9405018N-WW



T100-18W
Black Reflector


LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
18W	21 W	36 V	500 mA	80	2700K	30°	2000lm	1800lm	TS3-8273018N-WB
						50°	2000lm	1500lm	TS3-8275018N-WB
					3000K	30°	2200lm	1900lm	TS3-8303018N-WB
						50°	2200lm	1600lm	TS3-8305018N-WB
					4000K	30°	2400lm	2000lm	TS3-8403018N-WB
						50°	2400lm	1700lm	TS3-8405018N-WB
				90	2700K	30°	1800lm	1550lm	TS3-9273018N-WB
						50°	1800lm	1300lm	TS3-9275018N-WB
					3000K	30°	1900lm	1650lm	TS3-9303018N-WB
						50°	1900lm	1400lm	TS3-9305018N-WB
					4000K	30°	2100lm	1800lm	TS3-9403018N-WB
						50°	2100lm	1500lm	TS3-9405018N-WB

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

NEKO / TAKEO / T100-DW

Fixed LED Downlight

Dim to Warm





12W | CRI95 | 1800K-3000K Dim to Warm | 50° | bridgelux 50,000h@L80B10 | UGR < 19 | IP54 | 5 YEARS GUARANTEE | CB | CE | ETL Intertek



LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
12 W	14 W	34 V	350 mA	95	1800K~3000K	50°	1200lm	Max.1000lm	TS2-9D35012N-WM



Matt Reflector

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
12 W	14 W	34 V	350 mA	95	1800K~3000K	50°	1200lm	Max.1000lm	TS2-9D35012N-WW



White Reflector

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
12 W	14 W	34 V	350 mA	95	1800K~3000K	50°	1200lm	Max.1000lm	TS2-9D35012N-WB



Black Reflector


Code Remark: N=N(No Driver) P=P(Phase Dim) A=A(1~10V Dim) D=D(DALI Dim)




NEKO / TAKEO / T100-TW

Fixed LED Downlight

Tunable White





13W | CRI90 | 2700K-6500K Tunable White | 50° | bridgelux 50,000h@L80B10 | UGR < 19 | IP54 | 5 YEARS GUARANTEE | CB | CE | ETL Intertek



LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	System Output	Code
13 W	15 W	36 V	350 mA	90	2700K~6500K	50°	Max.900lm	TS2-9TW5013N-WM
					@2700K	50°	750lm	
					@3000K	50°	780lm	
					@4000K	50°	850lm	
					@5000K	50°	900lm	
					@6500K	50°	900lm	



Matt Reflector

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	System Output	Code
13 W	15 W	36 V	350 mA	90	2700K~6500K	50°	Max.900lm	TS2-9TW5013N-WW
					@2700K	50°	750lm	
					@3000K	50°	780lm	
					@4000K	50°	850lm	
					@5000K	50°	900lm	
					@6500K	50°	900lm	



White Reflector

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	System Output	Code
13 W	15 W	36 V	350 mA	90	2700K~6500K	50°	Max.900lm	TS2-9TW5013N-WB
					@2700K	50°	750lm	
					@3000K	50°	780lm	
					@4000K	50°	850lm	
					@5000K	50°	900lm	
					@6500K	50°	900lm	




Black Reflector


Code Remark: N=N(No Driver) D=D(DALI Dim)

NEKO / TAKEO / T150

Fixed LED Downlight

Super Eye Comfort
High Efficiency



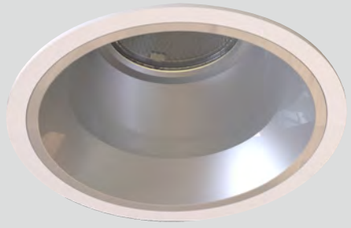



25W 18W | CRI80 CRI90 | 2700K 3000K 4000K | 30° 60° | CITIZEN 50,000h@L80B10 | UGR < 19 | IP 54 | 5 YEARS GUARANTEE | CB | CE | ETL Intertek





Matt Reflector

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
18 W	21 W	36 V	500 mA	80	2700K	30°	2600lm	2200lm	TM1-8273018N-WM
						60°	2600lm	1950lm	TM1-8276018N-WM
					3000K	30°	2800lm	2300lm	TM1-8303018N-WM
						60°	2800lm	2000lm	TM1-8306018N-WM
					4000K	30°	3000lm	2500lm	TM1-8403018N-WM
						60°	3000lm	2200lm	TM1-8406018N-WM
25 W	28 W	36 V	700 mA	80	2700K	30°	3600lm	3000lm	TM2-8273025N-WM
						60°	3600lm	2600lm	TM2-8276025N-WM
					3000K	30°	3800lm	3100lm	TM2-8303025N-WM
						60°	3800lm	2700lm	TM2-8306025N-WM
					4000K	30°	4000lm	3300lm	TM2-8403025N-WM
						60°	4000lm	2900lm	TM2-8406025N-WM



White Reflector

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
18 W	21 W	36 V	500 mA	80	2700K	30°	2600lm	2200lm	TM1-8273018N-WW
						60°	2600lm	1950lm	TM1-8276018N-WW
					3000K	30°	2800lm	2300lm	TM1-8303018N-WW
						60°	2800lm	2000lm	TM1-8306018N-WW
					4000K	30°	3000lm	2500lm	TM1-8403018N-WW
						60°	3000lm	2200lm	TM1-8406018N-WW
25 W	28 W	36 V	700 mA	80	2700K	30°	3600lm	3000lm	TM2-8273025N-WW
						60°	3600lm	2600lm	TM2-8276025N-WW
					3000K	30°	3800lm	3100lm	TM2-8303025N-WW
						60°	3800lm	2700lm	TM2-8306025N-WW
					4000K	30°	4000lm	3300lm	TM2-8403025N-WW
						60°	4000lm	2900lm	TM2-8406025N-WW

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)



Black Reflector


LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
18 W	21 W	36 V	500 mA	80	2700K	30°	2600lm	2200lm	TM1-8273018N-WB
						60°	2600lm	1950lm	TM1-8276018N-WB
					2700K	30°	2800lm	2300lm	TM1-8303018N-WB
						60°	2800lm	2000lm	TM1-8306018N-WB
					4000K	30°	3000lm	2500lm	TM1-8403018N-WB
						60°	3000lm	2200lm	TM1-8406018N-WB
25 W	28 W	36 V	700 mA	80	2700K	30°	3600lm	3000lm	TM2-8273025N-WB
						60°	3600lm	2600lm	TM2-8276025N-WB
					3000K	30°	3800lm	3100lm	TM2-8303025N-WB
						60°	3800lm	2700lm	TM2-8306025N-WB
					4000K	30°	4000lm	3300lm	TM2-8403025N-WB
						60°	4000lm	2900lm	TM2-8406025N-WB


Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

NEKO / TAKEO / T150-TW


Fixed LED Downlight

Tunable White



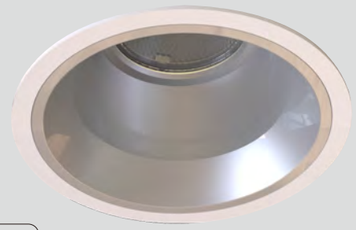

25W
18W | CRI90 | 2700K-6500K Tunable White | 60° | bridgelux 50,000h@L80B10 | UGR < 19 | IP54 | 5 YEARS GUARANTEE | CB | CE | ETL Intertek



LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	System Output	Code
18 W	21 W	36 V	500 mA	90	2700K-6500K	60°	Max.1400lm	TM1-9TW6018N-WM
					@2700K	60°	1200lm	
					@3000K	60°	1250lm	
					@4000K	60°	1350lm	
					@5000K	60°	1400lm	
					@6500K	60°	1400lm	
25 W	28 W	36 V	700 mA	90	2700K-6500K	60°	Max.1900lm	TM2-9TW6025N-WM
					@2700K	60°	1700lm	
					@3000K	60°	1750lm	
					@4000K	60°	1850lm	
					@5000K	60°	1900lm	
					@6500K	60°	1900lm	



Matt Reflector

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	System Output	Code
18 W	21 W	36 V	500 mA	90	2700K-6500K	60°	Max.1400lm	TM1-9TW6018N-WW
					@2700K	60°	1200lm	
					@3000K	60°	1250lm	
					@4000K	60°	1350lm	
					@5000K	60°	1400lm	
					@6500K	60°	1400lm	
25 W	28 W	36 V	700 mA	90	2700K-6500K	60°	Max.1900lm	TM2-9TW6025N-WW
					@2700K	60°	1700lm	
					@3000K	60°	1750lm	
					@4000K	60°	1850lm	
					@5000K	60°	1900lm	
					@6500K	60°	1900lm	



White Reflector

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	System Output	Code
18 W	21 W	36 V	500 mA	90	2700K-6500K	60°	Max.1400lm	TM1-9TW6018N-WB
					@2700K	60°	1200lm	
					@3000K	60°	1250lm	
					@4000K	60°	1350lm	
					@5000K	60°	1400lm	
					@6500K	60°	1400lm	
25 W	28 W	36 V	700 mA	90	2700K-6500K	60°	Max.1900lm	TM2-9TW6025N-WB
					@2700K	60°	1700lm	
					@3000K	60°	1750lm	
					@4000K	60°	1850lm	
					@5000K	60°	1900lm	
					@6500K	60°	1900lm	



Black Reflector

Code Remark: N=N(No Driver) D=D(DALI Dim)


Project: Mist Hot Spring Hotel Xuchang, China



NEKO / TAKEO / T200


Fixed LED Downlight

Super Eye Comfort
High Efficiency

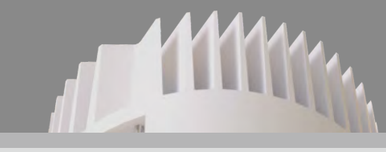



38W 52W | CRI80 CRI90 | 2700K 3000K 4000K | 18° 30° 60° | CITIZEN 50,000h@L80B10 | UGR < 19 | IP54 | 5 YEARS GUARANTEE | CB | CE | ETL Intertek



LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
38 W	42 W	36 V	1050 mA	80	2700K	18°	5200lm	4300lm	TL2-8271838N-WM
						30°	5200lm	4300lm	TL2-8273038N-WM
						60°	5200lm	3800lm	TL2-8276038N-WM
					3000K	18°	5400lm	4400lm	TL2-8301838N-WM
						30°	5400lm	4400lm	TL2-8303038N-WM
						60°	5400lm	3900lm	TL2-8306038N-WM
					4000K	18°	5600lm	4600lm	TL2-8401838N-WM
						30°	5600lm	4600lm	TL2-8403038N-WM
						60°	5600lm	4100lm	TL2-8406038N-WM
52 W	56 W	36 V	1400 mA	80	2700K	18°	6400lm	5300lm	TL3-8271852N-WM
						30°	6400lm	5300lm	TL3-8273052N-WM
						60°	6400lm	4700lm	TL3-8276052N-WM
					3000K	18°	6600lm	5400lm	TL3-8301852N-WM
						30°	6600lm	5400lm	TL3-8303052N-WM
						60°	6600lm	4800lm	TL3-8306052N-WM
					4000K	18°	6800lm	5600lm	TL3-8401852N-WM
						30°	6800lm	5600lm	TL3-8403052N-WM
						60°	6800lm	5000lm	TL3-8406052N-WM



Matt Reflector

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
38 W	42 W	36 V	1050 mA	80	2700K	18°	5200lm	4300lm	TL2-8271838N-WW
						30°	5200lm	4300lm	TL2-8273038N-WW
						60°	5200lm	3800lm	TL2-8306038N-WW
					3000K	18°	5400lm	4400lm	TL2-8301838N-WW
						30°	5400lm	4400lm	TL2-8303038N-WW
						60°	5400lm	3900lm	TL2-8306038N-WW
					4000K	18°	5600lm	4600lm	TL2-8401838N-WW
						30°	5600lm	4600lm	TL2-8403038N-WW
						60°	5600lm	4100lm	TL2-8406038N-WW
52 W	56 W	36 V	1400 mA	80	2700K	18°	6400lm	5300lm	TL3-8271852N-WW
						30°	6400lm	5300lm	TL3-8273052N-WW
						60°	6400lm	4700lm	TL3-8306052N-WW
					3000K	18°	6600lm	5400lm	TL3-8301852N-WW
						30°	6600lm	5400lm	TL3-8303052N-WW
						60°	6600lm	4800lm	TL3-8306052N-WW
					4000K	18°	6800lm	5600lm	TL3-8401852N-WW
						30°	6800lm	5600lm	TL3-8403052N-WW
						60°	6800lm	5000lm	TL3-8406052N-WW



White Reflector

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

Project: Malaysia International Exhibition Convention Centre, Malaysia





Black Reflector


LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
38 W	42 W	36 V	1050 mA	80	2700K	18°	5200lm	4300lm	TL2-8271838N-WB
						30°	5200lm	4300lm	TL2-8273038N-WB
						60°	5200lm	3800lm	TL2-8276038N-WB
					3000K	18°	5400lm	4400lm	TL2-8301838N-WB
						30°	5400lm	4400lm	TL2-8303038N-WB
						60°	5400lm	3900lm	TL2-8306038N-WB
					4000K	18°	5600lm	4600lm	TL2-8401838N-WB
						30°	5600lm	4600lm	TL2-8403038N-WB
						60°	5600lm	4100lm	TL2-8406038N-WB
52 W	56 W	36 V	1400 mA	80	2700K	18°	6400lm	5300lm	TL3-8271852N-WB
						30°	6400lm	5300lm	TL3-8273052N-WB
						60°	6400lm	4700lm	TL3-8276052N-WB
					3000K	18°	6600lm	5400lm	TL3-8301852N-WB
						30°	6600lm	5400lm	TL3-8303052N-WB
						60°	6600lm	4800lm	TL3-8306052N-WB
					4000K	18°	6800lm	5600lm	TL3-8401852N-WB
						30°	6800lm	5600lm	TL3-8403052N-WB
						60°	6800lm	5000lm	TL3-8406052N-WB


Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

NEKO / TAKEO / T200-TW


Fixed LED Downlight

Tunable White

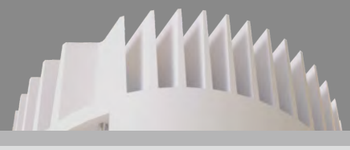

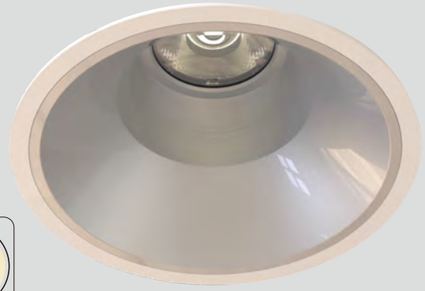

25W | CRI90 | 2700K-6500K Tunable White | 60° | bridgelux 50,000h@L80B10 | UGR < 19 | IP54 | 5 YEARS GUARANTEE | CB | CE | ETL Intertek



LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	System Output	Code
25 W	28 W	36 V	700 mA	90	2700K-6500K	60°	Max.1900lm	TL1-9TW6025N-WM
					@2700K	60°	1700lm	
					@3000K	60°	1750lm	
					@4000K	60°	1850lm	
					@5000K	60°	1900lm	
					@6500K	60°	1900lm	



Matt Reflector

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	System Output	Code
25 W	28 W	36 V	700 mA	90	2700K-6500K	60°	Max.1900lm	TL1-9TW6025N-WW
					@2700K	60°	1700lm	
					@3000K	60°	1750lm	
					@4000K	60°	1850lm	
					@5000K	60°	1900lm	
					@6500K	60°	1900lm	



White Reflector

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	System Output	Code
25 W	28 W	36 V	700 mA	90	2700K-6500K	60°	Max.1900lm	TL1-9TW6025N-WB
					@2700K	60°	1700lm	
					@3000K	60°	1750lm	
					@4000K	60°	1850lm	
					@5000K	60°	1900lm	
					@6500K	60°	1900lm	



Black Reflector

Code Remark: N=N(No Driver) D=D(DALI Dim)

Project: Malaysia International Exhibition Convention Centre, Malaysia



NEKO / TAKEO / T150C

TAKEO150 Ceiling Light

Super Eye Comfort
High Efficiency



25W 18W | CRI80 CRI90 | 2700K 3000K 4000K | 30° 60° | CITIZEN 50,000h@L80B10 | UGR < 19 | IP 20 | 5 YEARS GUARANTEE | CB CE



LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
18 W	21 W	36 V	500 mA	80	2700K	30°	2800lm	2300lm	TMC1-8273018N-WM
						60°	2800lm	2000lm	TMC1-8276018N-WM
					3000K	30°	2800lm	2300lm	TMC1-8303018N-WM
						60°	2800lm	2000lm	TMC1-8306018N-WM
					4000K	30°	3000lm	2500lm	TMC1-8403018N-WM
						60°	3000lm	2200lm	TMC1-8406018N-WM
25 W	28 W	36 V	700 mA	80	2700K	30°	3800lm	3100lm	TMC2-8273025N-WM
						60°	3800lm	2700lm	TMC2-8276025N-WM
					3000K	30°	3800lm	3100lm	TMC2-8303025N-WM
						60°	3800lm	2700lm	TMC2-8306025N-WM
					4000K	30°	4000lm	3300lm	TMC2-8403025N-WM
						60°	4000lm	2900lm	TMC2-8406025N-WM



Matt Reflector

18 W	21 W	36 V	500 mA	80	2700K	30°	2800lm	2300lm	TMC1-8273018N-WB
						60°	2800lm	2000lm	TMC1-8276018N-WB
					3000K	30°	2800lm	2300lm	TMC1-8303018N-WB
						60°	2800lm	2000lm	TMC1-8306018N-WB
					4000K	30°	3000lm	2500lm	TMC1-8403018N-WB
						60°	3000lm	2200lm	TMC1-8406018N-WB
25 W	28 W	36 V	700 mA	80	2700K	30°	3800lm	3100lm	TMC2-8273025N-WB
						60°	3800lm	2700lm	TMC2-8276025N-WB
					3000K	30°	3800lm	3100lm	TMC2-8303025N-WB
						60°	3800lm	2700lm	TMC2-8306025N-WB
					4000K	30°	4000lm	3300lm	TMC2-8403025N-WB
						60°	4000lm	2900lm	TMC2-8406025N-WB



Matt Reflector

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)





Black Reflector | White Reflector | Matt Reflector

NEKO / TAKEO
Fixed LED Downlight
Project: Bank Sparkasse, German


NEKO / TAKEO / TS68

Fixed LED Downlight

Super Eye Comfort
High Efficiency




7.5 W
11 W
CRI80
CRI90
2700K
3000K
4000K
25°
60°
CITIZEN
50,000h@L80B10
UGR < 19
IP54
5 YEARS GUARANTEE
CB
CE
ETL Intertek





Matt Reflector


LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
7.5 W	9 W	31 V	250 mA	80	2700K	25°	1000lm	680lm	TTS1-8272508N-WM
						60°	1000lm	680lm	TTS1-8276008N-WM
					3000K	25°	1100lm	700lm	TTS1-8302508N-WM
						60°	1100lm	700lm	TTS1-8306008N-WM
					4000K	25°	1200lm	750lm	TTS1-8402508N-WM
						60°	1200lm	750lm	TTS1-8406008N-WM
11 W	13 W	31 V	350 mA	80	2700K	25°	1300lm	870lm	TTS2-8272511N-WM
						60°	1300lm	870lm	TTS2-8276011N-WM
					3000K	25°	1400lm	900lm	TTS2-8302511N-WM
						60°	1400lm	900lm	TTS2-8306011N-WM
					4000K	25°	1500lm	950lm	TTS2-8402511N-WM
						60°	1500lm	950lm	TTS2-8406011N-WM



White Reflector

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
7.5 W	9 W	31 V	250 mA	80	2700K	25°	1000lm	680lm	TTS1-8272508N-WW
						60°	1000lm	680lm	TTS1-8276008N-WW
					3000K	25°	1100lm	700lm	TTS1-8302508N-WW
						60°	1100lm	700lm	TTS1-8306008N-WW
					4000K	25°	1200lm	750lm	TTS1-8402508N-WW
						60°	1200lm	750lm	TTS1-8406008N-WW
11 W	13 W	31 V	350 mA	80	2700K	25°	1300lm	870lm	TTS2-8272511N-WW
						60°	1300lm	870lm	TTS2-8276011N-WW
					3000K	25°	1400lm	900lm	TTS2-8302511N-WW
						60°	1400lm	900lm	TTS2-8306011N-WW
					4000K	25°	1500lm	950lm	TTS2-8402511N-WW
						60°	1500lm	950lm	TTS2-8406011N-WW


Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)



Black Reflector

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
7.5 W	9 W	31 V	250 mA	80	2700K	25°	1000lm	680lm	TTS1-8272508N-WB
						60°	1000lm	680lm	TTS1-8276008N-WB
					3000K	25°	1100lm	700lm	TTS1-8302508N-WB
						60°	1100lm	700lm	TTS1-8306008N-WB
					4000K	25°	1200lm	750lm	TTS1-8402508N-WB
						60°	1200lm	750lm	TTS1-8406008N-WB
11 W	13 W	31 V	350 mA	80	2700K	25°	1300lm	870lm	TTS2-8272511N-WB
						60°	1300lm	870lm	TTS2-8276011N-WB
					3000K	25°	1400lm	900lm	TTS2-8302511N-WB
						60°	1400lm	900lm	TTS2-8306011N-WB
					4000K	25°	1500lm	950lm	TTS2-8402511N-WB
						60°	1500lm	950lm	TTS2-8406011N-WB


Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

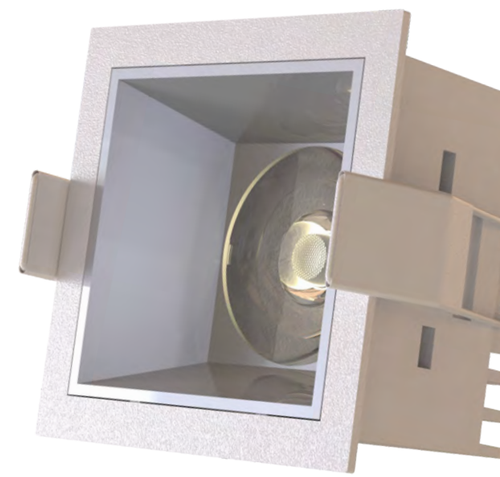


NEKO / TAKEO / TS100

Fixed LED Downlight

Super Eye Comfort
High Efficiency



9 W 13W | CRI80 CRI90 | 2700K 3000K 4000K | 60° | CITIZEN 50,000h@L80B10 | UGR < 19 | IP54 | 5 YEARS GUARANTEE | CB | CE | ETL Intertek



LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
9 W	11 W	36 V	250 mA	80	2700K	60°	1200lm	850lm	TSS1-8276009N-WM
					3000K	60°	1300lm	900lm	TSS1-8306009N-WM
					4000K	60°	1400lm	1000lm	TSS1-8406009N-WM
13 W	15 W	36 V	350 mA	80	2700K	60°	1700lm	1150lm	TSS2-8276013N-WM
					3000K	60°	1800lm	1200lm	TSS2-8306013N-WM
					4000K	60°	1900lm	1300lm	TSS2-8406013N-WM



Matt Reflector

9 W	11 W	36 V	250 mA	80	2700K	60°	1200lm	850lm	TSS1-8276009N-WW
					3000K	60°	1300lm	900lm	TSS1-8306009N-WW
					4000K	60°	1400lm	1000lm	TSS1-8406009N-WW
13 W	15 W	36 V	350 mA	80	2700K	60°	1700lm	1150lm	TSS2-8276013N-WW
					3000K	60°	1800lm	1200lm	TSS2-8306013N-WW
					4000K	60°	1900lm	1300lm	TSS2-8406013N-WW



White Reflector

9 W	11 W	36 V	250 mA	80	2700K	60°	1200lm	850lm	TSS1-8276009N-WB
					3000K	60°	1300lm	900lm	TSS1-8306009N-WB
					4000K	60°	1400lm	1000lm	TSS1-8406009N-WB
13 W	15 W	36 V	350 mA	80	2700K	60°	1700lm	1150lm	TSS2-8276013N-WB
					3000K	60°	1800lm	1200lm	TSS2-8306013N-WB
					4000K	60°	1900lm	1300lm	TSS2-8406013N-WB




Black Reflector

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)


NEKO / TAKEO / TS150

Fixed LED Downlight

Super Eye Comfort
High Efficiency



18W 25W | CRI80 CRI90 | 2700K 3000K 4000K | 70° | CITIZEN 50,000h@L80B10 | UGR < 19 | IP54 | 5 YEARS GUARANTEE | CB | CE | ETL Intertek



LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
18 W	21 W	36 V	500 mA	80	2700K	70°	2100lm	1600lm	TSM1-8277018N-WM
					3000K	70°	2300lm	1700lm	TSM1-8307018N-WM
					4000K	70°	2500lm	1800lm	TSM1-8407018N-WM
25 W	28 W	36 V	700 mA	80	2700K	70°	3200lm	2200lm	TSM2-8277025N-WM
					3000K	70°	3400lm	2400lm	TSM2-8307025N-WM
					4000K	70°	3600lm	2600lm	TSM2-8407025N-WM



Matt Reflector

18 W	21 W	36 V	500 mA	80	2700K	70°	2100lm	1600lm	TSM1-8277018N-WW
					3000K	70°	2300lm	1700lm	TSM1-8307018N-WW
					4000K	70°	2500lm	1800lm	TSM1-8407018N-WW
25 W	28 W	36 V	700 mA	80	2700K	70°	3200lm	2200lm	TSM2-8277025N-WW
					3000K	70°	3400lm	2400lm	TSM2-8307025N-WW
					4000K	70°	3600lm	2600lm	TSM2-8407025N-WW



White Reflector

18 W	21 W	36 V	500 mA	80	2700K	70°	2100lm	1600lm	TSM1-8277018N-WB
					3000K	70°	2300lm	1700lm	TSM1-8307018N-WB
					4000K	70°	2500lm	1800lm	TSM1-8407018N-WB
25 W	28 W	36 V	700 mA	80	2700K	70°	3200lm	2200lm	TSM2-8277025N-WB
					3000K	70°	3400lm	2400lm	TSM2-8307025N-WB
					4000K	70°	3600lm	2600lm	TSM2-8407025N-WB



Black Reflector

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)


NEKO / TAKEO / TS200


Fixed LED Downlight

Super Eye Comfort
High Efficiency



25W 38W | CRI80 CRI90 | 2700K 3000K 4000K | 70° | CITIZEN 50,000h@L80B10 | UGR < 19 | IP54 | 5 YEARS GUARANTEE | CB | CE | ETL Intertek



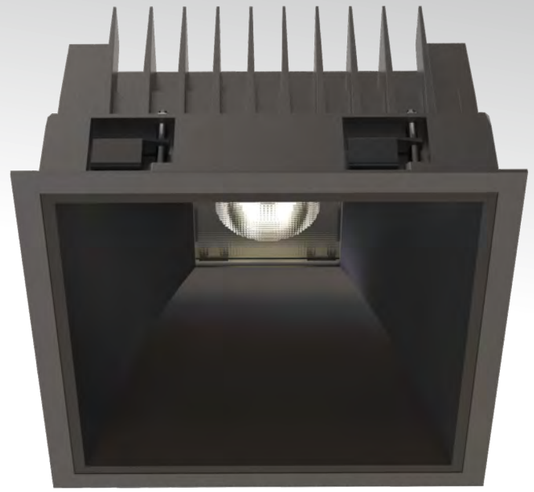


Black Housing Available for TAKEO Series



Matt Reflector

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
25 W	28 W	36 V	700 mA	80	2700K	70°	2800lm	2000lm	TSL1-8277025N-WM
					3000K	70°	3000lm	2200lm	TSL1-8307025N-WM
					4000K	70°	3200lm	2400lm	TSL1-8407025N-WM
38 W	42 W	36 V	1050 mA	80	2700K	70°	4100lm	3000lm	TSL2-8277038N-WM
					3000K	70°	4300lm	3200lm	TSL2-8307038N-WM
					4000K	70°	4500lm	3400lm	TSL2-8407038N-WM



White Reflector

25 W	28 W	36 V	700 mA	80	2700K	70°	2800lm	2000lm	TSL1-8277025N-WW
					3000K	70°	3000lm	2200lm	TSL1-8307025N-WW
					4000K	70°	3200lm	2400lm	TSL1-8407025N-WW
38 W	42 W	36 V	1050 mA	80	2700K	70°	4100lm	3000lm	TSL2-8277038N-WW
					3000K	70°	4300lm	3200lm	TSL2-8307038N-WW
					4000K	70°	4500lm	3400lm	TSL2-8407038N-WW



Black Reflector


25 W	28 W	36 V	700 mA	80	2700K	70°	2800lm	2000lm	TSL1-8277025N-WB
					3000K	70°	3000lm	2200lm	TSL1-8307025N-WB
					4000K	70°	3200lm	2400lm	TSL1-8407025N-WB
38 W	42 W	36 V	1050 mA	80	2700K	70°	4100lm	3000lm	TSL2-8277038N-WB
					3000K	70°	4300lm	3200lm	TSL2-8307038N-WB
					4000K	70°	4500lm	3400lm	TSL2-8407038N-WB

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

NEKO / CLUB
LED Module

- NEKO LED-Module sind die perfekte Austauschlösung für MR16 Halogen.
- Sehr schickes und elegantes Design und vielfältig einsetzbar bei Downlight- und
- Spotanwendungen.
- Hohe Farbkonsistenz bei allen LED-Modulen innerhalb einer 3-Step-MacAdam-Ellipse
- Neko-LED-Module können in verschiedenen Leuchten verwendet werden, ohne Einfluss auf die Farbkonsistenz.
- Hervorragende Lichtausbeute und exzellenter Lampenlichtstromerhalt mit
- 50.000 Stunden Lebensdauer machen häufige Lampenwechsel zu einem Relikt der Vergangenheit.
- 5 Jahre Qualitätsgarantie von NEKO.



- The NEKO LED module is a perfect replacement for MR16 halogen modules.
- Smart and elegant design.
- Versatile for downlight and spotlight applications.
- Uniform color for all LED modules within 3 MacAdam steps.
- You can use NEKO LED modules in various fixture designs with no color variability.
- Outstanding lumen output, excellent lumen maintenance.
- 50,000-hour lifetime eliminates frequent re-lamping.
- NEKO 5-Year Quality Guarantee

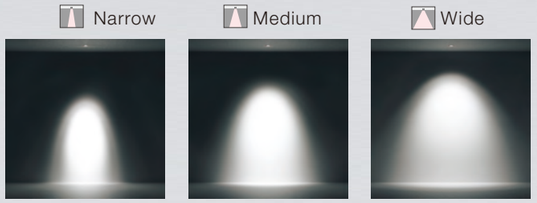

Verschiedene Abstrahlwinkel für architektonische Designs
Three beam angles for various architectural design requirements.



NEKO / CLUB
LED Module


Model No.	M3	M4
Product Photo		
Dimension (mm)		
Cutout (mm)	Mounted with Trim	Mounted with Trim
Wattage	7.5W/ 11W	9W/ 13W/ 18W
CCT	2700K/ 3000K/ 4000K Dim to Wam	2700K/ 3000K/ 4000K Dim to Wam
CRI	>80/ >90	>80/ >90
Beam Angle	15°/ 25°/ 35°/ 60°	20°/ 35°/ 60°
Lumen Output	1050lm @CRI80 3000K	1300lm @CRI80 3000K
Reflector Color	NEKO Standard	NEKO Standard
IP	IP54	IP54
Dimming	On/ Off, Phase Dim, 0/1-10V Dim, DALI Dim	On/ Off, Phase Dim, 0/1-10V Dim, DALI Dim
Accessory	Fit with CLUB Series Trims	Fit with CLUB Series Trims

NEKO / CLUB/ M3

LED Downlight Module
Fit with CLUB Series Trims



11W 7.5W | CRI90 | 2700K 3000K 4000K | 15° 25° 35° 60° | CITIZEN 50,000h@L80B10 | UGR < 19 | IP54 | 5 YEARS GUARANTEE | CB | CE | ETL Intertek




LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
11 W	13 W	31 V	350 mA	90	2700K	15°	1000lm	900lm	M3- 9271511N-NN
						25°	1000lm	900lm	M3- 9272511N-NN
						35°	1000lm	900lm	M3- 9273511N-NN
						60°	1000lm	900lm	M3- 9276011N-NN
					3000K	15°	1100lm	950lm	M3- 9301511N-NN
						25°	1100lm	950lm	M3- 9302511N-NN
						35°	1100lm	950lm	M3- 9303511N-NN
						60°	1100lm	950lm	M3- 9306011N-NN
					4000K	15°	1200lm	1000lm	M3- 9401511N-NN
						25°	1200lm	1000lm	M3- 9402511N-NN
						35°	1200lm	1000lm	M3- 9403511N-NN
						60°	1200lm	1000lm	M3- 9406011N-NN
7.5W	9 W	31 V	250 mA	90	2700K	15°	850lm	650lm	M3- 9271508N-NN
						25°	850lm	650lm	M3- 9272508N-NN
						35°	850lm	650lm	M3- 9273508N-NN
						60°	850lm	650lm	M3- 9276008N-NN
					3000K	15°	900lm	700lm	M3- 9301508N-NN
						25°	900lm	700lm	M3- 9302508N-NN
						35°	900lm	700lm	M3- 9303508N-NN
						60°	900lm	700lm	M3- 9306008N-NN
					4000K	15°	950lm	750lm	M3- 9401508N-NN
						25°	950lm	750lm	M3- 9402508N-NN
						35°	950lm	750lm	M3- 9403508N-NN
						60°	950lm	750lm	M3- 9406008N-NN

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)



M3

12W | CRI95 | 1800K-3000K Dim to Warm | 35° 60° | bridgelux 50,000h@L80B10 | Replace Halogen 50W | UGR < 19 | IP54 | 5 YEARS GUARANTEE | CB | CE



LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
12 W	14 W	34 V	350 mA	95	1800K-3000K	35°	1100lm	Max.850lm	M3- 9D33512N-NN
						60°	1100lm	Max.850lm	M3- 9D36012N-NN

Code Remark: N=N(No Driver) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)



M3-DW







Can be used in limited ceiling space of 80mm height

NEKO / CLUB/ M4

LED Downlight Module
Fit with CLUB Series Trims



13W / 9W | 18W Available In Different LED Chip | CRI90 | 2700K / 3000K / 4000K | 20° / 35° / 60° | CITIZEN 50,000h@L80B10 | UGR < 19 | IP54 | 5 YEARS GUARANTEE | CB | CE | ETL Intertek



LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
13 W	15 W	36 V	350 mA	90	2700K	20°	1300lm	1100lm	M4- 9272013N-NN
						35°	1300lm	1100lm	M4- 9273513N-NN
						60°	1300lm	1100lm	M4- 9276013N-NN
					3000K	20°	1400lm	1200lm	M4- 9302013N-NN
						35°	1400lm	1200lm	M4- 9303513N-NN
						60°	1400lm	1200lm	M4- 9306013N-NN
					4000K	20°	1500lm	1300lm	M4- 9402013N-NN
						35°	1500lm	1300lm	M4- 9403513N-NN
						60°	1500lm	1300lm	M4- 9406013N-NN
9W	11 W	36 V	250 mA	90	2700K	20°	900lm	800lm	M4- 9272009N-NN
						35°	900lm	800lm	M4- 9273509N-NN
						60°	900lm	800lm	M4- 9276009N-NN
					3000K	20°	1000lm	850lm	M4- 9302009N-NN
						35°	1000lm	850lm	M4- 9303509N-NN
						60°	1000lm	850lm	M4- 9306009N-NN
					4000K	20°	1100lm	950lm	M4- 9402009N-NN
						35°	1100lm	950lm	M4- 9403509N-NN
						60°	1100lm	950lm	M4- 9406009N-NN



M4


LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
18W	21 W	36 V	500 mA	90	2700K	20°	1800lm	1500lm	M4- 9272018N-NN
						35°	1800lm	1500lm	M4- 9273518N-NN
						60°	1800lm	1500lm	M4- 9276018N-NN
					3000K	20°	1900lm	1600lm	M4- 9302018N-NN
						35°	1900lm	1600lm	M4- 9303518N-NN
						60°	1900lm	1600lm	M4- 9306018N-NN
					4000K	20°	2000lm	1700lm	M4- 9402018N-NN
						35°	2000lm	1700lm	M4- 9403518N-NN
						60°	2000lm	1700lm	M4- 9406018N-NN



M4-18W

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

12W | CRI95 | 1800K-3000K Dim to Warm | 35° / 60° | bridgelux 50,000h@L80B10 | Replace Halogen 50W | UGR < 19 | IP54 | 5 YEARS GUARANTEE | CB | CE





M4-DW

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
12 W	14 W	34 V	350 mA	95	1800K–3000K	35°	1100lm	Max.950lm	M4- 9D33512N-NN
						60°	1100lm	Max.950lm	M4- 9D36012N-NN

Code Remark: N=N(No Driver) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

DIM to WARM





Can be used in limited ceiling space of 80mm height

NEKO / CLUB/ M4 Pro

Architectural LED Downlight Module
Fit with CLUB Series Trims

NEW

- NEKO M4 Pro-LED-Module sind die perfekte Austauschlösung für MR16 Halogen.
- Sehr schickes und elegantes Design und vielfältig einsetzbar bei Downlight- und
- Spotanwendungen.
- Hohe Farbkonsistenz bei allen LED-Modulen innerhalb einer 2-Step-MacAdam-Ellipse
- NEKO M4 Pro-LED-Module können in verschiedenen Leuchten verwendet werden, ohne Einfluss auf die Farbkonsistenz.
- Hervorragende Lichtausbeute und exzellenter Lampenlichtstromerhalt mit
- 50.000 Stunden Lebensdauer machen häufige Lampenwechsel zu einem Relikt der Vergangenheit.
- 5 Jahre Qualitätsgarantie von NEKO.

- The NEKO M4 Pro LED module is a perfect replacement for MR16 halogen modules.
- Smart and elegant design.
- Versatile for downlight and spotlight applications.
- Uniform color for all LED modules within 2 MacAdam steps.
- You can use NEKO M4 Pro LED modules in various fixture designs with no color variability.
- Outstanding lumen output, excellent lumen maintenance.
- 50,000-hour lifetime eliminates frequent re-lamping.
- NEKO 5-Year Quality Guarantee



Verschiedene Abstrahlwinkel für architektonische Designs
Five beam angles for various architectural design requirements.





NEKO / CLUB/ M4 Pro

Architectural LED Downlight Module
Fit with CLUB Series Trims

M4 Pro LED Module
LED Power: 7W/ 9W/ 12W/ 13W/ 18W
LED Chip: Bridgelux CRI>97, R9=95, 2-step SDCM
Beam Angle: 10°/ 15°/ 25°/ 35°/ 50°
Standard CCT: 2700K/ 3000K/ 3500K/ 4000K
Optional CCT: 1800K-3000K Warm Dim/ 2700K-6500K Tunable White
Optional Accessory: Honeycomb/ Diffusion Filter/ Linear Spread Filter
Single Asymmetric Filter/ Double Asymmetric Filter

M4 Pro LED Module



Accessory:




Honeycomb | Diffusion Filter | Linear Spread Filter | Single Asmmetric Filter | Double Asmmetric Filter


CLUB Trim:




Honeycomb Effect




Diffusion Filter Effect




Linear Spread Filter Effect



Single Asymmetric Filter Effect



Double Asymmetric Filter Effect




NEKO / CLUB/ M4 Pro

Architectural LED Downlight Module
Fit with CLUB Series Trims

NEW



13W 18W | CRI97 | 2700K 3000K 3500K 4000K | 15° 25° 35° 50° | bridgelux 50,000h@L80B10 | UGR < 19 | IP54 | 5 YEARS GUARANTEE | CB | CE



LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
13 W	15 W	36 V	350 mA	97	2700K	15°	1300lm	1050lm	M4P3- 0271513N-NN
						25°	1300lm	1050lm	M4P3- 0272513N-NN
						35°	1300lm	1050lm	M4P3- 0273513N-NN
						50°	1300lm	1000lm	M4P3- 0275013N-NN
					3000K	15°	1400lm	1100lm	M4P3- 0301513N-NN
						25°	1400m	1100lm	M4P3- 0302513N-NN
						35°	1400lm	1100lm	M4P3- 0303513N-NN
						50°	1400lm	1050lm	M4P3- 0305013N-NN
					3500K	15°	1450lm	1150lm	M4P3- 0351513N-NN
						25°	1450lm	1150lm	M4P3- 0352513N-NN
						35°	1450lm	1150lm	M4P3- 0353513N-NN
						50°	1450lm	1100lm	M4P3- 0355013N-NN
					4000K	15°	1500lm	1200lm	M4P3- 0401513N-NN
						25°	1500lm	1200lm	M4P3- 0402513N-NN
						35°	1500lm	1200lm	M4P3- 0403513N-NN
						50°	1500lm	1150lm	M4P3- 0405013N-NN



M4 Pro-13W


LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
18 W	21 W	36 V	500 mA	97	2700K	18°	1900lm	1500lm	M4P4- 0271818N-NN
						30°	1900lm	1500lm	M4P4- 0273018N-NN
						36°	1900lm	1500lm	M4P4- 0273618N-NN
						50°	1900lm	1400lm	M4P4- 0275018N-NN
					3000K	18°	2000lm	1600lm	M4P4- 0301818N-NN
						30°	2000m	1600lm	M4P4- 0303018N-NN
						36°	2000lm	1600lm	M4P4- 0303618N-NN
						50°	2000lm	1500lm	M4P4- 0305018N-NN
					3500K	18°	2100lm	1650lm	M4P4- 0351818N-NN
						30°	2100lm	1650lm	M4P4- 0353018N-NN
						36°	2100lm	1650lm	M4P4- 0353618N-NN
						50°	2100lm	1600lm	M4P4- 0355018N-NN
					4000K	18°	2200lm	1700lm	M4P4- 0401818N-NN
						30°	2200lm	1700lm	M4P4- 0403018N-NN
						36°	2200lm	1700lm	M4P4- 0403618N-NN
						50°	2200lm	1650lm	M4P4- 0405018N-NN



M4 Pro-18W

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

7W | CRI97 | 2700K 3000K 3500K 4000K | 10° | bridgelux 50,000h@L80B10 | UGR < 19 | IP54 | 5 YEARS GUARANTEE | CB | CE





M4 Pro-7W-10°

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
7 W	9 W	36 V	200 mA	97	2700K	10°	650lm	500lm	M4P1- 0271007N-NN
					3000K	10°	700lm	550lm	M4P1- 0301007N-NN
					3500K	10°	725lm	600lm	M4P1- 0351007N-NN
					4000K	10°	750lm	650lm	M4P1- 0401007N-NN

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)




NEKO / CLUB/ M4 Pro


Architectural LED Downlight Module
Fit with CLUB Series Trims

NEW





12W | CRI95 | 1800K-3000K Dim to Warm | 38° 50° | bridgelux. 50,000h@L80B10 | UGR < 19 | IP54 | 5 YEARS GUARANTEE | CB | CE



LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
12 W	14 W	34 V	350 mA	95	1800K-3000K	38°	1100lm	Max.900lm	M4P5-0D33812N-NN
						50°	1100lm	Max.850lm	M4P5-0D35012N-NN




M4 Pro-DW

Code Remark: N=N(No Driver) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

DIM to WARM 1800K 2700K 3000K



9W 13W | CRI90 | 2700K-6500K Tunable White | 20° 38° 50° | bridgelux. 50,000h@L80B10 | UGR < 19 | IP54 | 5 YEARS GUARANTEE | CB | CE



LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	System Output	Code
9 W	11 W	36 V	250 mA	90	2700K-6500K	20°	700lm-850lm	M4P6-9TW2009N-NN
						38°	700lm-850lm	M4P6-9TW3809N-NN
						50°	620lm-750lm	M4P6-9TW5009N-NN
					@2700K	38°	700lm	
					@3000K	38°	730lm	
					@4000K	38°	800lm	
					@5000K	38°	850lm	
					@6500K	38°	850lm	
13 W	15 W	36 V	350 mA	90	2700K-6500K	20°	900lm-1100lm	M4P6-9TW2013N-NN
						38°	900lm-1100lm	M4P6-9TW3813N-NN
						50°	850lm-1050lm	M4P6-9TW5013N-NN
					@2700K	38°	900lm	
					@3000K	38°	950lm	
					@4000K	38°	1000lm	
					@5000K	38°	1100lm	
					@6500K	38°	1100lm	



M4 Pro-TW

Code Remark: N=N(No Driver) D=D(DT8 DALI Dim)

Tunable White 2700K 3000K 3500K 4000K 5000K 6500K



NEKO / CLUB
Project: Private Residence, Germany



NEKO / CLUB

Trim Series

- Perfect choice for specified architectural projects
- Compatible with Mr16 and LED Modules
- Wide range of design variants for different applications
- Available in trimless versions
- Decorative rings painted in a variety of colors (black, white, marble, wood, etc.)
- Magnetic design for changing decorative ring without any tools

Module


M3


M4

NEW


M4 Pro

Ring



Holding Ring-R


Honeycomb


Linear Spread Lens


Diffuser


Holding Ring-S



Trim


TA Pre-installation Trim

75


KA-EI Pre-installation Trim

75


KA Pre-installation Trim

75


TSA Pre-installation Trim

75X75


KSA-EI Pre-installation Trim

80X80


KSA Pre-installation Trim

75X75

Reflector

NEW

Decoration Ring

Decoration Ring Cover

Decoration Ring

Decoration Ring Cover

Decoration Ring

Decoration Ring Cover


TA8



TRF1

TRF1-IP44



TA5

TA5-IP65


TA6


KA8-EI



KRF1-EI

KRF1-EI-IP44


KA5-EI


KA6-EI


KA8


KRF1


KRF1-IP44


KA5


KA6


TA7


TSA1


TSA2


TSA3


KA7-EI


KSA1-EI


KSA2-EI


KSA3-EI


KA7


KSA1


KSA2


KSA3


White-Matt
Code: A8 WM


White-White
Code: A8 WW



White-Black
Code: A8 WB


White-Gold
Code: A8 WG


Matt
Code: RF1 MR


White
Code: RF1 WR


Black-Matt
Code: A8 BM


Black-Black
Code: A8 BB


Black-Gold
Code: A8 BG


Black
Code: RF1 BR


Gold
Code: RF1 GR


Matt
Code: A5 MR


White
Code: A5 WR


Black
Code: A5 BR


Gold
Code: A5 GR


Matt
Code: A6 MD


White
Code: A6 WD


Black
Code: A6 BD


Gold
Code: A6 GD


Black
Code: A6 BDC


White
Code: A6 WDC


Wood
Code: A6 WODC


Marble
Code: A6 MBDC


Matt
Code: A7 MD


White
Code: A7 WD


Black
Code: A7 BD


Gold
Code: A7 GD


Black
Code: A7 BDC


White
Code: A7 WDC


Wood
Code: A7 WODC


Marble
Code: A7 MBDC


Matt
Code: SA1 MR


White
Code: SA1 WR


Black
Code: SA1 BR


Gold
Code: SA1 GR


Matt
Code: SA2 MD


White
Code: SA2 WD


Black
Code: SA2 BD


Gold
Code: SA2 GD


Black
Code: SA2 BDC


White
Code: SA2 WDC


Wood
Code: SA2 WODC


Marble
Code: SA2 MBDC


White-Matt
Code: SA3 WM


White-White
Code: SA3 WW



White-Black
Code: SA3 WB



White-Gold
Code: SA3 WG


Black-Matt
Code: SA3 BM


Black-Black
Code: SA3 BB


Black-Gold
Code: SA3 BG

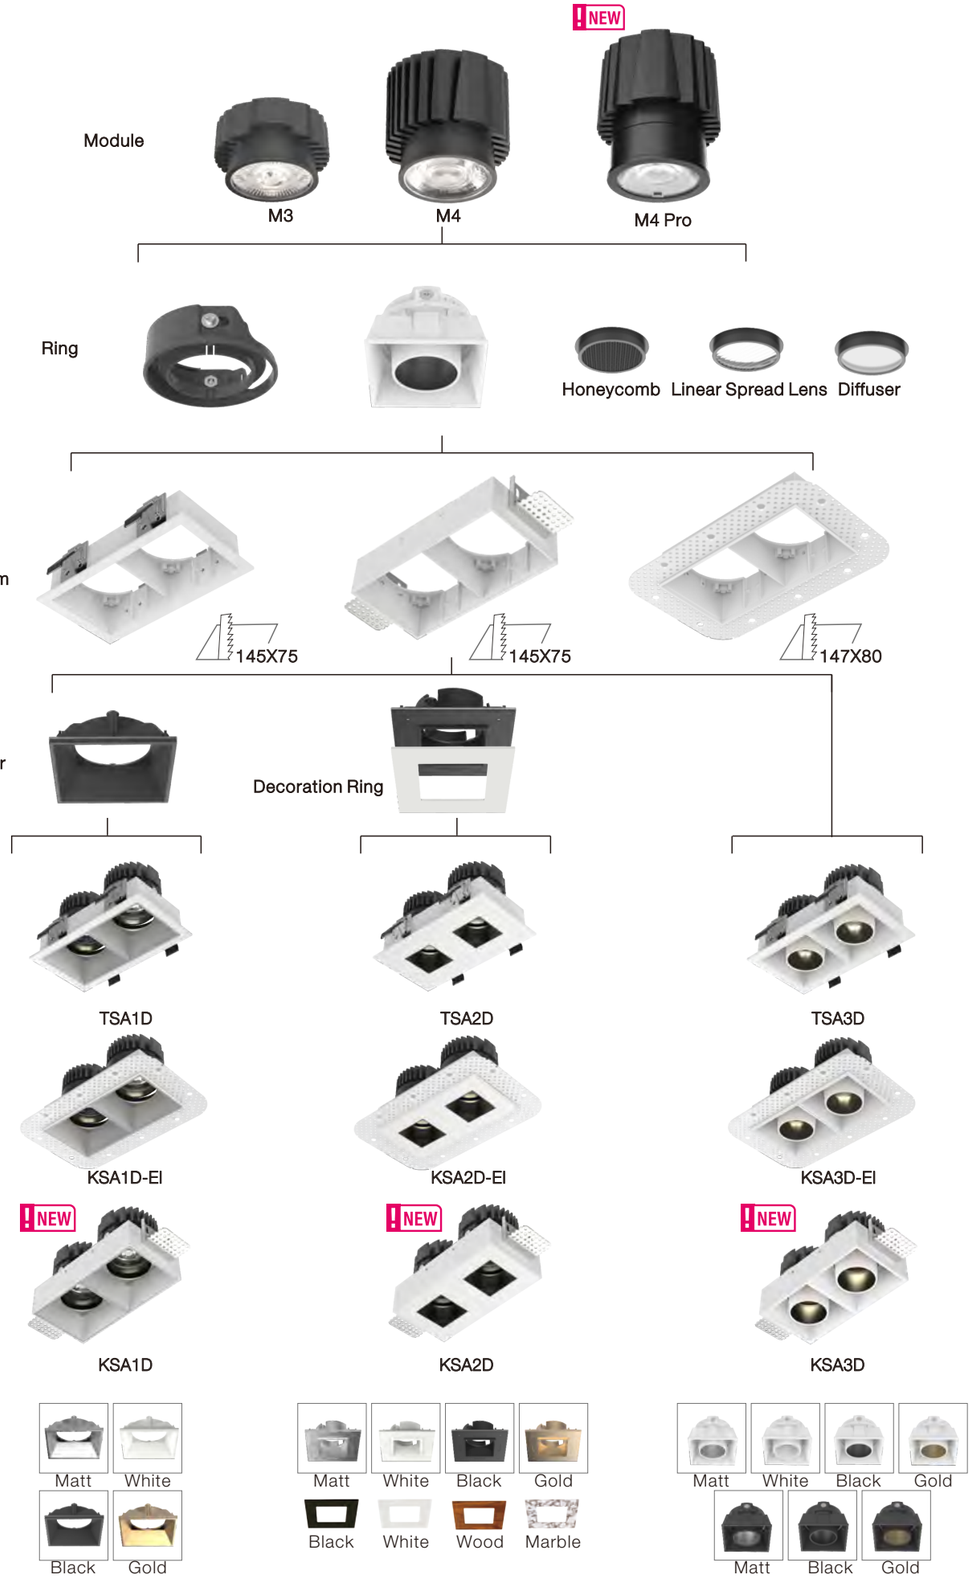
NEW
Module
M3
M4
M4 Pro
Ring
Honeycomb
Linear Spread Lens
Diffuser
Trim
145X75
145X75
147X80
Reflector
Decoration Ring
TSA1D
TSA2D
TSA3D
KSA1D-EI
KSA2D-EI
KSA3D-EI
NEW
NEW
NEW
KSA1D
KSA2D
KSA3D
Matt
White
Black
Gold
Black
White
Wood
Marble
Matt
White
Black
Gold
Matt
Black
Gold

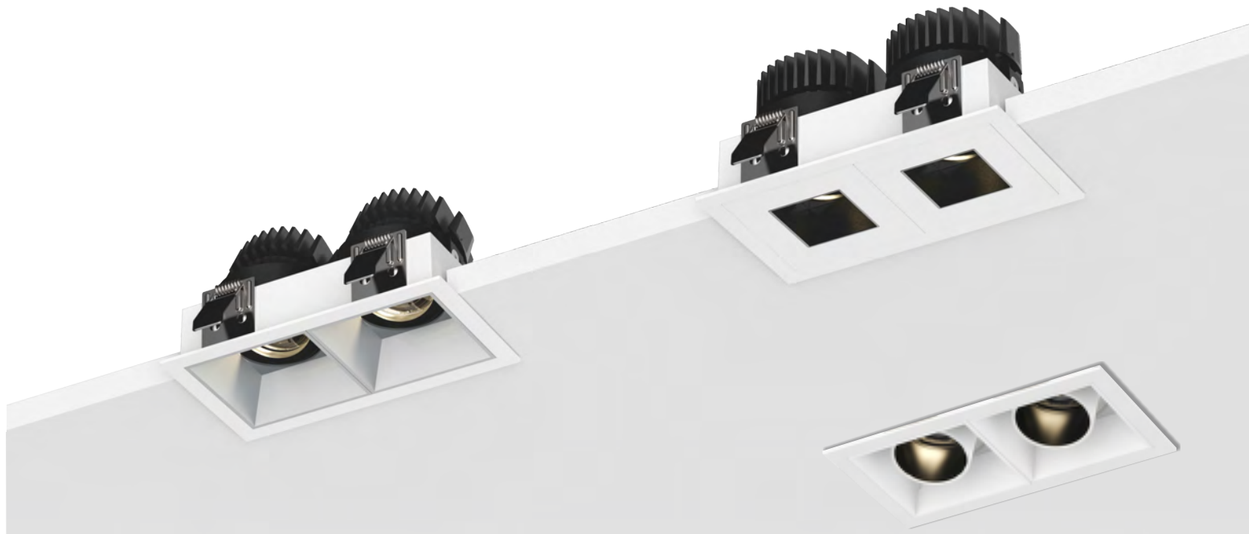

NEW




TRF1

TA5

TA6

TA7

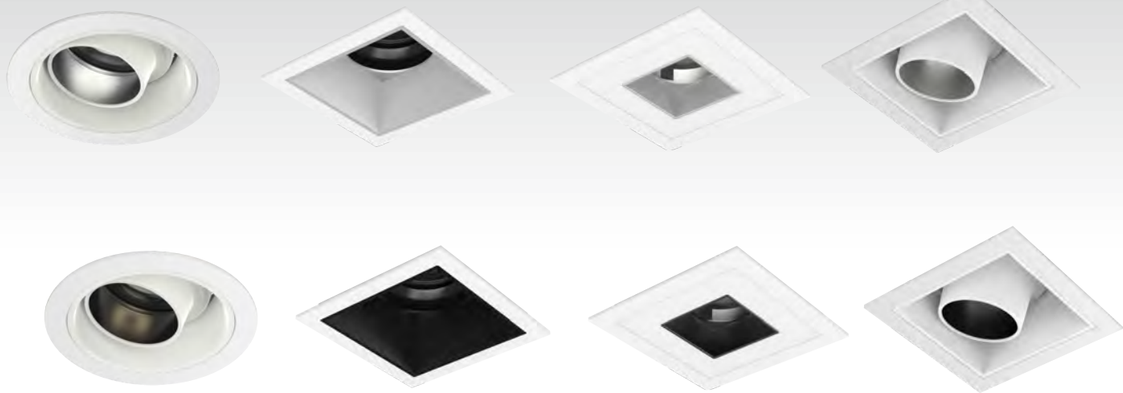

TA8

TSA1

TSA2


TSA3









TSA1D

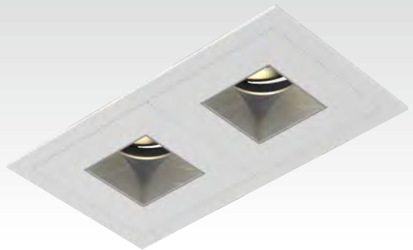



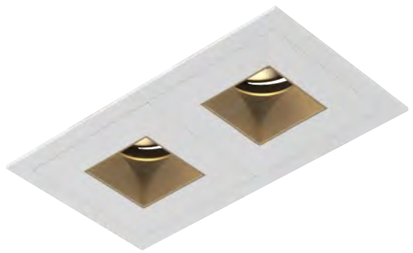

TSA2D

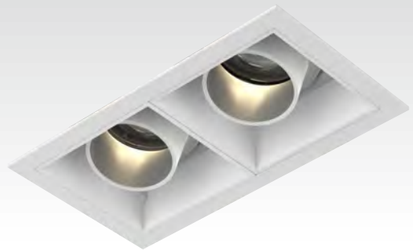






TSA3D


Frosted Glass
Silicone Gasket
Aluminium Cover

Matt
White
Black
Gold


TA5-IP65




54mm
Ø90mm



75

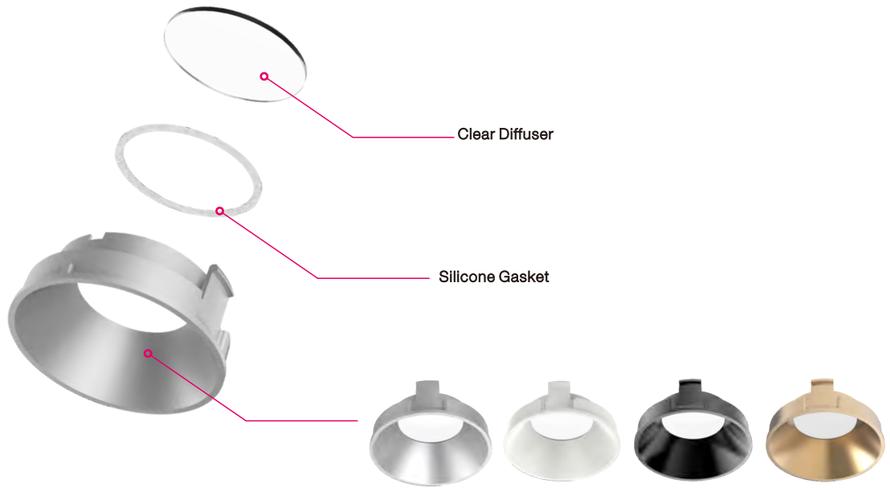


Clear Diffuser
Silicone Gasket
Matt
White
Black
Gold

TRF1-IP44





49mm
Ø85mm
75




TSA1-IP44



Matt White Black Gold

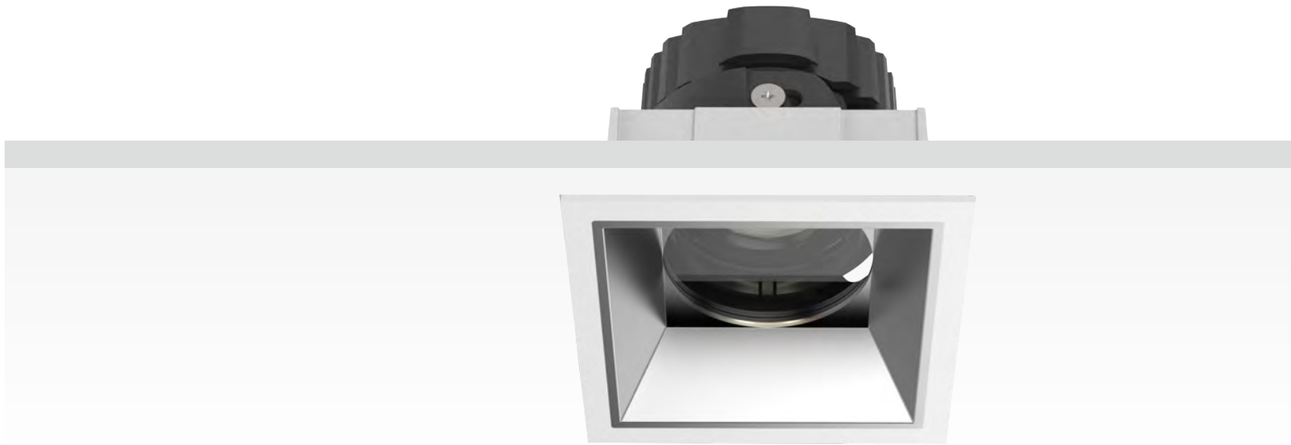



75X75





KA5



KA8

NEW



KRF1



KSA1



KSA1D-EI



KSA3



KSA2



KSA2D-EI




KSA3D-EI





KA6


KA7


Installation Trimless Trims








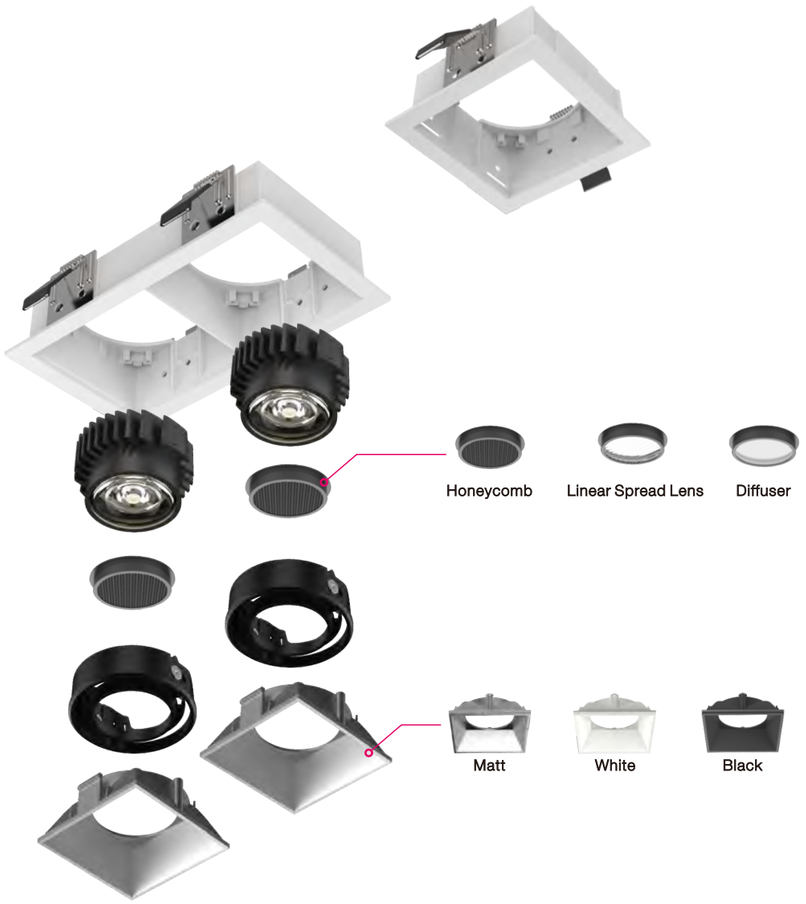

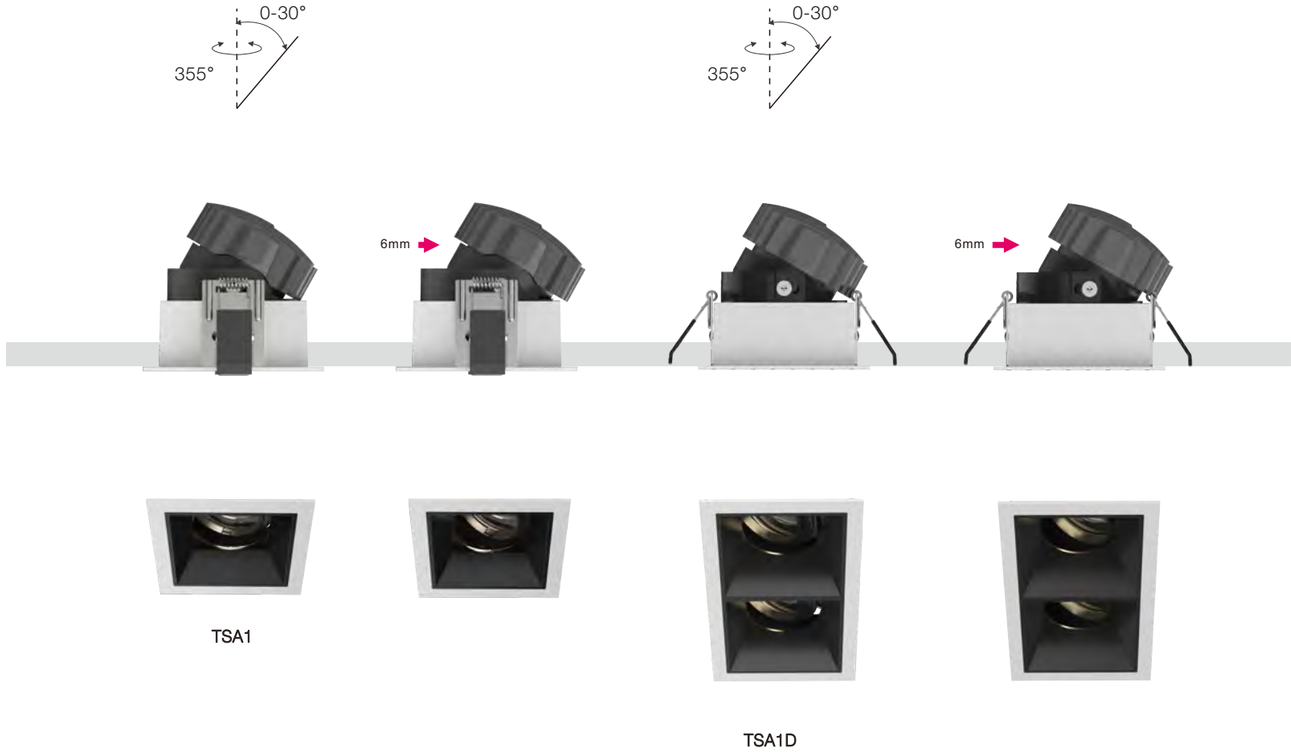


TSA1


TSA1D




75X75

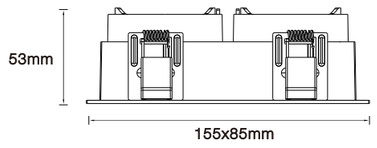


145X75

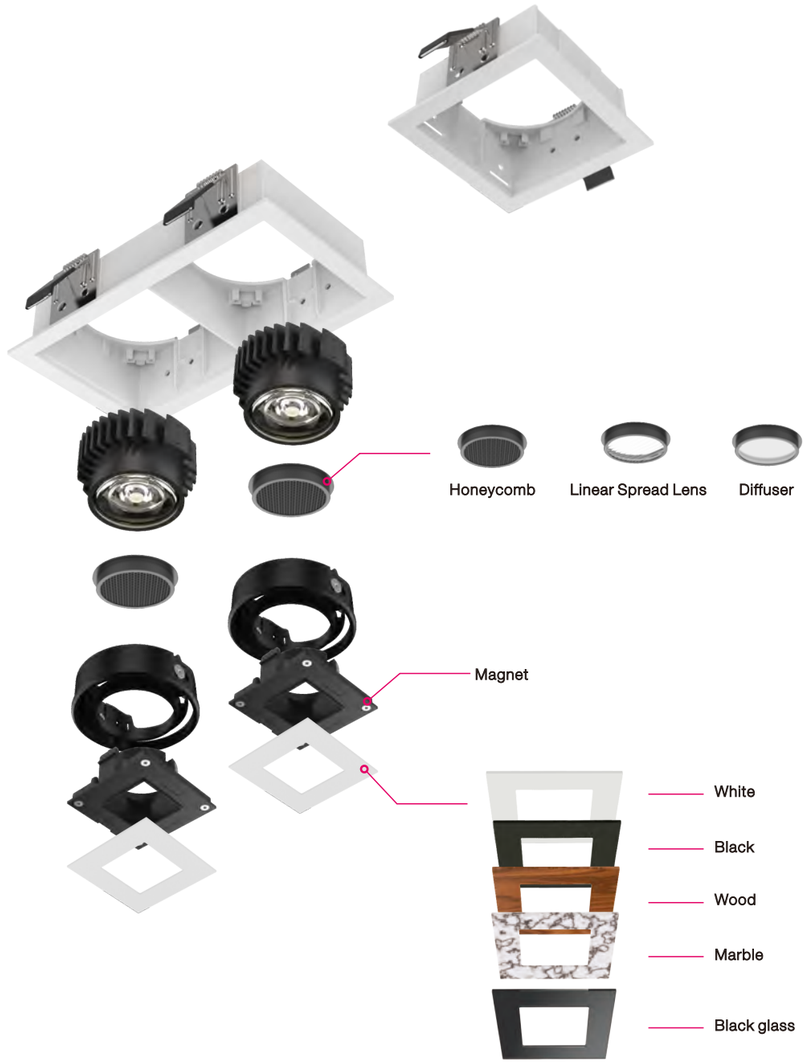

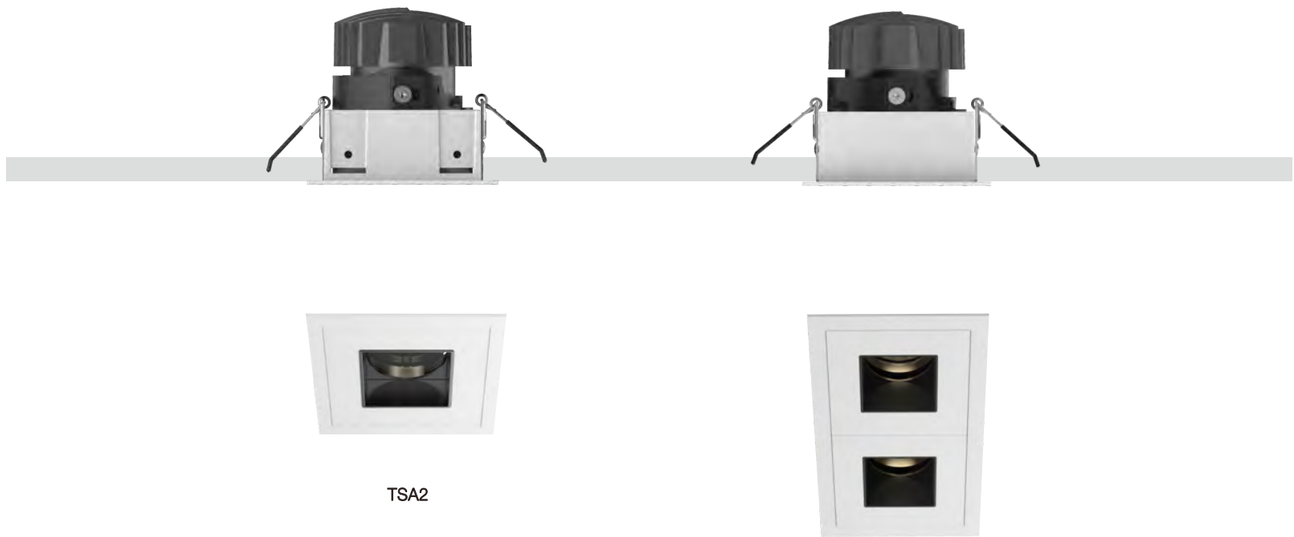


TSA2

TSA2D



75X75

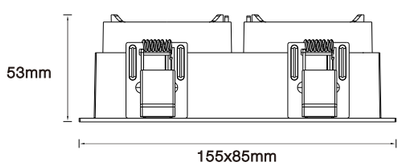



145X75















TSA3

TSA3D



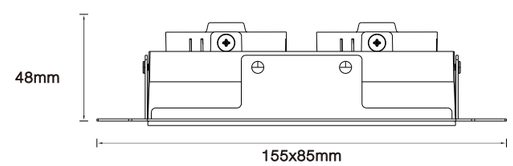

75X75

145X75

NEKO / CLUB

Trim Series

TA5





M3-TA5





M4-TA5



TA6





M3-TA6





M4-TA6



KA5-EI





M3-KA5-EI





M4-KA5-EI



KA6-EI





M3-KA6-EI





M4-KA6-EI



KA5





M3-KA5





M4-KA5



KA6





M3-KA6





M4-KA6



TA7





M3-TA7





M4-TA7



TA8





M3-TA8





M4-TA8



KA7-EI





M3-KA7-EI





M4-KA7-EI



KA8-EI





M3-KA8-EI





M4-KA8-EI



KA7





M3-KA7





M4-KA7




KA8






M3-KA8





M4-KA8



NEKO / CLUB

Trim Series

TRF1/ TRF1-IP44 NEW





M3-TRF1





M4-TRF1



TSA1





M3-TSA1





M4-TSA1



TSA2





M3-TSA2





M4-TSA2



TSA3





M3-TSA3





M4-TSA3



KRF1-EI/ KRF1-EI-IP44 NEW





M3-KRF1-EI





M4-KRF1-EI



KSA1-EI





M3-KSA1-EI





M4-KSA1-EI



KSA2-EI





M3-KSA2-EI





M4-KSA2-EI



KSA3-EI





M3-KSA3-EI





M4-KSA3-EI



KRF1/ KRF1-IP44 NEW





M3-KRF1





M4-KRF1



KSA1






M3-KSA1





M4-KSA1



KSA2






M3-KSA2





M4-KSA2



KSA3






M3-KSA3





M4-KSA3




NEKO / CLUB

Trim Series

TSA1D

145X75 | 355° | 30° | F | CE






M3/M4-TSA1D

TSA2D

145X75 | F | CE






M3/M4-TSA2D

TSA3D

145X75 | 355° | 18° | F | CE






M3/M4-TSA3D

KSA1D-EI

147X80 | 355° | 30° | F | CE






M3/M4-KSA1D-EI

KSA2D-EI

147X80 | F | CE






M3/M4-KSA2D-EI

KSA2D-EI

147X80 | F | CE






M3/M4-KSA2D-EI

KSA1D NEW

145X75 | 355° | 18° | F | CE







M3/M4-KSA1D

KSA2D NEW

145X75 | F | CE






M3/M4-KSA2D

KSA3D NEW

145X75 | F | CE





M3/M4-KSA3D





Classic
SKYJACK A68 SJA1-9W



Recessed Architectural
SKYJACK D SJD-9W



IP65
SKYJACK F SJF-9W



Shop & Corridors
SKYJACK A145 SJA2-25W


NEKO / SKYJACK A68

LED Downlight

Incl. Phase Dim Driver & Fast Connection Junction Box



9W | CRI90 | 2700K 3000K | 38° | ±30° Tiltable | bridgelux 50,000h@L80B10 | IP44 | 5 YEARS GUARANTEE | CE





LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
9 W	11 W	18 V	500 mA	90	2700K	38°	900lm	720lm	SJA1-9273809P-WW
					3000K	38°	950lm	750lm	SJA1-9303809P-WW


Code Remark: P=(Phase Dim)



LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
9 W	11 W	18 V	500 mA	90	2700K	38°	900lm	720lm	SJA1-9273809P-BB
					3000K	38°	950lm	750lm	SJA1-9303809P-BB

Code Remark: P=(Phase Dim)

Light Distribution

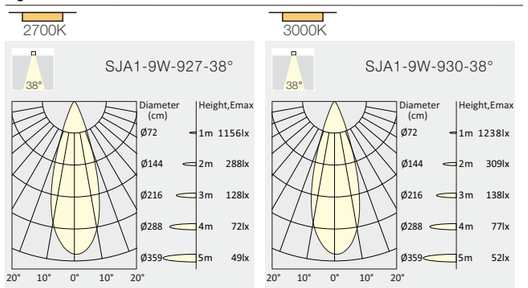

6W | CRI90 | 1800K-3000K Dim to Warm | 38° | ±30° Tiltable | bridgelux 50,000h@L80B10 | IP44 | 5 YEARS GUARANTEE | CE





LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
6 W	8 W	18 V	350 mA	90	1800K-3000K	38°	650lm	Max.450lm	SJA1-9D33806P-WW


Code Remark: P=(Phase Dim)



LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
6 W	8 W	18 V	350 mA	90	1800K-3000K	38°	650lm	Max.450lm	SJA1-9D33806P-BB

Code Remark: P=(Phase Dim)

Light Distribution






NEKO / SKYJACK D

LED Downlight

Incl. Phase Dim Driver & Fast Connection Junction Box



9W | CRI90 | 2700K 3000K | 38° | ±30° Tiltable | bridgelux 50,000h@L80B10 | UGR < 19 | IP44 | 5 YEARS GUARANTEE | CE








LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
9 W	11 W	18 V	500 mA	90	2700K	38°	900lm	700lm	SJD-9273809P-WW
					3000K	38°	950lm	750lm	SJD-9303809P-WW

Code Remark: P=(Phase Dim)


LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
9 W	11 W	18 V	500 mA	90	2700K	38°	900lm	650lm	SJD-9273809P-BB
					3000K	38°	950lm	700lm	SJD-9303809P-BB

Code Remark: P=(Phase Dim)

Light Distribution

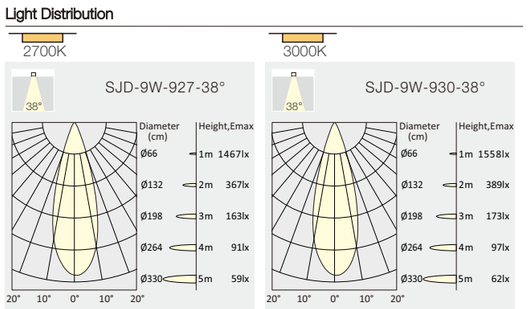

6W | CRI90 | 1800K-3000K Dim to Warm | 38° | ±30° Tiltable | bridgelux 50,000h@L80B10 | IP44 | 5 YEARS GUARANTEE | CE








LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
6 W	8 W	18 V	350 mA	90	1800K-3000K	38°	650lm	Max.450lm	SJD-9D33806P-WW

Code Remark: P=(Phase Dim)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
6 W	8 W	18 V	350 mA	90	1800K-3000K	38°	650lm	Max.400lm	SJD-9D33806P-BB

Code Remark: P=(Phase Dim)

Light Distribution





NEKO / SKYJACK F

LED Downlight

Incl. Phase Dim Driver & Fast Connection Junction Box





9W | CRI90 | 2700K 3000K | 38° | bridgelux 50,000h@L80B10 | IP65 FRONT | 5 YEARS GUARANTEE | CE








LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
9 W	11 W	18 V	500 mA	90	2700K	38°	900lm	720lm	SJF-9273809P-WW
					3000K	38°	950lm	750lm	SJF-9303809P-WW

Code Remark: P=(Phase Dim)

9 W	11 W	18 V	500 mA	90	2700K	38°	900lm	720lm	SJF-9273809P-BB
					3000K	38°	950lm	750lm	SJF-9303809P-BB

Code Remark: P=(Phase Dim)


Light Distribution

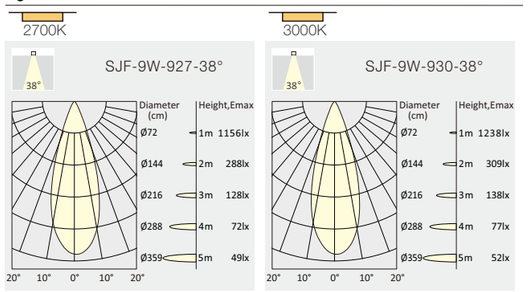

NEKO / SKYJACK A145
LED Downlight



25W | CRI90 | 3000K | 30° | ±30° Tiltable | bridgelux 50,000hrsL80B10 | UGR < 19 | IP20 | 5 YEARS GUARANTEE | CE



LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
25 W	28 W	36 V	700 mA	90	3000K	30°	2500lm	2200lm	SJA2-9303025N-WW




Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
25 W	28 W	36 V	700 mA	90	3000K	30°	2500lm	2200lm	SJA2-9303025N-BB



Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

Light Distribution







K1X30





K1X55






K1X70



NEKO / KENZO / K1X30
Adjustable LED Spotlight



4W | CRI90 CRI80 | 2700K 3000K 4000K | 15° 30° 55° | CREE 50,000h@L80B10 | UGR < 19 | IP20 | 5 YEARS GUARANTEE | CB | CE



LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
4 W	6 W	12 V	350 mA	90	2700K	15°	350lm	300lm	K1S-9271504N-WB
						30°	350lm	300lm	K1S-9273004N-WB
						55°	350lm	300lm	K1S-9275504N-WB
					3000K	15°	400lm	320lm	K1S-9301504N-WB
						30°	400lm	320lm	K1S-9303004N-WB
						55°	400lm	320lm	K1S-9305504N-WB
					4000K	15°	450lm	350lm	K1S-9401504N-WB
						30°	450lm	350lm	K1S-9403004N-WB
						55°	450lm	350lm	K1S-9405504N-WB



Black Decoration Ring

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
4 W	6 W	12 V	350 mA	90	2700K	15°	350lm	300lm	K1S-9271504N-WW
						30°	350lm	300lm	K1S-9273004N-WW
						55°	350lm	300lm	K1S-9275504N-WW
					3000K	15°	400lm	320lm	K1S-9301504N-WW
						30°	400lm	320lm	K1S-9303004N-WW
						55°	400lm	320lm	K1S-9305504N-WW
					4000K	15°	450lm	350lm	K1S-9401504N-WW
						30°	450lm	350lm	K1S-9403004N-WW
						55°	450lm	350lm	K1S-9405504N-WW



White Decoration Ring

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
4 W	6 W	12 V	350 mA	90	2700K	15°	350lm	300lm	K1S-9271504N-WG
						30°	350lm	300lm	K1S-9273004N-WG
						55°	350lm	300lm	K1S-9275504N-WG
					3000K	15°	400lm	320lm	K1S-9301504N-WG
						30°	400lm	320lm	K1S-9303004N-WG
						55°	400lm	320lm	K1S-9305504N-WG
					4000K	15°	450lm	350lm	K1S-9401504N-WG
						30°	450lm	350lm	K1S-9403004N-WG
						55°	450lm	350lm	K1S-9405504N-WG




Gold Decoration Ring

Code Remark: N=N(No Driver) F=F(ON-OFF) A=A(1-10V Dim) D=D(DALI Dim)

NEKO / KENZO / K1X55
Adjustable LED Spotlight



9W | CRI90 CRI80 | 2700K 3000K 4000K | 18° 24° 36° | CITIZEN 50,000h@L80B10 | UGR < 19 | IP20 | 5 YEARS GUARANTEE | CB | CE



LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
9 W	11 W	36 V	260 mA	90	2700K	18°	850lm	700lm	K1M-9271809N-WB
						24°	850lm	700lm	K1M-9272409N-WB
						36°	850lm	700lm	K1M-9273609N-WB
					3000K	18°	950lm	720lm	K1M-9301809N-WB
						24°	950lm	720lm	K1M-9302409N-WB
						36°	950lm	720lm	K1M-9303609N-WB
					4000K	18°	1050lm	800lm	K1M-9401809N-WB
						24°	1050lm	800lm	K1M-9402409N-WB
						36°	1050lm	800lm	K1M-9403609N-WB



Black Decoration Ring

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
9 W	11 W	36 V	260 mA	90	2700K	18°	850lm	700lm	K1M-9271809N-WW
						24°	850lm	700lm	K1M-9272409N-WW
						36°	850lm	700lm	K1M-9273609N-WW
					3000K	18°	950lm	720lm	K1M-9301809N-WW
						24°	950lm	720lm	K1M-9302409N-WW
						36°	950lm	720lm	K1M-9303609N-WW
					4000K	18°	1050lm	800lm	K1M-9401809N-WW
						24°	1050lm	800lm	K1M-9402409N-WW
						36°	1050lm	800lm	K1M-9403609N-WW



White Decoration Ring

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
9 W	11 W	36 V	260 mA	90	2700K	18°	850lm	700lm	K1M-9271809N-WG
						24°	850lm	700lm	K1M-9272409N-WG
						36°	850lm	700lm	K1M-9273609N-WG
					3000K	18°	950lm	720lm	K1M-9301809N-WG
						24°	950lm	720lm	K1M-9302409N-WG
						36°	950lm	720lm	K1M-9303609N-WG
					4000K	18°	1050lm	800lm	K1M-9401809N-WG
						24°	1050lm	800lm	K1M-9402409N-WG
						36°	1050lm	800lm	K1M-9403609N-WG



Gold Decoration Ring

Code Remark: N=(NO Driver) F=(ON-OFF) P=(Phase Dim) A=(1-10V Dim) D=(DALI Dim)

Optional accessory



Honeycomb


Code for K1M-9402409N-WG with **H**oneycomb
K1M-9402409N-WG -**H**

NEKO / KENZO / K1X70

Adjustable LED Spotlight



13W 18W | CRI90 CRI80 | 2700K 3000K 4000K | 15° 25° 30° | CITIZEN 50,000h@L80B10 | UGR < 19 | IP 20 | 5 YEARS GUARANTEE | CB | CE



LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
13	W	15 W	36 V	350 mA	90	2700K	15°	1400lm	1100lm	K1L1-9271513N-WB
							25°	1400lm	1100lm	K1L1-9272513N-WB
							30°	1400lm	1100lm	K1L1-9273013N-WB
						3000K	15°	1500lm	1200lm	K1L1-9301513N-WB
							25°	1500lm	1200lm	K1L1-9302513N-WB
							30°	1500lm	1200lm	K1L1-9303013N-WB
						4000K	15°	1600lm	1300lm	K1L1-9401513N-WB
							25°	1600lm	1300lm	K1L1-9402513N-WB
							30°	1600lm	1300lm	K1L1-9403013N-WB
18	W	21 W	36 V	500 mA	90	2700K	15°	1800lm	1500lm	K1L2-9271518N-WB
							25°	1800lm	1500lm	K1L2-9272518N-WB
							30°	1800lm	1500lm	K1L2-9273018N-WB
						3000K	15°	2000lm	1600lm	K1L2-9301518N-WB
							25°	2000lm	1600lm	K1L2-9302518N-WB
							30°	2000lm	1600lm	K1L2-9303018N-WB
						4000K	15°	2200lm	1700lm	K1L2-9401518N-WB
							25°	2200lm	1700lm	K1L2-9402518N-WB
							30°	2200lm	1700lm	K1L2-9403018N-WB



Black Decoration Ring

Code Remark: N=(NO Driver) F=(ON-OFF) P=(Phase Dim) A=(1-10V Dim) D=(DALI Dim)



White Decoration Ring

LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
13	W	15 W	36 V	350 mA	90	2700K	15°	1400lm	1100lm	K1L1-9271513N-WG
							25°	1400lm	1100lm	K1L1-9272513N-WG
							30°	1400lm	1100lm	K1L1-9273013N-WG
						3000K	15°	1500lm	1200lm	K1L1-9301513N-WG
							25°	1500lm	1200lm	K1L1-9302513N-WG
							30°	1500lm	1200lm	K1L1-9303013N-WG
						4000K	15°	1600lm	1300lm	K1L1-9401513N-WG
							25°	1600lm	1300lm	K1L1-9402513N-WG
							30°	1600lm	1300lm	K1L1-9403013N-WG
18	W	21 W	36 V	500 mA	90	2700K	15°	1800lm	1500lm	K1L2-9271518N-WG
							25°	1800lm	1500lm	K1L2-9272518N-WG
							30°	1800lm	1500lm	K1L2-9273018N-WG
						3000K	15°	2000lm	1600lm	K1L2-9301518N-WG
							25°	2000lm	1600lm	K1L2-9302518N-WG
							30°	2000lm	1600lm	K1L2-9303018N-WG
						4000K	15°	2200lm	1700lm	K1L2-9401518N-WG
							25°	2200lm	1700lm	K1L2-9402518N-WG
							30°	2200lm	1700lm	K1L2-9403018N-WG



Gold Decoration Ring

Code Remark: N=(NO Driver) F=(ON-OFF) P=(Phase Dim) A=(1-10V Dim) D=(DALI Dim)

Optional accessory



Honeycomb


Code for K1L2-9403018N-WG with **H**oneycomb
K1L2-9403018N-WG-**H**

Project: Bvlgari Hotel, Shanghai, China







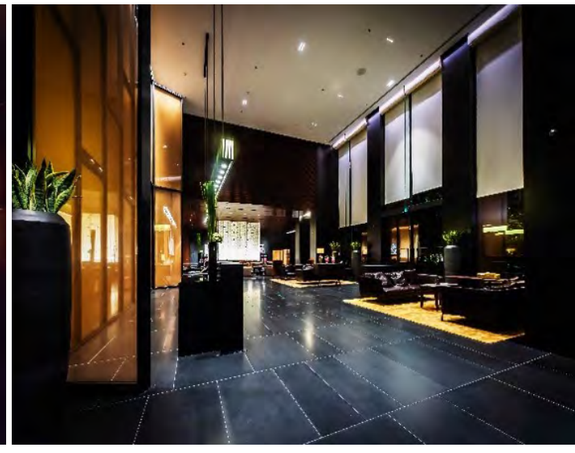

NEKO / FUSION
Project: Eggen Restaurant, Norway

NEKO / FUSION

- Hohe Lichtplanungsflexibilität mit verschiedenen Grössen von Lichtmodulen
- Schmale LED-Downlights für reinen Minimalismus
- Bester Blendschutz mit hoher Leistung und gutem Sehkomfort
- Fix und schwenkbar, Wall Washer, Allgemeinbeleuchtung, Spot und rahmenlose Version verfügbar
- 5 Jahre Garantie

- Create a circle of light from a line of LED Downlights
- A narrow line of nano LED Downlights for pure minimalism
- Superior glare control for high performance and visual comfort
- Fixed, Adjustable, Wall Washer, General light, Spotlight and trimless versions for choice
- Five-year guarantee



NEKO / FUSION
Linear Downlight Series

Fixed | Adjustable | Wall Washer | General Light | Spotlight | Trimless





37X37 FF1 / 1 LED / 2W / 170 lm



62X37 FF2 / 2 LED / 4W / 350 lm




90X37 FF3 / 3 LED / 7W / 550 lm



68X68 FX4 / 4 LED / 9W / 700 lm



144X37 FF5 / 5 LED / 11W / 900 lm



282X37 FF10 / 10 LED / 22W / 1800 lm



152X44 FFT5 / 5LED / 11W / 900 lm




290X44 FFT10 / 10 LED / 22W / 1800 lm



160X52 FA5 / 5 LED / 11W / 900 lm



298X52 FA10 / 10 LED / 22W / 1800 lm





144X37 FW5 / 5 LED / 11W / 600 lm



282X37 FW10 / 10 LED / 22W / 1200 lm



152X44 FWT5 / 5 LED / 11W / 600 lm



290X44 FWT10 / 10 LED / 22W / 1200 lm





144X37 FG5 / 5 LED / 11W / 400 lm



282X37 FG10 / 10 LED / 22W / 950 lm




152X44 FGT5 / 5 LED / 11W / 400 lm



290X44 FGT10 / 10 LED / 22W / 950 lm



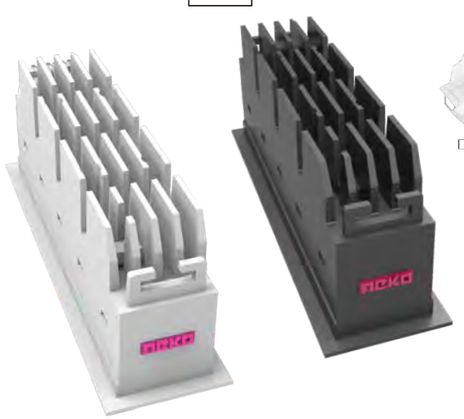



62X37 FS1 / 1 LED / 2W / 170 lm



90X37 FS2 / 2 LED / 4W / 350 lm



144X37 FS3 / 3 LED / 7W / 550 lm



282X37 FS6 / 6 LED / 14W / 1050 lm



144X37 FF3-FS1 / 4 LED / 9W / 700 lm



282X37 FF6-FS2 / 8 LED / 18W / 1400 lm



152X44 FST3 / 3 LED / 7W / 550 lm



290X44 FST6 / 6 LED / 14W / 1050 lm




152X44 FFT3-FST1 / 4 LED / 9W / 700 lm




290X44 FFT6-FST2 / 8 LED / 18W / 1400 lm

Secondary Reflector



Black | Specular

Beam



Medium 24° | Wide 40°

NEKO / FUSION

Fixed Series LED Downlight




Black Reflector



1 LED / 2W / 170lm



2 LED / 4W / 350lm



3 LED / 7W / 550lm



5 LED / 11W / 900lm



10 LED / 22W / 1800lm

Specular Reflector



1 LED / 2W / 200lm



2 LED / 4W / 400lm



3 LED / 7W / 600lm



5 LED / 11W / 1050lm



10 LED / 22W / 2100lm

Secondary Reflector




Black



Specular


Beam





Medium 24°





Wide 40°

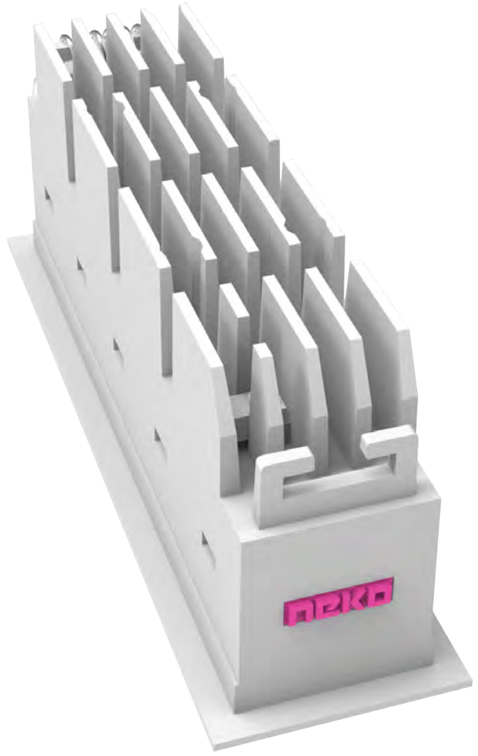




















NEKO / FUSION / FF1

Fixed LED Downlight





2W | CRI90 CRI80 | 2700K 3000K 4000K | 24° 40° | OSRAM 50,000h@L80B10 | UGR < 10 | IP20 | 5 YEARS GUARANTEE | CB | CE | ETL Intertek






Black Reflector



Black Reflector



Specular Reflector



Specular Reflector

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
2 W	3 W	3 V	700 mA	80	2700K	24°	220lm	160lm	FF1-8272402N-WB
						40°	220lm	160lm	FF1-8274002N-WB
					3000K	24°	250lm	170lm	FF1-8302402N-WB
						40°	250lm	170lm	FF1-8304002N-WB
					4000K	24°	280lm	180lm	FF1-8402402N-WB
						40°	280lm	180lm	FF1-8404002N-WB
2 W	3 W	3 V	700 mA	80	2700K	24°	220lm	160lm	FF1-8272402N-BB
						40°	220lm	160lm	FF1-8274002N-BB
					3000K	24°	250lm	170lm	FF1-8302402N-BB
						40°	250lm	170lm	FF1-8304002N-BB
					4000K	24°	280lm	180lm	FF1-8402402N-BB
						40°	280lm	180lm	FF1-8404002N-BB
2 W	3 W	3 V	700 mA	80	2700K	24°	220lm	180lm	FF1-8272402N-WS
						40°	220lm	180lm	FF1-8274002N-WS
					3000K	24°	250lm	200lm	FF1-8302402N-WS
						40°	250lm	200lm	FF1-8304002N-WS
					4000K	24°	280lm	220lm	FF1-8402402N-WS
						40°	280lm	220lm	FF1-8404002N-WS
2 W	3 W	3 V	700 mA	80	2700K	24°	220lm	180lm	FF1-8272402N-BS
						40°	220lm	180lm	FF1-8274002N-BS
					3000K	24°	250lm	200lm	FF1-8302402N-BS
						40°	250lm	200lm	FF1-8304002N-BS
					4000K	24°	280lm	220lm	FF1-8402402N-BS
						40°	280lm	220lm	FF1-8404002N-BS

Code Remark: N=(NO Driver) F=(ON-OFF) A=(1-10V Dim) D=(DALI Dim)


Project: Muyang Museum, China



NEKO / FUSION / FF2
Fixed LED Downlight



4W | CRI90 CRI80 | 2700K 3000K 4000K | 24° 40° | OSRAM 50,000h@L80B10 | UGR < 10 | IP20 | 5 YEARS GUARANTEE | CB | CE | ETL Intertek



LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
4 W	6 W	6 V	700 mA	80	2700K	24°	450lm	330lm	FF2-8272404N-WB
						40°	450lm	330lm	FF2-8274004N-WB
					3000K	24°	500lm	350lm	FF2-8302404N-WB
						40°	500lm	350lm	FF2-8304004N-WB
					4000K	24°	550lm	380lm	FF2-8402404N-WB
						40°	550lm	380lm	FF2-8404004N-WB



Black Reflector

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
4 W	6 W	6 V	700 mA	80	2700K	24°	450lm	330lm	FF2-8272404N-BB
						40°	450lm	330lm	FF2-8274004N-BB
					3000K	24°	500lm	350lm	FF2-8302404N-BB
						40°	500lm	350lm	FF2-8304004N-BB
					4000K	24°	550lm	380lm	FF2-8402404N-BB
						40°	550lm	380lm	FF2-8404004N-BB



Black Reflector

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
4 W	6 W	6 V	700 mA	80	2700K	24°	450lm	380lm	FF2-8272404N-WS
						40°	450lm	380lm	FF2-8274004N-WS
					3000K	24°	500lm	400lm	FF2-8302404N-WS
						40°	500lm	400lm	FF2-8304004N-WS
					4000K	24°	550lm	440lm	FF2-8402404N-WS
						40°	550lm	440lm	FF2-8404004N-WS



Specular Reflector

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
4 W	6 W	6 V	700 mA	80	2700K	24°	450lm	380lm	FF2-8272404N-BS
						40°	450lm	380lm	FF2-8274004N-BS
					3000K	24°	500lm	400lm	FF2-8302404N-BS
						40°	500lm	400lm	FF2-8304004N-BS
					4000K	24°	550lm	440lm	FF2-8402404N-BS
						40°	550lm	440lm	FF2-8404004N-BS



Specular Reflector

Code Remark: N=(NO Driver) F=(ON-OFF) P=(Phase Dim) A=(1-10V Dim) D=(DALI Dim)


Project: Bvlgari Hotel, Shanghai, China



NEKO / FUSION / FF3
Fixed LED Downlight



7W | CRI90 CRI80 | 2700K 3000K 4000K | 24° 40° | OSRAM 50,000h@L80B10 | UGR < 10 | IP 20 | 5 YEARS GUARANTEE | CB | CE | ETL Intertek



LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
7	W	9 W	9 V	700 mA	80	2700K	24°	700lm	500lm	FF3-8272407N-WB
							40°	700lm	500lm	FF3-8274007N-WB
						3000K	24°	750lm	550lm	FF3-8302407N-WB
							40°	750lm	550lm	FF3-8304007N-WB
						4000K	24°	800lm	600lm	FF3-8402407N-WB
							40°	800lm	600lm	FF3-8404007N-WB



Black Reflector

LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
7	W	9 W	9 V	700 mA	80	2700K	24°	700lm	500lm	FF3-8272407N-BB
							40°	700lm	500lm	FF3-8274007N-BB
						3000K	24°	750lm	550lm	FF3-8302407N-BB
							40°	750lm	550lm	FF3-8304007N-BB
						4000K	24°	800lm	600lm	FF3-8402407N-BB
							40°	800lm	600lm	FF3-8404007N-BB



Black Reflector

LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
7	W	9 W	9 V	700 mA	80	2700K	24°	700lm	550lm	FF3-8272407N-WS
							40°	700lm	550lm	FF3-8274007N-WS
						3000K	24°	750lm	600lm	FF3-8302407N-WS
							40°	750lm	600lm	FF3-8304007N-WS
						4000K	24°	800lm	650lm	FF3-8402407N-WS
							40°	800lm	650lm	FF3-8404007N-WS



Specular Reflector

LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
7	W	9 W	9 V	700 mA	80	2700K	24°	700lm	550lm	FF3-8272407N-BS
							40°	700lm	550lm	FF3-8274007N-BS
						3000K	24°	750lm	600lm	FF3-8302407N-BS
							40°	750lm	600lm	FF3-8304007N-BS
						4000K	24°	800lm	650lm	FF3-8402407N-BS
							40°	800lm	650lm	FF3-8404007N-BS



Specular Reflector

Code Remark: N=(NO Driver) F=(ON-OFF) P=(Phase Dim) A=(1-10V Dim) D=(DALI Dim)

Project: Hallunda Station, Sweden




NEKO / FUSION / FX4

Fixed LED Downlight



9W | CRI90 CRI80 | 2700K 3000K 4000K | 24° 40° | OSRAM 50,000h@L80B10 | UGR < 10 | IP20 | 5 YEARS GUARANTEE | CB | CE | ETL Intertek





Black Reflector



Black Reflector



Specular Reflector



Specular Reflector

LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
9	W	11 W	12 V	700 mA	80	2700K	24°	850lm	670lm	FX4-8272409N-WB
							40°	850lm	670lm	FX4-8274009N-WB
						3000K	24°	900lm	700lm	FX4-8302409N-WB
							40°	900lm	700lm	FX4-8304009N-WB
						4000K	24°	1000lm	750lm	FX4-8402409N-WB
							40°	1000lm	750lm	FX4-8404009N-WB
9	W	11 W	12 V	700 mA	80	2700K	24°	850lm	670lm	FX4-8272409N-BB
							40°	850lm	670lm	FX4-8274009N-BB
						3000K	24°	900lm	700lm	FX4-8302409N-BB
							40°	900lm	700lm	FX4-8304009N-BB
						4000K	24°	1000lm	750lm	FX4-8402409N-BB
							40°	1000lm	750lm	FX4-8404009N-BB
9	W	11 W	12 V	700 mA	80	2700K	24°	850lm	700lm	FX4-8272409N-WS
							40°	850lm	700lm	FX4-8274009N-WS
						3000K	24°	900lm	750lm	FX4-8302409N-WS
							40°	900lm	750lm	FX4-8304009N-WS
						4000K	24°	1000lm	800lm	FX4-8402409N-WS
							40°	1000lm	800lm	FX4-8404009N-WS
9	W	11 W	12 V	700 mA	80	2700K	24°	850lm	700lm	FX4-8272409N-BS
							40°	850lm	700lm	FX4-8274009N-BS
						3000K	24°	900lm	750lm	FX4-8302409N-BS
							40°	900lm	750lm	FX4-8304009N-BS
						4000K	24°	1000lm	800lm	FX4-8402409N-BS
							40°	1000lm	800lm	FX4-8404009N-BS

Code Remark: N=(NO Driver) F=(ON-OFF) P=(Phase Dim) A=(1-10V Dim) D=(DALI Dim)

Project: Office Helsinki, Finland

NEKO / FUSION / FF5
Fixed LED Downlight



11W | CRI90 CRI80 | 2700K 3000K 4000K | 24° 40° | OSRAM 50,000h@L80B10 | UGR < 10 | IP20 | 5 YEARS GUARANTEE | CB | CE | ETL Intertek





Black Reflector

LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
11	W	13 W	15 V	700 mA	80	2700K	24°	1200lm	850lm	FF5-8272411N-WB
							40°	1200lm	850lm	FF5-8274011N-WB
						3000K	24°	1300lm	900lm	FF5-8302411N-WB
							40°	1300lm	900lm	FF5-8304011N-WB
						4000K	24°	1400lm	950lm	FF5-8402411N-WB
							40°	1400lm	950lm	FF5-8404011N-WB



Black Reflector

LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
11	W	13 W	15 V	700 mA	80	2700K	24°	1200lm	850lm	FF5-8272411N-BB
							40°	1200lm	850lm	FF5-8274011N-BB
						3000K	24°	1300lm	900lm	FF5-8302411N-BB
							40°	1300lm	900lm	FF5-8304011N-BB
						4000K	24°	1400lm	950lm	FF5-8402411N-BB
							40°	1400lm	950lm	FF5-8404011N-BB



Specular Reflector

LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
11	W	13 W	15 V	700 mA	80	2700K	24°	1200lm	950lm	FF5-8272411N-WS
							40°	1200lm	950lm	FF5-8274011N-WS
						3000K	24°	1300lm	1000lm	FF5-8302411N-WS
							40°	1300lm	1000lm	FF5-8304011N-WS
						4000K	24°	1400lm	1100lm	FF5-8402411N-WS
							40°	1400lm	1100lm	FF5-8404011N-WS



Specular Reflector

LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
11	W	13 W	15 V	700 mA	80	2700K	24°	1200lm	950lm	FF5-8272411N-BS
							40°	1200lm	950lm	FF5-8274011N-BS
						3000K	24°	1300lm	1000lm	FF5-8302411N-BS
							40°	1300lm	1000lm	FF5-8304011N-BS
						4000K	24°	1400lm	1100lm	FF5-8402411N-BS
							40°	1400lm	1100lm	FF5-8404011N-BS

Code Remark: N=(NO Driver) F=(ON-OFF) P=(Phase Dim) A=(1-10V Dim) D=(DALI Dim)


Project: World Health Organization Building, Philippines




NEKO / FUSION / FF10
Fixed LED Downlight




22W | CRI90 CRI80 | 2700K 3000K 4000K | 24° 40° | OSRAM 50,000h@L80B10 | UGR < 10 | IP20 | 5 YEARS GUARANTEE | CB | CE | ETL Intertek





Black Reflector

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
22 W	24 W	30 V	700 mA	80	2700K	24°	2400lm	1600lm	FF10-8272422N-WB
						40°	2400lm	1600lm	FF10-8274022N-WB
					3000K	24°	2600lm	1800lm	FF10-8302422N-WB
						40°	2600lm	1800lm	FF10-8304022N-WB
					4000K	24°	2800lm	2000lm	FF10-8402422N-WB
						40°	2800lm	2000lm	FF10-8404022N-WB




Black Reflector

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
22 W	24 W	30 V	700 mA	80	2700K	24°	2400lm	1600lm	FF10-8272422N-BB
						40°	2400lm	1600lm	FF10-8274022N-BB
					3000K	24°	2600lm	1800lm	FF10-8302422N-BB
						40°	2600lm	1800lm	FF10-8304022N-BB
					4000K	24°	2800lm	2000lm	FF10-8402422N-BB
						40°	2800lm	2000lm	FF10-8404022N-BB



Specular Reflector

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
22 W	24 W	30 V	700 mA	80	2700K	24°	2400lm	2000lm	FF10-8272422N-WS
						40°	2400lm	2000lm	FF10-8274022N-WS
					3000K	24°	2600lm	2100lm	FF10-8302422N-WS
						40°	2600lm	2100lm	FF10-8304022N-WS
					4000K	24°	2800lm	2300lm	FF10-8402422N-WS
						40°	2800lm	2300lm	FF10-8404022N-WS



Specular Reflector

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
22 W	24 W	30 V	700 mA	80	2700K	24°	2400lm	2000lm	FF10-8272422N-BS
						40°	2400lm	2000lm	FF10-8274022N-BS
					3000K	24°	2600lm	2100lm	FF10-8302422N-BS
						40°	2600lm	2100lm	FF10-8304022N-BS
					4000K	24°	2800lm	2300lm	FF10-8402422N-BS
						40°	2800lm	2300lm	FF10-8404022N-BS

Code Remark: N=(NO Driver) F=(ON-OFF) P=(Phase Dim) A=(1-10V Dim) D=(DALI Dim)

Project: Bvlgari Hotel, Shanghai, China




NEKO / FUSION / FF2-IP65

Surface IP65

NEW



4W | CRI80 CRI90 | 2700K 3000K 4000K | 35° | 45° | OSRAM 50,000h@L80B10 | UGR < 19 | IP65 | 5 YEARS GUARANTEE | CB | CE | ETL Intertek





Black Reflector

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
4 W	6 W	6 V	700 mA	80	2700K	35°	450lm	260lm	FF2-8273504N-WB-IP
						45°	450lm	260lm	FF2-8274504N-WB-IP
					3000K	35°	500lm	265lm	FF2-8303504N-WB-IP
						45°	500lm	265lm	FF2-8304504N-WB-IP
					4000K	35°	550lm	280lm	FF2-8403504N-WB-IP
						45°	550lm	280lm	FF2-8404504N-WB-IP



Black Reflector


LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
4 W	6 W	6 V	700 mA	80	2700K	35°	450lm	260lm	FF2-8273504N-BB-IP
						45°	450lm	260lm	FF2-8274504N-BB-IP
					3000K	35°	500lm	265lm	FF2-8303504N-BB-IP
						45°	500lm	265lm	FF2-8304504N-BB-IP
					4000K	35°	550lm	280lm	FF2-8403504N-BB-IP
						45°	550lm	280lm	FF2-8404504N-BB-IP

Code Remark: N=(NO Driver) F=(ON-OFF) P=(Phase Dim) A=(1-10V Dim) D=(DALI Dim)


NEKO / FUSION / FF3-IP65


Surface IP65

NEW



7W | CRI80 CRI90 | 2700K 3000K 4000K | 35° | 45° | OSRAM 50,000h@L80B10 | UGR < 19 | IP65 | 5 YEARS GUARANTEE | CB | CE | ETL Intertek





Black Reflector

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
7 W	9 W	9 V	700 mA	80	2700K	35°	700lm	400lm	FF3-8273507N-WB-IP
						45°	700lm	400lm	FF3-8274507N-WB-IP
					3000K	35°	750lm	420lm	FF3-8303507N-WB-IP
						45°	750lm	420lm	FF3-8304507N-WB-IP
					4000K	35°	800lm	460lm	FF3-8403507N-WB-IP
						45°	800lm	460lm	FF3-8404507N-WB-IP



Black Reflector

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
7 W	9 W	9 V	700 mA	80	2700K	35°	700lm	400lm	FF3-8273507N-BB-IP
						45°	700lm	400lm	FF3-8274507N-BB-IP
					3000K	35°	750lm	420lm	FF3-8303507N-BB-IP
						45°	750lm	420lm	FF3-8304507N-BB-IP
					4000K	35°	800lm	460lm	FF3-8403507N-BB-IP
						45°	800lm	460lm	FF3-8404507N-BB-IP

Code Remark: N=(NO Driver) F=(ON-OFF) P=(Phase Dim) A=(1-10V Dim) D=(DALI Dim)


NEKO / FUSION / FF5-IP65

Surface IP65

NEW



11W | CRI80 CRI90 | 2700K 3000K 4000K | 35° 45° | OSRAM 50,000h@L80B10 | UGR < 19 | IP65 | 5 YEARS GUARANTEE | CB CE ETL Intertek





Black Reflector



Black Reflector

LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
11	W	13 W	15 V	700 mA	80	2700K	35°	1200lm	650lm	FF5-8273511N-WB-IP
							45°	1200lm	650lm	FF5-8274511N-WB-IP
						3000K	35°	1300lm	685lm	FF5-8303511N-WB-IP
							45°	1300lm	685lm	FF5-8304511N-WB-IP
						4000K	35°	1400lm	750lm	FF5-8403511N-WB-IP
							45°	1400lm	750lm	FF5-8404511N-WB-IP
11	W	13 W	15 V	700 mA	80	2700K	35°	1200lm	650lm	FF5-8273511N-BB-IP
							45°	1200lm	650lm	FF5-827451 1N-BB-IP
						3000K	35°	1300lm	685lm	FF5-8303511N-BB-IP
							45°	1300lm	685lm	FF5-8304511N-BB-IP
						4000K	35°	1400lm	750lm	FF5-8403511N-BB-IP
							45°	1400lm	750lm	FF5-8404511N-BB-IP

Code Remark: N=(NO Driver) F=(ON-OFF) P=(Phase Dim) A=(1-10V Dim) D=(DALI Dim)


NEKO / FUSION / FF10-IP65


Surface IP65

NEW




22W | CRI80 CRI90 | 2700K 3000K 4000K | 35° 45° | OSRAM 50,000h@L80B10 | UGR < 19 | IP65 | 5 YEARS GUARANTEE | CB CE ETL Intertek





Black Reflector



Black Reflector


LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
22	W	24 W	30 V	700 mA	80	2700K	35°	2400lm	1250lm	FF10-8273522N-WB-IP
							45°	2400lm	1250lm	FF10-8274522N-WB-IP
						3000K	35°	2600lm	1350lm	FF10-8303522N-WB-IP
							45°	2600lm	1350lm	FF10-8304522N-WB-IP
						4000K	35°	2800lm	1500lm	FF10-8403522N-WB-IP
							45°	2800lm	1500lm	FF10-8404522N-WB-IP
22	W	24 W	30 V	700 mA	80	2700K	35°	2400lm	1250lm	FF10-8273522N-BB-IP
							45°	2400lm	1250lm	FF10-8274522N-BB-IP
						3000K	35°	2600lm	1350lm	FF10-8303522N-BB-IP
							45°	2600lm	1350lm	FF10-8304522N-BB-IP
						4000K	35°	2800lm	1500lm	FF10-8403522N-BB-IP
							45°	2800lm	1500lm	FF10-8404522N-BB-IP

Code Remark: N=(NO Driver) F=(ON-OFF) P=(Phase Dim) A=(1-10V Dim) D=(DALI Dim)

NEKO / FUSION / FFT5
Fixed Trimless Downlight



11W | CRI90 CRI80 | 2700K 3000K 4000K | 24° 40° | OSRAM 50,000h@L80B10 | UGR < 10 | IP20 | 5 YEARS GUARANTEE | CB CE





Black Reflector

LED	Power System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
11 W	13 W	15 V	700 mA	80	2700K	24°	1200lm	850lm	FFT5-8272411N-WB
						40°	1200lm	850lm	FFT5-8274011N-WB
					3000K	24°	1300lm	900lm	FFT5-8302411N-WB
						40°	1300lm	900lm	FFT5-8304011N-WB
					4000K	24°	1400lm	950lm	FFT5-8402411N-WB
						40°	1400lm	950lm	FFT5-8404011N-WB



Black Reflector

LED	Power System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
11 W	13 W	15 V	700 mA	80	2700K	24°	1200lm	850lm	FFT5-8272411N-BB
						40°	1200lm	850lm	FFT5-8274011N-BB
					3000K	24°	1300lm	900lm	FFT5-8302411N-BB
						40°	1300lm	900lm	FFT5-8304011N-BB
					4000K	24°	1400lm	950lm	FFT5-8402411N-BB
						40°	1400lm	950lm	FFT5-8404011N-BB



Specular Reflector

LED	Power System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
11 W	13 W	15 V	700 mA	80	2700K	24°	1200lm	950lm	FFT5-8272411N-WS
						40°	1200lm	950lm	FFT5-8274011N-WS
					3000K	24°	1300lm	1000lm	FFT5-8302411N-WS
						40°	1300lm	1000lm	FFT5-8304011N-WS
					4000K	24°	1400lm	1100lm	FFT5-8402411N-WS
						40°	1400lm	1100lm	FFT5-8404011N-WS



Specular Reflector

LED	Power System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
11 W	13 W	15 V	700 mA	80	2700K	24°	1200lm	950lm	FFT5-8272411N-BS
						40°	1200lm	950lm	FFT5-8274011N-BS
					3000K	24°	1300lm	1000lm	FFT5-8302411N-BS
						40°	1300lm	1000lm	FFT5-8304011N-BS
					4000K	24°	1400lm	1100lm	FFT5-8402411N-BS
						40°	1400lm	1100lm	FFT5-8404011N-BS

Code Remark: N=(NO Driver) F=(ON-OFF) P=(Phase Dim) A=(1-10V Dim) D=(DALI Dim)

NEKO / FUSION / FFT10
Fixed Trimless Downlight



22W | CRI90 CRI80 | 2700K 3000K 4000K | 24° 40° | OSRAM 50,000h@L80B10 | UGR < 10 | IP20 | 5 YEARS GUARANTEE | CB CE





Black Reflector

LED	Power System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
22 W	24 W	30 V	700 mA	80	2700K	24°	2400lm	1600lm	FFTA-8272422N-WB
						40°	2400lm	1600lm	FFTA-8274022N-WB
					3000K	24°	2600lm	1800lm	FFTA-8302422N-WB
						40°	2600lm	1800lm	FFTA-8304022N-WB
					4000K	24°	2800lm	2000lm	FFTA-8402422N-WB
						40°	2800lm	2000lm	FFTA-8404022N-WB



Black Reflector

LED	Power System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
22 W	24 W	30 V	700 mA	80	2700K	24°	2400lm	1600lm	FFTA-8272422N-BB
						40°	2400lm	1600lm	FFTA-8274022N-BB
					3000K	24°	2600lm	1800lm	FFTA-8302422N-BB
						40°	2600lm	1800lm	FFTA-8304022N-BB
					4000K	24°	2800lm	2000lm	FFTA-8402422N-BB
						40°	2800lm	2000lm	FFTA-8404022N-BB



Specular Reflector

LED	Power System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
22 W	24 W	30 V	700 mA	80	2700K	24°	2400lm	2000lm	FFTA-8272422N-WS
						40°	2400lm	2000lm	FFTA-8274022N-WS
					3000K	24°	2600lm	2100lm	FFTA-8302422N-WS
						40°	2600lm	2100lm	FFTA-8304022N-WS
					4000K	24°	2800lm	2300lm	FFTA-8402422N-WS
						40°	2800lm	2300lm	FFTA-8404022N-WS



Specular Reflector


LED	Power System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
22 W	24 W	30 V	700 mA	80	2700K	24°	2400lm	2000lm	FFTA-8272422N-BS
						40°	2400lm	2000lm	FFTA-8274022N-BS
					3000K	24°	2600lm	2100lm	FFTA-8302422N-BS
						40°	2600lm	2100lm	FFTA-8304022N-BS
					4000K	24°	2800lm	2300lm	FFTA-8402422N-BS
						40°	2800lm	2300lm	FFTA-8404022N-BS

Code Remark: N=(NO Driver) F=(ON-OFF) P=(Phase Dim) A=(1-10V Dim) D=(DALI Dim)


NEKO / FUSION / FA5
Adjustable LED Downlight





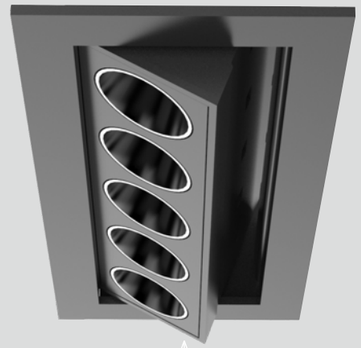

11W | CRI90 CRI80 | 2700K 3000K 4000K | 24° 40° | OSRAM 50,000h@L80B10 | UGR < 10 | IP20 | 5 YEARS GUARANTEE | CB | CE | ETL Intertek





Black Reflector



Black Reflector



Specular Reflector



Specular Reflector

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
11 W	13 W	15 V	700 mA	80	2700K	24°	1200lm	850lm	FA5-8272411N-WB
						40°	1200lm	850lm	FA5-8274011N-WB
					3000K	24°	1300lm	900lm	FA5-8302411N-WB
						40°	1300lm	900lm	FA5-8304011N-WB
					4000K	24°	1400lm	950lm	FA5-8402411N-WB
						40°	1400lm	950lm	FA5-8404011N-WB
11 W	13 W	15 V	700 mA	80	2700K	24°	1200lm	850lm	FA5-8272411N-BB
						40°	1200lm	850lm	FA5-8274011N-BB
					3000K	24°	1300lm	900lm	FA5-8302411N-BB
						40°	1300lm	900lm	FA5-8304011N-BB
					4000K	24°	1400lm	950lm	FA5-8402411N-BB
						40°	1400lm	950lm	FA5-8404011N-BB
11 W	13 W	15 V	700 mA	80	2700K	24°	1200lm	950lm	FA5-8272411N-WS
						40°	1200lm	950lm	FA5-8274011N-WS
					3000K	24°	1300lm	1000lm	FA5-8302411N-WS
						40°	1300lm	1000lm	FA5-8304011N-WS
					4000K	24°	1400lm	1100lm	FA5-8402411N-WS
						40°	1400lm	1100lm	FA5-8404011N-WS
11 W	13 W	15 V	700 mA	80	2700K	24°	1200lm	950lm	FA5-8272411N-BS
						40°	1200lm	950lm	FA5-8274011N-BS
					3000K	24°	1300lm	1000lm	FA5-8302411N-BS
						40°	1300lm	1000lm	FA5-8304011N-BS
					4000K	24°	1400lm	1100lm	FA5-8402411N-BS
						40°	1400lm	1100lm	FA5-8404011N-BS


Code Remark: N=(NO Driver) F=(ON-OFF) P=(Phase Dim) A=(1-10V Dim) D=(DALI Dim)

NEKO / FUSION / FA10

Adjustable LED Downlight



22W | CRI90 CRI80 | 2700K 3000K 4000K | 24° 40° | OSRAM 50,000h@L80B10 | UGR < 10 | IP20 | 5 YEARS GUARANTEE | CB | CE | ETL Intertek




LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
22 W	24 W	30 V	700 mA	80	2700K	24°	2400lm	1600lm	FA10-8272422N-WB
						40°	2400lm	1600lm	FA10-8274022N-WB
					3000K	24°	2600lm	1800lm	FA10-8302422N-WB
						40°	2600lm	1800lm	FA10-8304022N-WB
					4000K	24°	2800lm	2000lm	FA10-8402422N-WB
						40°	2800lm	2000lm	FA10-8404022N-WB



Black Reflector

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
22 W	24 W	30 V	700 mA	80	2700K	24°	2400lm	1600lm	FA10-8272422N-BB
						40°	2400lm	1600lm	FA10-8274022N-BB
					3000K	24°	2600lm	1800lm	FA10-8302422N-BB
						40°	2600lm	1800lm	FA10-8304022N-BB
					4000K	24°	2800lm	2000lm	FA10-8402422N-BB
						40°	2800lm	2000lm	FA10-8404022N-BB




Black Reflector

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
22 W	24 W	30 V	700 mA	80	2700K	24°	2400lm	2000lm	FA10-8272422N-WS
						40°	2400lm	2000lm	FA10-8274022N-WS
					3000K	24°	2600lm	2100lm	FA10-8302422N-WS
						40°	2600lm	2100lm	FA10-8304022N-WS
					4000K	24°	2800lm	2300lm	FA10-8402422N-WS
						40°	2800lm	2300lm	FA10-8404022N-WS



Specular Reflector

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
22 W	24 W	30 V	700 mA	80	2700K	24°	2400lm	2000lm	FA10-8272422N-BS
						40°	2400lm	2000lm	FA10-8274022N-BS
					3000K	24°	2600lm	2100lm	FA10-8302422N-BS
						40°	2600lm	2100lm	FA10-8304022N-BS
					4000K	24°	2800lm	2300lm	FA10-8402422N-BS
						40°	2800lm	2300lm	FA10-8404022N-BS



Specular Reflector

Code Remark: N=(NO Driver) F=(ON-OFF) P=(Phase Dim) A=(1-10V Dim) D=(DALI Dim)


Project: Bvlgari Hotel, Shanghai, China



NEKO / FUSION / FW5
Wall Washer LED Downlight



11W | CRI90 CRI80 | 2700K 3000K 4000K | OSRAM 50,000h@L80B10 | IP 20 | 5 YEARS GUARANTEE | CB | CE | ETL Intertek





Matt Reflector



Matt Reflector


LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
11 W	13 W	15 V	700 mA	80	2700K	WW	1200lm	550lm	FW5-827WW11N-WM
					3000K	WW	1300lm	600lm	FW5-830WW11N-WM
					4000K	WW	1400lm	650lm	FW5-840WW11N-WM
11 W	13 W	15 V	700 mA	80	2700K	WW	1200lm	550lm	FW5-827WW11N-BM
					3000K	WW	1300lm	600lm	FW5-830WW11N-BM
					4000K	WW	1400lm	650lm	FW5-840WW11N-BM

Code Remark: N=(NO Driver) F=(ON-OFF) P=(Phase Dim) A=(1-10V Dim) D=(DALI Dim)

Trimless available



Trimless code for FW5-830WW11N-WM
FWT5-830WW11N-WM



Project: Private House, China




NEKO / FUSION / FW10

Wall Washer LED Downlight



22W | CRI90 CRI80 | 2700K 3000K 4000K | OSRAM 50,000h@L80B10 | IP 20 | 5 YEARS GUARANTEE | CB | CE | ETL Intertek





Matt Reflector



Matt Reflector


LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
22	W	24 W	30 V	700 mA	80	2700K	WW	2400lm	1100lm	FW10-827WW22N-WM
						3000K	WW	2600lm	1200lm	FW10-830WW22N-WM
						4000K	WW	2800lm	1300lm	FW10-840WW22N-WM
22	W	24 W	30 V	700 mA	80	2700K	WW	2400lm	1100lm	FW10-827WW22N-BM
						3000K	WW	2600lm	1200lm	FW10-830WW22N-BM
						4000K	WW	2800lm	1300lm	FW10-840WW22N-BM

Code Remark: N=(NO Driver) F=(ON-OFF) P=(Phase Dim) A=(1-10V Dim) D=(DALI Dim)


Trimless available




Trimless code for FW10-830WW22N-WM
FWTA-830WW22N-WM










sehr gute Wall Washer Beleuchtungsqualität
High quality wall washer illumination



NEKO / FUSION / FG5
General LED Downlight



11W | CRI90 CRI80 | 2700K 3000K 4000K | OSRAM 50,000h@L80B10 | IP 20 | 5 YEARS GUARANTEE | CB | CE | ETL Intertek





Black Reflector

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
11 W	13 W	15 V	700 mA	80	2700K	75°	1200lm	380lm	FG5-8277511N-WB
					3000K	75°	1300lm	400lm	FG5-8307511N-WB
					4000K	75°	1400lm	450lm	FG5-8407511N-WB



Black Reflector


LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
11 W	13 W	15 V	700 mA	80	2700K	75°	1200lm	350lm	FG5-8277511N-BB
					3000K	75°	1300lm	400lm	FG5-8307511N-BB
					4000K	75°	1400lm	450lm	FG5-8407511N-BB

Code Remark: N=(NO Driver) F=(ON-OFF) P=(Phase Dim) A=(1-10V Dim) D=(DALI Dim)

Trimless available




Trimless code for FG5-8307511N-WB
FGT5-8307511N-WB



NEKO / FUSION / FG10
General LED Downlight




22W | CRI90 CRI80 | 2700K 3000K 4000K | OSRAM 50,000h@L80B10 | IP 20 | 5 YEARS GUARANTEE | CB | CE | ETL Intertek





Black Reflector

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
22 W	24 W	30 V	700 mA	80	2700K	75°	2400lm	850lm	FG10-8277522N-WB
					3000K	75°	2600lm	900lm	FG10-8307522N-WB
					4000K	75°	2800lm	950lm	FG10-8407522N-WB



Black Reflector

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
22 W	24 W	30 V	700 mA	80	2700K	75°	2400lm	850lm	FG10-8277522N-BB
					3000K	75°	2600lm	900lm	FG10-8307522N-BB
					4000K	75°	2800lm	950lm	FG10-8407522N-BB

Code Remark: N=(NO Driver) F=(ON-OFF) P=(Phase Dim) A=(1-10V Dim) D=(DALI Dim)

Trimless available



Trimless code for FG10-8307522N-WB
FGTA-8307522N-WB




Project: Medical Office Celle Germany, Germany





Diversity Design with Adjustable Spot Light

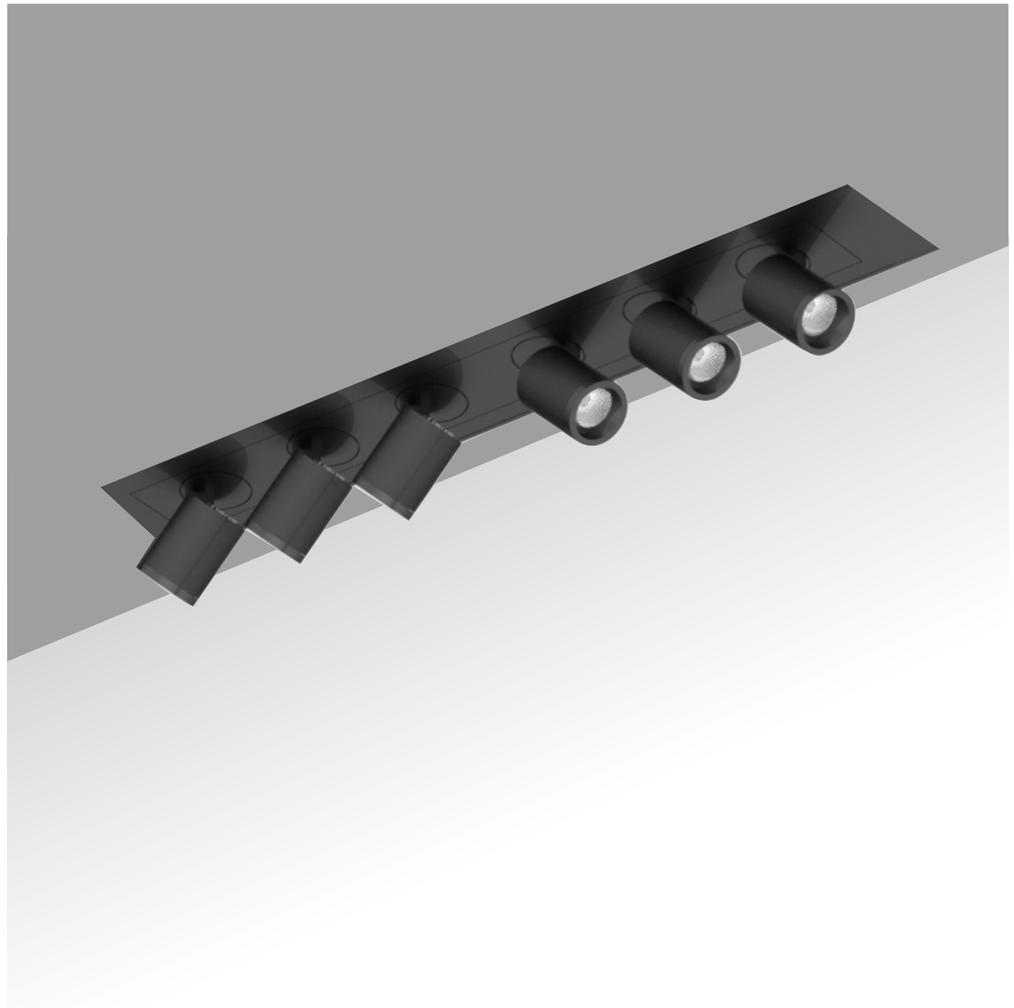

















NEKO / FUSION / FS1
Adjustable Spotlight



2W | CRI80 CRI90 | 2700K 3000K 4000K | 15° | 30° | OSRAM 50,000h@L80B10 | UGR < 19 | IP20 | 5 YEARS GUARANTEE | CB | CE | ETL Intertek





LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
2 W	3 W	3 V	700 mA	80	2700K	15°	220lm	160lm	FS1-8271502N-WN
						30°	220lm	160lm	FS1-8273002N-WN
					3000K	15°	250lm	170lm	FS1-8301502N-WN
						30°	250lm	170lm	FS1-8303002N-WN
					4000K	15°	280lm	180lm	FS1-8401502N-WN
						30°	280lm	180lm	FS1-8403002N-WN




2 W	3 W	3 V	700 mA	80	2700K	15°	220lm	160lm	FS1-8271502N-BN
						30°	220lm	160lm	FS1-8273002N-BN
					3000K	15°	250lm	170lm	FS1-8301502N-BN
						30°	250lm	170lm	FS1-8303002N-BN
					4000K	15°	280lm	180lm	FS1-8401502N-BN
						30°	280lm	180lm	FS1-8403002N-BN

Code Remark: N=(NO Driver) F=(ON-OFF) A=(1-10V Dim) D=(DALI Dim)

NEKO / FUSION / FS2
Adjustable Spotlight



4W | CRI80 CRI90 | 2700K 3000K 4000K | 15° | 30° | OSRAM 50,000h@L80B10 | UGR < 19 | IP20 | 5 YEARS GUARANTEE | CB | CE | ETL Intertek






LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
4 W	6 W	6 V	700 mA	80	2700K	15°	450lm	330lm	FS2-8271504N-WN
						30°	450lm	330lm	FS2-8273004N-WN
					3000K	15°	500lm	350lm	FS2-8301504N-WN
						30°	500lm	350lm	FS2-8303004N-WN
					4000K	15°	550lm	400lm	FS2-8401504N-WN
						30°	550lm	400lm	FS2-8403004N-WN



4 W	6 W	6 V	700 mA	80	2700K	15°	450lm	330lm	FS2-8271504N-BN
						30°	450lm	330lm	FS2-8273004N-BN
					3000K	15°	500lm	350lm	FS2-8301504N-BN
						30°	500lm	350lm	FS2-8303004N-BN
					4000K	15°	550lm	400lm	FS2-8401504N-BN
						30°	550lm	400lm	FS2-8403004N-BN

Code Remark: N=(NO Driver) F=(ON-OFF) P=(Phase Dim) A=(1-10V Dim) D=(DALI Dim)

NEKO / FUSION / FS3
Adjustable Spotlight



7W | CRI80 CRI90 | 2700K 3000K 4000K | 15° | 30° | OSRAM 50,000h@L80B10 | UGR < 19 | IP20 | 5 YEARS GUARANTEE | CB | CE | ETL Intertek

144x37 | 1-25mm Ceiling Thickness | 60 | 152.5x45

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
7 W	9 W	9 V	700 mA	80	2700K	15°	700lm	500lm	FS3-8271507N-WN
						30°	700lm	500lm	FS3-8273007N-WN
					3000K	15°	750lm	550lm	FS3-8301507N-WN
						30°	750lm	550lm	FS3-8303007N-WN
					4000K	15°	800lm	600lm	FS3-8401507N-WN
						30°	800lm	600lm	FS3-8403007N-WN



LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
7 W	9 W	9 V	700 mA	80	2700K	15°	700lm	500lm	FS3-8271507N-BN
						30°	700lm	500lm	FS3-8273007N-BN
					3000K	15°	750lm	550lm	FS3-8301507N-BN
						30°	750lm	550lm	FS3-8303007N-BN
					4000K	15°	800lm	600lm	FS3-8401507N-BN
						30°	800lm	600lm	FS3-8402507N-BN

Code Remark: N=(NO Driver) F=(ON-OFF) P=(Phase Dim) A=(1-10V Dim) D=(DALI Dim)


Trimless available



Trimless code for FS3-8301507N-WN
FST3-8301507N-WN

144x37 | 60 | 36 | 144x37

NEKO / FUSION / FS6
Adjustable Spotlight

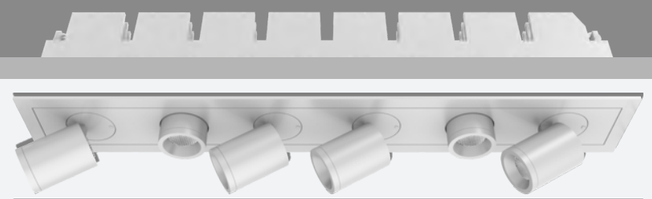

13W | CRI80 CRI90 | 2700K 3000K 4000K | 15° | 30° | OSRAM 50,000h@L80B10 | UGR < 19 | IP20 | 5 YEARS GUARANTEE | CB | CE | ETL Intertek

282x37 | 1-25mm Ceiling Thickness | 60 | 290x45

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
13 W	15 W	18 V	700 mA	80	2700K	15°	1400lm	1000lm	FS6-8271513N-WN
						30°	1400lm	1000lm	FS6-8273013N-WN
					3000K	15°	1500lm	1050lm	FS6-8301513N-WN
						30°	1500lm	1050lm	FS6-8303013N-WN
					4000K	15°	1600lm	1100lm	FS6-8401513N-WN
						30°	1600lm	1100lm	FS6-8403013N-WN



LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
13 W	15 W	18 V	700 mA	80	2700K	15°	1400lm	1000lm	FS6-8271513N-BN
						30°	1400lm	1000lm	FS6-8273013N-BN
					3000K	15°	1500lm	1050lm	FS6-8301513N-BN
						30°	1500lm	1050lm	FS6-8303013N-BN
					4000K	15°	1600lm	1100lm	FS6-8401513N-BN
						30°	1600lm	1100lm	FS6-8403013N-BN

Code Remark: N=(NO Driver) F=(ON-OFF) P=(Phase Dim) A=(1-10V Dim) D=(DALI Dim)

Trimless available



Trimless code for FS6-8301513N-WN
FST6-8301513N-WN

282x37 | 60 | 37 | 282x37

NEKO / FUSION / FF3-FS1
Adjustable Spotlight



9W | CRI80 CRI90 | 2700K 3000K 4000K | 24° 40° | OSRAM 50,000h@L80B10 | UGR < 19 | IP20 | 5 YEARS GUARANTEE | CB | CE | ETL Intertek

144x37 | 1-25mm Ceiling Thickness | 60 | 152.5x45



LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
9 W	11 W	12 V	700 mA	80	2700K	24°	900lm	650lm	FFS1-8272409N-WB
						40°	900lm	650lm	FFS1-8274009N-WB
					3000K	24°	1000lm	700lm	FFS1-8302409N-WB
						40°	1000lm	700lm	FFS1-8304009N-WB
					4000K	24°	1100lm	800lm	FFS1-8402409N-WB
						40°	1100lm	800lm	FFS1-8404009N-WB



9 W	11 W	12 V	700 mA	80	2700K	24°	900lm	650lm	FFS1-8272409N-BB
						40°	900lm	650lm	FFS1-8274009N-BB
					3000K	24°	1000lm	700lm	FFS1-8302409N-BB
						40°	1000lm	700lm	FFS1-8304009N-BB
					4000K	24°	1100lm	800lm	FFS1-8402409N-BB
						40°	1100lm	800lm	FFS1-8404009N-BB

Code Remark: N=(NO Driver) F=(ON-OFF) P=(Phase Dim) A=(1-10V Dim) D=(DALI Dim)

Trimless available



Trimless code for FFS1-8304009N-WN
FFS3-8304009N-WN

144x37 | 36 | 60 | 144x37

NEKO / FUSION / FF6-FS2
Adjustable Spotlight



17W | CRI80 CRI90 | 2700K 3000K 4000K | 24° 40° | OSRAM 50,000h@L80B10 | UGR < 19 | IP20 | 5 YEARS GUARANTEE | CB | CE | ETL Intertek

282x37 | 1-25mm Ceiling Thickness | 60 | 290x45




LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
17 W	19 W	24 V	700 mA	80	2700K	24°	1900lm	1300lm	FFS2-8272417N-WB
						40°	1900lm	1300lm	FFS2-8274017N-WB
					3000K	24°	2000lm	1400lm	FFS2-8302417N-WB
						40°	2000lm	1400lm	FFS2-8304017N-WB
					4000K	24°	2200lm	1500lm	FFS2-8402417N-WB
						40°	2200lm	1500lm	FFS2-8404017N-WB



17 W	19 W	24 V	700 mA	80	2700K	24°	1900lm	1300lm	FFS2-8272417N-BB
						4°0	1900lm	1300lm	FFS2-8274017N-BB
					3000K	24°	2000lm	1400lm	FFS2-8302417N-BB
						40°	2000lm	1400lm	FFS2-8304017N-BB
					4000K	24°	2200lm	1500lm	FFS2-8402417N-BB
						40°	2200lm	1500lm	FFS2-8404017N-BB

Code Remark: N=(NO Driver) F=(ON-OFF) P=(Phase Dim) A=(1-10V Dim) D=(DALI Dim)

Trimless available



Trimless code for FFS2-8304017N-WN
FFS4-8304017N-WN

282x37 | 37 | 60 | 282x37

NEKO / FUSION Fixed

Higher Efficiency Version

Flat Surface
Higher Lumen Output
More Beam Angles



FFE1-2W/ 220lm @CRI80 3000K



FFE3-6W/ 660lm @CRI80 3000K




FFE5-10W/ 1100lm @CRI80 3000K



FFE10-20W/ 2200lm @CRI80 3000K
FFE10-26W/ 2800lm @CRI80 3000K

Beam Angles

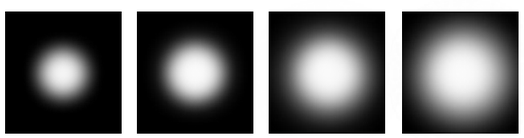

Spot 15° | Medium 24° | Wide 40° | Flood 55°

NEKO / FUSION Fixed / FFE1

Higher Efficiency Version

Flat Surface
Higher Lumen Output
More Beam Angles




2W | CRI90 CRI80 | 2700K 3000K 4000K | 15° 24° 40° 55° | OSRAM 50,000h@L80B10 | UGR < 19 | IP20 | 5 YEARS GUARANTEE | CB CE ETL Intertek

37x37 | 1-25mm Ceiling Thickness | 55 | 45x45



Black Reflector

LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
2	W	3 W	3 V	700 mA	80	2700K	15°	230lm	210lm	FFE1-8271502N-WB
							24°	230lm	210lm	FFE1-8272402N-WB
							40°	230lm	210lm	FFE1-8274002N-WB
							55°	230lm	210lm	FFE1-8275502N-WB
						3000K	15°	250lm	220lm	FFE1-8301502N-WB
							24°	250lm	220lm	FFE1-8302402N-WB
							40°	250lm	220lm	FFE1-8304002N-WB
							55°	250lm	220lm	FFE1-8305502N-WB
						4000K	15°	270lm	240lm	FFE1-8401502N-WB
							24°	270lm	240lm	FFE1-8402402N-WB
							40°	270lm	240lm	FFE1-8404002N-WB
							55°	270lm	240lm	FFE1-8405502N-WB



Black Reflector

LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
2	W	3 W	3 V	700 mA	80	2700K	15°	230lm	210lm	FFE1-8271502N-BB
							24°	230lm	210lm	FFE1-8272402N-BB
							40°	230lm	210lm	FFE1-8274002N-BB
							55°	230lm	210lm	FFE1-8275502N-BB
						3000K	15°	250lm	220lm	FFE1-8301502N-BB
							24°	250lm	220lm	FFE1-8302402N-BB
							40°	250lm	220lm	FFE1-8304002N-BB
							55°	250lm	220lm	FFE1-8305502N-BB
						4000K	15°	270lm	240lm	FFE1-8401502N-BB
							24°	270lm	240lm	FFE1-8402402N-BB
							40°	270lm	240lm	FFE1-8404002N-BB
							55°	270lm	240lm	FFE1-8405502N-BB

Code Remark: N=(NO Driver) F=(ON-OFF) A=(1-10V Dim) D=(DALI Dim)


NEKO / FUSION Fixed / FFE3

Higher Efficiency Version

Flat Surface
Higher Lumen Output
More Beam Angles



6W | CRI90 CRI80 | 2700K 3000K 4000K | 15° 24° 40° 55° | OSRAM 50,000h@L80B10 | UGR < 19 | IP20 | 5 YEARS GUARANTEE | CB | CE | ETL Intertek





Black Reflector

LED	Power System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
6 W	8 W	9 V	700 mA	80	2700K	15°	700lm	630lm	FFE3-8271506N-WB
						24°	700lm	630lm	FFE3-8272406N-WB
						40°	700lm	630lm	FFE3-8274006N-WB
						55°	700lm	630lm	FFE3-8275506N-WB
					3000K	15°	750lm	660lm	FFE3-8301506N-WB
						24°	750lm	660lm	FFE3-8302406N-WB
						40°	750lm	660lm	FFE3-8304006N-WB
						55°	750lm	660lm	FFE3-8305506N-WB
					4000K	15°	800lm	720lm	FFE3-8401506N-WB
						24°	800lm	720lm	FFE3-8402406N-WB
						40°	800lm	720lm	FFE3-8404006N-WB
						55°	800lm	720lm	FFE3-8405506N-WB



Black Reflector

LED	Power System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
6 W	8 W	9 V	700 mA	80	2700K	15°	700lm	630lm	FFE3-8271506N-BB
						24°	700lm	630lm	FFE3-8272406N-BB
						40°	700lm	630lm	FFE3-8274006N-BB
						55°	700lm	630lm	FFE3-8275506N-BB
					3000K	15°	750lm	660lm	FFE3-8301506N-BB
						24°	750lm	660lm	FFE3-8302406N-BB
						40°	750lm	660lm	FFE3-8304006N-BB
						55°	750lm	660lm	FFE3-8305506N-BB
					4000K	15°	800lm	720lm	FFE3-8401506N-BB
						24°	800lm	720lm	FFE3-8402406N-BB
						40°	800lm	720lm	FFE3-8404006N-BB
						55°	800lm	720lm	FFE3-8405506N-BB

Code Remark: N=(NO Driver) F=(ON-OFF) A=(1-10V Dim) D=(DALI Dim)


NEKO / FUSION Fixed / FFE5

Higher Efficiency Version

Flat Surface
Higher Lumen Output
More Beam Angles



10W | CRI90 CRI80 | 2700K 3000K 4000K | 15° 24° 40° 55° | OSRAM 50,000h@L80B10 | UGR < 19 | IP20 | 5 YEARS GUARANTEE | CB | CE | ETL Intertek





Black Reflector

LED	Power System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
10 W	12 W	15 V	700 mA	80	2700K	15°	1200lm	1000lm	FFE5-8271510N-WB
						24°	1200lm	1000lm	FFE5-8272410N-WB
						40°	1200lm	1000lm	FFE5-8274010N-WB
						55°	1200lm	1000lm	FFE5-8275510N-WB
					3000K	15°	1300lm	1100lm	FFE5-8301510N-WB
						24°	1300lm	1100lm	FFE5-8302410N-WB
						40°	1300lm	1100lm	FFE5-8304010N-WB
						55°	1300lm	1100lm	FFE5-8305510N-WB
					4000K	15°	1400lm	1200lm	FFE5-8401510N-WB
						24°	1400lm	1200lm	FFE5-8402410N-WB
						40°	1400lm	1200lm	FFE5-8404010N-WB
						55°	1400lm	1200lm	FFE5-8405510N-WB



Black Reflector

LED	Power System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
10 W	12 W	15 V	700 mA	80	2700K	15°	1200lm	1000lm	FFE5-8271510N-BB
						24°	1200lm	1000lm	FFE5-8272410N-BB
						40°	1200lm	1000lm	FFE5-8274010N-BB
						55°	1200lm	1000lm	FFE5-8275510N-BB
					3000K	15°	1300lm	1100lm	FFE5-8301510N-BB
						24°	1300lm	1100lm	FFE5-8302410N-BB
						40°	1300lm	1100lm	FFE5-8304010N-BB
						55°	1300lm	1100lm	FFE5-8305510N-BB
					4000K	15°	1400lm	1200lm	FFE5-8401510N-BB
						24°	1400lm	1200lm	FFE5-8402410N-BB
						40°	1400lm	1200lm	FFE5-8404010N-BB
						55°	1400lm	1200lm	FFE5-8405510N-BB

Code Remark: N=(NO Driver) F=(ON-OFF) A=(1-10V Dim) D=(DALI Dim)

NEKO / FUSION Fixed / FFE10

Higher Efficiency Version

Flat Surface
Higher Lumen Output
More Beam Angles


NEW



20W 26W | CRI90 CRI80 | 2700K 3000K 4000K | 15° 24° 40° 55° | OSRAM 50,000h@L80B10 | UGR < 19 | IP20 | 5 YEARS GUARANTEE | CB | CE | ETL Intertek


282x37 | 1-25mm Ceiling Thickness | 55 | 290x45

LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
20	W	29 W	29 V	700 mA	80	2700K	15°	2300lm	2100lm	FFEA-8271520N-WB
							24°	2300lm	2100lm	FFEA-8272420N-WB
							40°	2300lm	2100lm	FFEA-8274020N-WB
							55°	2300lm	2100lm	FFEA-8275520N-WB
						3000K	15°	2500lm	2200lm	FFEA-8301520N-WB
							24°	2500lm	2200lm	FFEA-8302420N-WB
							40°	2500lm	2200lm	FFEA-8304020N-WB
							55°	2500lm	2200lm	FFEA-8305520N-WB
						4000K	15°	2700lm	2400lm	FFEA-8401520N-WB
							24°	2700lm	2400lm	FFEA-8402420N-WB
							40°	2700lm	2400lm	FFEA-8404020N-WB
							55°	2700lm	2400lm	FFEA-8405520N-WB
26	W	29 W	29 V	900 mA	80	2700K	15°	3000lm	2600lm	FFEA-8271526N-WB
							24°	3000lm	2600lm	FFEA-8272426N-WB
							40°	3000lm	2600lm	FFEA-8274026N-WB
							55°	3000lm	2600lm	FFEA-8275526N-WB
						3000K	15°	3200lm	2800lm	FFEA-8301526N-WB
							24°	3200lm	2800lm	FFEA-8302426N-WB
							40°	3200lm	2800lm	FFEA-8304026N-WB
							55°	3200lm	2800lm	FFEA-8305526N-WB
						4000K	15°	3500lm	3000lm	FFEA-8401526N-WB
							24°	3500lm	3000lm	FFEA-8402426N-WB
							40°	3500lm	3000lm	FFEA-8404026N-WB
							55°	3500lm	3000lm	FFEA-8405526N-WB



Black Reflector


LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
20	W	29 W	29 V	700 mA	80	2700K	15°	2300lm	2100lm	FFEA-8271520N-BB
							24°	2300lm	2100lm	FFEA-8272420N-BB
							40°	2300lm	2100lm	FFEA-8274020N-BB
							55°	2300lm	2100lm	FFEA-8275520N-BB
						3000K	15°	2500lm	2200lm	FFEA-8301520N-BB
							24°	2500lm	2200lm	FFEA-8302420N-BB
							40°	2500lm	2200lm	FFEA-8304020N-BB
							55°	2500lm	2200lm	FFEA-8305520N-BB
						4000K	15°	2700lm	2400lm	FFEA-8401520N-BB
							24°	2700lm	2400lm	FFEA-8402420N-BB
							40°	2700lm	2400lm	FFEA-8404020N-BB
							55°	2700lm	2400lm	FFEA-8405520N-BB
26	W	29 W	29 V	700 mA	80	2700K	15°	3000lm	2600lm	FFEA-8271526N-BB
							24°	3000lm	2600lm	FFEA-8272426N-BB
							40°	3000lm	2600lm	FFEA-8274026N-BB
							55°	3000lm	2600lm	FFEA-8275526N-BB
						3000K	15°	3200lm	2800lm	FFEA-8301526N-BB
							24°	3200lm	2800lm	FFEA-8302426N-BB
							40°	3200lm	2800lm	FFEA-8304026N-BB
							55°	3200lm	2800lm	FFEA-8305526N-BB
						4000K	15°	3500lm	3000lm	FFEA-8401526N-BB
							24°	3500lm	3000lm	FFEA-8402426N-BB
							40°	3500lm	3000lm	FFEA-8404026N-BB
							55°	3500lm	3000lm	FFEA-8405526N-BB



Black Reflector

Code Remark: N=(NO Driver) F=(ON-OFF) A=(1-10V Dim) D=(DALI Dim)

Project: Eggen Restaurant, Norway

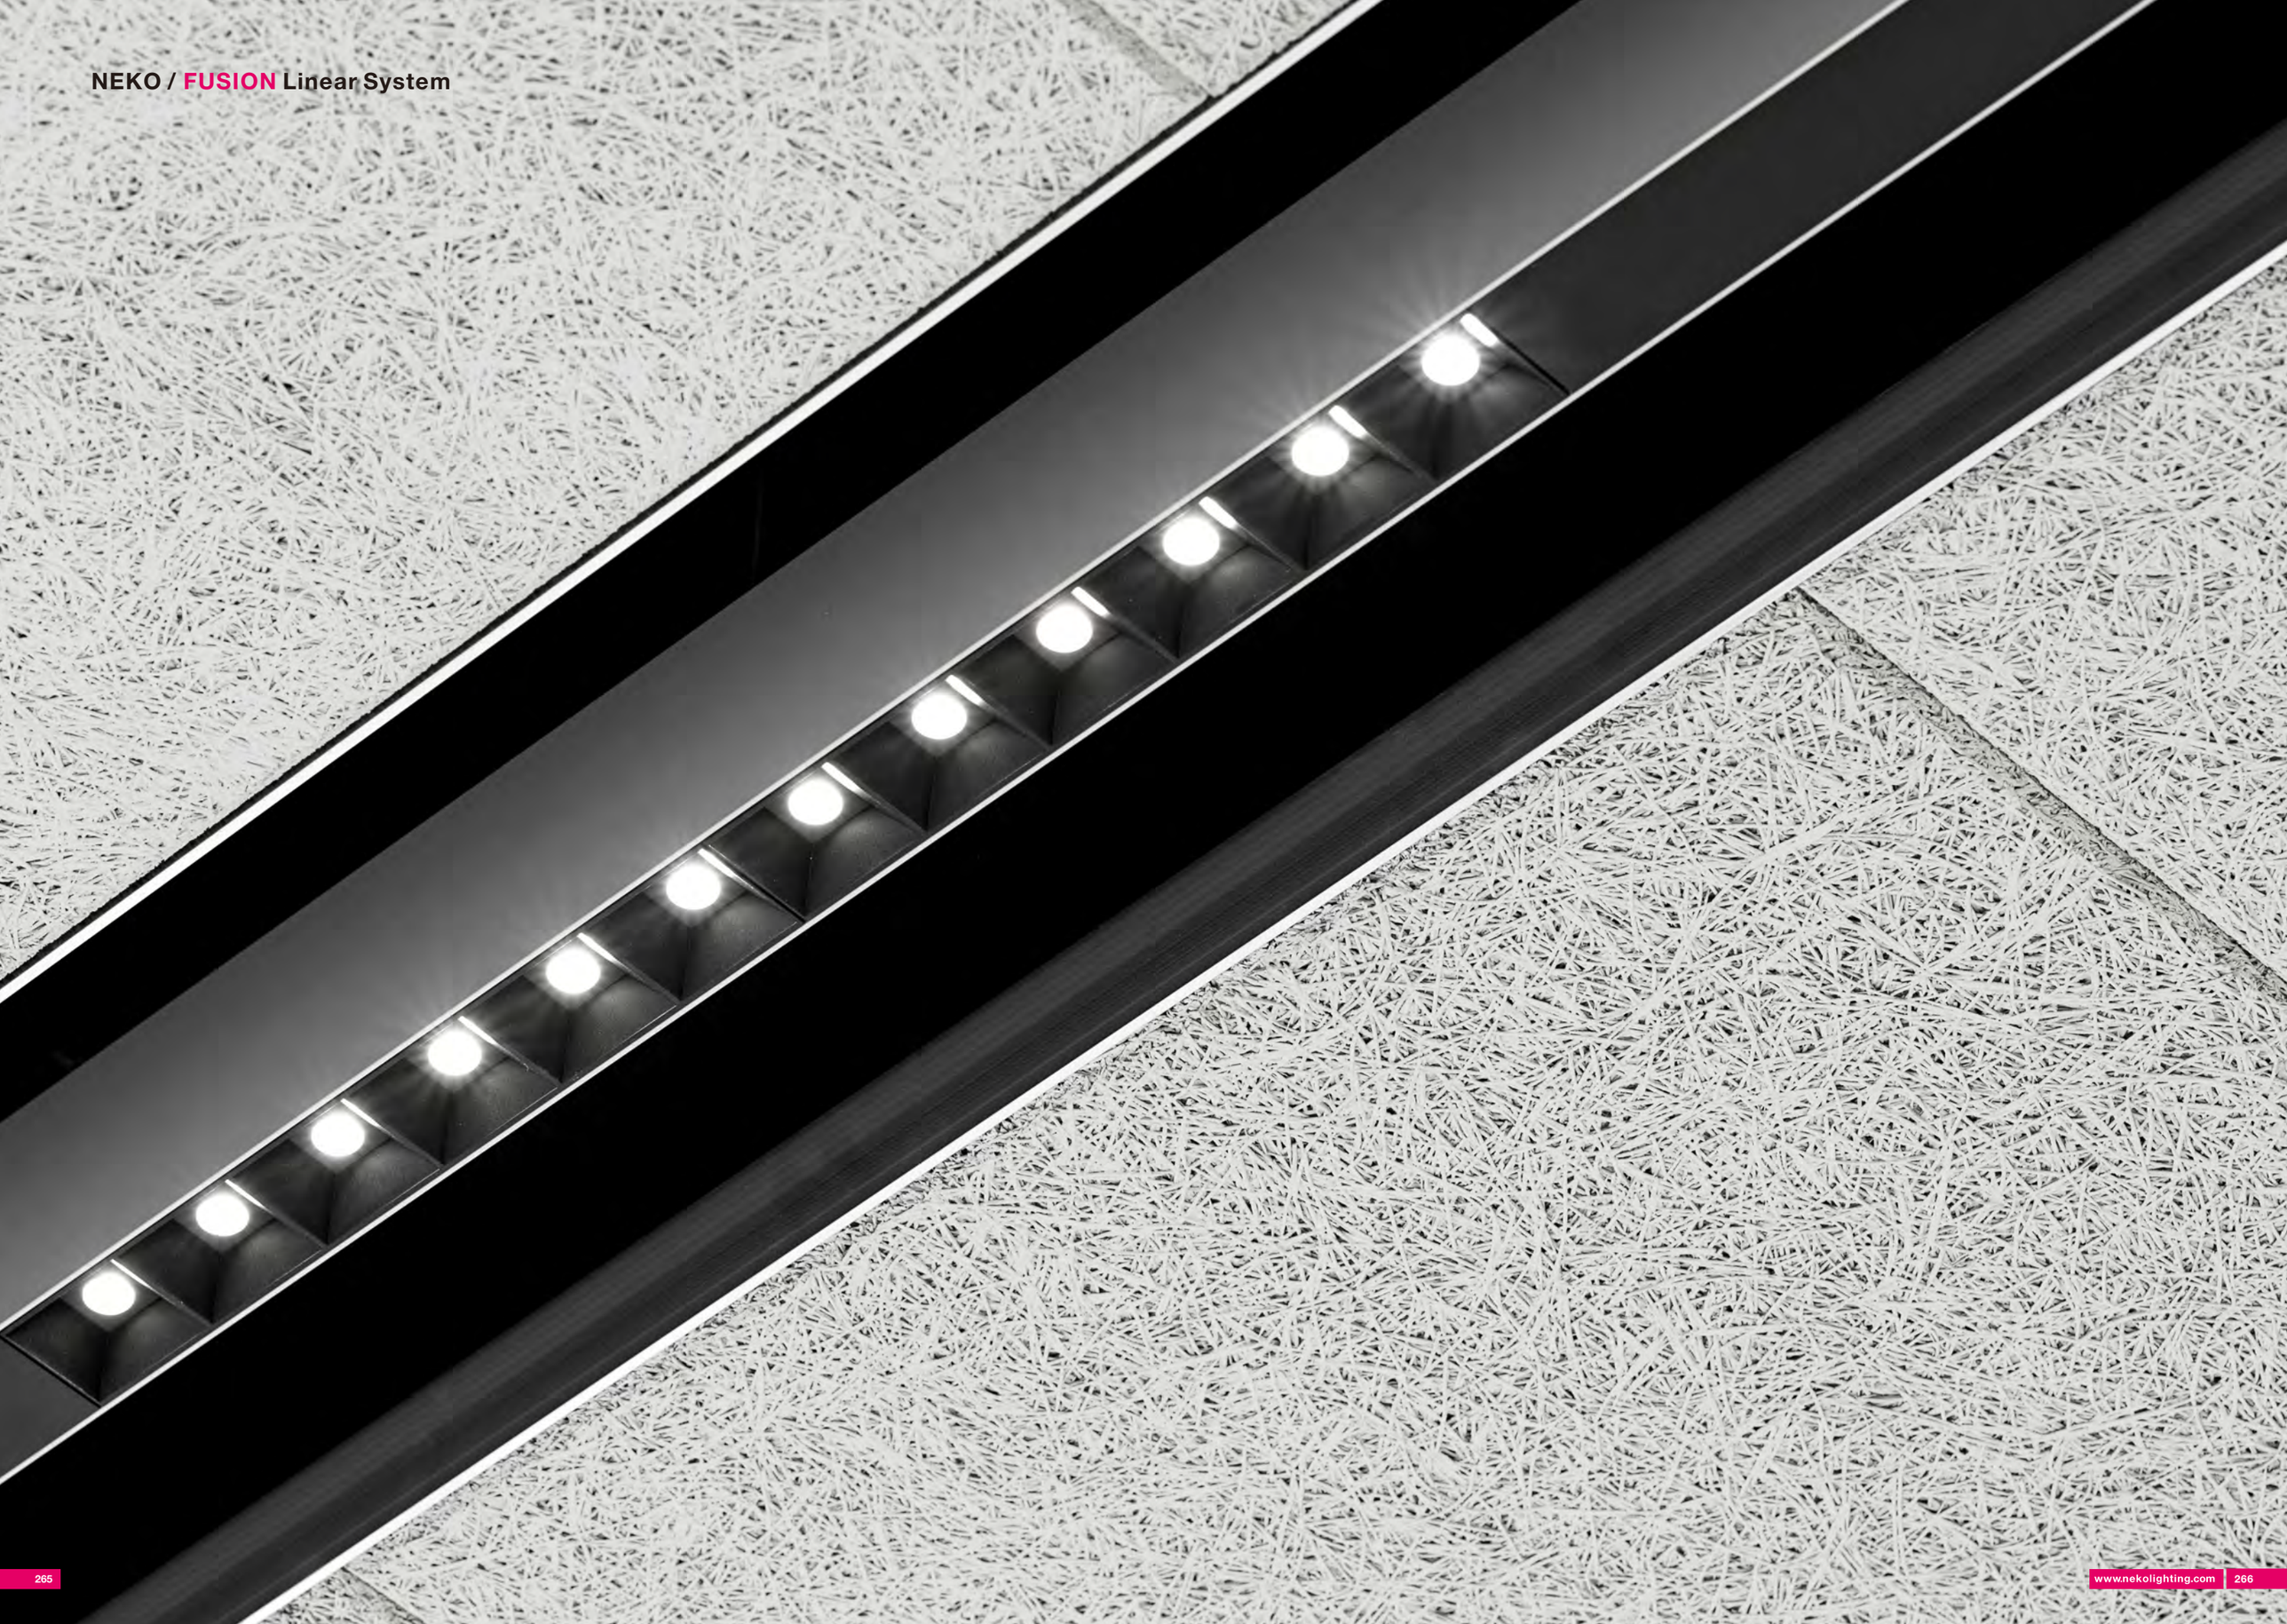


NEKO / FUSION Linear System
Project: Skyline Hill, Germany

NEKO / FUSION Linear System
Project: Office Shire House, U.K.

NEKO / FUSION Linear System
Project: Office Les Macons Parisiens, France


NEKO / FUSION Linear System
With FUSION Downlight Module

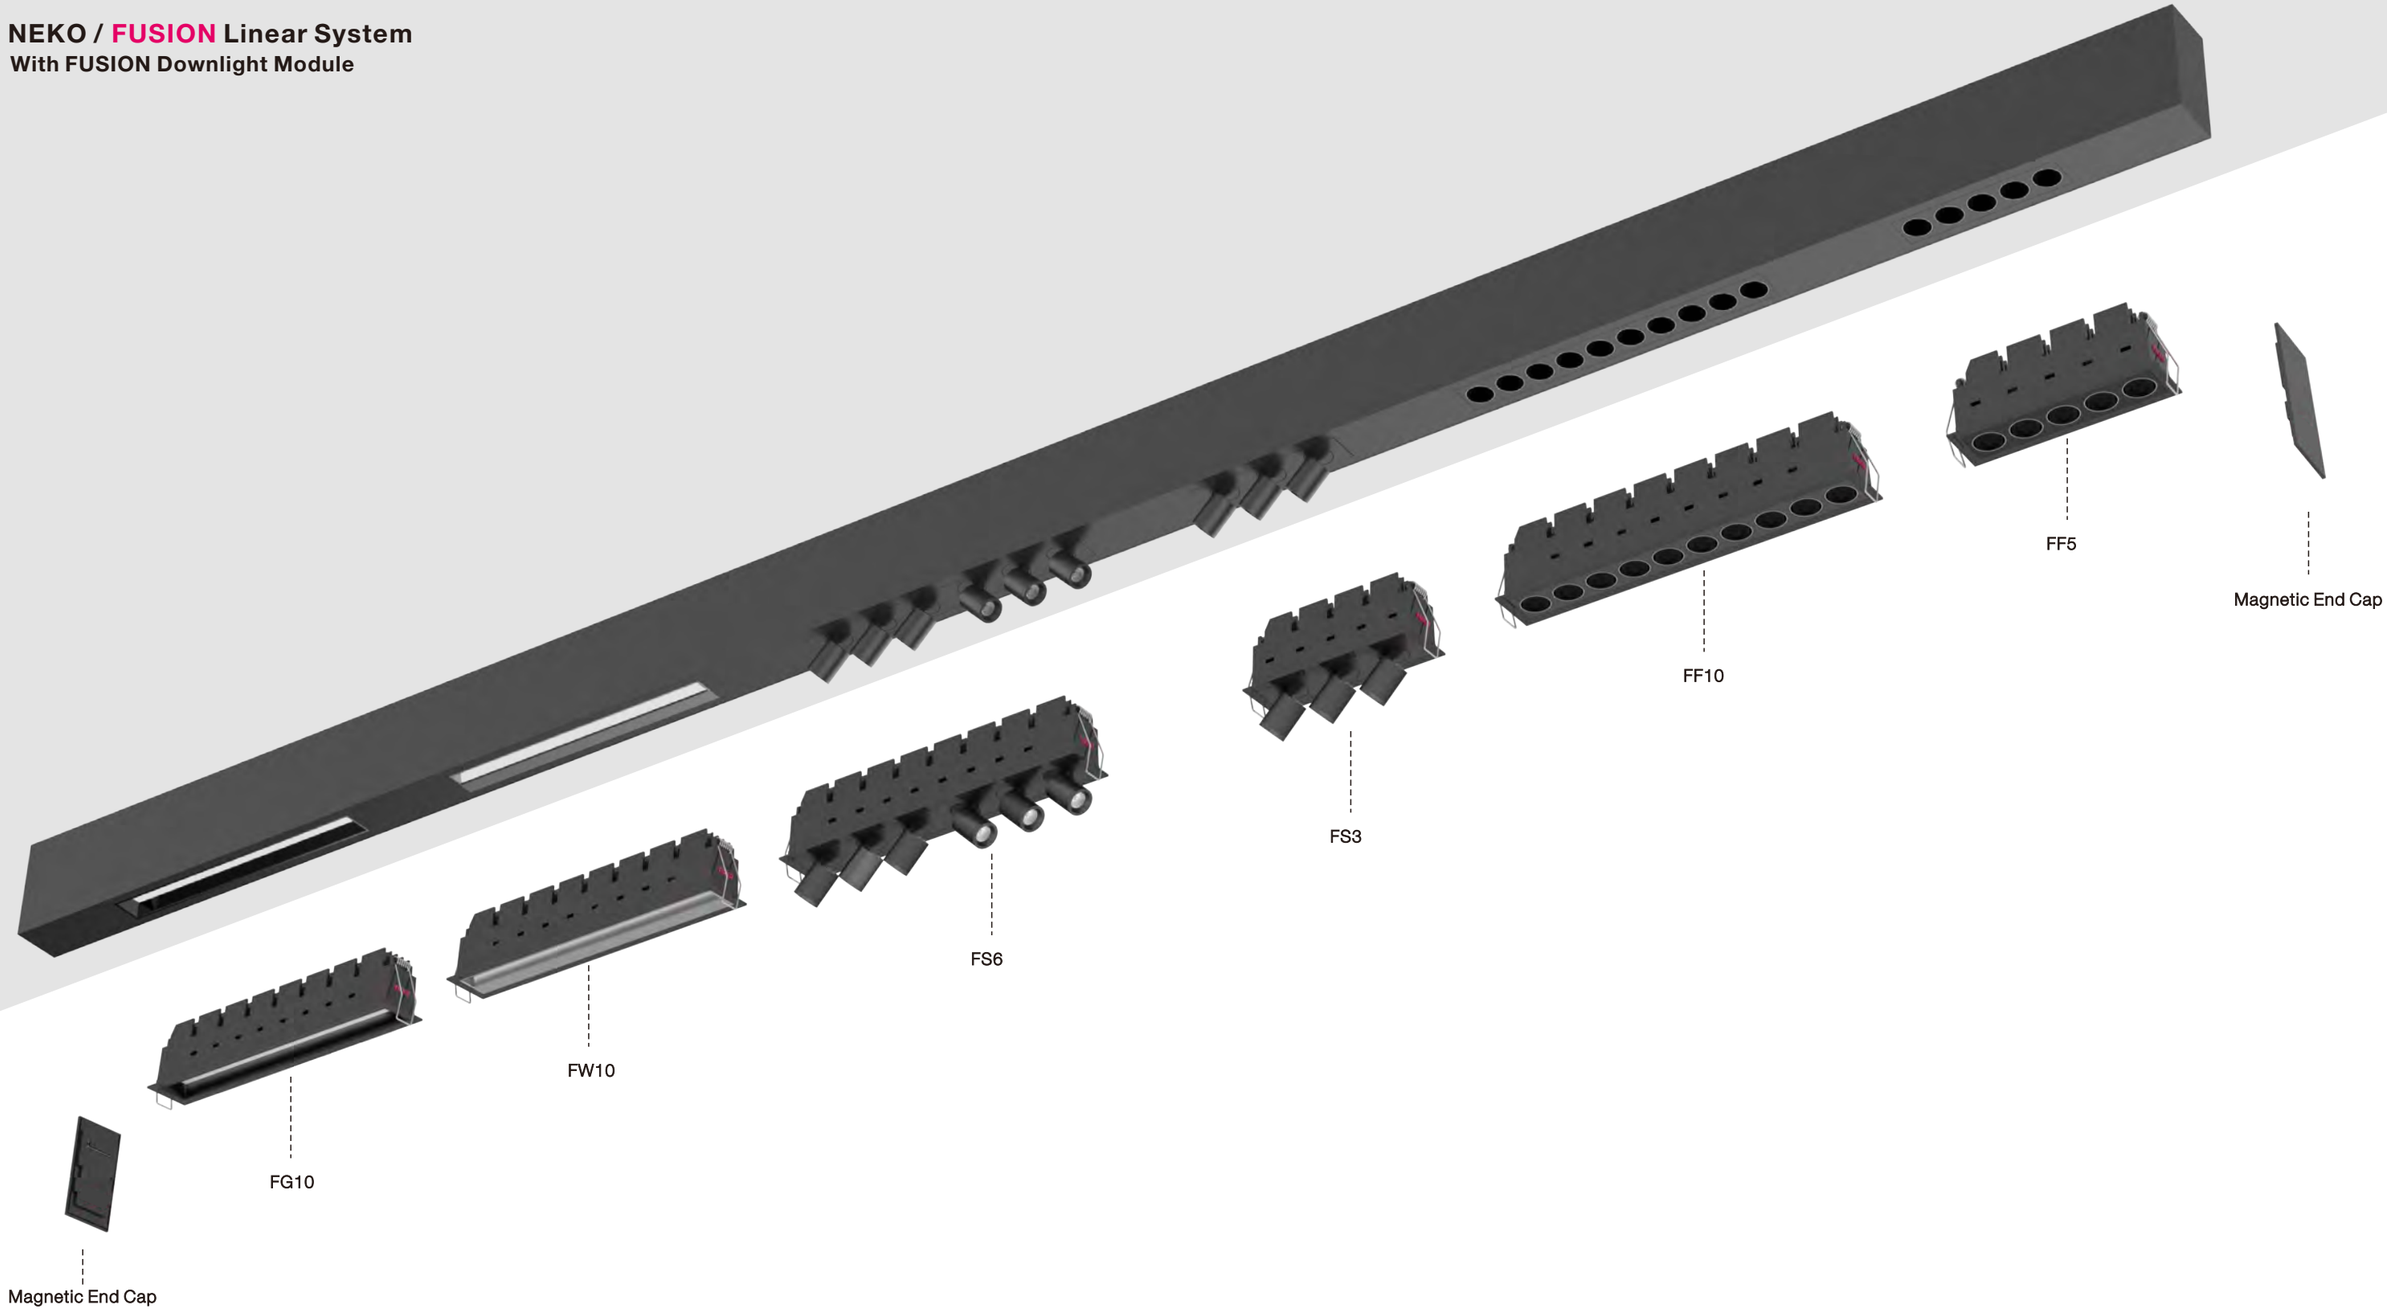

- Aufbau-, Einbau- und Pendelleuchte.
- Einfache und unbegrenzte Längenbestimmung, nahtlose Verbindung.
- Das Profil kann als einzelne, allgemeine, wall washer oder mit verschiedenen und unterschiedlichen Modulen bestückt werden.
- Modulares Profildesign ohne sichtbare Schrauben, Standardlänge 1,2 m & 1,5 m.
- Aluminiumprofil, Farbwahl weiß / schwarz .
- Pendelleuchte mit 2000mm Seilabhängung, werkzeuglose Höhenverstellung.
- Hoher Sehkomfort, UGR <19.
- LED 3000K / 4000K, Binning <3 step MacAdam, CRI 80/90.

- Suspended, surface mounted and recessed mounted luminaires.
- Easy and unlimited length adjustment, seamless connection.
- Can be used as single fixed / general light / spotlight / wall washer / MIXED.
- Modular profile design with no visible screws, standard length 1.2m & 1.5m.
- Aluminum profile, color choices white / black .
- Suspended luminaire with 2000mm cable suspension, tool free height adjustment.
- High visual comfort, UGR<19.
- LED 3000K/ 4000K, binning≤ 3 step MacAdam, CRI 80/ 90.


NEKO / FUSION Linear System
With Linear Light Module

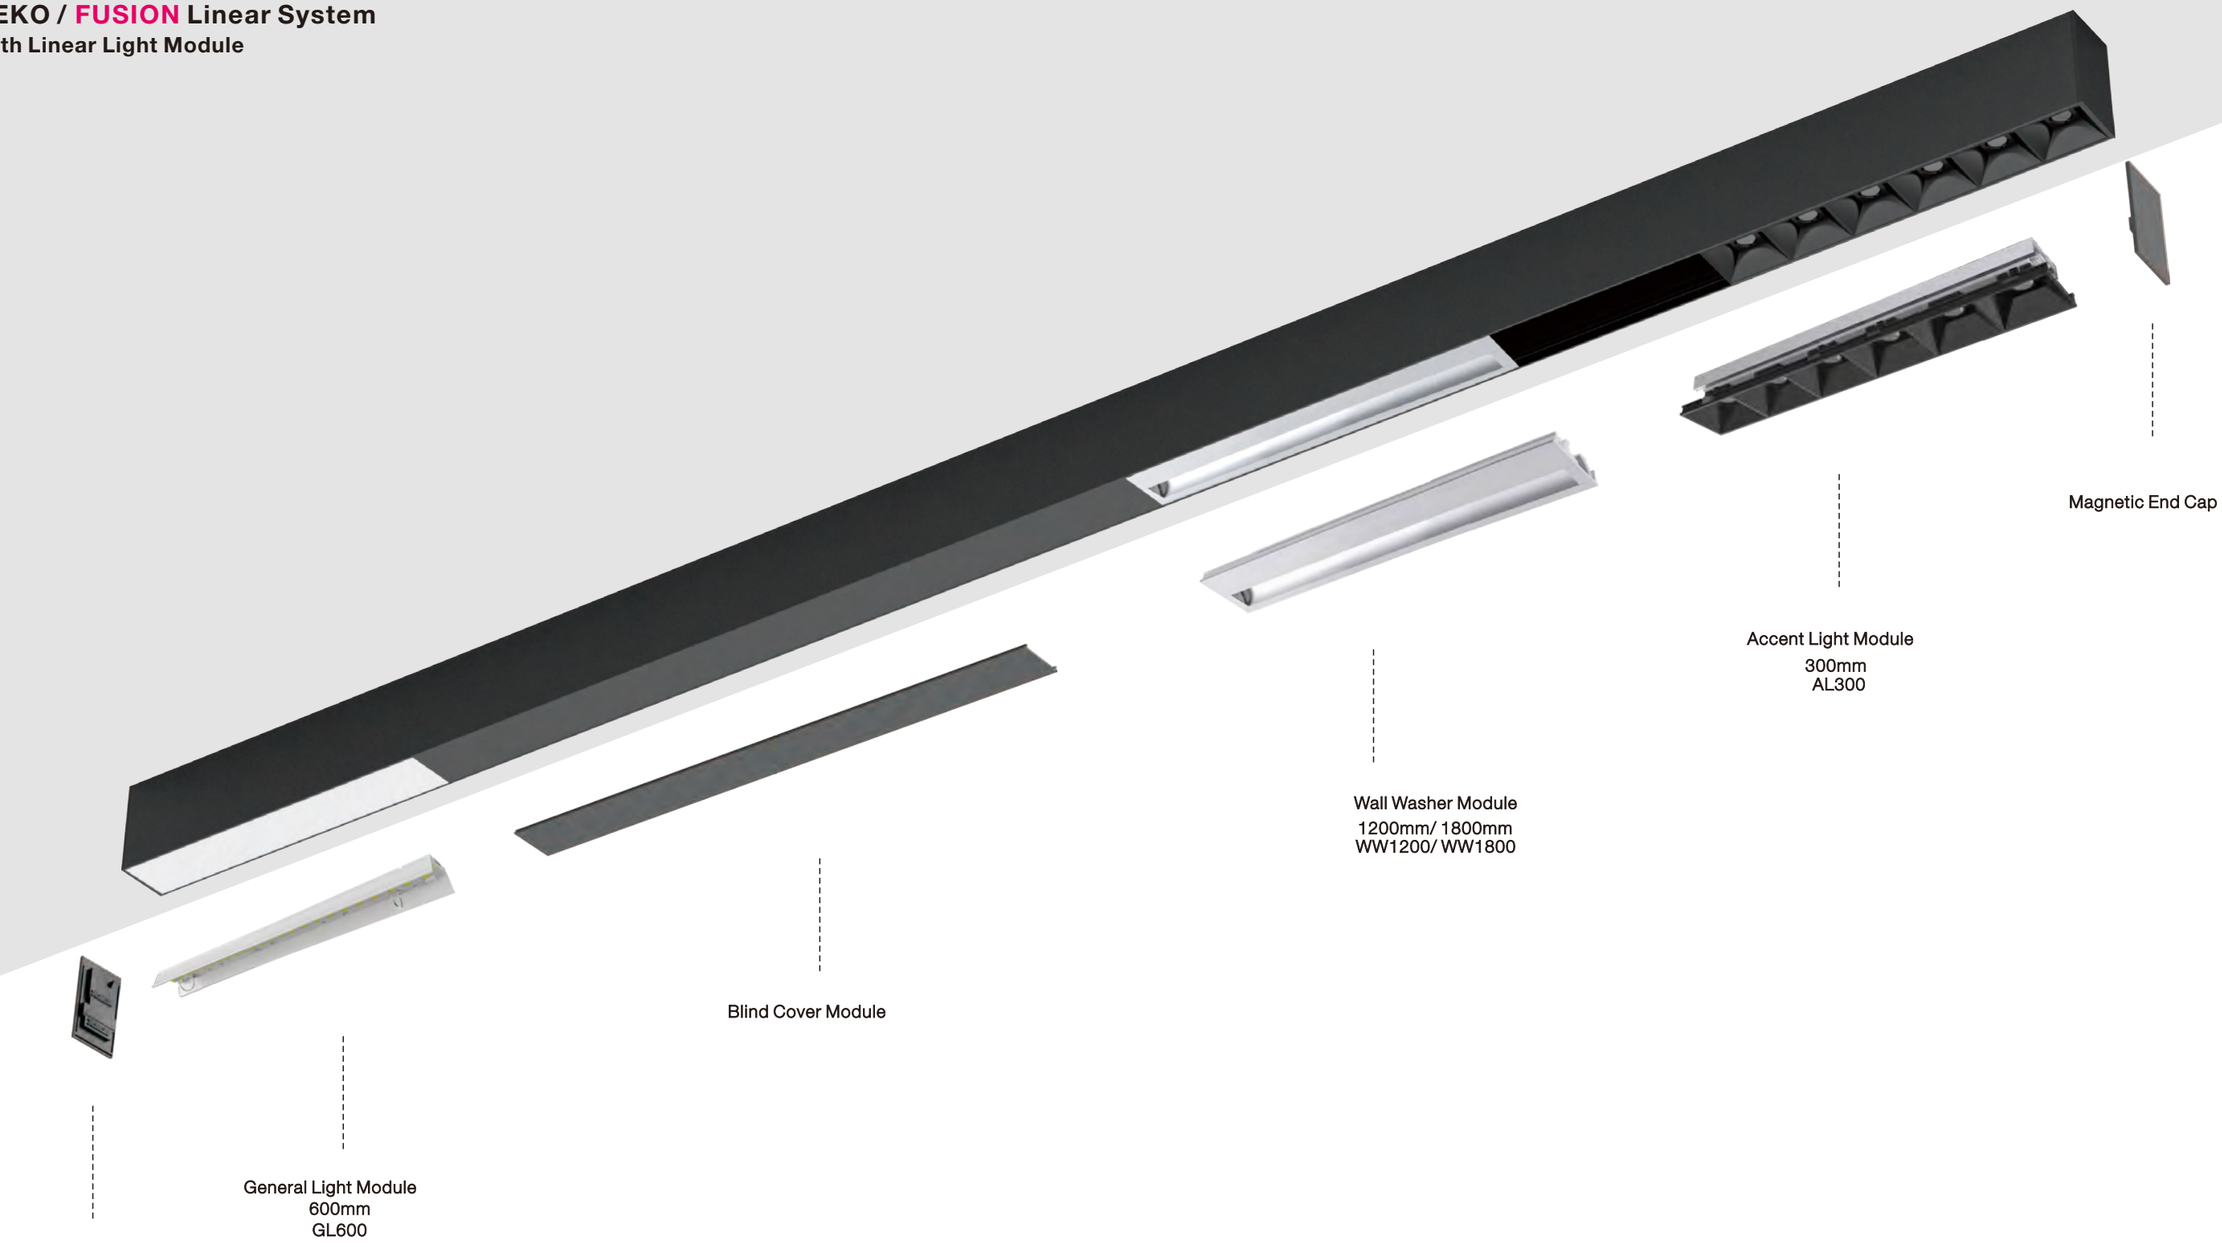

- Schönes Profilsystem aus Aluminiumdruckguss und mit 50 mm Breite
- Verschiedenste Lichtmodule für beste und individuelle Lichtlösungen
- Akzent-, Allgemein- und Spotbeleuchtung – auch Wall washer Modul vorhanden
- Komplett werkzeuglose Montage
- Standard und kundenspezifische Längen
- Magnetische Endkappen – keine Schrauben sichtbar


- Profile system made of extruded aluminium with 50mm width.
- Various lighting modules with multiple lighting applications.
- General light, accent light, wall washer and spotlight module for choice.
- Tool-free inserts mounting by clip-in mechanism.
- Standard and customized length of module and cover for high precise system.
- Magnetic end cap without fixing scr ews.

NEKO / FUSION Linear System

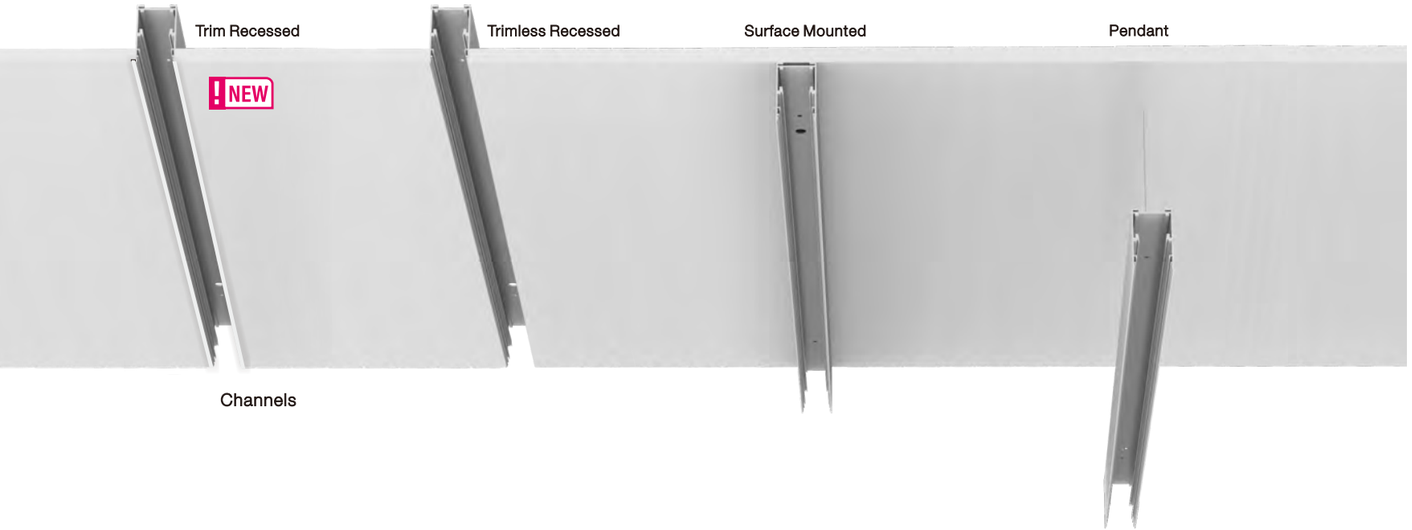


Channels

Corner Modules and Linear Connector

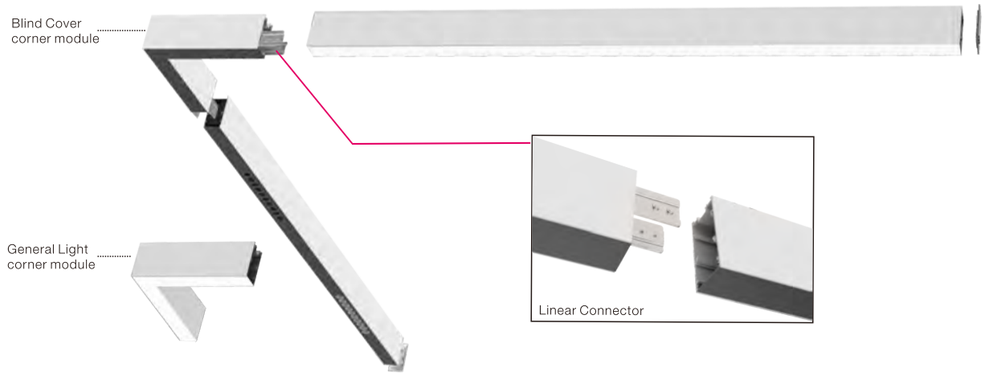

Inserts

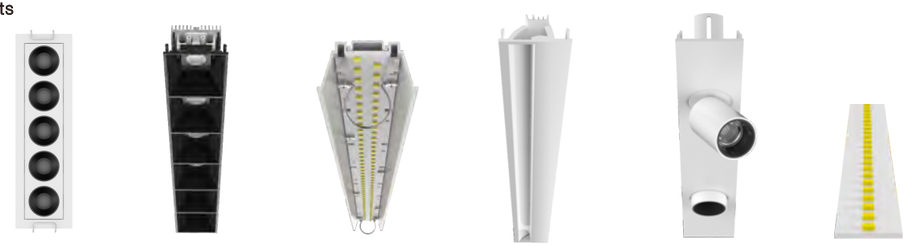

FUSION Module (FF/ FW/ FS/ FG)
Accent Light Module (300mm)
General Light Module (600mm)
Wall Washer Module (1200mm/1800mm)
Spot Light Module (300mm)
Uplight Module (1070mm/ 1605mm)

Covers




Blind Cover
Opal Cover
Flexible Opal Cover

Mounting Kits



Recessed Mounting Kit (2pcs/ Set)
Surface Mounted Kit (2pcs/ Set)
Pendant Kit (Ceiling Box in White/ Black)


System details

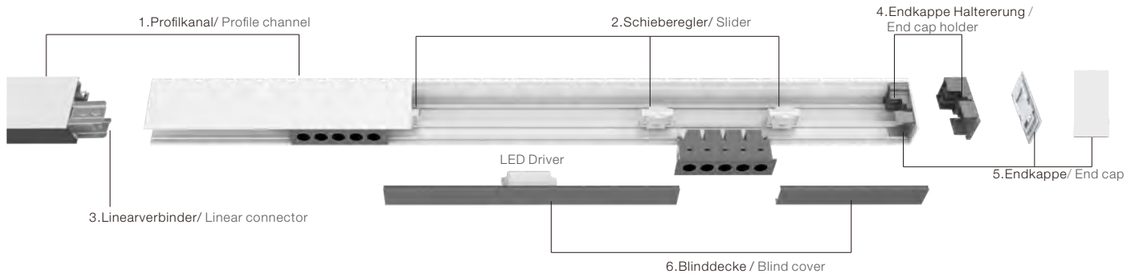



Intelligentes Linear-Profildesign
Einfachste Installation der Fusion-Einbauleuchte in den Profilkanal

Smart linear profile design
Easy to install fusion downlight into profile channel

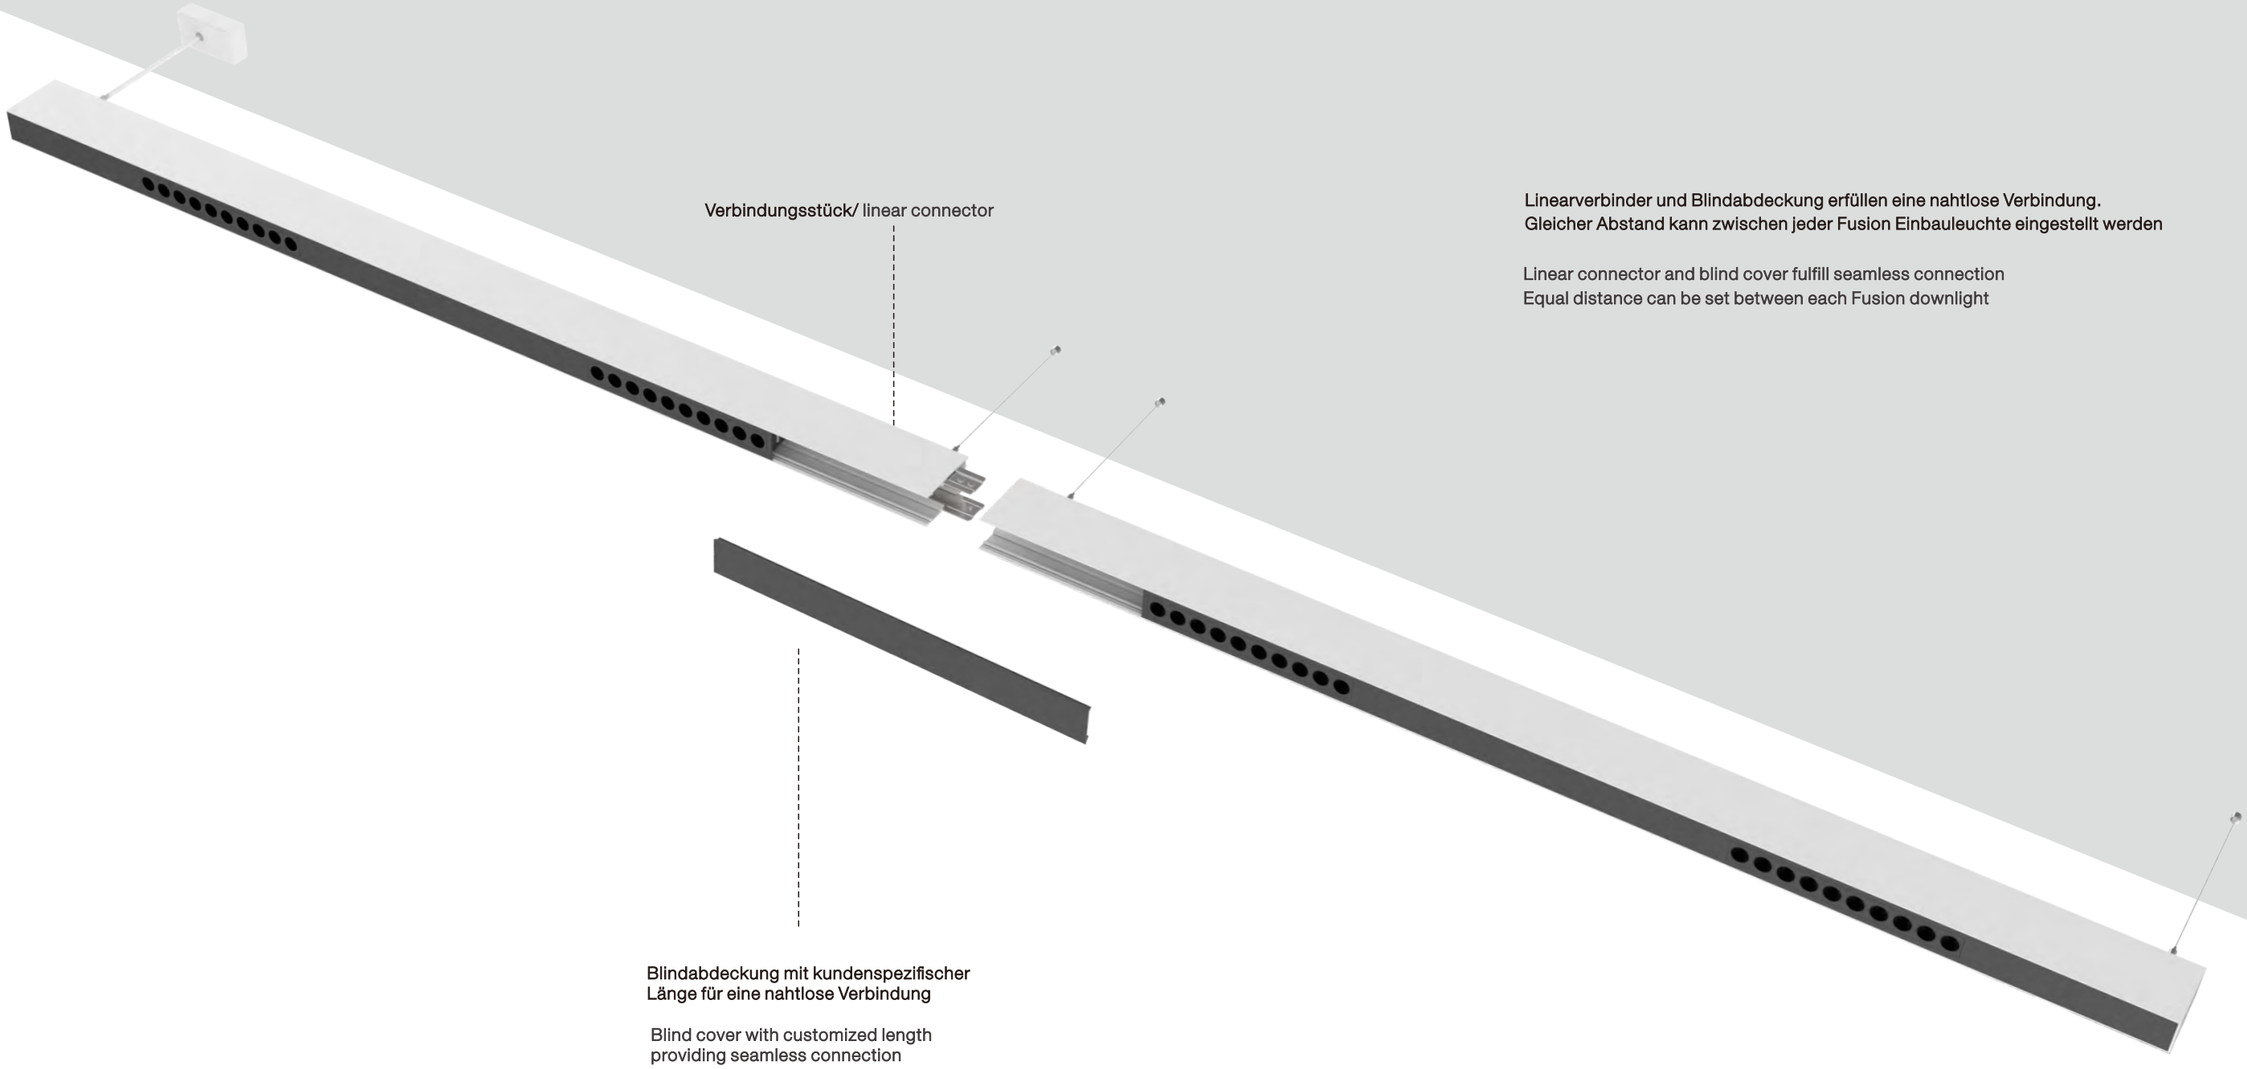


Linearverbinder und Blindabdeckung erfüllen eine nahtlose Verbindung.
Gleicher Abstand kann zwischen jeder Fusion Einbauleuchte eingestellt werden

Linear connector and blind cover fulfill seamless connection
Equal distance can be set between each Fusion downlight

Blindabdeckung mit kundenspezifischer
Länge für eine nahtlose Verbindung

Blind cover with customized length
providing seamless connection



NEKO / FUSION Linear System

Linear Light module


General Light Module





GL600

Linkable extruded aluminium
for continuous linear light
594mm for different system
Opal cover can be customized length



11W | CRI80 CRI90 | 2700K 3000K 4000K | 105° | SAMSUNG 50,000h@L80B10 | 5 YEARS GUARANTEE | CB CE




LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Model
11 W	13 W	46V	250 mA	80	2700K	105°	1600lm	1200lm	GL600-11W-827-105°N
					3000K	105°	1700lm	1300lm	GL600-11W-830-105°N
					4000K	105°	1800lm	1400lm	GL600-11W-840-105°N
				90	2700K	105°	1500lm	1100lm	GL600-11W-927-105°N
					3000K	105°	1600lm	1200lm	GL600-11W-930-105°N
					4000K	105°	1700lm	1300lm	GL600-11W-940-105°N
16 W	18 W	46V	350 mA	80	2700K	105°	2100lm	1700lm	GL600-16W-827-105°N
					3000K	105°	2200lm	1800lm	GL600-16W-830-105°N
					4000K	105°	2400lm	1900lm	GL600-16W-840-105°N
				90	2700K	105°	1900lm	1600lm	GL600-16W-927-105°N
					3000K	105°	2000lm	1700lm	GL600-16W-930-105°N
					4000K	105°	2200lm	1900lm	GL600-16W-940-105°N

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

Light Distribution

3000K



NEKO / FUSION Linear System

Linear Light module


Wallwasher Module






WW1200/ WW1800

Uniform wall washer effect



22W 32W 48W | CRI80 CRI90 | 2700K 3000K 4000K | SAMSUNG 50,000h@L80B10 | 5 YEARS GUARANTEE | CB CE




LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Model
22 W	26 W	46V	500 mA	80	2700K	WW	3200lm	1700lm	WW1200-22W-827N
					3000K	WW	3400lm	1800lm	WW1200-22W-830N
					4000K	WW	3600lm	1900lm	WW1200-22W-840N
				90	2700K	WW	3000lm	1500lm	WW1200-22W-927N
					3000K	WW	3200lm	1600lm	WW1200-22W-930N
					4000K	WW	3400lm	1700lm	WW1200-22W-940N
32 W	36 W	46V	700 mA	80	2700K	WW	4600lm	2300lm	WW1200-32W-827N
					3000K	WW	4800lm	2500lm	WW1200-32W-830N
					4000K	WW	5000lm	2700lm	WW1200-32W-840N
				90	2700K	WW	4000lm	2000lm	WW1200-32W-927N
					3000K	WW	4200lm	2200lm	WW1200-32W-930N
					4000K	WW	4400lm	2400lm	WW1200-32W-940N
32 W	36 W	46V	700 mA	80	2700K	WW	4600lm	2500lm	WW1800-32W-827N
					3000K	WW	4800lm	2700lm	WW1800-32W-830N
					4000K	WW	5000lm	2900lm	WW1800-32W-840N
				90	2700K	WW	4000lm	2100lm	WW1800-32W-927N
					3000K	WW	4200lm	2300lm	WW1800-32W-930N
					4000K	WW	4400lm	2500lm	WW1800-32W-940N
48 W	52 W	46V	700+350 mA	80	2700K	WW	6200lm	3300lm	WW1800-48W-827N
					3000K	WW	6400lm	3500lm	WW1800-48W-830N
					4000K	WW	6600lm	3700lm	WW1800-48W-840N
				90	2700K	WW	5500lm	2900lm	WW1800-48W-927N
					3000K	WW	5700lm	3100lm	WW1800-48W-930N
					4000K	WW	5900lm	3300lm	WW1800-48W-940N

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

Light Distribution

3000K



NEKO / FUSION Linear System


Linear Light module

Spot Light Module

SL300-1S-4W



4W | CRI80 CRI90 | 2700K 3000K 4000K | 15° 30° 55° | CREE 50,000h@L80B10 | UGR < 19 | IP40 | 5 YEARS GUARANTEE | CB CE




LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Model
4 W	6 W	12V	350 mA	80	2700K	15°	470lm	350lm	SL300-1S-4W-827-15°N
						30°	470lm	350lm	SL300-1S-4W-827-30°N
						55°	470lm	350lm	SL300-1S-4W-827-55°N
					3000K	15°	500lm	380lm	SL300-1S-4W-830-15°N
						30°	500lm	380lm	SL300-1S-4W-830-30°N
						55°	500lm	380lm	SL300-1S-4W-830-55°N
					4000K	15°	550lm	420lm	SL300-1S-4W-840-15°N
						30°	550lm	420lm	SL300-1S-4W-840-30°N
						55°	550lm	420lm	SL300-1S-4W-840-55°N

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

Light Distribution

3000K

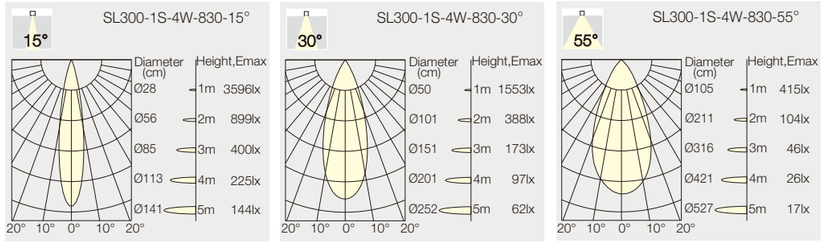

NEKO / FUSION Linear System

Linear Light module


Spot Light Module

SL300-2S-8W





8W | CRI80 CRI90 | 2700K 3000K 4000K | 15° 30° 55° | CREE 50,000h@L80B10 | UGR < 19 | IP40 | 5 YEARS GUARANTEE | CB CE




LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Model
8 W	10 W	24V	350 mA	80	2700K	15°	850lm	650lm	SL300-2S-8W-827-15°N
						30°	850lm	650lm	SL300-2S-8W-827-30°N
						55°	850lm	650lm	SL300-2S-8W-827-55°N
					3000K	15°	900lm	700lm	SL300-2S-8W-830-15°N
						30°	900lm	700lm	SL300-2S-8W-830-30°N
						55°	900lm	700lm	SL300-2S-8W-830-55°N
					4000K	15°	950lm	750lm	SL300-2S-8W-840-15°N
						30°	950lm	750lm	SL300-2S-8W-840-30°N
						55°	950lm	750lm	SL300-3S-8W-840-55°N

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

Light Distribution

3000K

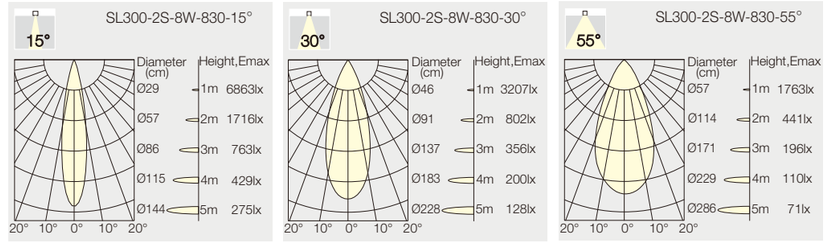


NEKO / FUSION Linear System

Linear Light module


Spot Light Module

SL450-3S-13W

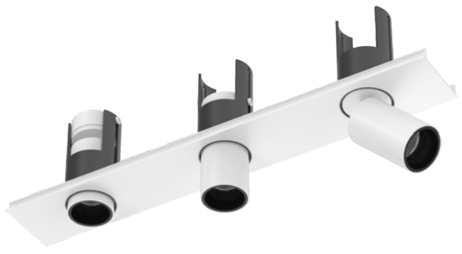



13W | CRI80 CRI90 | 2700K 3000K 4000K | 15° 30° 55° | CREE 50,000h@L80B10 | UGR < 19 | IP40 | 5 YEARS GUARANTEE | CB CE




LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Model
13 W	15 W	36V	350 mA	80	2700K	15°	1200lm	950lm	SL450-3S-13W-827-15°N
						30°	1200lm	950lm	SL450-3S-13W-827-30°N
						55°	1200lm	950lm	SL450-3S-13W-827-55°N
					3000K	15°	1300lm	1000lm	SL450-3S-13W-830-15°N
						30°	1300lm	1000lm	SL450-3S-13W-830-30°N
						55°	1300lm	1000lm	SL450-3S-13W-830-55°N
					4000K	15°	1400lm	1100lm	SL450-3S-13W-840-15°N
						30°	1400lm	1100lm	SL450-3S-13W-840-30°N
						55°	1400lm	1100lm	SL450-3S-13W-840-55°N


Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)


Light Distribution

3000K

Per Single Spot:








NEKO / FUSION Linear System

Linear Light module

Accent Light Module

AL300-13W






AL300

Different lens for beam control

Low glare contributed by black baffle



13W | CRI80 CRI90 | 2700K 3000K 4000K | 15° 30° 40° | OSRAM 50,000h@L80B10 | UGR < 19 | 5 YEARS GUARANTEE | CB CE





LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Model
13 W	15 W	18 V	700 mA	80	2700K	15°	1300lm	1000lm	AL300-13W-827-15°N
						30°	1300lm	1000lm	AL300-13W-827-30°N
						40°	1300lm	1100lm	AL300-13W-827-40°N
					3000K	15°	1400lm	1100lm	AL300-13W-830-15°N
						30°	1400lm	1100lm	AL300-13W-830-30°N
						40°	1400lm	1200lm	AL300-13W-830-40°N
					4000K	15°	1500lm	1200lm	AL300-13W-840-15°N
						30°	1500lm	1200lm	AL300-13W-840-30°N
						40°	1500lm	1300lm	AL300-13W-840-40°N


Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

Light Distribution

3000K








NEKO / FUSION Linear System

Linear Light module


Up Light Module

UL1200-11W/ UL1800-16W

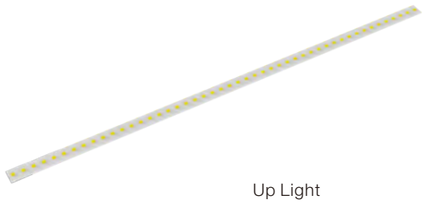




Up Light



11W 16W | CRI80 CRI90 | 2700K 3000K 4000K | 110° | SAMSUNG 50,000h@L80B10 | 5 YEARS GUARANTEE | CB CE




LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Model
11 W	13 W	46 V	250 mA	80	2700K	110°	1700lm	1500lm	UL1200-11W-827-110°N
					3000K	110°	1800lm	1600lm	UL1200-11W-830-110°N
					4000K	110°	1900lm	1700lm	UL1200-11W-840-110°N
16 W	18 W	46 V	350 mA	80	2700K	110°	2300lm	2000lm	UL1800-16W-827-110°N
					3000K	110°	2500lm	2200lm	UL1800-16W-830-110°N
					4000K	110°	2700lm	2400lm	UL1800-16W-840-110°N

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

Light Distribution

3000K




For more info see: www.nekolighting.com




NEKO/ FUSION Linear System

FL1500-2*FF10/ FL1200-2*FF5

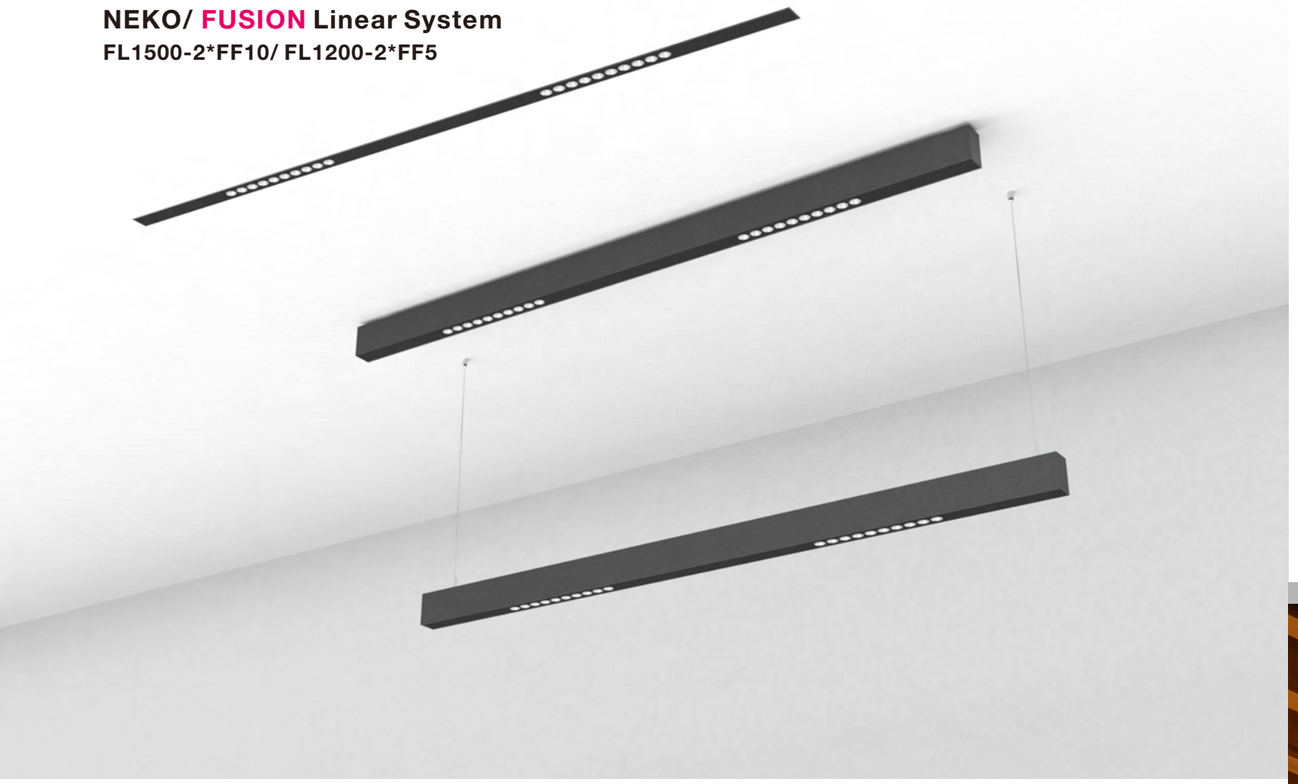

44W CRI80 2700K 3000K 4000K | 22W CRI90 | 24° 40° | OSRAM 50,000h@L80B10 | UGR < 10 | IP20 | 5 YEARS GUARANTEE | CB CE




LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Length	Model
44 W	48 W	31+31V	700 mA	80	2700K	24°	5000lm	3400lm	1500mm	FL1500(Y)-2*FF10-44W-827-24°F
						40°	5000lm	3400lm	1500mm	FL1500(Y)-2*FF10-44W-827-40°F
					3000K	24°	5200lm	3600lm	1500mm	FL1500(Y)-2*FF10-44W-830-24°F
						40°	5200lm	3600lm	1500mm	FL1500(Y)-2*FF10-44W-830-40°F
					4000K	24°	5600lm	3800lm	1500mm	FL1500(Y)-2*FF10-44W-840-24°F
						40°	5600lm	3800lm	1500mm	FL1500(Y)-2*FF10-44W-840-40°F
22 W	26 W	16+16V	700 mA	80	2700K	24°	2400lm	1700lm	1200mm	FL1200(Y)-2*FF5-22W-827-24°F
						40°	2400lm	1700lm	1200mm	FL1200(Y)-2*FF5-22W-827-40°F
					3000K	24°	2600lm	1800lm	1200mm	FL1200(Y)-2*FF5-22W-830-24°F
						40°	2600lm	1800lm	1200mm	FL1200(Y)-2*FF5-22W-830-40°F
					4000K	24°	2800lm	1900lm	1200mm	FL1200(Y)-2*FF5-22W-840-24°F
						40°	2800lm	1900lm	1200mm	FL1200(Y)-2*FF5-22W-840-40°F

Remark: (Y)=P(Pendant) (Y)= S(Surface mounted) (Y)= R(Trimless Recessed) (Y)= F(Trim Recessed)


Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

Project: Office Shire House, U.K.

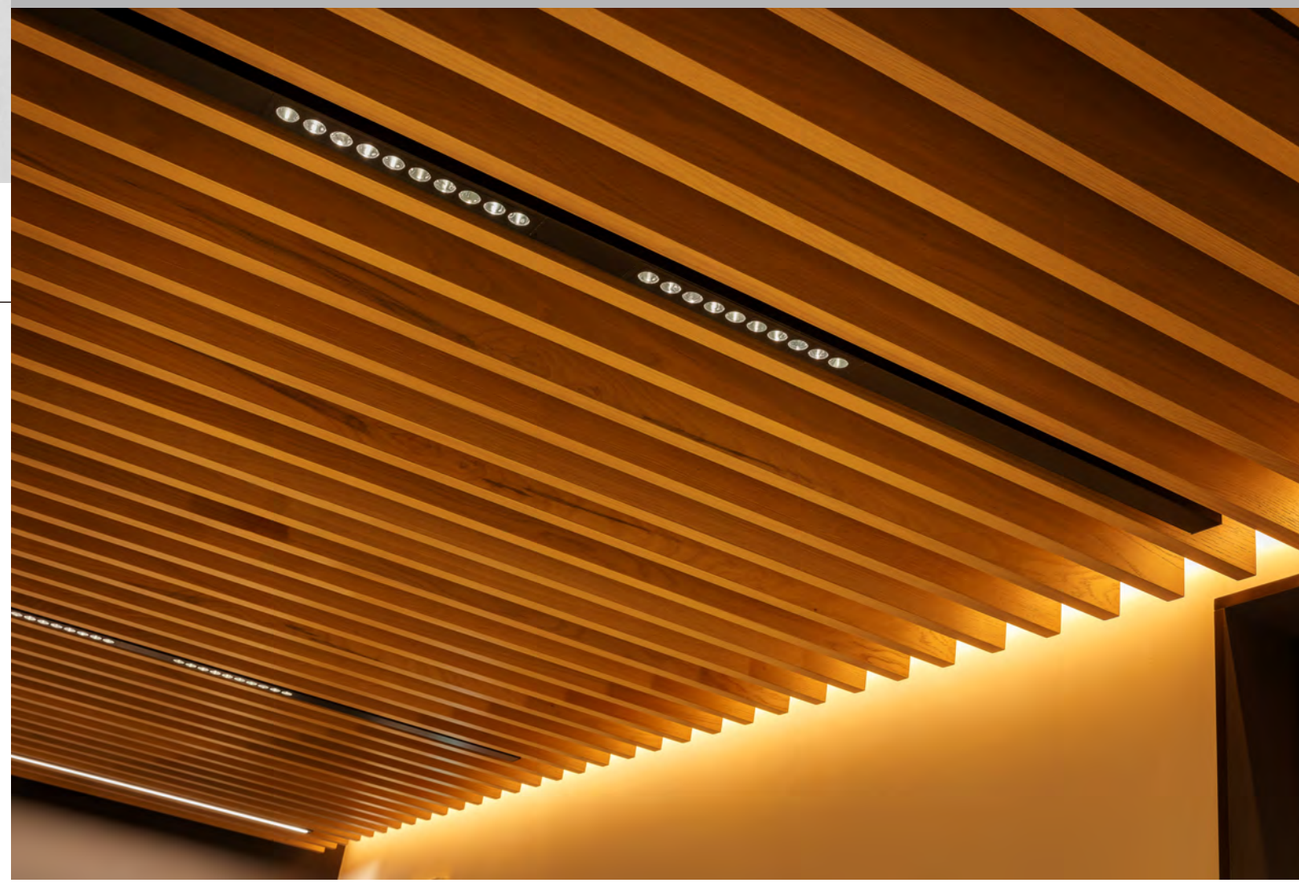


NEKO/ FUSION Linear System

FL1800-GL1800/ FL1200-GL1200

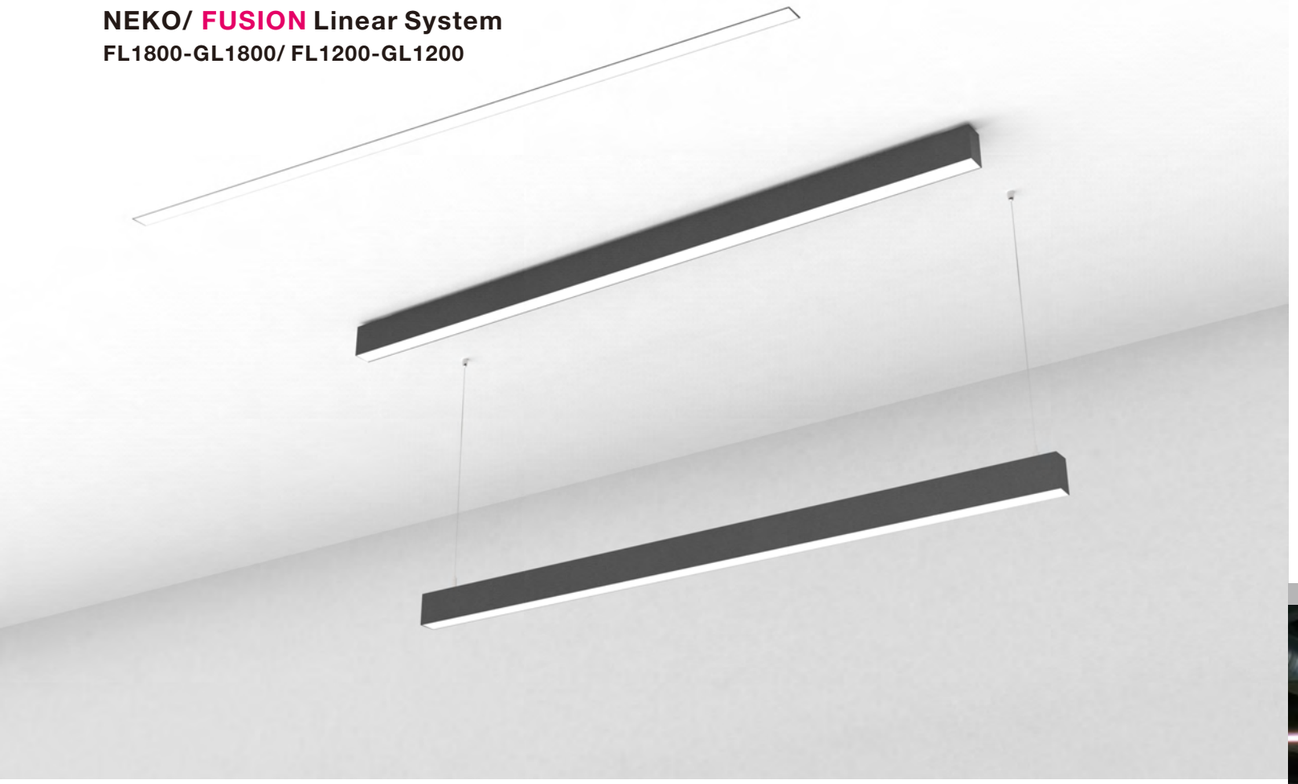

32W CRI80 2700K
22W CRI90 3000K
4000K
105°
SAMSUNG 50,000h@L80B10
IP20
5 YEARS GUARANTEE
CB CE




LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Length	Model
32 W	36 W	46V	700 mA	80	2700K	105°	4600lm	3400lm	1800mm	FL1800(Y)-GL1800-32W-827F
					3000K	105°	4800lm	3600lm	1800mm	FL1800(Y)-GL1800-32W-830F
					4000K	105°	5000lm	3800lm	1800mm	FL1800(Y)-GL1800-32W-840F
48 W	52 W	46V	700+350 mA	80	2700K	105°	6200lm	5000lm	1800mm	FL1800(Y)-GL1800-48W-827F
					3000K	105°	6400lm	5200lm	1800mm	FL1800(Y)-GL1800-48W-830F
					4000K	105°	7000lm	5500lm	1800mm	FL1800(Y)-GL1800-48W-840F
22 W	26 W	46V	500 mA	80	2700K	105°	3200lm	2300lm	1200mm	FL1200(Y)-GL1200-22W-827F
					3000K	105°	3400lm	2700lm	1200mm	FL1200(Y)-GL1200-22W-830F
					4000K	105°	3600lm	2900lm	1200mm	FL1200(Y)-GL1200-22W-840F
32 W	36 W	46V	700 mA	80	2700K	105°	4200lm	3400lm	1200mm	FL1200(Y)-GL1200-32W-827F
					3000K	105°	4400lm	3600lm	1200mm	FL1200(Y)-GL1200-32W-830F
					4000K	105°	4800lm	3800lm	1200mm	FL1200(Y)-GL1200-32W-840F

Remark: (Y)=P (Pendant) (Y)= S (Surface mounted) (Y)= R (Trimless Recessed) (Y)= F (Trim Recessed)


Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

Project: Catalina Bay,New Zealand

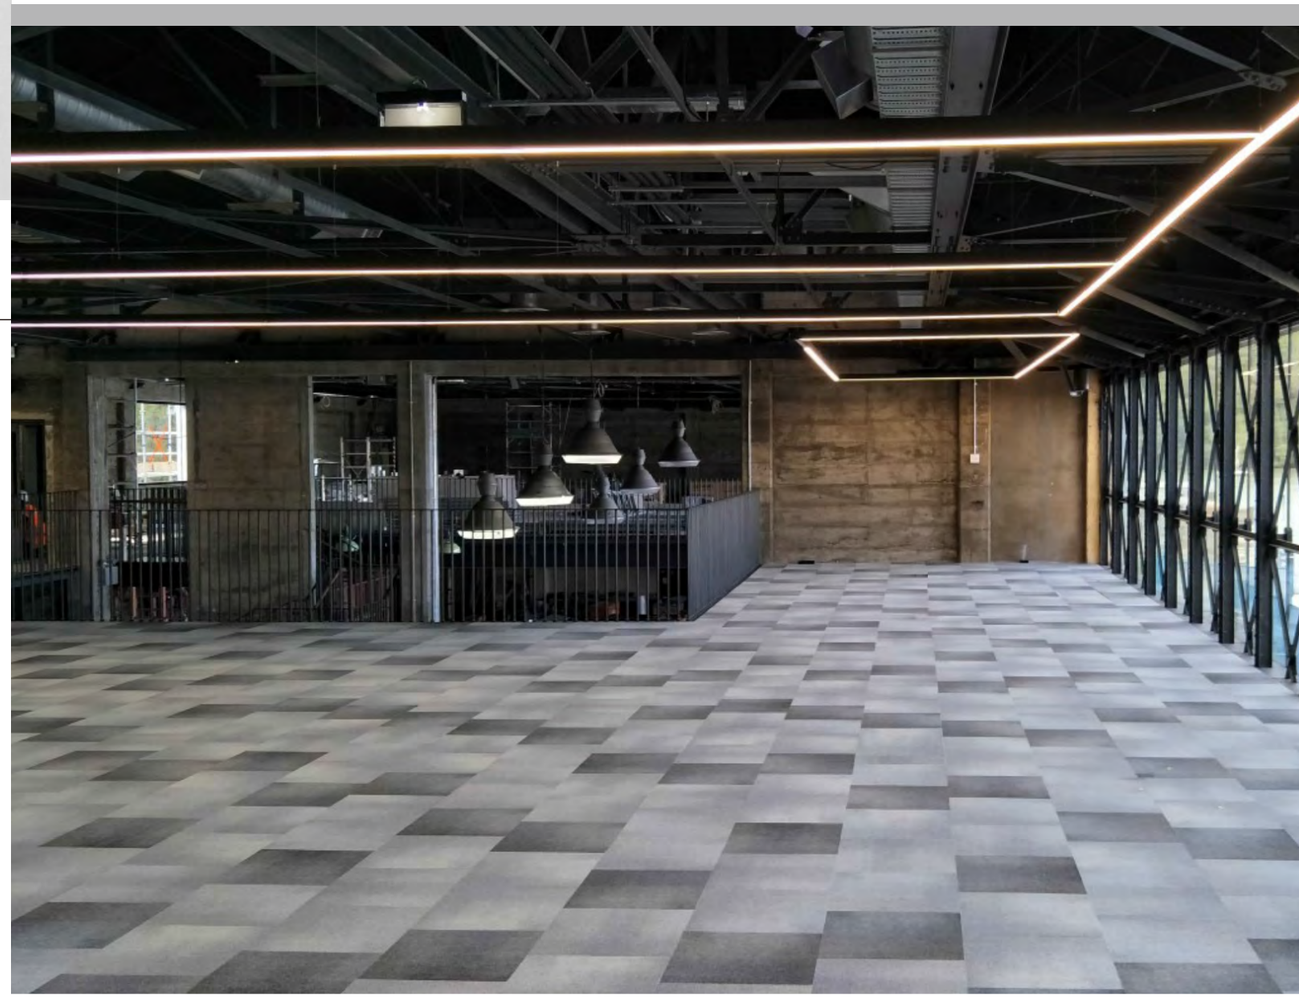

NEKO/ FUSION Linear System

FL1800-WW1800/ FL1200-WW1200

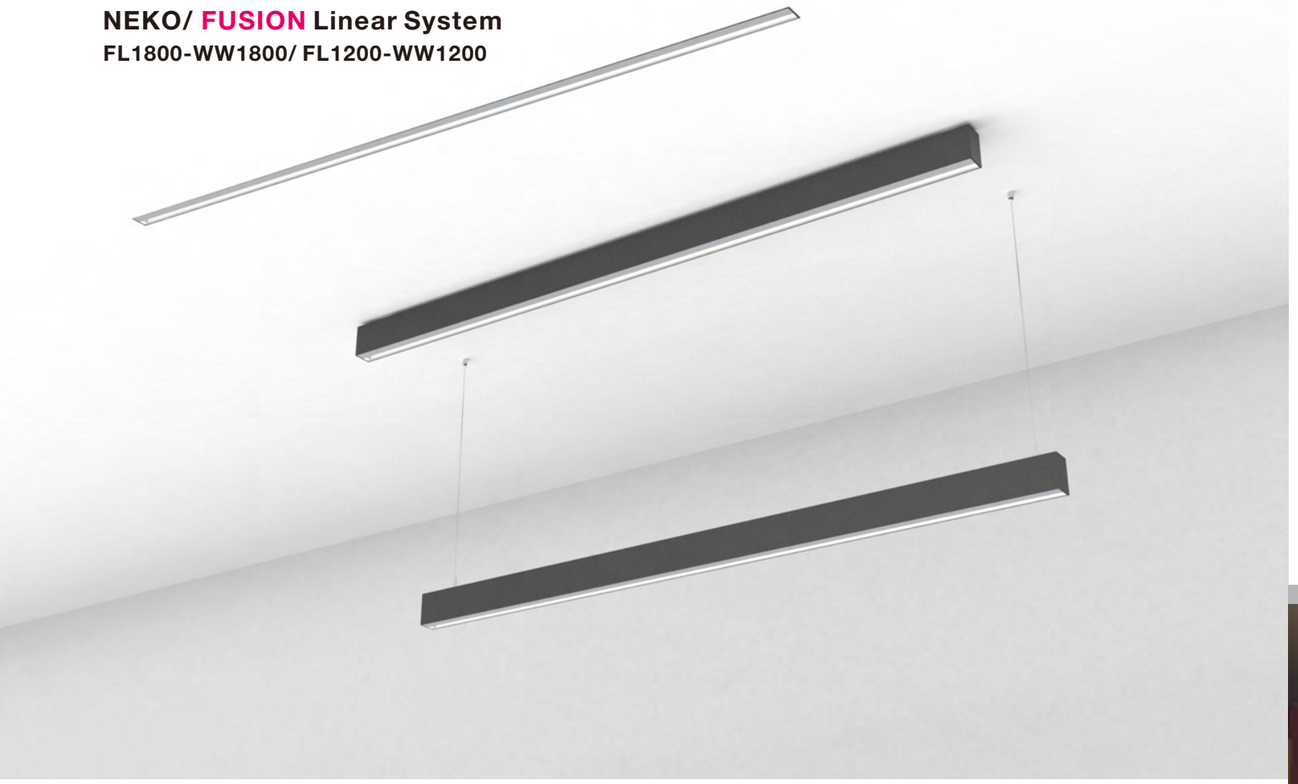


32W CRI80 2700K
22W CRI90 3000K
4000K

SAMSUNG 50,000h@L80B10

IP20

5 YEARS GUARANTEE

CB CE



LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Length	Model
32 W	36 W	46V	700 mA	80	2700K	WW	4600lm	2500lm	1800mm	FL1800(Y)-WW1800-32W-827F
					3000K	WW	4800lm	2700lm	1800mm	FL1800(Y)-WW1800-32W-830F
					4000K	WW	5000lm	2900lm	1800mm	FL1800(Y)-WW1800-32W-840F
48 W	52 W	46V	700+350 mA	80	2700K	WW	6200lm	3300lm	1800mm	FL1800(Y)-WW1800-48W-827F
					3000K	WW	6400lm	3500lm	1800mm	FL1800(Y)-WW1800-48W-830F
					4000K	WW	6600lm	3700lm	1800mm	FL1800(Y)-WW1800-48W-840F
22 W	26 W	46V	500 mA	80	2700K	WW	3200lm	1700lm	1200mm	FL1200(Y)-WW1200-22W-827F
					3000K	WW	3400lm	1800lm	1200mm	FL1200(Y)-WW1200-22W-830F
					4000K	WW	3600lm	1900lm	1200mm	FL1200(Y)-WW1200-22W-840F
32 W	36 W	46V	700 mA	80	2700K	WW	4600lm	2300lm	1200mm	FL1200(Y)-WW1200-32W-827F
					3000K	WW	4800lm	2500lm	1200mm	FL1200(Y)-WW1200-32W-830F
					4000K	WW	5000lm	2700lm	1200mm	FL1200(Y)-WW1200-32W-840F

Remark: (Y)=P (Pendant) (Y)= S (Surface mounted) (Y)= R (Trimless Recessed) (Y)= F (Trim Recessed)

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

Project: School, Uruguay



NEKO/ FUSION Linear System

FL1200-2*AL300/ FL1500-2*AL300




26W | CRI80 CRI90 | 2700K 3000K 4000K | 15° 30° 40° | OSRAM 50,000h@L80B10 | UGR < 19 | IP 20 | 5 YEARS GUARANTEE | CB | CE

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Length	Model
26 W	30 W	36 V	700 mA	80	2700K	15°	2800lm	2000lm	1200mm	FL1200(Y)-2*AL300-26W-827-15DF
						30°	2800lm	2000lm	1200mm	FL1200(Y)-2*AL300-26W-827-30DF
						40°	2800lm	2200lm	1200mm	FL1200(Y)-2*AL300-26W-827-40DF
					3000K	15°	3000lm	2200lm	1200mm	FL1200(Y)-2*AL300-26W-830-15DF
						30°	3000lm	2200lm	1200mm	FL1200(Y)-2*AL300-26W-830-30DF
						40°	3000lm	2400lm	1200mm	FL1200(Y)-2*AL300-26W-830-40DF
					4000K	15°	3400lm	2400lm	1200mm	FL1200(Y)-2*AL300-26W-840-15DF
						30°	3400lm	2400lm	1200mm	FL1200(Y)-2*AL300-26W-840-30DF
						40°	3400lm	2600lm	1200mm	FL1200(Y)-2*AL300-26W-840-40DF
26 W	30 W	36 V	700 mA	80	2700K	15°	2800lm	2000lm	1500mm	FL1500(Y)-2*AL300-26W-827-15DF
						30°	2800lm	2000lm	1500mm	FL1500(Y)-2*AL300-26W-827-30DF
						40°	2800lm	2200lm	1500mm	FL1500(Y)-2*AL300-26W-827-40DF
					3000K	15°	3000lm	2200lm	1500mm	FL1500(Y)-2*AL300-26W-830-15DF
						30°	3000lm	2200lm	1500mm	FL1500(Y)-2*AL300-26W-830-30DF
						40°	3000lm	2400lm	1500mm	FL1500(Y)-2*AL300-26W-830-40DF
					4000K	15°	3400lm	2400lm	1500mm	FL1500(Y)-2*AL300-26W-840-15DF
						30°	3400lm	2400lm	1500mm	FL1500(Y)-2*AL300-26W-840-30DF
						40°	3400lm	2600lm	1500mm	FL1500(Y)-2*AL300-26W-840-40DF

Remark: (Y)=P(Pendant) (Y)= S(Surface mounted) (Y)= R(Trimless Recessed) (Y)= F(Trim Recessed)


Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

Project: Skyline Hill, Germany

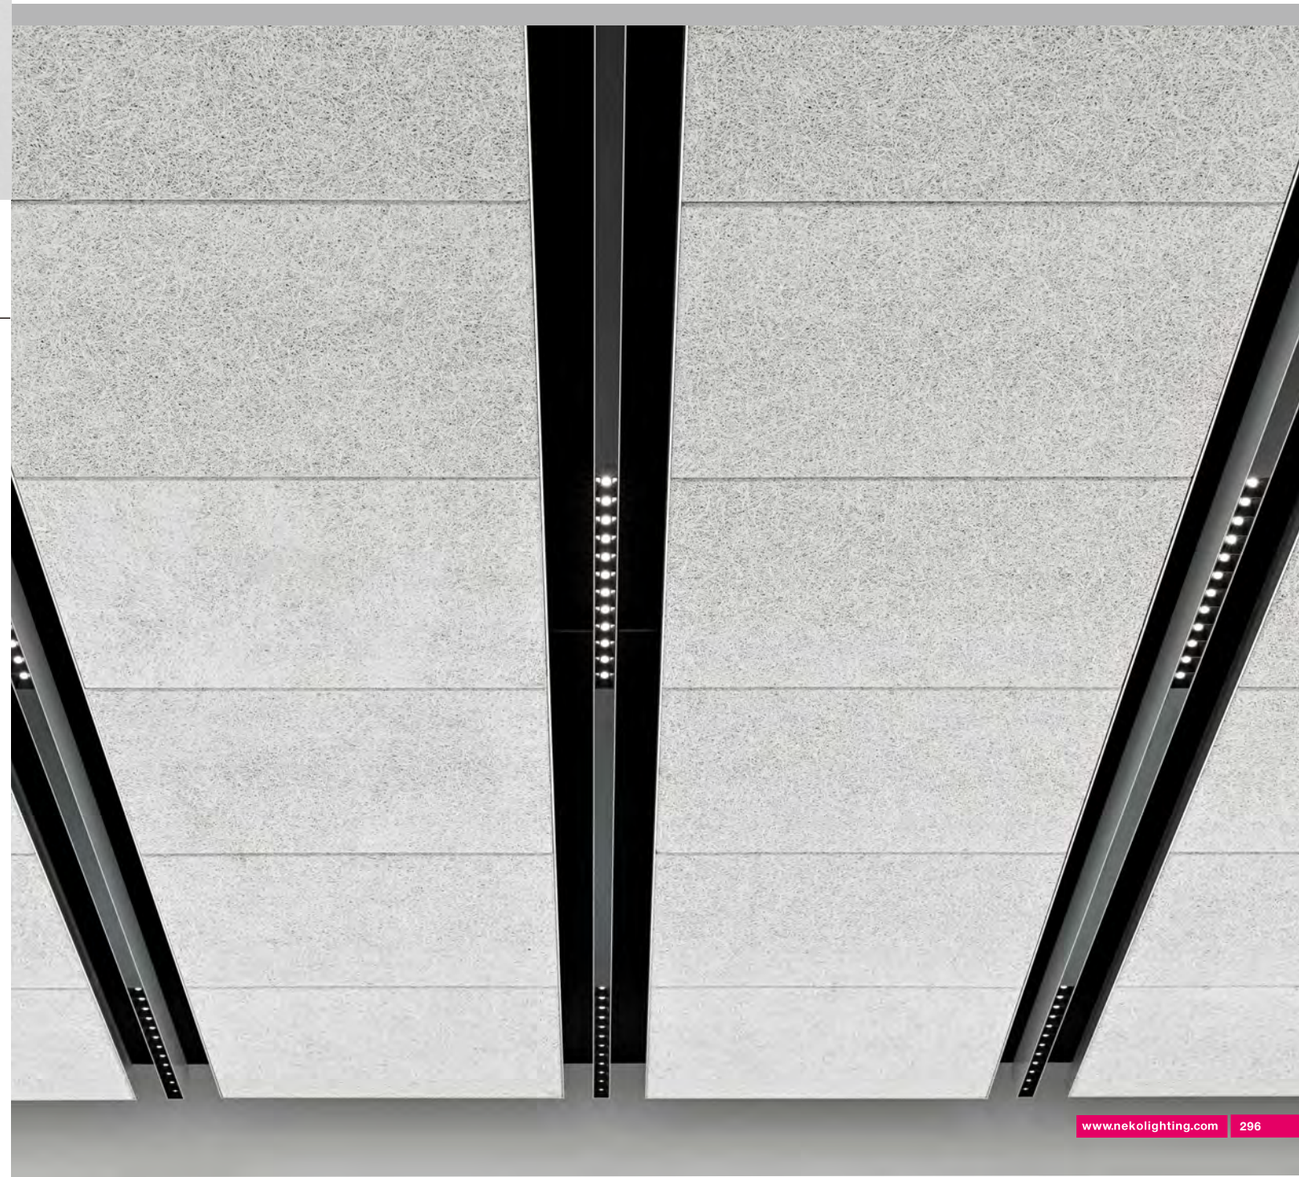


NEKO/ FUSION Linear System

FL1200-2*AL300+GL600

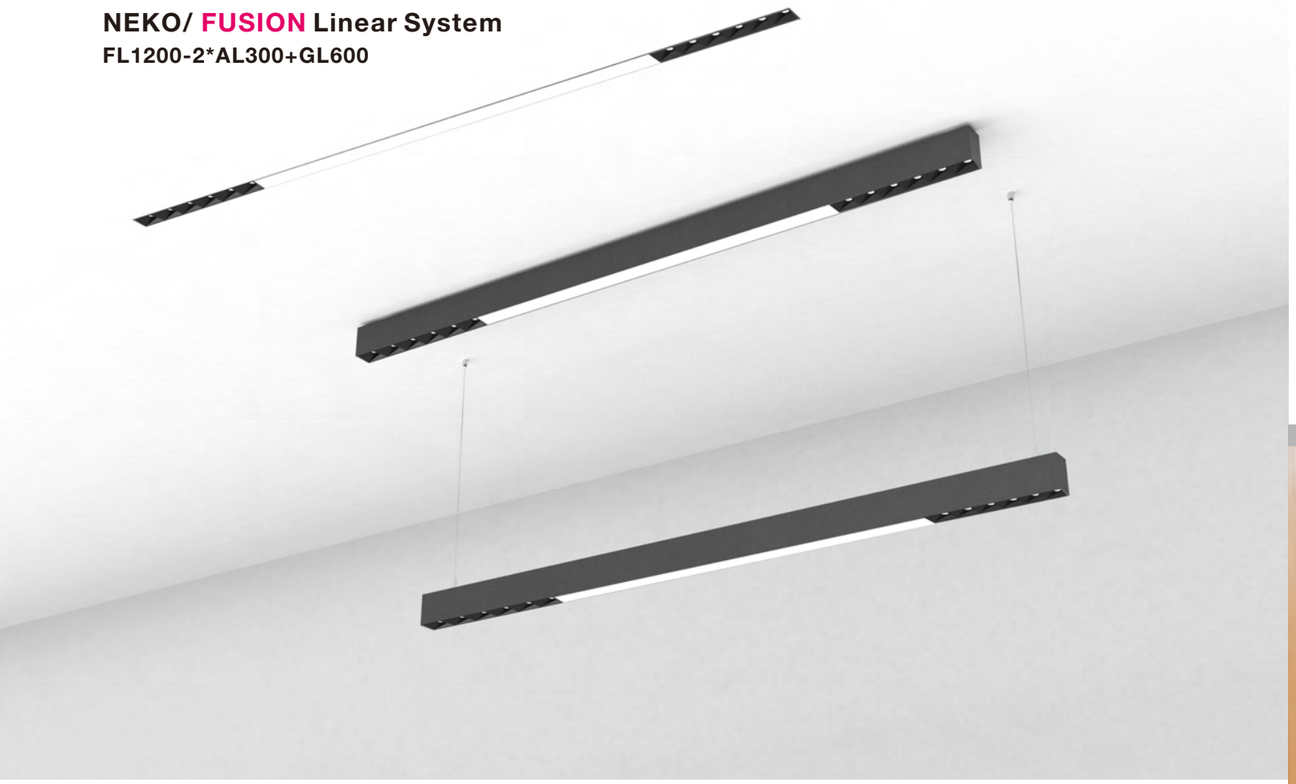

37W | CRI80 CRI90 | 2700K 3000K 4000K | 15° 30° 40° | SAMSUNG 50,000h@L80B10 | OSRAM 50,000h@L80B10 | IP 20 | 5 YEARS GUARANTEE | CB | CE




LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Model
37 W	41 W	47 V	700 mA	80	2700K	15°+105°	4500lm	3300lm	FL1200(Y)-2*AL300+GL600-37W-827-15DF
						30°+105°	4500lm	3300lm	FL1200(Y)-2*AL300+GL600-37W-827-30DF
						40°+105°	4500lm	3500lm	FL1200(Y)-2*AL300+GL600-37W-827-40DF
					3000K	15°+105°	4700lm	3500lm	FL1200(Y)-2*AL300+GL600-37W-830-15DF
						30°+105°	4700lm	3500lm	FL1200(Y)-2*AL300+GL600-37W-830-30DF
						40°+105°	4700lm	3700lm	FL1200(Y)-2*AL300+GL600-37W-830-40DF
					4000K	15°+105°	5100lm	3800lm	FL1200(Y)-2*AL300+GL600-37W-840-15DF
						30°+105°	5100lm	3800lm	FL1200(Y)-2*AL300+GL600-37W-840-30DF
						40°+105°	5100lm	4000lm	FL1200(Y)-2*AL300+GL600-37W-840-40DF

Remark: (Y)=P(Pendant) (Y)= S(Surface mounted) (Y)= R(Trimless Recessed) (Y)= F(Trim Recessed)


Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

Project: Office Shire House, U.K.

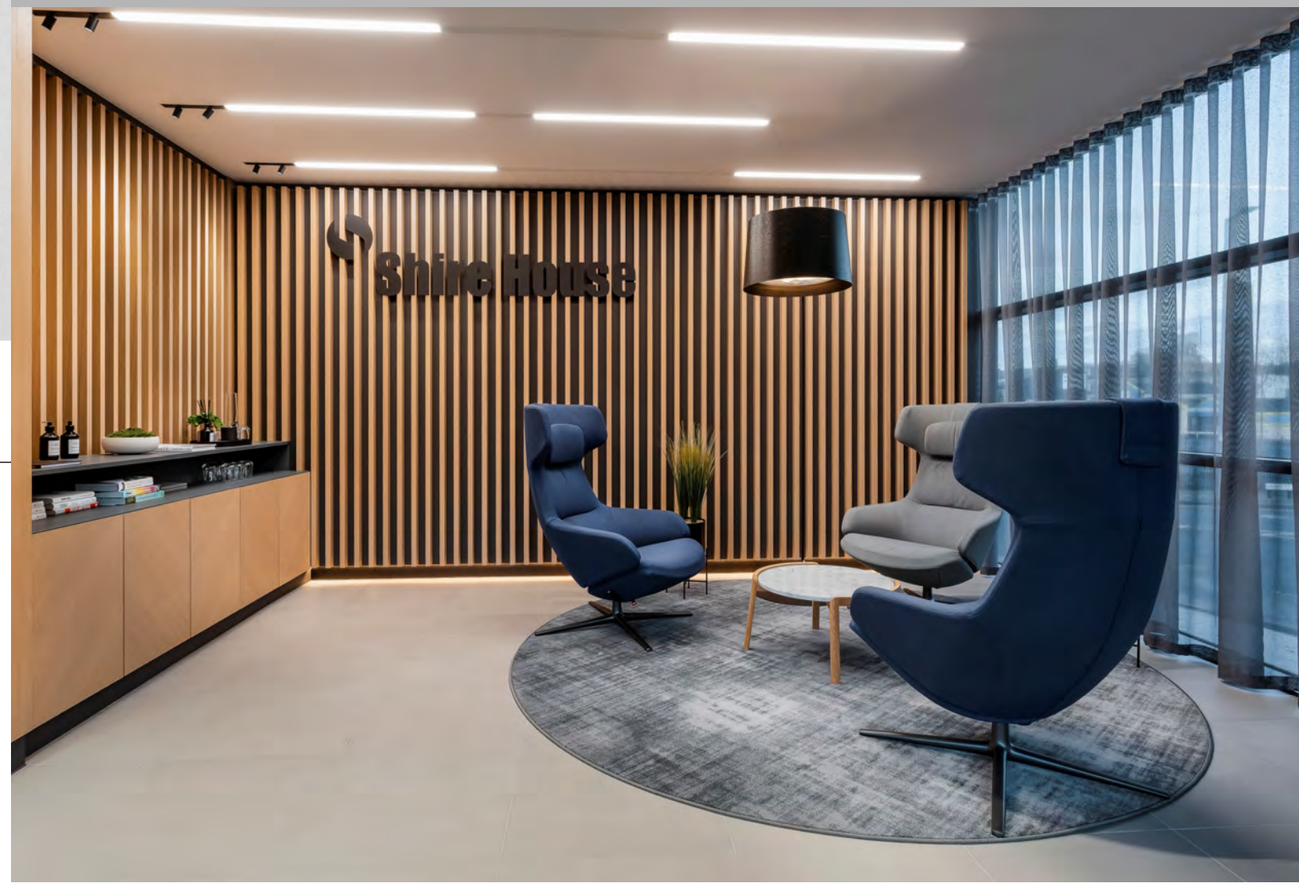

NEKO/FUSION Linear System

More modules combination available

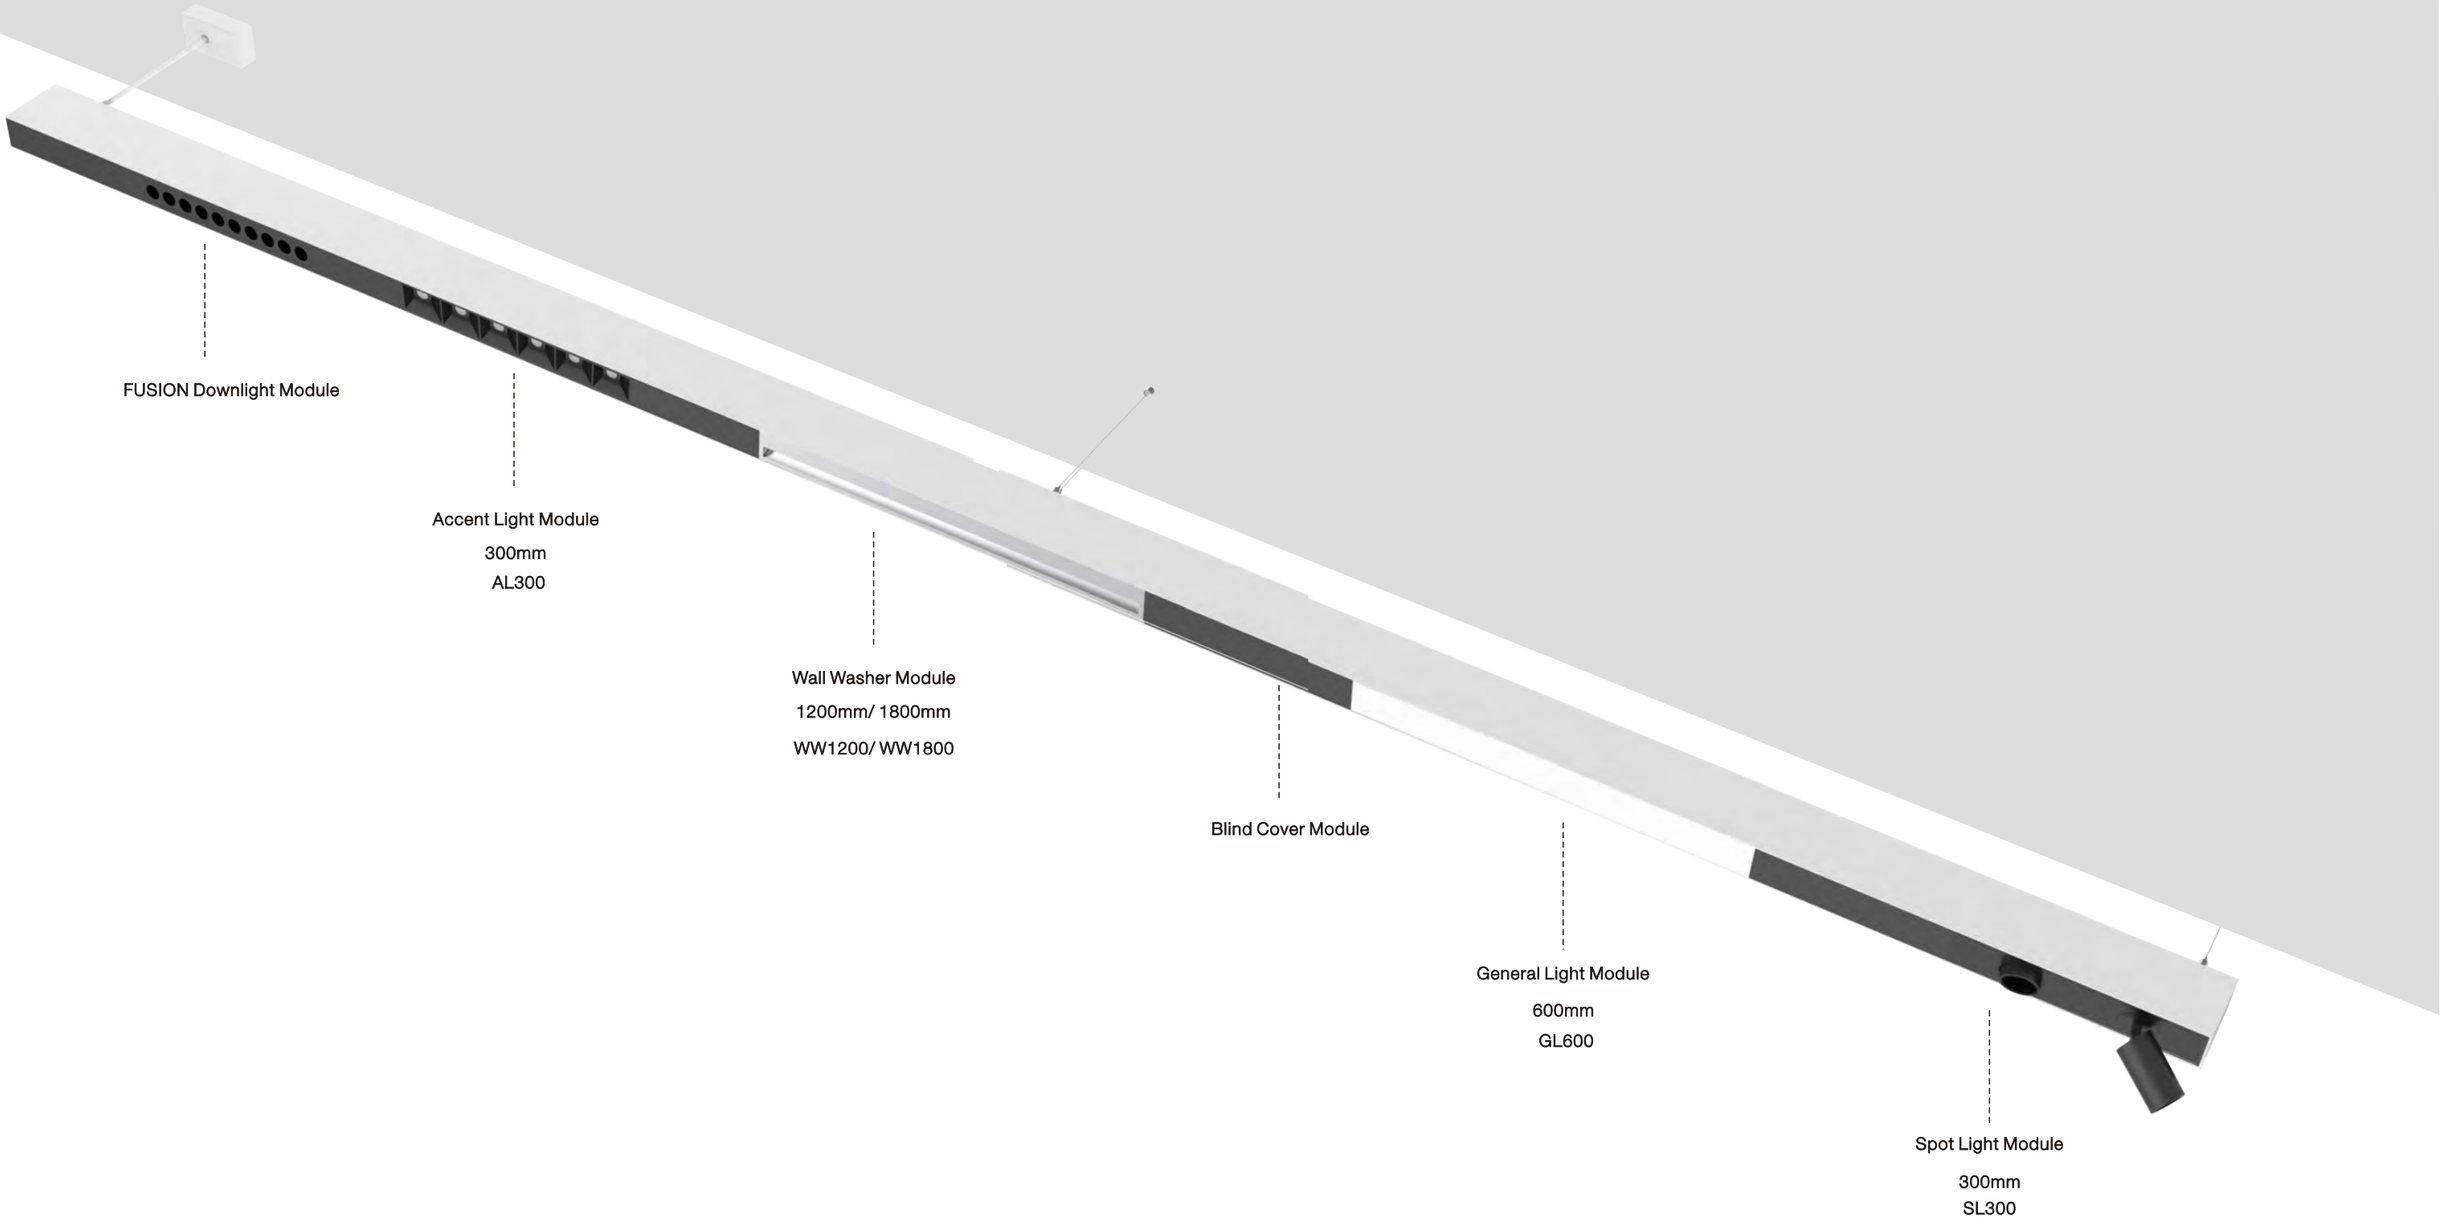

Linear System with more modules combination available.
All available with Suspended, surface mounted and recessed mounted versions.

NEW




NEW

Microprismatic Cover/ Opal Cover/ U-Cover




Surface Mounted



Microprismatic Cover/ Opal Cover/ U-Cover




Pendant

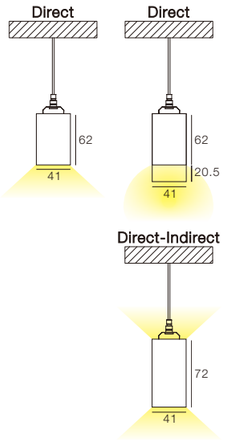

Microprismatic Cover/ Opal Cover



Trim Recessed




Microprismatic Cover/ Opal Cover



Wall Mounted

Direct-Indirect



NEKO / DASH 40
Linear Light System
Surface Mounted

NEW



LED-Anbauleuchte direktstrahlend. Lichtkanal aus Aluminium Strangpressprofil mit einer Breite von 41mm. Fertigung der Leuchte milimetergenau auf Kundenwunsch möglich. Oberfläche der Leuchte feinstruktur matt pulverbeschichtet ähnlich RAL9016 weiß, RAL 9006 silber oder RAL9005 schwarz – auf Anfrage in RAL nach Wahl. Diffusor wahlweise in PMMA opal, PMMA opal U-Abdeckung oder PMMA klar mit eingeschobener Mikroprismatischer Plat-te für eine reduzierte Leuchtdichte (UGR<19). Der Konverter ist in das Leuchtengehäuse integriert. Wahlweise als on/off oder DALI Variante – weitere Steuerungsoptionen auf Anfrage möglich. Farbtem-peraturen: 2700K, 3000K, 4000K – weitere Licht-farben auf Anfrage. Farbwiedergabe CRI>80 oder CRI>90 – Mac Adam <3

Surface-mounted LED Luminaire direct beam Ex-truded aluminium light channel with 41mm width. The luminaire can be manufactured according to the customer's wishes down to the last millimetre. Luminaire surface fine textured matte powder coat-ing similar to RAL9016 white, RAL 9006 silver or RAL9005 black – or in any other RAL of your choice. Diffuser available in either PMMA opal, PMMA opal with U-cover or PMMA clear with microprismatic pla-te inserted for lower luminance (UGR<19). The con-verter is integrated into the luminaire housing. Avai-lable as either on/off or DALI variant - other control options available on request. Colour temperatures: 2700K, 3000K, 4000K - other light colours availa-ble on request. Colour rendering CRI>80 or CRI>90 - Mac Adam <3

Luminaire en saillie à LED à rayonnement di-rect. Canal lumineux sous forme de profilé extrudé en aluminium d'une largeur de 41 mm. Possibilité de fabriquer le luminaire sur mesure, au millimètre près. Surface de luminaire thermolaquée matte à fine structure en RAL9016 blanc, RAL 9006 argent ou RAL9005 noir, sur demande RAL au choix. Dif-fuseur au choix en PMMA opale, couvercle en U en PPMA opale ou PPMA transparent avec plaque mi-croprismatique pour une intensité lumineuse réduite (UGR<19). Le convertisseur est intégré au boîtier du luminaire. Au choix en version on/off ou DALI, autres options de commande disponibles sur demande. Températures de couleur : 2700 K, 3000 K, 4000 K, autres couleurs sur demande. Rendu des couleurs CRI>80 ou CRI>90 – Mac Adam <3

ÜBERSICHT | OVERVIEW | VUE D'ENSEMBLE

GENERAL INFO
2700K, 3000K, 4000K
Direct Light
Up to 142lm/W, Up to 6297lm/m
Ra>80, Ra>90, MacAdam 3
On-Off / DALI
Opal & Microprismatic (UGR<19)
Up to L80B10/ 50,000h

HOUSING COLOUR
Weiß feinstruktur matt RAL 9016 White fine structure matt RAL 9016 Blanc structure fine mate RAL 9016
Schwarz feinstruktur matt RAL 9005 Black fine structure matt RAL 9005 Noir structure fine mate RAL 9005
Silber feinstruktur matt RAL 9006 Silver fine structure matt RAL 9006 Argent structure fine mate RAL 9006

LED >80 CRI >90 CRI IP20 DALI/ SwitchDim SDCM 3 >50,000 h >50,000

LED ANBAULEUCHTE
LED SURFACE MOUNTED LUMINAIRE
LED LUMINAIRE EN SAILLIE

Bestellbeispiel Example order Exemple de commande
3381mm, CRI80, 4000K, Direct, Low Output On-Off, Black, Microprismatic

D4S03381-840LPF-BM
1 2 3 4 5 6 7

1

LÄNGE LENGTH LONGEUR		CODE
571 mm	1,5	00571
851 mm	2,0	00851
1131 mm	2,6	01131
1271 mm	2,8	01271
1411 mm	3,5	01411
1691 mm	4,0	01691
2251 mm	5,0	02251
2531 mm	5,2	02531
2812 mm	6,6	02812
3372 mm	7,6	03372
3792 mm	9,1	03792

2

FARBWIEDERGABE COLOUR RENDERING COLOUR RENDERING	CODE
CRI>80	8
CRI>90	9

3

FARBTEMPERATUR COLOUR TEMPERATURE TEMPÉRATURE DE COULEUR	CODE
2700K	27 (CRI>90 only)
3000K	30
4000K	40

4

POWER OUTPUT SORTIE	CODE
Low Output	LP
High Output	HP

5


STEUERUNG CONTROL CONTRÔLE	CODE
On-Off	F
DALI	D

6

GEHÄUSEFARBE HOUSING COLOUR COULEUR DU BOÎTIER	CODE
Silver RAL9006	V
White RAL9016	W
Black RAL9005	B

7

ABDECKUNG COVER COUVERTURE	CODE
Opal	O
Microprismatic	M
U-Cover	C

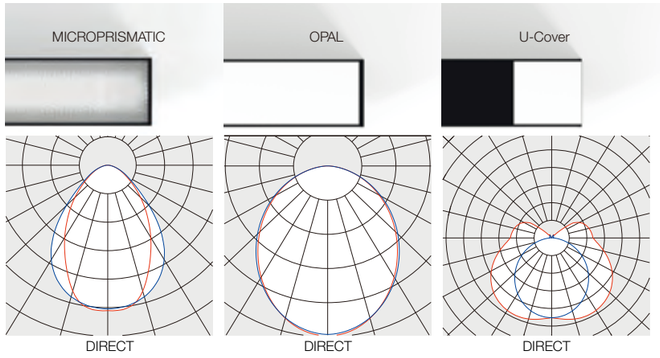

LENGTH MM	LUMEN I WATT LOW OUTPUT	LUMEN I WATT HIGH OUTPUT	LUMEN I WATT LOW OUTPUT	LUMEN I WATT HIGH OUTPUT	LUMEN I WATT LOW OUTPUT	LUMEN I WATT HIGH OUTPUT
571	757 lm I 8 W	1503 lm I 17 W	852 lm I 8 W	1439 lm I 17 W	785 lm I 8 W	1492 lm I 17 W
851	1135 lm I 12 W	2254 lm I 23 W	1136 lm I 12W	2158 lm I 23 W	1177 lm I 12W	2238 lm I 23 W
1131	1514 lm I 15 W	3005 lm I 29 W	1514 lm I 15 W	2879 lm I 29 W	1570 lm I 15 W	2984 lm I 29 W
1271	1703 lm I 17 W	3381 lm I 33 W	1704 lm I 17 W	3238 lm I 33 W	1767 lm I 17 W	3357 lm I 33 W
1411	1892 lm I 18 W	3757 lm I 35 W	1893 lm I 18 W	3599 lm I 35 W	1962 lm I 18 W	3730 lm I 35 W
1691	2271 lm I 20 W	4508 lm I 40 W	2272 lm I 20 W	4318 lm I 40 W	2355 lm I 20 W	4476 lm I 40 W
2251	3028 lm I 27 W	6010 lm I 53 W	3028 lm I 27 W	5756 lm I 53 W	3140 lm I 27 W	5968 lm I 53 W
2531	3406 lm I 30 W	6762 lm I 60 W	3408 lm I 30 W	6475 lm I 60 W	3534 lm I 30 W	6714 lm I 60 W
2812	3784 lm I 35 W	7514 lm I 70 W	3786 lm I 35 W	7198 lm I 70 W	3924 lm I 35 W	7460 lm I 70 W
3372	4542 lm I 41 W	9016 lm I 81 W	4544 lm I 41 W	8636 lm I 81 W	4710 lm I 41 W	8952 lm I 81 W
3792	5110 lm I 46 W	10143 lm I 91 W	5112 lm I 46 W	9715 lm I 91 W	5299 lm I 46 W	10071 lm I 91 W


Alle Lumen- und Wattangaben für 4000K, CRI80 – (Mikroprismenangaben ohne Opalfolie) (Details auf P. 313-314)
All lumen and watt figures are for 4000K, CRI80 – (Microprismatic details without opal film) (details on p. 313-314)
Toutes les données lumen et watt pour 4000K, CRI80 – (données microprisme sans feuille opale) (détails p. 313-314)


NEKO / DASH 40

Linear Light System

Pendant

NEW

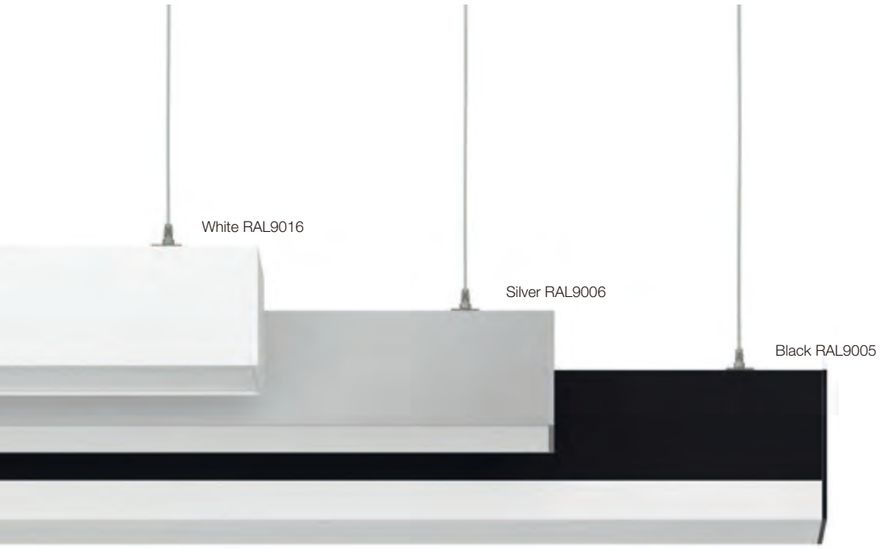

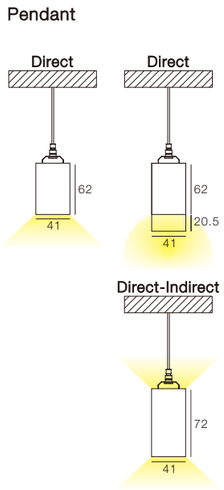

LED-Hängeleuchte direktstrahlend oder direkt-/indirektstrahlend. Lichtkanal aus Aluminium Strangpressprofil mit einer Breite von 41mm. Fertigung der Leuchte milimetergenau auf Kundenwunsch möglich. Oberfläche der Leuch-te feinstruktur matt pulverbeschichtet ähnlich RAL9016 weiß, RAL 9006 silber oder RAL9005 schwarz – auf Anfrage in RAL nach Wahl. Dif-fusor wahlweise in PMMA opal, PMMA opal U-Abdeckung oder PMMA klar mit eingescho-bener Mikroprismatischer Platte für eine re-duzierte Leuchtdichte (UGR<19). Leuchte inkl. Baldachin mit transparentem Einspeisekabel sowie Seilabhängern und Schnellspannern zur stufenlosen Regulierung der Montagehöhe. Der Konverter ist in das Leuchtengehäuse integriert. Wahlweise als on/off oder DALI Variante – wei-tere Steuerungsoptionen auf Anfrage möglich. Farbtemperaturen: 2700K, 3000K, 4000K – wei-tere Lichtfarben auf Anfrage. Farbwiedergabe CRI>80 oder CRI>90 – Mac Adam <3Farbtemperaturen: 2700K, 3000K, 4000K – wei-tere Lichtfarben auf Anfrage. Farbwiedergabe CRI>80 oder CRI>90 – Mac Adam <3

Pendant LED Luminaire direct beam or direct/indi-rect beam. Extruded aluminium light channel with 41mm width. The luminaire can be manufactured according to the customer's wishes down to the last millimetre. Luminaire surface fine textured mat-te powder coating similar to RAL9016 white, RAL 9006 silver or RAL9005 black – or in any other RAL of your choice. Diffuser available in either PMMA opal, PMMA opal with U-cover or PMMA clear with microprismatic plate inserted for lower luminance (UGR<19). Luminaire with canopy with transparent feed cable plus cable hangers and quick-release clamps for smooth mounting height adjustment. The converter is integrated into the luminaire housing. Available as either on/off or DALI variant - other control options available on request. Colour tempe-ratures: 2700K, 3000K, 4000K - other light colours available on request. Colour rendering CRI>80 or CRI>90 - Mac Adam <3

Suspension à LED à rayonnement direct ou direct/indirect. Canal lumineux sous forme de profilé extru-dé en aluminium d'une largeur de 41 mm. Possibilité de fabriquer le luminaire sur mesure, au millimètre près. Surface de luminaire thermolaquée matte à fine structure en RAL9016 blanc, RAL 9006 argent ou RAL9005 noir, sur demande RAL au choix. Diffuseur au choix en PMMA opale, couvercle en U en PPMA opale ou PPMA transparent avec plaque mi-croprismatique pour une intensité lumineuse réduite (UGR<19). Luminaire avec cache et câble d'alimen-tation transparent, câbles de suspension et systèmes de serrage rapide permettant d'ajuster la hauteur de montage en continu. Le convertisseur est intégré au boîtier du luminaire. Au choix en version on/off ou DALI, autres options de commande disponibles sur demande. Températures de couleur : 2700 K, 3000 K, 4000 K, autres couleurs sur demande. Ren-du des couleurs CRI>80 ou CRI>90 – Mac Adam <3

ÜBERSICHT | OVERVIEW | VUE D'ENSEMBLE

GENERAL INFO
2700K, 3000K, 4000K
Direct Light, Direct-Indirect Light
Up to 142lm/W, Up to 6297lm/m
Ra>80, Ra>90, MacAdam 3
On-Off / DALI
Opal & Microprismatic (UGR<19)
Up to L80B10/ 50,000h

HOUSING COLOUR
Weiß feinstruktur matt RAL 9016 White fine structure matt RAL 9016 Blanc structure fine mate RAL 9016
Schwarz feinstruktur matt RAL 9005 Black fine structure matt RAL 9005 Noir structure fine mate RAL 9005
Silber feinstruktur matt RAL 9006 Silver fine structure matt RAL 9006 Argent structure fine mate RAL 9006

LED CRI >80 CRI >90 IP20 DALI/ SwitchDim SDCM 3 >50,000 h >50,000

LED-HÄNGELEUCHTE
LED PENDANT LUMINAIRE
LED SUSPENSION

Bestellbeispiel Example order Exemple de commande
3381mm, CRI80, 4000K, Direct-Indirect, Low Output On-Off, Black, Microprismatic

D4P03381-840LPF-BM-U

❶

LÄNGE LENGTH LONGEUR		CODE
1131 mm	3,7	01131
1271 mm	3,9	01271
1411 mm	4,2	01411
1691 mm	4,9	01691
2251 mm	6,0	02251
2531 mm	6,2	02531
2812 mm	8,0	02812
3372 mm	9,3	03372
3792 mm	11,3	03792

❷

FARBWIEDERGABE COLOUR RENDERING COLOUR RENDERING	CODE
CRI>80	8
CRI>90	9

❸

FARBTEMPERATUR COLOUR TEMPERATURE TEMPÉRATURE DE COULEUR	CODE
2700K	27 (CRI>90 only)
3000K	30
4000K	40

❹

POWER OUTPUT SORTIE	CODE
Low Output	LP
High Output	HP

❺

STEUERUNG CONTROL CONTRÔLE	CODE
On-Off	F
DALI	D

❻


GEHÄUSEFARBE HOUSING COLOUR COULEUR DU BOÎTIER	CODE
Silver RAL9006	V
White RAL9016	W
Black RAL9005	B

❼

ABDECKUNG COVER COUVERTURE	CODE
Opal	O
Microprismatic	M
U-Cover	C

❽

LICHTVERTEILUNG LIGHT DISTRIBUTION RÉPARTITION DE LA LUMIÈRE	CODE
Direct	(none)
Direct-Indirect	U

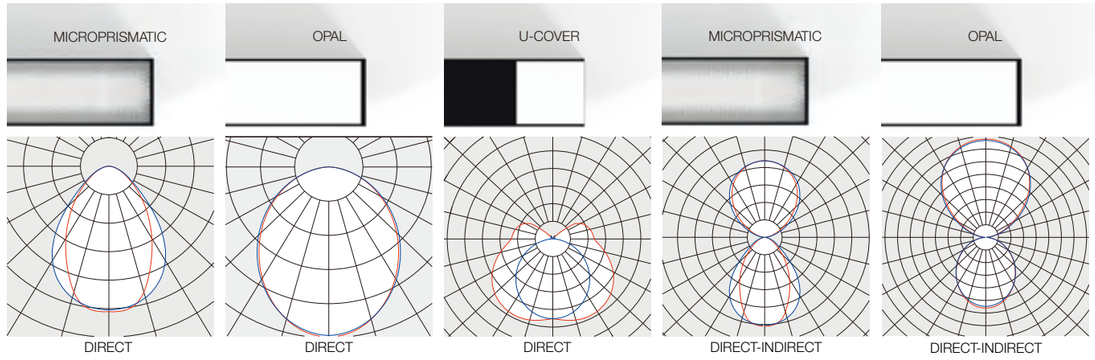


LENGTH MM	LUMEN I WATT LOW OUTPUT	LUMEN I WATT HIGH OUTPUT	LUMEN I WATT LOW OUTPUT	LUMEN I WATT HIGH OUTPUT	LUMEN I WATT LOW OUTPUT	LUMEN I WATT HIGH OUTPUT	LUMEN I WATT LOW OUTPUT	LUMEN I WATT HIGH OUTPUT	LUMEN I WATT LOW OUTPUT	LUMEN I WATT HIGH OUTPUT
1131	1514 lm I 15 W	3005 lm I 29 W	1514 lm I 15 W	2879 lm I 29 W	1570 lm I 15 W	2984 lm I 29 W	3527 lm I 26 W	6866 lm I 55 W	3535 lm I 26 W	6846 lm I 55 W
1271	1703 lm I 17 W	3381 lm I 33 W	1704 lm I 17 W	3238 lm I 33 W	1767 lm I 17 W	3357 lm I 33 W	3968 lm I 29 W	7724 lm I 63 W	3977 lm I 29 W	7702 lm I 63 W
1411	1892 lm I 18 W	3757 lm I 35 W	1893 lm I 18 W	3599 lm I 35 W	1962 lm I 18 W	3730 lm I 35 W	4408 lm I 32 W	8582 lm I 68 W	4419 lm I 32 W	8557 lm I 68 W
1691	2271 lm I 20 W	4508 lm I 40 W	2272 lm I 20 W	4318 lm I 40 W	2355 lm I 20 W	4476 lm I 40 W	5289 lm I 38 W	10298 lm I 82 W	5303 lm I 38 W	10268 lm I 82 W
2251	3028 lm I 27 W	6010 lm I 53 W	3028 lm I 27 W	5756 lm I 53 W	3140 lm I 27 W	5968 lm I 53 W	7054 lm I 50 W	13732 lm I 105 W	7070 lm I 50 W	13692 lm I 105 W
2531	3406 lm I 30 W	6762 lm I 60 W	3408 lm I 30 W	6475 lm I 60 W	3534 lm I 30 W	6714 lm I 60 W	7936 lm I 56 W	15448 lm I 119 W	7954 lm I 56 W	15404 lm I 119 W
2812	3784 lm I 35 W	7514 lm I 70 W	3786 lm I 35 W	7198 lm I 70 W	3924 lm I 35 W	7460 lm I 70 W	8816 lm I 64 W	17164 lm I 136 W	8838 lm I 64 W	17114 lm I 136 W
3372	4542 lm I 41 W	9016 lm I 81 W	4544 lm I 41 W	8636 lm I 81 W	4710 lm I 41 W	8952 lm I 81 W	10578 lm I 77 W	20596 lm I 163 W	10606 lm I 77 W	20536 lm I 163 W
3792	5110 lm I 46 W	10143 lm I 91 W	5112 lm I 46 W	9715 lm I 91 W	5299 lm I 46 W	10071 lm I 91 W	11900 lm I 87 W	23140 lm I 184 W	11932 lm I 87 W	23103 lm I 184 W


Alle Lumen- und Wattangaben für 4000K, CRI80 – (Mikroprismenangaben ohne Opalfolie) (Details auf P. 313-314)
All lumen and watt figures are for 4000K, CRI80 – (Microprismatic details without opal film) (details on p. 313-314)
Toutes les données lumen et watt pour 4000K, CRI80 – (données microprisme sans feuille opale) (détails p. 313-314)

NEKO / DASH 40
Linear Light System
Trim Recessed

NEW

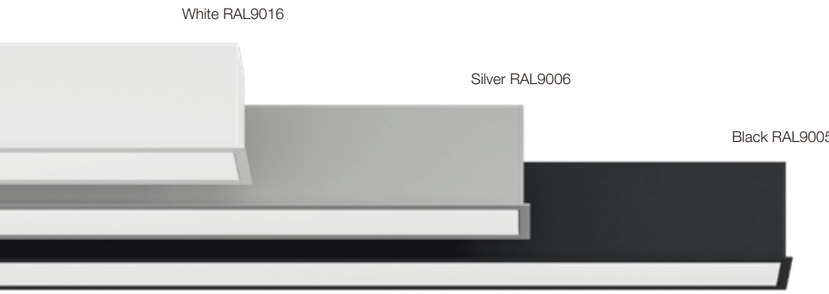

Trim Recessed



LED-Einbauleuchte mit umlaufendem Rahmen direktstrahlend. Lichtkanal aus Aluminium Strangpressprofil mit einer Gesamtbreite von 54mm. Fertigung der Leuchte milimetergenau auf Kundenwunsch möglich. Oberfläche der Leuchte feinstruktur matt pulverbeschichtet ähnlich RAL9016 weiß, RAL 9006 silber oder RAL9005 schwarz – auf Anfrage in RAL nach Wahl. Diffusor wahlweise in PMMA opal oder PMMA klar mit eingeschobener Mikroprisma-tischer Platte für eine reduzierte Leuchtdichte (UGR<19). Leuchte inkl. Montagebügel. Der Konverter ist in das Leuchtengehäuse integri-ert. Wahlweise als on/off oder DALI Variante weitere Steuerungsoptionen auf Anfrage möglich. Farbtemperaturen: 2700K, 3000K, 4000K – weitere Lichtfarben auf Anfrage. Farb-wiedergabe CRI>80 oder CRI>90 – Mac Adam <3

Recessed LED Luminaire with frame direct beam. Extruded aluminium light channel with a total width of 54mm. The luminaire can be manufactured ac-cording to the customer's wishes down to the last millimetre. Luminaire surface fine textured matte powder coating similar to RAL9016 white, RAL 9006 silver or RAL9005 black – or in any other RAL of your choice. Diffuser available in either PMMA opal or PMMA clear with microprismatic plate inserted for lower luminance (UGR<19). Luminaire with moun-ting bracket. The converter is integrated into the lu-minaire housing. Available as either on/off or DALI variant - other control options available on request. Colour temperatures: 2700K, 3000K, 4000K - other light colours available on request. Colour rendering CRI>80 or CRI>90 - Mac Adam <3

Luminaire à LED encastrable à rayonnement di-rect avec cadre périphérique. Canal lumineux sous forme de profilé extrudé en aluminium d'une largeur totale de 54 mm. Possibilité de fabriquer le luminaire sur mesure, au millimètre près. Surface de luminaire thermolaquée matte à fine structure en RAL9016 blanc, RAL 9006 argent ou RAL9005 noir, sur de-mande RAL au choix. Diffuseur au choix en PMMA opale ou transparent avec plaque microprismatique pour une intensité lumineuse réduite (UGR<19). Luminaire avec barre de montage. Le convertisseur est intégré au boîtier du luminaire. Au choix en ver-sion on/off ou DALI, autres options de commande disponibles sur demande. Températures de cou-leur : 2700 K, 3000 K, 4000 K, autres couleurs sur demande. Rendu des couleurs CRI>80 ou CRI>90 – Mac Adam <3

ÜBERSICHT | OVERVIEW | VUE D'ENSEMBLE

GENERAL INFO
2700K, 3000K, 4000K
Direct Light
Up to 142lm/W, Up to 6297lm/m
Ra>80, Ra>90, MacAdam 3
On-Off / DALI
Opal & Microprismatic (UGR<19)
Up to L80B10/ 50,000h

HOUSING COLOUR
Weiß feinstruktur matt RAL 9016 White fine structure matt RAL 9016 Blanc structure fine mate RAL 9016
Schwarz feinstruktur matt RAL 9005 Black fine structure matt RAL 9005 Noir structure fine mate RAL 9005
Silber feinstruktur matt RAL 9006 Silver fine structure matt RAL 9006 Argent structure fine mate RAL 9006

LED | CRI >80 | CRI >90 | IP20 | DALI/ SwitchDim | SDCM 3 | >50,000 h | >50,000

LED EINBAULEUCHTE
LED RECESSED VERSION
LED LUMINAIRE ENCASTRABLE

Bestellbeispiel Example order Exemple de commande
3381mm, CRI80, 4000K, Direct, Low Output On-Off, Black, Microprismatic

D4R03381-840LPF-BM
1 2 3 4 5 6 7

1

LÄNGE LENGTH LONGEUR		CODE
580 mm	1,7	00571
860 mm	2,0	00851
1140 mm	2,5	01131
1280 mm	2,7	01271
1420 mm	3,3	01411
1700 mm	3,8	01691
2260 mm	4,6	02251
2540 mm	4,8	02531
2821m	6,4	02812
3381mm	7,3	03372
3801 mm	8,9	03792

2

FARBWIEDERGABE COLOUR RENDERING COLOUR RENDERING	CODE
CRI>80	8
CRI>90	9

3

FARBTEMPERATUR COLOUR TEMPERATURE TEMPÉRATURE DE COULEUR	CODE
2700K	27 (CRI>90 only)
3000K	30
4000K	40

4

POWER OUTPUT SORTIE	CODE
Low Output	LP
High Output	HP

5


STEUERUNG CONTROL CONTRÔLE	CODE
On-Off	F
DALI	D

6

GEHÄUSEFARBE HOUSING COLOUR COULEUR DU BOÎTIER	CODE
Silver RAL9006	V
White RAL9016	W
Black RAL9005	B

7

ABDECKUNG COVER COUVERTURE	CODE
Opal	O
Microprismatic	M

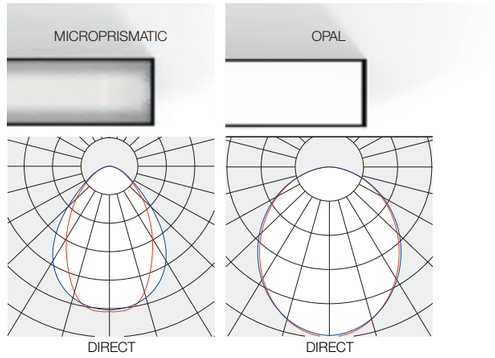

LENGTH MM	LUMEN I WATT LOW OUTPUT	LUMEN I WATT HIGH OUTPUT	LUMEN I WATT LOW OUTPUT	LUMEN I WATT HIGH OUTPUT
580	757 lm I 8 W	1503 lm I 17 W	852 lm I 8 W	1439 lm I 17 W
860	1135 lm I 12 W	2254 lm I 23 W	1136 lm I 12W	2158 lm I 23 W
1140	1514 lm I 15 W	3005 lm I 29 W	1514 lm I 15 W	2879 lm I 29 W
1280	1703 lm I 17 W	3381 lm I 33 W	1704 lm I 17 W	3238 lm I 33 W
1420	1892 lm I 18 W	3757 lm I 35 W	1893 lm I 18 W	3599 lm I 35 W
1700	2271 lm I 20 W	4508 lm I 40 W	2272 lm I 20 W	4318 lm I 40 W
2260	3028 lm I 27 W	6010 lm I 53 W	3028 lm I 27 W	5756 lm I 53 W
2540	3406 lm I 30 W	6762 lm I 60 W	3408 lm I 30 W	6475 lm I 60 W
2821	3784 lm I 35 W	7514 lm I 70 W	3786 lm I 35 W	7198 lm I 70 W
3381	4542 lm I 41 W	9016 lm I 81 W	4544 lm I 41 W	8636 lm I 81 W
3801	5110 lm I 46 W	10143 lm I 91 W	5112 lm I 46 W	9715 lm I 91 W

CUT OUT

RAHMEN FRAME CADRE	LÄNGE LENGTH LA GAUCHE	BREITE WIDTH À DROITE	TIEFE DEPTH PROFONDEUR
580 mm	575 mm	49 mm	110 mm
860 mm	855 mm	49 mm	110 mm
1140 mm	1135 mm	49 mm	110 mm
1280 mm	1275 mm	49 mm	110 mm
1420 mm	1415 mm	49 mm	110 mm
1700 mm	1695 mm	49 mm	110 mm
2260 mm	2255 mm	49 mm	110 mm
2540 mm	2535 mm	49 mm	110 mm
2821 mm	2816 mm	49 mm	110 mm
3381 mm	3376 mm	49 mm	110 mm
3801 mm	3796 mm	49 mm	110 mm

Alle Lumen- und Wattangaben für 4000K, CRI80 – (Mikroprismenangaben ohne Opalfolie) (Details auf P. 313-314)
All lumen and watt figures are for 4000K, CRI80 – (Microprismatic details without opal film) (details on p. 313-314)
Toutes les données lumen et watt pour 4000K, CRI80 – (données microprisme sans feuille opale) (détails p. 313-314)


NEKO / DASH 40
Linear Light System
Wall Mounted

NEW




Wall Mounted

Direct



Direct-Indirect



LED-Wandleuchte direktstrahlend oder direkt-/indirektstrahlend. Lichtkanal aus Aluminium Strangpressprofil mit einer Breite von 41mm. Fertigung der Leuchte milimetergenau auf Kundenwunsch möglich. Oberfläche der Leuch-te feinstruktur matt pulverbeschichtet ähnlich RAL9016 weiß, RAL 9006 silber oder RAL9005 schwarz – auf Anfrage in RAL nach Wahl. Dif-fusor wahlweise in PMMA opal oder PMMA klar mit eingeschobener Mikroprismatischer Plat-te für eine reduzierte Leuchtdichte (UGR<19). Leuchte inkl. speziellem Schnellmontage Wand-baldachin (Montage mittels Stecker und Gegen-stecker). Der Konverter ist in das Leuchten-gehäuse integriert. Wahlweise als on/off oder DALI Variante – weitere Steuerungsoptionen auf Anfrage möglich. Farbtemperaturen: 2700K, 3000K, 4000K – weitere Lichtfarben auf Anfra-ge. Farbwiedergabe CRI>80 oder CRI>90 – Mac Adam <3

LED Wall Luminaire direct beam or direct/indirect beam. Extruded aluminium light channel with 41mm width. The luminaire can be manufactured according to the customer's wishes down to the last millime-tre. Luminaire surface fine textured matte powder coating similar to RAL9016 white, RAL 9006 silver or RAL9005 black – or in any other RAL of your choice. Diffuser available in either PMMA opal or PMMA clear with microprismatic plate inserted for lower luminance (UGR<19). Luminaire with special quick-mount wall canopy (plug with mating plug used for mounting). The converter is integrated into the lu-minaire housing. Available as either on/off or DALI variant - other control options available on request. Colour temperatures: 2700K, 3000K, 4000K - other light colours available on request. Colour rendering CRI>80 or CRI>90 - Mac Adam <3

LED Applique Murale à rayonnement direct ou di-rect/indirect. Canal lumineux sous forme de profi-lé extrudé en aluminium d'une largeur de 41 mm. Possibilité de fabriquer le luminaire sur mesure, au millimètre près. Surface de luminaire thermolaquée matte à fine structure en RAL9016 blanc, RAL 9006 argent ou RAL9005 noir, sur demande RAL au choix. Diffuseur au choix en PMMA opale ou transparent avec plaque microprismatique pour une intensité lumineuse réduite (UGR<19). Luminaire avec cache mural spécial à montage rapide inclus (montage par fiche et contre-fiche). Le convertisseur est intégré au boîtier du luminaire. Au choix en version on/off ou DALI, autres options de commande disponibles sur demande. Températures de couleur : 2700 K, 3000 K, 4000 K, autres couleurs sur demande. Ren-du des couleurs CRI>80 ou CRI>90 – Mac Adam <3

ÜBERSICHT | OVERVIEW | VUE D'ENSEMBLE

GENERAL INFO
2700K, 3000K, 4000K
Direct Light, Direct-indirect Light
Up to 142lm/W, Up to 6297lm/m
Ra>80, Ra>90, MacAdam 3
On-Off / DALI
Opal & Microprism (UGR <19)
Up to L80B10/ 50,000h

HOUSING COLOUR
Weiß feinstruktur matt RAL 9016 White fine structure matt RAL 9016 Blanc structure fine mate RAL 9016
Schwarz feinstruktur matt RAL 9005 Black fine structure matt RAL 9005 Noir structure fine mate RAL 9005
Silber feinstruktur matt RAL 9006 Silver fine structure matt RAL 9006 Argent structure fine mate RAL 9006

LED | CRI >80 | CRI >90 | IP20 | DALI/ SwitchDim | SDCM 3 | >50,000 h | >50,000

LED WANDLEUCHTE
LED WALL LUMINAIRE
LED APPLIQUE MURALE

Bestellbeispiel Example order Exemple de commande
3381mm, CRI80, 4000K, Direct-Indirect, Low Output On-Off, Black, Microprismatic

D4W03381-840LPF-BM-U
1 2 3 4 5 6 7 8

1

LÄNGE LENGTH LONGEUR		CODE
571 mm	2,2	00571
851 mm	2,9	00851
1131 mm	3,7	01131
1271 mm	3,9	01271
1411 mm	4,2	01411
1691 mm	4,7	01691
2251 mm	5,7	02251
2531 mm	5,9	02531
2812 mm	7,8	02812
3372 mm	9,2	03372
3792 mm	10,9	03792

2

FARBWIEDERGABE COLOUR RENDERING COLOUR RENDERING	CODE
CRI>80	8
CRI>90	9

3

FARBTEMPERATUR COLOUR TEMPERATURE TEMPÉRATURE DE COULEUR	CODE
2700K	27 (CRI>90 only)
3000K	30
4000K	40

4

POWER OUTPUT SORTIE	CODE
Low Output	LP
High Output	HP

5

STEUERUNG CONTROL CONTRÔLE	CODE
On-Off	F
DALI	D

6


GEHÄUSEFARBE HOUSING COLOUR COULEUR DU BOÎTIER	CODE
Silver RAL9006	V
White RAL9016	W
Black RAL9005	B

7

ABDECKUNG COVER COUVERTURE	CODE
Opal	O
Microprismatic	M
U-Cover	C

8

LICHTVERTEILUNG LIGHT DISTRIBUTION RÉPARTITION DE LA LUMIÈRE	CODE
Direct	(none)
Direct-Indirect	U

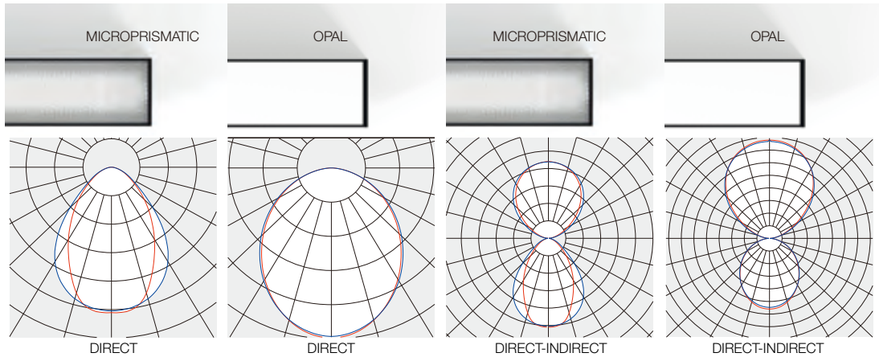

LENGTH MM	LUMEN I WATT LOW OUTPUT	LUMEN I WATT HIGH OUTPUT	LUMEN I WATT LOW OUTPUT	LUMENIWATT HIGH OUTPUT	LUMEN I WATT LOW OUTPUT	LUMEN I WATT HIGH OUTPUT	LUMEN I WATT LOW OUTPUT	LUMEN I WATT HIGH OUTPUT
571	757 lm I 8 W	1503 lm I 17 W	852 lm I 8 W	1439 lm I 17 W	1763 lm I 14 W	3433 lm I 29 W	1767 lm I 14 W	3423 lm I 29 W
851	1135 lm I 12 W	2254 lm I 23 W	1136 lm I 12W	2158 lm I 23 W	2644 lm I 20 W	5149 lm I 43 W	2650 lm I 20 W	5149 lm I 43 W
1131	1514 lm I 15 W	3005 lm I 29 W	1514 lm I 15 W	2879 lm I 29 W	3527 lm I 26 W	6866 lm I 55 W	3535 lm I 26 W	6846 lm I 55 W
1271	1703 lm I 17 W	3381 lm I 33 W	1704 lm I 17 W	3238 lm I 33 W	3968 lm I 29 W	7724 lm I 63 W	3977 lm I 29 W	7702 lm I 63 W
1411	1892 lm I 18 W	3757 lm I 35 W	1893 lm I 18 W	3599 lm I 35 W	4408 lm I 32 W	8582 lm I 68 W	4419 lm I 32 W	8557 lm I 68 W
1691	2271 lm I 20 W	4508 lm I 40 W	2272 lm I 20 W	4318 lm I 40 W	5289 lm I 38 W	10298 lm I 82 W	5303 lm I 38 W	10268 lm I 82 W
2251	3028 lm I 27 W	6010 lm I 53 W	3028 lm I 27 W	5756 lm I 53 W	7054 lm I 50 W	13732 lm I 105 W	7070 lm I 50 W	13692 lm I 105 W
2531	3406 lm I 30 W	6762 lm I 60 W	3408 lm I 30 W	6475 lm I 60 W	7936 lm I 56 W	15448 lm I 119 W	7954 lm I 56 W	15404 lm I 119 W
2812	3784 lm I 35 W	7514 lm I 70 W	3786 lm I 35 W	7198 lm I 70 W	8816 lm I 64 W	17164 lm I 136 W	8838 lm I 64 W	17114 lm I 136 W
3372	4542 lm I 41 W	9016 lm I 81 W	4544 lm I 41 W	8636 lm I 81 W	10578 lm I 77 W	20596 lm I 163 W	10606 lm I 77 W	20536 lm I 163 W
3792	5110 lm I 46 W	10143 lm I 91 W	5112 lm I 46 W	9715 lm I 91 W	11900 lm I 87 W	23140 lm I 184 W	11932 lm I 87 W	23103 lm I 184 W

Alle Lumen- und Wattangaben für 4000K, CRI80 – (Mikroprismenangaben ohne Opalfolie) (Details auf P. 313-314)
All lumen and watt figures are for 4000K, CRI80 – (Microprismatic details without opal film) (details on p. 313-314)
Toutes les données lumen et watt pour 4000K, CRI80 – (données microprisme sans feuille opale) (détails p. 313-314)

NEKO / DASH 40
Linear Light System

NEW



LUMEN OUTPUT (lm)

MICROPRISMATIC

CRI80

LÄNGE	DIRECT › LOW OUTPUT		DIRECT › HIGH OUTPUT		DIRECT › LOW OUTPUT		DIRECT › HIGH OUTPUT	
LENGTH	3000K	4000K	3000K	4000K	3000K	4000K	3000K	4000K
LONGEUR mm	Lumen	Lumen	Lumen	Lumen	Lumen	Lumen	Lumen	Lumen
571 - 580	727	757	1443	1503	1693	1763	3295	3433
851 - 860	1090	1135	2164	2254	2539	2644	4942	5149
1131 - 1140	1453	1514	2885	3005	3386	3527	6591	6866
1271 - 1280	1635	1703	3246	3381	3809	3968	7415	7724
1411 - 1420	1817	1892	3607	3757	4232	4408	8238	8582
1691 - 1700	2180	2271	4328	4508	5078	5289	9885	10298
2251 - 2260	2906	3028	5770	6010	6672	7054	13182	13732
2531 - 2540	3270	3406	6492	6762	7618	7936	14830	15448
2812 - 2821	3634	3784	7214	7514	8464	8816	16476	17164
3372 - 3381	4360	4542	8656	9016	10156	10578	19770	20596
3792 - 3801	4905	5110	9738	10143	11425	11900	22241	23140

CRI90

LÄNGE	DIRECT › LOW OUTPUT			DIRECT › HIGH OUTPUT			DIRECT › LOW OUTPUT			DIRECT › HIGH OUTPUT		
LENGTH	2700K	3000K	4000K	2700K	3000K	4000K	2700K	3000K	4000K	2700K	3000K	4000K
LONGEUR mm	Lumen	Lumen	Lumen	Lumen	Lumen	Lumen	Lumen	Lumen	Lumen	Lumen	Lumen	Lumen
571 - 580	590	628	655	1172	1247	1300	1375	1463	1525	2678	2849	2969
851 - 860	885	942	982	1758	1871	1950	2062	2194	2287	4017	4273	4453
1131 - 1140	1180	1256	1309	2344	2494	2600	2751	2927	3051	5356	5699	5939
1271 - 1280	1328	1413	1473	2637	2806	2925	3095	3293	3432	6025	6411	6681
1411 - 1420	1476	1570	1637	2930	3118	3250	3438	3659	3813	6694	7123	7423
1691 - 1700	1771	1884	1964	3516	3741	3900	4125	4390	4575	8033	8547	8907
2251 - 2260	2360	2512	2618	4688	4988	5200	5502	5854	6102	10712	11395	11878
2531 - 2540	2656	2826	2946	5274	5612	5850	6190	6586	6864	12050	12822	13362
3372 - 3381	2952	3140	3274	5860	6236	6500	6876	7318	7626	13388	14246	14846
3372 - 3381	3542	3768	3928	7032	7482	7800	8250	8780	9150	16066	17094	17814
3792 - 3801	3985	4239	4419	7911	8417	8775	9281	9877	10293	18074	19230	20040



LUMEN OUTPUT (lm)

OPAL

CRI80

LÄNGE	DIRECT › LOW OUTPUT		DIRECT › HIGH OUTPUT		DIRECT › LOW OUTPUT		DIRECT › HIGH OUTPUT	
LENGTH	3000K	4000K	3000K	4000K	3000K	4000K	3000K	4000K
LONGEUR mm	Lumen	Lumen	Lumen	Lumen	Lumen	Lumen	Lumen	Lumen
571 - 580	818	852	1381	1439	1697	1767	3286	3423
851 - 860	1091	1136	2071	2158	2545	2650	4929	5149
1131 - 1140	1454	1514	2762	2879	3394	3535	6572	6846
1271 - 1280	1636	1704	3107	3238	3818	3977	7394	7702
1411 - 1420	1818	1893	3452	3599	4242	4419	8215	8557
1691 - 1700	2181	2272	4143	4318	5090	5303	9858	10268
2251 - 2260	2908	3028	5524	5756	6788	7070	13144	13692
2531 - 2540	3272	3408	6214	6475	7636	7954	14788	15404
2812 - 2821	3636	3786	6904	7198	8484	8838	16430	17114
3372 - 3381	4362	4544	8286	8636	10180	10606	19716	20536
3792 - 3801	4908	5112	9322	9715	11452	11932	22180	23103

CRI90

LÄNGE	DIRECT › LOW OUTPUT			DIRECT › HIGH OUTPUT			DIRECT › LOW OUTPUT			DIRECT › HIGH OUTPUT		
LENGTH	2700K	3000K	4000K	2700K	3000K	4000K	2700K	3000K	4000K	2700K	3000K	4000K
LONGEUR mm	Lumen	Lumen	Lumen	Lumen	Lumen	Lumen	Lumen	Lumen	Lumen	Lumen	Lumen	Lumen
571 - 580	664	707	737	1154	1194	1264	1378	1467	1529	2670	2841	2960
851 - 860	886	942	983	1731	1791	1896	2067	2200	2293	4005	4261	4440
1131 - 1140	1181	1257	1310	2309	2388	2529	2757	2934	3058	5340	5682	5921
1271 - 1280	1329	1414	1474	2597	2687	2845	3102	3301	3440	6008	6393	6662
1411 - 1420	1477	1571	1638	2886	2985	3161	3446	3667	3822	6675	7102	7401
1691 - 1700	1772	1885	1965	3463	3582	3793	4135	4400	4586	8010	8522	8881
2251 - 2260	2362	2514	2620	4618	4776	5058	5514	5868	6116	10680	11364	11842
2531 - 2540	2658	2828	2948	5194	5374	5690	6204	6602	6880	12016	12786	13324
2812 - 2821	2954	3142	3276	5772	5970	6322	6892	7334	7644	13350	14204	14802
3372 - 3381	3544	3770	3930	6926	7164	7586	8270	8800	9172	16020	17044	17762
3792 - 3801	3987	4242	4422	7792	8059	8534	9304	9900	10318	18022	19174	19982

OPAL U-COVER CRI80

LÄNGE	DIRECT › LOW OUTPUT		DIRECT › HIGH OUTPUT	
LENGTH	3000K	4000K	3000K	4000K
LONGEUR mm	Lumen	Lumen	Lumen	Lumen
571 - 580	753	785	1432	1492
851 - 860	1130	1177	2148	2238
1131 - 1140	1507	1570	2864	2984
1271 - 1280	1696	1767	3222	3357
1411 - 1420	1884	1962	3580	3730
1691 - 1700	2260	2355	4296	4476
2251 - 2260	3014	3140	5728	5968
2531 - 2540	3392	3534	6444	6714
2812 - 2821	3768	3924	7160	7460
3372 - 3381	4520	4710	8592	8952
3792 - 3801	5085	5299	9666	10071


OPAL U-COVER CRI90

DIRECT › LOW OUTPUT			DIRECT › HIGH OUTPUT		
2700K	3000K	4000K	2700K	3000K	4000K
Lumen	Lumen	Lumen	Lumen	Lumen	Lumen
612	652	679	1190	1230	1290
919	978	1019	1785	1846	1935
1225	1304	1358	2381	2461	2581
1378	1467	1528	2679	2769	2904
1531	1630	1697	2976	3076	3226
1837	1956	2037	3571	3691	3871
2450	2608	2716	4762	4922	5162
2756	2934	3056	5358	5538	5808
3062	3260	3394	5952	6152	6452
3674	3912	4074	7142	7382	7742
4133	4401	4583	8035	8304	8710


Microprismatic Cover/ Opal Cover



Surface Mounted




Microprismatic Cover/ Opal Cover

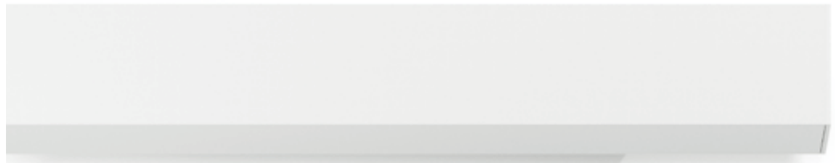


Microprismatic Cover/ Opal Cover



Pendant




Microprismatic Cover/ Opal Cover

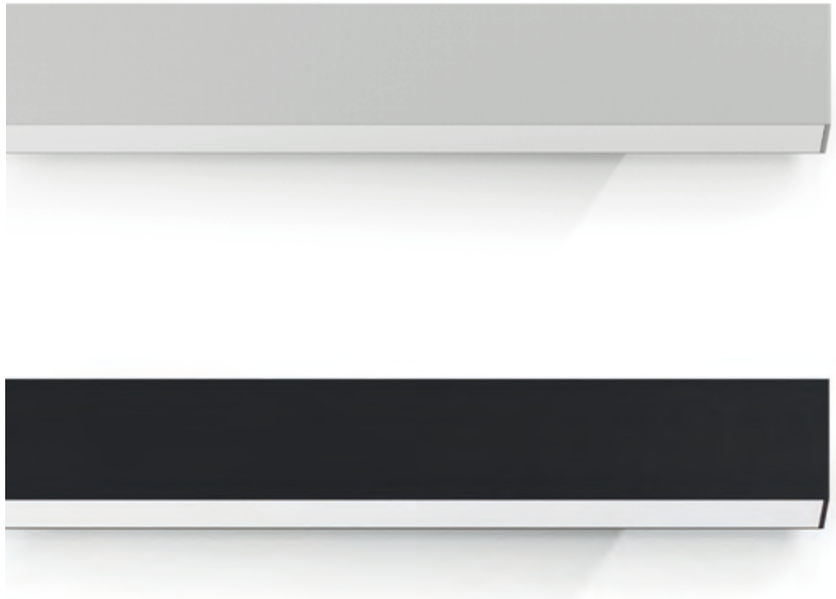

Wall Mounted

Direct


Direct-Indirect



Microprismatic Cover/ Opal Cover




Trim Recessed



NEKO / DASH 50
Linear Light System
Surface Mounted

NEW

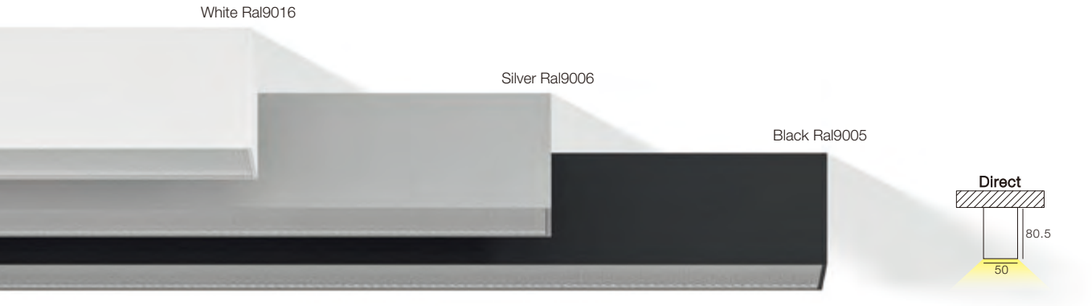

LED-Anbauleuchte direktstrahlend. Lichtkanal aus Aluminium Strangpressprofil mit einer Breite von 50mm. Fertigung der Leuchte milimetergenau auf Kundenwunsch möglich. Oberfläche der Leuchte feinstruktur matt pulverbeschichtet ähnlich RAL9016 weiß, RAL 9006 silber oder RAL9005 schwarz – auf Anfrage in RAL nach Wahl. Diffusor wahlweise in PMMA opal oder PMMA klar mit eingeschobener Mikroprisma-tischer Platte für eine reduzierte Leuchtdichte (UGR<19). Der Konverter ist in das Leuchten-gehäuse integriert. Wahlweise als on/off oder DALI Variante – weitere Steuerungsoptionen auf Anfrage möglich. Farbtemperaturen: 2700K, 3000K, 4000K – weitere Lichtfarben auf Anfrage. Farbwiedergabe CRI>80 oder CRI>90 – Mac Adam <3

Surface-mounted LED Luminaire direct beam Ex-truded aluminium light channel with 50mm width. The luminaire can be manufactured according to the customer's wishes down to the last millimetre. Lumi-naire surface fine textured matte powder coating si-milar to RAL9016 white, RAL 9006 silver or RAL9005 black – or in any other RAL of your choice. Diffuser available in either PMMA opal or PMMA clear with microprismatic plate inserted for lower luminance (UGR<19). The converter is integrated into the lu-minaire housing. Available as either on/off or DALI variant - other control options available on request. Colour temperatures: 2700K, 3000K, 4000K - other light colours available on request. Colour rendering CRI>80 or CRI>90 - Mac Adam <3

Luminaire en saillie à LED à rayonnement direct. Canal lumineux sous forme de profilé extrudé en aluminium d'une largeur de 50 mm. Possibilité de fabriquer le luminaire sur mesure, au millimètre près. Surface de luminaire thermolaquée matte à fine structure en RAL9016 blanc, RAL 9006 argent ou RAL9005 noir, sur demande RAL au choix. Diffu-seur au choix en PMMA opale ou transparent avec plaque microprismatique pour une intensité lumi-neuse réduite (UGR<19). Le convertisseur est intégré au boîtier du luminaire. Au choix en version on/off ou DALI, autres options de commande disponibles sur demande. Températures de couleur : 2700 K, 3000 K, 4000 K, autres couleurs sur demande. Ren-du des couleurs CRI>80 ou CRI>90 – Mac Adam <3

ÜBERSICHT | OVERVIEW | VUE D'ENSEMBLE

GENERAL INFO
2700K, 3000K, 4000K
Direct Light
Up to 142lm/W, Up to 6297lm/m
Ra>80, Ra>90, MacAdam 3
On-Off / DALI
Opal & Microprismatic (UGR<19)
Up to L80B10/ 50,000h

HOUSING COLOUR
Weiß feinstruktur matt RAL 9016 White fine structure matt RAL 9016 Blanc structure fine mate RAL 9016
Schwarz feinstruktur matt RAL 9005 Black fine structure matt RAL 9005 Noir structure fine mate RAL 9005
Silber feinstruktur matt RAL 9006 Silver fine structure matt RAL 9006 Argent structure fine mate RAL 9006

LED >80 | CRI >90 | CRI IP20 | DALI/ SwitchDim | SDCM 3 | >50,000 h | >50,000

LED ANBAULEUCHTE
LED SURFACE MOUNTED LUMINAIRE
LED LUMINAIRE EN SAILLIE

Bestellbeispiel Example order Exemple de commande
3381mm, CRI80, 4000K, Direct, Low Output On-Off, Black, Microprismatic

D5S03381-840LPF-BM
1 2 3 4 5 6 7

1

LÄNGE LENGTH LONGEUR		CODE
571 mm	1,5	00571
851 mm	2,0	00851
1131 mm	2,6	01131
1271 mm	2,8	01271
1411 mm	3,5	01411
1691 mm	4,0	01691
2251 mm	5,0	02251
2531 mm	5,2	02531
2812 mm	6,6	02812
3372 mm	7,6	03372
3792 mm	9,1	03792

2

FARBWIEDERGABE COLOUR RENDERING COLOUR RENDERING	CODE
CRI>80	8
CRI>90	9

3

FARBTEMPERATUR COLOUR TEMPERATURE TEMPÉRATURE DE COULEUR	CODE
2700K	27 (CRI>90 only)
3000K	30
4000K	40

4

POWER OUTPUT SORTIE	CODE
Low Output	LP
High Output	HP

5


STEUERUNG CONTROL CONTRÔLE	CODE
On-Off	F
DALI	D

6

GEHÄUSEFARBE HOUSING COLOUR COULEUR DU BOÎTIER	CODE
Silver RAL9006	V
White RAL9016	W
Black RAL9005	B

7

ABDECKUNG COVER COUVERTURE	CODE
Opal	O
Microprismatic	M

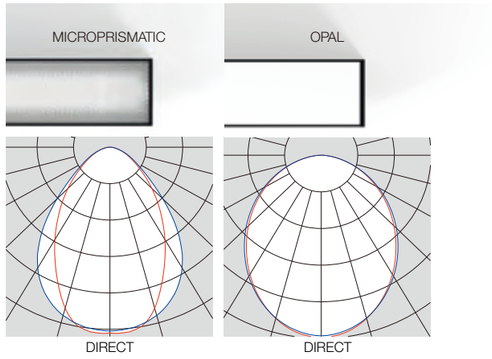


LENGTH MM	LUMEN I WATT LOW OUTPUT	LUMEN I WATT HIGH OUTPUT	LUMEN I WATT LOW OUTPUT	LUMEN I WATT HIGH OUTPUT
571	741 lm I 8 W	1470 lm I 17 W	741 lm I 8 W	1470 lm I 17 W
851	1111 lm I 12 W	2205 lm I 23 W	1111 lm I 12W	2205 lm I 23 W
1131	1481 lm I 15 W	2940 lm I 29 W	1481 lm I 15 W	2940 lm I 29 W
1271	1666 lm I 16 W	3306 lm I 33 W	1666 lm I 16 W	3306 lm I 33 W
1411	1851 lm I 18 W	3675 lm I 35 W	1851 lm I 18 W	3675 lm I 35 W
1691	2222 lm I 20 W	4409 lm I 41 W	2222 lm I 20 W	4409 lm I 41 W
2251	2962 lm I 27 W	5879 lm I 54 W	2962 lm I 27 W	5879 lm I 54 W
2531	3332 lm I 30 W	6614 lm I 60 W	3332 lm I 30 W	6614 lm I 60 W
2812	3702 lm I 35 W	7349 lm I 70 W	3702 lm I 35 W	7349 lm I 70 W
3372	4444 lm I 41 W	8818 lm I 81 W	4444 lm I 41 W	8818 lm I 81 W
3792	5000 lm I 46 W	9922 lm I 91 W	5000 lm I 46 W	9922 lm I 91 W

Alle Lumen- und Wattangaben für 4000K, CRI80 – (Mikroprismenangaben ohne Opalfolie) (Details auf P. 325–326)
All lumen and watt figures are for 4000K, CRI80 – (Microprismatic details without opal film) (details on p. 325-326)
Toutes les données lumen et watt pour 4000K, CRI80 – (données microprisme sans feuille opale) (détails p. 325-326)

NEKO / DASH 50
Linear Light System
Pendant

NEW





LED-Hängeleuchte direktstrahlend oder direkt-/indirektstrahlend. Lichtkanal aus Aluminium Strangpressprofil mit einer Breite von 50mm. Fertigung der Leuchte milimetergenau auf Kundenwunsch möglich. Oberfläche der Leuchte feinstruktur matt pulverbeschichtet ähnlich RAL9016 weiß, RAL 9006 silber oder RAL9005 schwarz – auf Anfrage in RAL nach Wahl. Diffusor wahlweise in PMMA opal oder PMMA klar mit eingeschobener Mikroprismatischer Platte für eine reduzierte Leuchtdichte (UGR<19). Leuchte inkl. Baldachin mit transparentem Einspeisekabel sowie Seilabhängern und Schnellspannern zur stufenlosen regulierung der Montagehöhe. Der Konverter ist in das Leuchtengehäuse integriert. Wahlweise als on/off oder DALI Variante – weitere Steuerungsop-tionen auf Anfrage möglich. Farbtemperaturen: 2700K, 3000K, 4000K – weitere Lichtfarben auf Anfrage. Farbwiedergabe CRI>80 oder CRI>90 – Mac Adam <3

Pendant LED Luminaire direct beam or direct/indi-rect beam. Extruded aluminium light channel with 50mm width. The luminaire can be manufactured according to the customer's wishes down to the last millimetre. Luminaire surface fine textured matte powder coating similar to RAL9016 white, RAL 9006 silver or RAL9005 black – or in any other RAL of your choice. Diffuser available in either PMMA opal or PMMA clear with microprismatic plate inserted for lower luminance (UGR<19). Luminaire with canopy with transparent feed cable plus cable hangers and quick-release clamps for smooth mounting height adjustment. The converter is integrated into the lu-minaire housing. Available as either on/off or DALI variant - other control options available on request. Colour temperatures: 2700K, 3000K, 4000K - other light colours available on request. Colour rendering CRI>80 or CRI>90 - Mac Adam <3

uspension à LED à rayonnement direct ou direct/indirect. Canal lumineux sous forme de profi-lé extrudé en aluminium d'une largeur de 50 mm. Possibilité de fabriquer le luminaire sur mesure, au millimètre près. Surface de luminaire thermolaquée matte à fine structure en RAL9016 blanc, RAL 9006 argent ou RAL9005 noir, sur demande RAL au choix. Diffuseur au choix en PMMA opale ou transparent avec plaque microprismatique pour une intensité lumineuse réduite (UGR<19). Luminaire avec cache et câble d'alimentation transparent, câbles de suspension et systèmes de serrage rapide permettant d'ajuster la hauteur de montage en continu. Le convertisseur est intégré au boîtier du luminaire. Au choix en version on/off ou DALI, autres options de commande disponibles sur demande. Températures de couleur : 2700 K, 3000 K, 4000 K, autres couleurs sur demande. Rendu des couleurs CRI>80 ou CRI>90uleurs CRI>80 ou CRI>90- Mac Adam <3

ÜBERSICHT | OVERVIEW | VUE D'ENSEMBLE

GENERAL INFO
2700K, 3000K, 4000K
Direct Light, Direct-Indirect Light
Up to 142lm/W, Up to 6297lm/m
Ra>80, Ra>90, MacAdam 3
On-Off / DALI
Opal & Microprismatic (UGR<19)
Up to L80B10/ 50,000h

HOUSING COLOUR
Weiß feinstruktur matt RAL 9016 White fine structure matt RAL 9016 Blanc structure fine mate RAL 9016
Schwarz feinstruktur matt RAL 9005 Black fine structure matt RAL 9005 Noir structure fine mate RAL 9005
Silber feinstruktur matt RAL 9006 Silver fine structure matt RAL 9006 Argent structure fine mate RAL 9006

LED | CRI >80 | CRI >90 | IP20 | DALI/ SwitchDim | SDCM 3 | >50,000 h | >50,000

LED-HÄNGELEUCHTE
LED PENDANT LUMINAIRE
LED SUSPENSION

Bestellbeispiel Example order Exemple de commande
3381mm, CRI80, 4000K, Direct-Indirect, Low Output On-Off, Black, Microprismatic

D5P03381-840LPF-BM-U
1 2 3 4 5 6 7 8

1

LÄNGE LENGTH LONGEUR		CODE
1131 mm	3,7	01131
1271 mm	3,9	01271
1411 mm	4,2	01411
1691 mm	4,9	01691
2251 mm	6,0	02251
2531 mm	6,2	02531
2812 mm	8,0	02812
3372 mm	9,3	03372
3792 mm	11,3	03792

2

FARBWIEDERGABE COLOUR RENDERING COLOUR RENDERING	CODE
CRI>80	8
CRI>90	9

3

FARBTEMPERATUR COLOUR TEMPERATURE TEMPÉRATURE DE COULEUR	CODE
2700K	27 (CRI>90 only)
3000K	30
4000K	40

4

POWER OUTPUT SORTIE	CODE
Low Output	LP
High Output	HP

5

STEUERUNG CONTROL CONTRÔLE	CODE
On-Off	F
DALI	D

6


GEHÄUSEFARBE HOUSING COLOUR COULEUR DU BOÎTIER	CODE
Silver RAL9006	V
White RAL9016	W
Black RAL9005	B

7

ABDECKUNG COVER COUVERTURE	CODE
Opal	O
Microprismatic	M

8

LICHTVERTEILUNG LIGHT DISTRIBUTION RÉPARTITION DE LA LUMIÈRE	CODE
Direct	(none)
Direct-Indirect	U

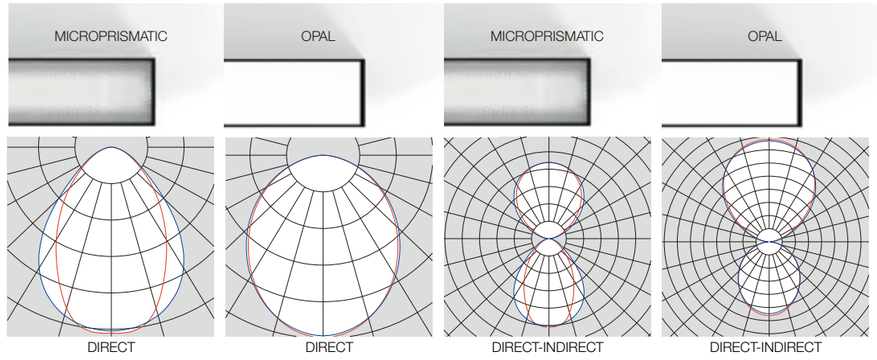


LENGTH MM	LUMEN I WATT LOW OUTPUT	LUMEN I WATT HIGH OUTPUT	LUMEN I WATT LOW OUTPUT	LUMEN I WATT HIGH OUTPUT	LUMEN I WATT LOW OUTPUT	LUMEN I WATT HIGH OUTPUT	LUMEN I WATT LOW OUTPUT	LUMEN I WATT HIGH OUTPUT
1131	1481 lm I 15 W	2940 lm I 29 W	1481 lm I 15 W	2940 lm I 29 W	3517 lm I 26 W	6548 lm I 55 W	3517 lm I 26 W	6548 lm I 55 W
1271	1666 lm I 16 W	3306 lm I 33 W	1666 lm I 16 W	3306 lm I 33 W	3955 lm I 29 W	7700 lm I 62 W	3955 lm I 29 W	7700 lm I 62 W
1411	1851 lm I 18 W	3675 lm I 35 W	1851 lm I 18 W	3675 lm I 35 W	4397 lm I 32 W	8556 lm I 68 W	4397 lm I 32 W	8556 lm I 68 W
1691	2222 lm I 20 W	4409 lm I 41 W	2222 lm I 20 W	4409 lm I 41 W	5276 lm I 38 W	10267 lm I 81 W	5276 lm I 38 W	10267 lm I 81 W
2251	2962 lm I 27 W	5879 lm I 54 W	2962 lm I 27 W	5879 lm I 54 W	7034 lm I 50 W	13690 lm I 105 W	7034 lm I 50 W	13690 lm I 105 W
2531	3332 lm I 30 W	6614 lm I 60 W	3332 lm I 30 W	6614 lm I 60 W	7912 lm I 56 W	15402 lm I 118 W	7912 lm I 56 W	15402 lm I 118 W
2812	3702 lm I 35 W	7349 lm I 70 W	3702 lm I 35 W	7349 lm I 70 W	8794 lm I 64 W	17112 lm I 136 W	8794 lm I 64 W	17112 lm I 136 W
3372	4444 lm I 41 W	8818 lm I 81 W	4444 lm I 41 W	8818 lm I 81 W	10552 lm I 77 W	20534 lm I 163 W	10552 lm I 77 W	20534 lm I 163 W
3792	5000 lm I 46 W	9922 lm I 91 W	5000 lm I 46 W	9922 lm I 91 W	11871 lm I 86 W	23101 lm I 183 W	11871 lm I 86 W	23101 lm I 183 W


Alle Lumen- und Wattangaben für 4000K, CRI80 – (Mikroprismenangaben ohne Opalfolie) (Details auf P. 325–326)
All lumen and watt figures are for 4000K, CRI80 – (Microprismatic details without opal film) (details on p. 325-326)
Toutes les données lumen et watt pour 4000K, CRI80 – (données microprisme sans feuille opale) (détails p. 325-326)

NEKO / DASH 50
Linear Light System
Trim Recessed

NEW

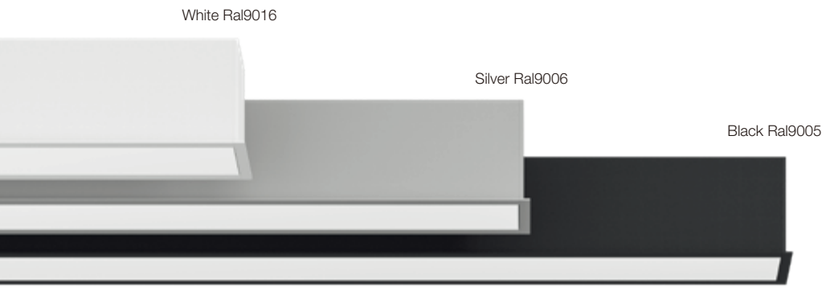

Trim Recessed



LED-Einbauleuchte mit umlaufendem Rahmen direktstrahlend. Lichtkanal aus Aluminium Strangpressprofil mit einer Gesamtbreite von 63mm. Fertigung der Leuchte milimetergenau auf Kundenwunsch möglich. Oberfläche der Leuchte feinstruktur matt pulverbeschichtet ähnlich RAL9016 weiß, RAL 9006 silber oder RAL9005 schwarz – auf Anfrage in RAL nach Wahl. Diffusor wahlweise in PMMA opal oder PMMA klar mit eingeschobener Mikroprismatischer Platte für eine reduzierte Leuchtdichte (UGR<19). Leuchte inkl. Montagebügel. Der Konverter ist in das Leuchtengehäuse integriert. Wahlweise als on/off oder DALI Variantebe weitere Steuerungsoptionen auf Anfrage möglich. Farbtemperaturen: 2700K, 3000K, 4000K – weitere Lichtfarben auf Anfrage. Farbwiedergabe CRI>80 oder CRI>90 – Mac Adam <3

Recessed LED Luminaire with frame direct beam. Extruded aluminium light channel with a total width of 63mm. The luminaire can be manufactured ac-cording to the customer's wishes down to the last millimetre. Luminaire surface fine textured matte powder coating similar to RAL9016 white, RAL 9006 silver or RAL9005 black – or in any other RAL of your choice. Diffuser available in either PMMA opal or PMMA clear with microprismatic plate inserted for lower luminance (UGR<19). Luminaire with moun-ting bracket. The converter is integrated into the lu-minaire housing. Available as either on/off or DALI variant - other control options available on request. Colour temperatures: 2700K, 3000K, 4000K - other light colours available on request. Colour rendering CRI>80 or CRI>90 - Mac Adam <3

Luminaire à LED encastrable à rayonnement direct avec cadre périphérique. Canal lumineux sous forme de profilé extrudé en aluminium d'une largeur totale de 63 mm. Possibilité de fabriquer le luminaire sur mesure, au millimètre près. Surface de luminaire thermolaquée matte à fine structure en RAL9016 blanc, RAL 9006 argent ou RAL9005 noir, sur de-mande RAL au choix. Diffuseur au choix en PMMA opale ou transparent avec plaque microprismatique pour une intensité lumineuse réduite (UGR<19). Luminaire avec barre de montage. Le convertisseur est intégré au boîtier du luminaire. Au choix en ver-sion on/off ou DALI, autres options de commande disponibles sur demande. Températures de cou-leur : 2700 K, 3000 K, 4000 K, autres couleurs sur demande. Rendu des couleurs CRI>80 ou CRI>90 – Mac Adam <3

ÜBERSICHT | OVERVIEW | VUE D'ENSEMBLE

GENERAL INFO
2700K, 3000K, 4000K
Direct Light
Up to 142lm/W, Up to 6297lm/m
Ra>80, Ra>90, MacAdam 3
On-Off / DALI
Opal & Microprismatic (UGR<19)
Up to L80B10/ 50,000h

HOUSING COLOUR
Weiß feinstruktur matt RAL 9016 White fine structure matt RAL 9016 Blanc structure fine mate RAL 9016
Schwarz feinstruktur matt RAL 9005 Black fine structure matt RAL 9005 Noir structure fine mate RAL 9005
Silber feinstruktur matt RAL 9006 Silver fine structure matt RAL 9006 Argent structure fine mate RAL 9006

LED >80 | CRI >80 | CRI >90 | IP20 | DALI/ SwitchDim | SDCM 3 | >50,000 h | >50,000

LED EINBAULEUCHTE
LED RECESSED VERSION
LED LUMINAIRE ENCASTRABLE

Bestellbeispiel Example order Exemple de commande
3381mm, CRI80, 4000K, Direct, Low Output On-Off, Black, Microprismatic

D5R03381-840LPF-BM
1 2 3 4 5 6 7

1

LÄNGE LENGTH LONGEUR		CODE
580 mm	1,7	00571
860 mm	2,0	00851
1140 mm	2,5	01131
1280 mm	2,7	01271
1420 mm	3,3	01411
1700 mm	3,8	01691
2260 mm	4,6	02251
2540 mm	4,8	02531
2821m	6,4	02812
3381mm	7,3	03372
3801 mm	8,9	03792

2

FARBWIEDERGABE COLOUR RENDERING COLOUR RENDERING	CODE
CRI>80	8
CRI>90	9

3

FARBTEMPERATUR COLOUR TEMPERATURE TEMPÉRATURE DE COULEUR	CODE
2700K	27 (CRI>90 only)
3000K	30
4000K	40

4

POWER OUTPUT SORTIE	CODE
Low Output	LP
High Output	HP

5

STEUERUNG CONTROL CONTRÔLE	CODE
On-Off	F
DALI	D


6

GEHÄUSEFARBE HOUSING COLOUR COULEUR DU BOÎTIER	CODE
Silver RAL9006	V
White RAL9016	W
Black RAL9005	B

7

ABDECKUNG COVER COUVERTURE	CODE
Opal	O
Microprismatic	M



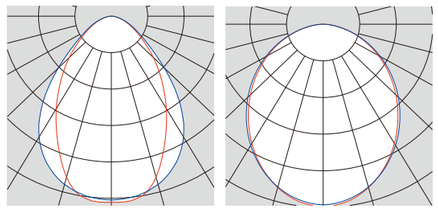

DIRECT DIRECT

LENGTH MM	LUMEN I WATT LOW OUTPUT	LUMEN I WATT HIGH OUTPUT	LUMEN I WATT LOW OUTPUT	LUMEN I WATT HIGH OUTPUT
580	741 lm I 8 W	1470 lm I 17 W	741 lm I 8 W	1470 lm I 17 W
860	1111 lm I 12 W	2205 lm I 23 W	1111 lm I 12W	2205 lm I 23 W
1140	1481 lm I 15 W	2940 lm I 29 W	1481 lm I 15 W	2940 lm I 29 W
1280	1666 lm I 16 W	3306 lm I 33 W	1666 lm I 16 W	3306 lm I 33 W
1420	1851 lm I 18 W	3675 lm I 35 W	1851 lm I 18 W	3675 lm I 35 W
1700	2222 lm I 20 W	4409 lm I 41 W	2222 lm I 20 W	4409 lm I 41 W
2260	2962 lm I 27 W	5879 lm I 54 W	2962 lm I 27 W	5879 lm I 54 W
2540	3332 lm I 30 W	6614 lm I 60 W	3332 lm I 30 W	6614 lm I 60 W
2821	3702 lm I 35 W	7349 lm I 70 W	3702 lm I 35 W	7349 lm I 70 W
3381	4444 lm I 41 W	8818 lm I 81 W	4444 lm I 41 W	8818 lm I 81 W
3801	5000 lm I 46 W	9922 lm I 91 W	5000 lm I 46 W	9922 lm I 91 W

CUT OUT

RAHMEN FRAME CADRE	LÄNGE LENGTH LA GAUCHE	BREITE WIDTH À DROITE	TIEFE DEPTH PROFONDEUR
580 mm	575 mm	57 mm	125 mm
860 mm	855 mm	57 mm	125 mm
1140 mm	1135 mm	57 mm	125 mm
1280 mm	1275 mm	57 mm	125 mm
1420 mm	1415 mm	57 mm	125 mm
1700 mm	1695 mm	57 mm	125 mm
2260 mm	2255 mm	57 mm	125 mm
2540 mm	2535 mm	57 mm	125 mm
2821 mm	2816 mm	57 mm	125 mm
3381 mm	3376 mm	57 mm	125 mm
3801 mm	3796 mm	57 mm	125 mm

Alle Lumen- und Wattangaben für 4000K, CRI80 – (Mikroprismenangaben ohne Opalfolie) (Details auf P. 325-326)
All lumen and watt figures are for 4000K, CRI80 – (Microprismatic details without opal film) (details on p. 325-326)
Toutes les données lumen et watt pour 4000K, CRI80 – (données microprisme sans feuille opale) (détails p. 325-326)

NEKO / DASH 50

Linear Light System


Wall Mounted

NEW




Wall Mounted

Direct



Direct-Indirect



LED-Wandleuchte direktstrahlend oder direkt-/indirektstrahlend. Lichtkanal aus Aluminium Strangpressprofil mit einer Breite von 41mm. Fertigung der Leuchte milimetergenau auf Kundenwunsch möglich. Oberfläche der Leuch-te feinstruktur matt pulverbeschichtet ähnlich RAL9016 weiß, RAL 9006 silber oder RAL9005 schwarz – auf Anfrage in RAL nach Wahl. Dif-fusor wahlweise in PMMA opal oder PMMA klar mit eingeschobener Mikroprismatischer Plat-te für eine reduzierte Leuchtdichte (UGR<19). Leuchte inkl. speziellem Schnellmontage Wand-baldachin (Montage mittels Stecker und Gegen-stecker). Der Konverter ist in das Leuchten-gehäuse integriert. Wahlweise als on/off oder DALI Variante – weitere Steuerungsoptionen auf Anfrage möglich. Farbtemperaturen: 2700K, 3000K, 4000K – weitere Lichtfarben auf Anfra-ge. Farbwiedergabe CRI>80 oder CRI>90 – Mac Adam <3

LED Wall Luminaire direct beam or direct/indirect beam. Extruded aluminium light channel with 41mm width. The luminaire can be manufactured according to the customer's wishes down to the last millime-tre. Luminaire surface fine textured matte powder coating similar to RAL9016 white, RAL 9006 silver or RAL9005 black – or in any other RAL of your choice. Diffuser available in either PMMA opal or PMMA clear with microprismatic plate inserted for lower luminance (UGR<19). Luminaire with special quick-mount wall canopy (plug with mating plug used for mounting). The converter is integrated into the lu-minaire housing. Available as either on/off or DALI variant - other control options available on request. Colour temperatures: 2700K, 3000K, 4000K - other light colours available on request. Colour rendering CRI>80 or CRI>90 - Mac Adam <3

LED Applique Murale à rayonnement direct ou di-rect/indirect. Canal lumineux sous forme de profi-lé extrudé en aluminium d'une largeur de 41 mm. Possibilité de fabriquer le luminaire sur mesure, au millimètre près. Surface de luminaire thermolaquée matte à fine structure en RAL9016 blanc, RAL 9006 argent ou RAL9005 noir, sur demande RAL au choix. Diffuseur au choix en PMMA opale ou transparent avec plaque microprismatique pour une intensité lumineuse réduite (UGR<19). Luminaire avec cache mural spécial à montage rapide inclus (montage par fiche et contre-fiche). Le convertisseur est intégré au boîtier du luminaire. Au choix en version on/off ou DALI, autres options de commande disponibles sur demande. Températures de couleur : 2700 K, 3000 K, 4000 K, autres couleurs sur demande. Ren-du des couleurs CRI>80 ou CRI>90 – Mac Adam <3

ÜBERSICHT | OVERVIEW | VUE D'ENSEMBLE

GENERAL INFO
2700K, 3000K, 4000K
Direct Light, Direct-indirect Light
Up to 142lm/W, Up to 6297lm/m
Ra>80, Ra>90, MacAdam 3
On-Off / DALI
Opal & Microprism (UGR <19)
Up to L80B10/ 50,000h

HOUSING COLOUR
Weiß feinstruktur matt RAL 9016 White fine structure matt RAL 9016 Blanc structure fine mate RAL 9016
Schwarz feinstruktur matt RAL 9005 Black fine structure matt RAL 9005 Noir structure fine mate RAL 9005
Silber feinstruktur matt RAL 9006 Silver fine structure matt RAL 9006 Argent structure fine mate RAL 9006

LED >80 | CRI >90 | CRI IP20 | DALI/ SwitchDim | SDCM 3 | >50,000 h | >50,000

LED WANDLEUCHTE
LED WALL LUMINAIRE
LED APPLIQUE MURALE

Bestellbeispiel Example order Exemple de commande
3381mm, CRI80, 4000K, Direct-Indirect, Low Output On-Off, Black, Microprismatic

D5W03381-840LPF-BM-U
1 2 3 4 5 6 7 8

1

LÄNGE LENGTH LONGUEUR		CODE
571 mm	2,2	00571
851 mm	2,9	00851
1131 mm	3,7	01131
1271 mm	3,9	01271
1411 mm	4,2	01411
1691 mm	4,7	01691
2251 mm	5,7	02251
2531 mm	5,9	02531
2812 mm	7,8	02812
3372 mm	9,2	03372
3792 mm	10,9	03792

2

FARBWIEDERGABE COLOUR RENDERING COLOUR RENDERING	CODE
CRI>80	8
CRI>90	9

3

FARBTEMPERATUR COLOUR TEMPERATURE TEMPÉRATURE DE COULEUR	CODE
2700K	27 (CRI>90 only)
3000K	30
4000K	40

4

POWER OUTPUT SORTIE	CODE
Low Output	LP
High Output	HP

5

STEUERUNG CONTROL CONTRÔLE	CODE
On-Off	F
DALI	D

6


GEHÄUSEFARBE HOUSING COLOUR COULEUR DU BOÎTIER	CODE
Silver RAL9006	V
White RAL9016	W
Black RAL9005	B

7

ABDECKUNG COVER COUVERTURE	CODE
Opal	O
Microprismatic	M

8

LICHTVERTEILUNG LIGHT DISTRIBUTION RÉPARTITION DE LA LUMIÈRE	CODE
Direct	(none)
Direct-Indirect	U

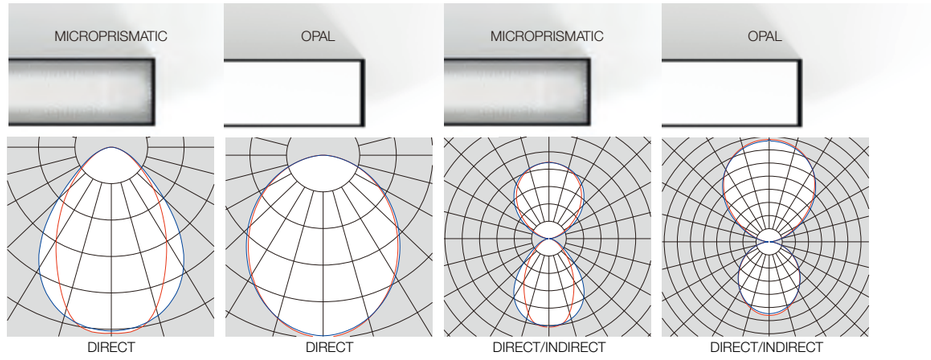

DIRECT | DIRECT | DIRECT/INDIRECT | DIRECT/INDIRECT

LENGTH MM	LUMEN I WATT LOW OUTPUT	LUMEN I WATT HIGH OUTPUT	LUMEN I WATT LOW OUTPUT	LUMENIWATT HIGH OUTPUT	LUMEN I WATT LOW OUTPUT	LUMEN I WATT HIGH OUTPUT	LUMEN I WATT LOW OUTPUT	LUMEN I WATT HIGH OUTPUT
571	741 lm I 8 W	1470 lm I 17 W	741 lm I 8 W	1470 lm I 17 W	1758 lm I 14 W	3422 lm I 29 W	1758 lm I 14 W	3422 lm I 29 W
851	1111 lm I 12 W	2205 lm I 23 W	1111 lm I 12W	2205 lm I 23 W	2638 lm I 23 W	5133 lm I 42 W	2638 lm I 23 W	5133 lm I 42 W
1131	1481 lm I 15 W	2940 lm I 29 W	1481 lm I 15 W	2940 lm I 29 W	3517 lm I 26 W	6548 lm I 55 W	3517 lm I 26 W	6548 lm I 55 W
1271	1666 lm I 16 W	3306 lm I 33 W	1666 lm I 16 W	3306 lm I 33 W	3955 lm I 29 W	7700 lm I 62 W	3955 lm I 29 W	7700 lm I 62 W
1411	1851 lm I 18 W	3675 lm I 35 W	1851 lm I 18 W	3675 lm I 35 W	4397 lm I 32 W	8556 lm I 68 W	4397 lm I 32 W	8556 lm I 68 W
1691	2222 lm I 20 W	4409 lm I 41 W	2222 lm I 20 W	4409 lm I 41 W	5276 lm I 38 W	10267 lm I 81 W	5276 lm I 38 W	10267 lm I 81 W
2251	2962 lm I 27 W	5879 lm I 54 W	2962 lm I 27 W	5879 lm I 54 W	7034 lm I 50 W	13690 lm I 105 W	7034 lm I 50 W	13690 lm I 105 W
2531	3332 lm I 30 W	6614 lm I 60 W	3332 lm I 30 W	6614 lm I 60 W	7912 lm I 56 W	15402 lm I 118 W	7912 lm I 56 W	15402 lm I 118 W
2812	3702 lm I 35 W	7349 lm I 70 W	3702 lm I 35 W	7349 lm I 70 W	8794 lm I 64 W	17112 lm I 136 W	8794 lm I 64 W	17112 lm I 136 W
3372	4444 lm I 41 W	8818 lm I 81 W	4444 lm I 41 W	8818 lm I 81 W	10552 lm I 77 W	20534 lm I 163 W	10552 lm I 77 W	20534 lm I 163 W
3792	5000 lm I 46 W	9922 lm I 91 W	5000 lm I 46 W	9922 lm I 91 W	11871 lm I 86 W	23101 lm I 183 W	11871 lm I 86 W	23101 lm I 183 W

Alle Lumen- und Wattangaben für 4000K, CRI80 – (Mikroprismenangaben ohne Opalfolie) (Details auf P. 325–326)
All lumen and watt figures are for 4000K, CRI80 – (Microprismatic details without opal film) (details on p. 325-326)
Toutes les données lumen et watt pour 4000K, CRI80 – (données microprisme sans feuille opale) (détails p. 325-326)

NEKO / DASH 50
Linear Light System

NEW



LUMEN OUTPUT (lm)

MICROPRISMATIC

CRI80

LÄNGE	DIRECT › LOW OUTPUT		DIRECT › HIGH OUTPUT		DIRECT › LOW OUTPUT		DIRECT › HIGH OUTPUT	
LENGTH	3000K	4000K	3000K	4000K	3000K	4000K	3000K	4000K
LONGEUR mm	Lumen	Lumen	Lumen	Lumen	Lumen	Lumen	Lumen	Lumen
571 - 580	712	741	1389	1470	1688	1758	3282	3422
851 - 860	1067	1111	2083	2204	2532	2638	4926	5133
1131 - 1140	1423	1481	2777	2939	3376	3517	6565	6845
1271 - 1280	1601	1666	3124	3306	3797	3955	7386	7700
1411 - 1420	1779	1851	3471	3674	4220	4397	8210	8556
1691 - 1700	2135	2222	4166	4408	5064	5276	9852	10267
2251 - 2260	2826	2962	5554	5878	6752	7034	13130	13690
2531 - 2540	3202	3332	6248	6612	7594	7912	14780	15402
2812 - 2821	3558	3702	6942	7348	8440	8794	16420	17112
3372 - 3381	4270	4444	8332	8816	10128	10552	19704	20534
3792 - 3801	4804	5000	9455	9920	11394	11871	22167	23101

CRI90

LÄNGE	DIRECT › LOW OUTPUT			DIRECT › HIGH OUTPUT			DIRECT › LOW OUTPUT			DIRECT › HIGH OUTPUT		
LENGTH	2700K	3000K	4000K	2700K	3000K	4000K	2700K	3000K	4000K	2700K	3000K	4000K
LONGEUR mm	Lumen	Lumen	Lumen	Lumen	Lumen	Lumen	Lumen	Lumen	Lumen	Lumen	Lumen	Lumen
571 - 580	578	615	640	1147	1220	1277	1371	1459	1520	2670	2338	3025
851 - 860	867	922	961	1720	1831	1908	2057	2180	2281	4004	4260	4440
1131 - 1140	1155	1229	1280	2293	2440	2553	2742	2918	3041	5340	5676	6050
1271 - 1280	1299	1383	1440	2580	2745	2873	3085	3283	3421	6001	6386	6806
1411 - 1420	1444	1536	1600	2866	3050	3191	3429	3649	3803	6674	7100	7400
1691 - 1700	1734	1844	1920	3440	3660	3816	4115	4379	4563	8009	8520	8880
2251 - 2260	2310	2458	2560	4586	4880	5106	5486	5838	6082	10680	11352	12100
2531 - 2540	2600	2766	2880	5160	5490	5745	6170	6566	6840	12002	12770	13610
2812 - 2821	2888	3072	3200	5732	6100	6382	6858	7300	7606	13348	14200	14800
3372 - 3381	3468	3688	3840	6880	7320	7632	8230	8758	9126	16018	17040	17760
3792 - 3801	3902	4149	4325	7742	8240	8586	9259	9853	10267	18020	19170	19980



LUMEN OUTPUT (lm)

OPAL

CRI80

LÄNGE	DIRECT › LOW OUTPUT		DIRECT › HIGH OUTPUT		DIRECT › LOW OUTPUT		DIRECT › HIGH OUTPUT	
LENGTH	3000K	4000K	3000K	4000K	3000K	4000K	3000K	4000K
LONGEUR mm	Lumen	Lumen	Lumen	Lumen	Lumen	Lumen	Lumen	Lumen
571 - 580	712	741	1389	1470	1688	1758	3282	3422
851 - 860	1067	1111	2083	2204	2532	2638	4926	5133
1131 - 1140	1423	1481	2777	2939	3376	3517	6565	6845
1271 - 1280	1601	1666	3124	3306	3797	3955	7386	7700
1411 - 1420	1779	1851	3471	3674	4220	4397	8210	8556
1691 - 1700	2135	2222	4166	4408	5064	5276	9852	10267
2251 - 2260	2826	2962	5554	5878	6752	7034	13130	13690
2531 - 2540	3202	3332	6248	6612	7594	7912	14780	15402
2812 - 2821	3558	3702	6942	7348	8440	8794	16420	17112
3372 - 3381	4270	4444	8332	8816	10128	10552	19704	20534
3792 - 3801	4804	5000	9455	9920	11394	11871	22167	23101

CRI90


LÄNGE	DIRECT › LOW OUTPUT			DIRECT › HIGH OUTPUT			DIRECT › LOW OUTPUT			DIRECT › HIGH OUTPUT		
LENGTH	2700K	3000K	4000K	2700K	3000K	4000K	2700K	3000K	4000K	2700K	3000K	4000K
LONGEUR mm	Lumen	Lumen	Lumen	Lumen	Lumen	Lumen	Lumen	Lumen	Lumen	Lumen	Lumen	Lumen
571 - 580	578	615	640	1147	1220	1277	1371	1459	2670	2838	3025	3025
851 - 860	867	922	961	1720	1831	1908	2057	2190	4004	4260	4440	4440
1131 - 1140	1155	1229	1280	2293	2440	2553	2742	2918	5340	5676	6050	6050
1271 - 1280	1299	1383	1440	2580	2745	2873	3085	3283	6001	6386	6806	6806
1411 - 1420	1444	1536	1600	2866	3050	3191	3429	3649	6674	7100	7400	7400
1691 - 1700	1734	1844	1920	3440	3660	3816	4115	4379	8009	8520	8880	8880
2251 - 2260	2310	2458	2560	4586	4880	5106	5486	5838	10680	11352	12100	12100
2531 - 2540	2600	2766	2880	5160	5490	5745	6170	6566	12002	12770	13610	13610
2812 - 2821	2888	3072	3200	5732	6100	6382	6858	7300	13348	14200	14800	14800
3372 - 3381	3468	3688	3840	6880	7320	7632	8230	8758	16018	17040	17760	17760
3792 - 3801	3902	4149	4325	7742	8240	8586	9259	9853	18020	19170	19980	19980

NEW



NEKO / SPACE 60
Linear Light System
UGR<19

NEW

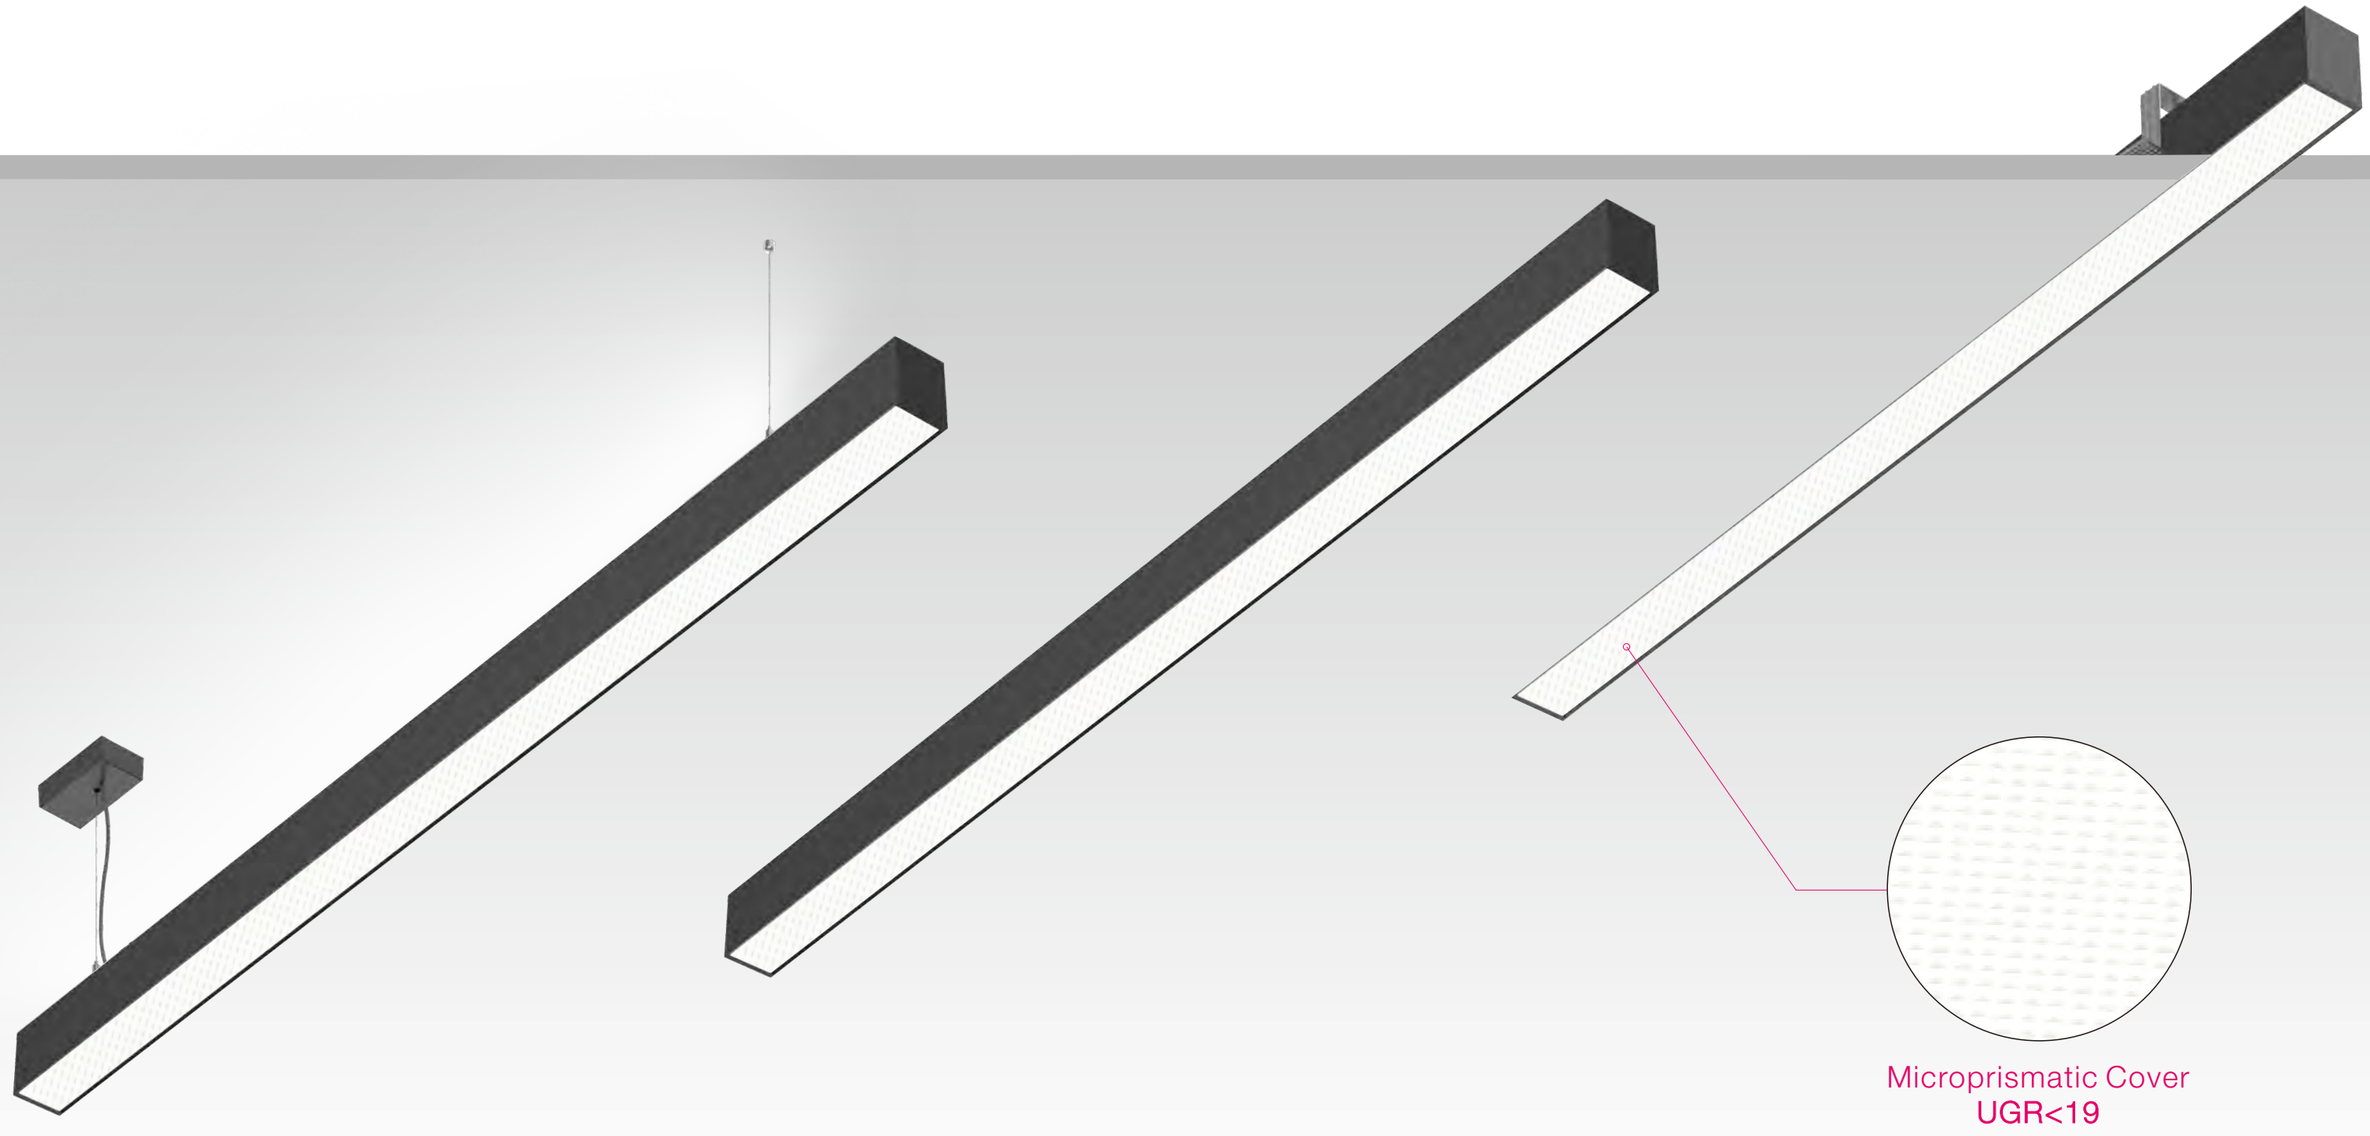

Microprismatic Cover
UGR<19

NEKO / SPACE 60

Linear Light System


UGR<19

NEW

Pendant


Surface Mounted

Trimless Recessed

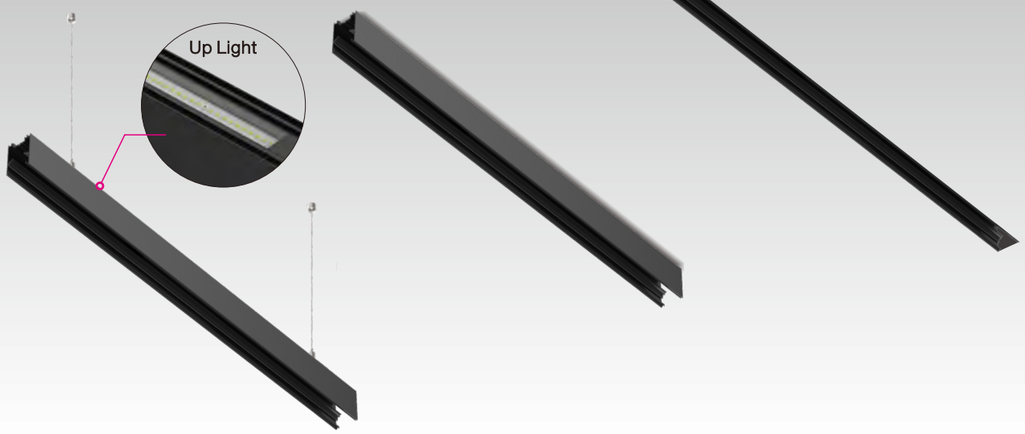

Channels

+

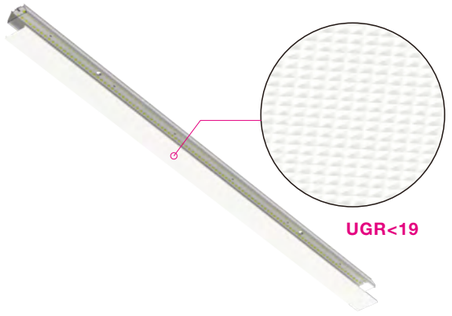

Mircoprismatic Diffuser (Standard)



Opal Diffuser (Option)

Optional Flexible Diffuser

*Up to 30 meters long, in-field cuttable





Flexible Prismatic Diffuser, **UGR<19**




Flexible Opal Diffuser

Inserts

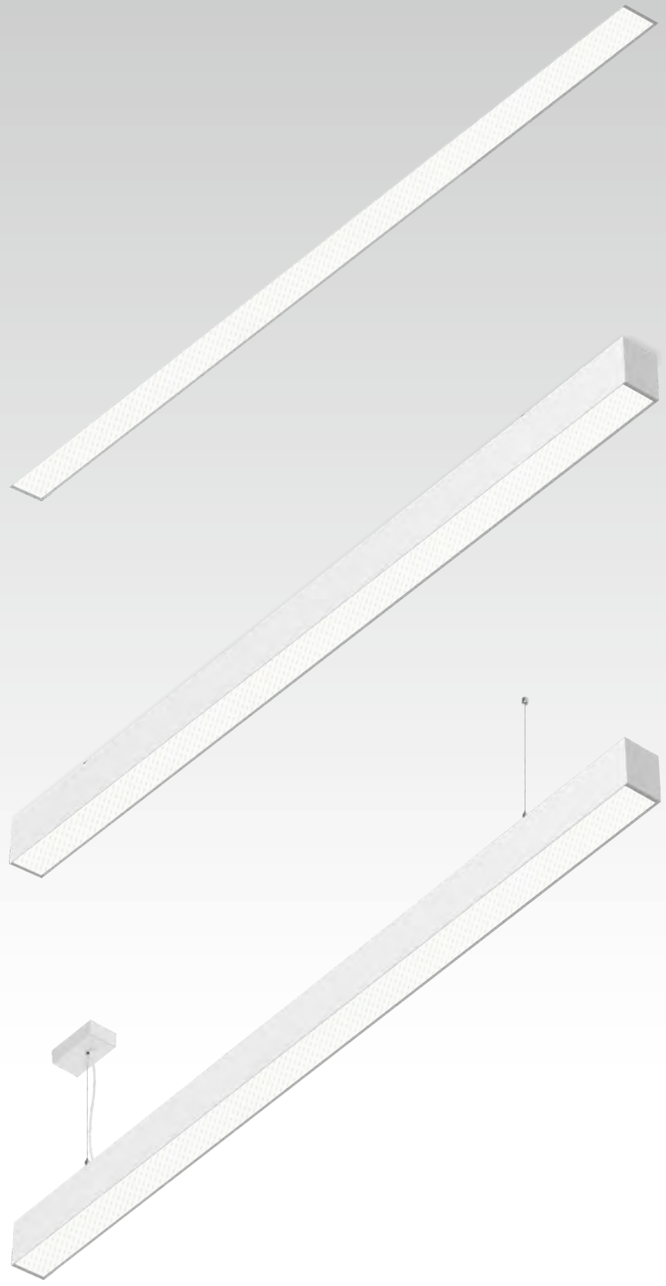

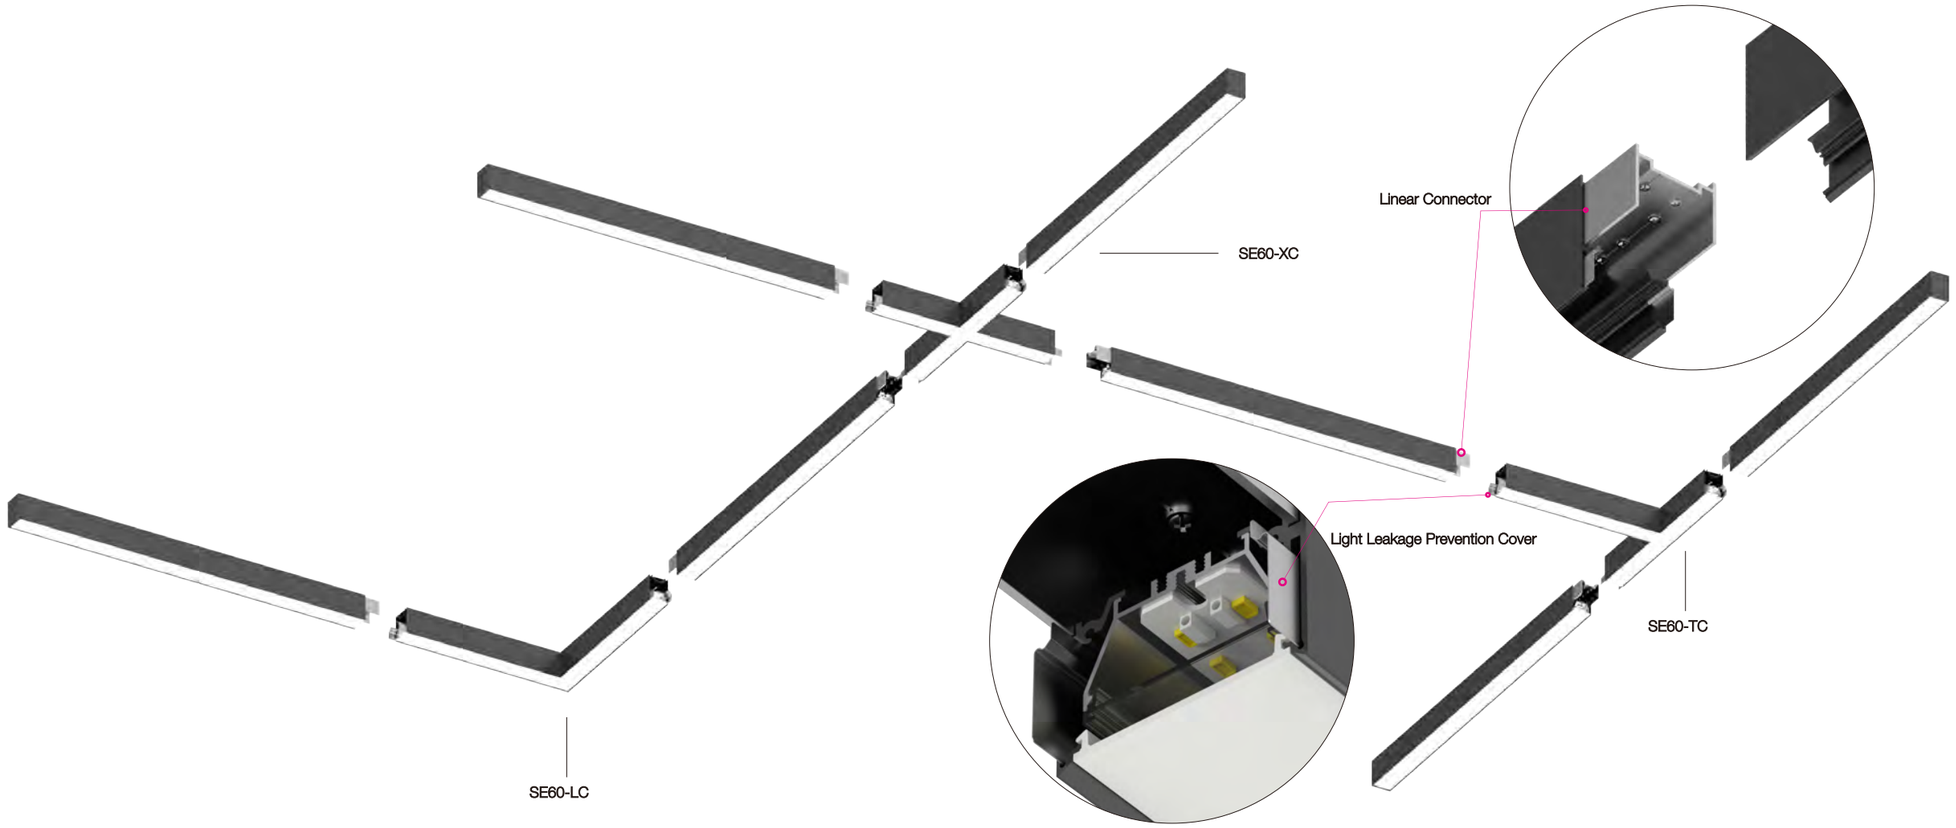

Corner Module of SPACE 60 Linear System

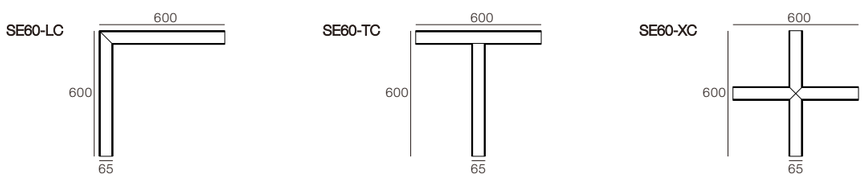

Module	LED Power	System Power	LED Voltage	LED Current	Length	Color	CRI	CCT	Beam	System Output	Code
SE60-LC	23 W	26 W	33V	700mA	600x600mm	White	80	3000K	80°	2300lm	SELC-8308026F-WN
								4000K	80°	2500lm	SELC-8408026F-WN
							90	3000K	80°	2000lm	SELC-9308026F-WN
								4000K	80°	2200lm	SELC-9408026F-WN
						Black	80	3000K	80°	2300lm	SELC-8308026F-BN
								4000K	80°	2500lm	SELC-8408026F-BN
							90	3000K	80°	2000lm	SELC-9308026F-BN
								4000K	80°	2200lm	SELC-9408026F-BN

Code Remark: F=F(ON-OFF) A=A(1-10V Dim) D=D(DALI Dim)

Module	LED Power	System Power	LED Voltage	LED Current	Length	Color	CRI	CCT	Beam	System Output	Code
SE60-TC	23 W	26 W	33V	700mA	600x600mm	White	80	3000K	80°	2300lm	SETC-8308026F-WN
								4000K	80°	2500lm	SETC-8408026F-WN
							90	3000K	80°	2000lm	SETC-9308026F-WN
								4000K	80°	2200lm	SETC-9408026F-WN
						Black	80	3000K	80°	2300lm	SETC-8308026F-BN
								4000K	80°	2500lm	SETC-8408026F-BN
							90	3000K	80°	2000lm	SETC-9308026F-BN
								4000K	80°	2200lm	SETC-9408026F-BN

Code Remark: F=F(ON-OFF) A=A(1-10V Dim) D=D(DALI Dim)


Module	LED Power	System Power	LED Voltage	LED Current	Length	Color	CRI	CCT	Beam	System Output	Code
SE60-XC	23 W	26 W	33V	700mA	600x600mm	White	80	3000K	80°	2300lm	SEXC-8308026F-WN
								4000K	80°	2500lm	SEXC-8408026F-WN
							90	3000K	80°	2000lm	SEXC-9308026F-WN
								4000K	80°	2200lm	SEXC-9408026F-WN
						Black	80	3000K	80°	2300lm	SEXC-8308026F-BN
								4000K	80°	2500lm	SEXC-8408026F-BN
							90	3000K	80°	2000lm	SEXC-9308026F-BN
								4000K	80°	2200lm	SEXC-9408026F-BN


Code Remark: F=F(ON-OFF) A=A(1-10V Dim) D=D(DALI Dim)

NEKO / SPACE 60

Linear Light System Pendant

UGR<19

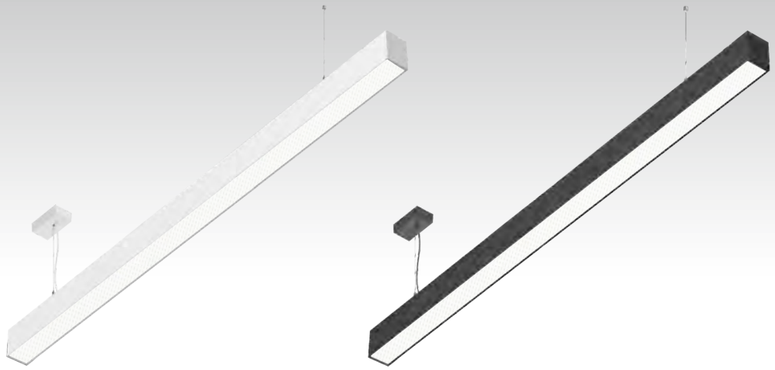

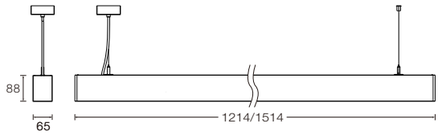

26W 34W | CRI80 CRI90 | 3000K 4000K | 80° | 105° 80° | SAMSUNG 50,000h@L80B10 | UGR < 19 | IP 20 | 5 YEARS GUARANTEE | CB | CE

LED Power	System Power	LED Voltage	LED Current	Length	Color	CRI	CCT	Beam	System Output	Code
23 W	26 W	33V	700mA	1214mm	White	80	3000K	80°↓	2300lm	SEAP-8308026F-WN
							4000K	80°↓	2500lm	SEAP-8408026F-WN
						90	3000K	80°↓	2000lm	SEAP-9308026F-WN
							4000K	80°↓	2200lm	SEAP-9408026F-WN
					Black	80	3000K	80°↓	2300lm	SEAP-8308026F-BN
							4000K	80°↓	2500lm	SEAP-8408026F-BN
						90	3000K	80°↓	2000lm	SEAP-9308026F-BN
							4000K	80°↓	2200lm	SEAP-9408026F-BN

Code Remark: F=F(ON-OFF) A=A(1-10V Dim) D=D(DALI Dim)

LED Power	System Power	LED Voltage	LED Current	Length	Color	CRI	CCT	Beam	System Output	Code
30 W	34 W	33V	900mA	1514mm	White	80	3000K	80°↓	3100lm	SEBP-8308034F-WN
							4000K	80°↓	3400lm	SEBP-8408034F-WN
						90	3000K	80°↓	2700lm	SEBP-9308034F-WN
							4000K	80°↓	2900lm	SEBP-9408034F-WN
					Black	80	3000K	80°↓	3100lm	SEBP-8308034F-BN
							4000K	80°↓	3400lm	SEBP-8408034F-BN
						90	3000K	80°↓	2700lm	SEBP-9308034F-BN
							4000K	80°↓	2900lm	SEBP-9408034F-BN

Code Remark: F=F(ON-OFF) A=A(1-10V Dim) D=D(DALI Dim)

NEW

LED Power	System Power	LED Voltage	LED Current	Length	Color	CRI	CCT	Beam	System Output	Code
35 W	38 W	33V	1050mA	1214mm	White	80	3000K	80°↓105°↑	2300lm↓1600lm↑	SEAP-8308038F-WN-U
							4000K	80°↓105°↑	2500lm↓1700lm↑	SEAP-8408038F-WN-U
						90	3000K	80°↓105°↑	2000lm↓1400lm↑	SEAP-9308038F-WN-U
							4000K	80°↓105°↑	2200lm↓1500lm↑	SEAP-9408038F-WN-U
					Black	80	3000K	80°↓105°↑	2300lm↓1600lm↑	SEAP-8308038F-BN-U
							4000K	80°↓105°↑	2500lm↓1700lm↑	SEAP-8408038F-BN-U
						90	3000K	80°↓105°↑	2000lm↓1400lm↑	SEAP-9308038F-BN-U
							4000K	80°↓105°↑	2200lm↓1500lm↑	SEAP-9408038F-BN-U

Code Remark: F=F(ON-OFF) A=A(1-10V Dim) D=D(DALI Dim)

LED Power	System Power	LED Voltage	LED Current	Length	Color	CRI	CCT	Beam	System Output	Code
43 W	47 W	33V	1300mA	1514mm	White	80	3000K	80°↓105°↑	3000lm↓2100lm↑	SEBP-8308047F-WN-U
							4000K	80°↓105°↑	3300lm↓2300lm↑	SEBP-8408047F-WN-U
						90	3000K	80°↓105°↑	2600lm↓1800lm↑	SEBP-9308047F-WN-U
							4000K	80°↓105°↑	2800lm↓1900lm↑	SEBP-9408047F-WN-U
					Black	80	3000K	80°↓105°↑	3000lm↓2100lm↑	SEBP-8308047F-BN-U
							4000K	80°↓105°↑	3300lm↓2300lm↑	SEBP-8408047F-BN-U
						90	3000K	80°↓105°↑	2600lm↓1800lm↑	SEBP-9308047F-BN-U
							4000K	80°↓105°↑	2800lm↓1900lm↑	SEBP-9408047F-BN-U

Code Remark: F=F(ON-OFF) A=A(1-10V Dim) D=D(DALI Dim)

Installation Type: **Pendant with Uplight**





NEKO / SPACE 60

Linear Light System Surface & Trimless Recessed


UGR<19

NEW

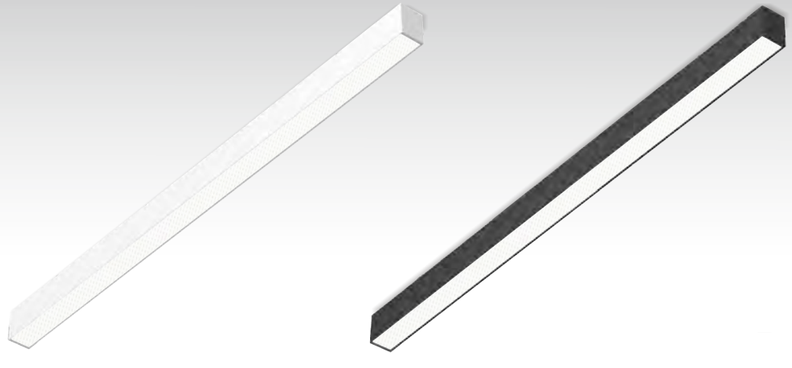

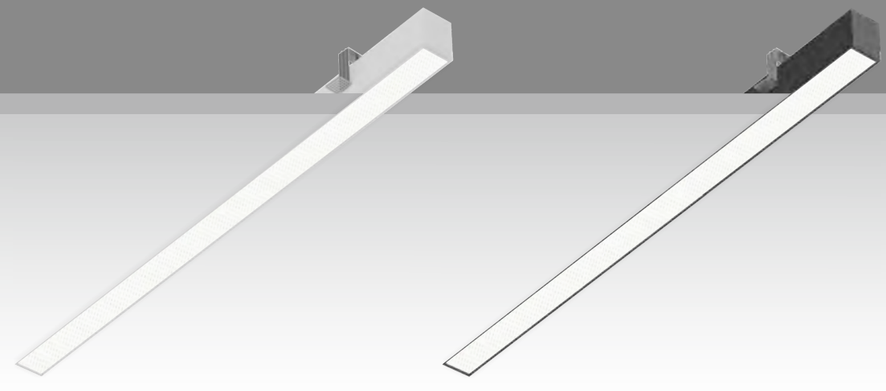

26W 34W | CRI80 CRI90 | 3000K 4000K | 80° | SAMSUNG 50,000h@L80B10 | UGR < 19 | IP20 | 5 YEARS GUARANTEE | CB | CE




LED Power	System Power	LED Voltage	LED Current	Length	Color	CRI	CCT	Beam	System Output	Code
23 W	26 W	33V	700mA	1214mm	White	80	3000K	80°↓	2300lm	SEAC-8308026F-WN
							4000K	80°↓	2500lm	SEAC-8408026F-WN
						90	3000K	80°↓	2000lm	SEAC-9308026F-WN
							4000K	80°↓	2200lm	SEAC-9408026F-WN
					Black	80	3000K	80°↓	2300lm	SEAC-8308026F-BN
							4000K	80°↓	2500lm	SEAC-8408026F-BN
						90	3000K	80°↓	2000lm	SEAC-9308026F-BN
							4000K	80°↓	2200lm	SEAC-9408026F-BN

Code Remark: F=F(ON-OFF) A=A(1-10V Dim) D=D(DALI Dim)

LED Power	System Power	LED Voltage	LED Current	Length	Color	CRI	CCT	Beam	System Output	Code
30 W	34 W	33V	900mA	1514mm	White	80	3000K	80°↓	3100lm	SEBC-8308034F-WN
							4000K	80°↓	3400lm	SEBC-8408034F-WN
						90	3000K	80°↓	2700lm	SEBC-9308034F-WN
							4000K	80°↓	2900lm	SEBC-9408034F-WN
					Black	80	3000K	80°↓	3100lm	SEBC-8308034F-BN
							4000K	80°↓	3400lm	SEBC-8408034F-BN
						90	3000K	80°↓	2700lm	SEBC-9308034F-BN
							4000K	80°↓	2900lm	SEBC-9408034F-BN

Code Remark: F=F(ON-OFF) A=A(1-10V Dim) D=D(DALI Dim)

26W 34W | CRI80 CRI90 | 3000K 4000K | 80° | SAMSUNG 50,000h@L80B10 | UGR < 19 | IP20 | 5 YEARS GUARANTEE | CB | CE



LED Power	System Power	LED Voltage	LED Current	Length	Color	CRI	CCT	Beam	System Output	Code
23 W	26 W	33V	700mA	1214mm	White	80	3000K	80°↓	2300lm	SEAT-8308026F-WN
							4000K	80°↓	2500lm	SEAT-8408026F-WN
						90	3000K	80°↓	2000lm	SEAT-9308026F-WN
							4000K	80°↓	2200lm	SEAT-9408026F-WN
					Black	80	3000K	80°↓	2300lm	SEAT-8308026F-BN
							4000K	80°↓	2500lm	SEAT-8408026F-BN
						90	3000K	80°↓	2000lm	SEAT-9308026F-BN
							4000K	80°↓	2200lm	SEAT-9408026F-BN

Code Remark: F=F(ON-OFF) A=A(1-10V Dim) D=D(DALI Dim)

LED Power	System Power	LED Voltage	LED Current	Length	Color	CRI	CCT	Beam	System Output	Code
30 W	34 W	33V	900mA	1514mm	White	80	3000K	80°↓	3100lm	SEBT-8308034F-WN
							4000K	80°↓	3400lm	SEBT-8408034F-WN
						90	3000K	80°↓	2700lm	SEBT-9308034F-WN
							4000K	80°↓	2900lm	SEBT-9408034F-WN
					Black	80	3000K	80°↓	3100lm	SEBT-8308034F-BN
							4000K	80°↓	3400lm	SEBT-8408034F-BN
						90	3000K	80°↓	2700lm	SEBT-9308034F-BN
							4000K	80°↓	2900lm	SEBT-9408034F-BN

Code Remark: F=F(ON-OFF) A=A(1-10V Dim) D=D(DALI Dim)


EXPERTS
ANTI-AGING
UPGRADE YOUR DAILY
BEAUTY ROUTINE
BABOR
DOCTOR
BABOR
PRO
100%
Individuell.
100%
Exklusiv für
Institut.


AMOS
Rex
AMOS 50


NEKO / MODULINE 26 Linear System

48V Low Voltage Modular Linear System


1 H Track




2 Standard Track




3 Slim Track




4 Trim Recessed Track



5 Trimless Recessed Track-EI



6 Trimless Recessed Track




NEKO / MODULINE 26 Linear System


48V Low Voltage Modular Linear System




Slim Track

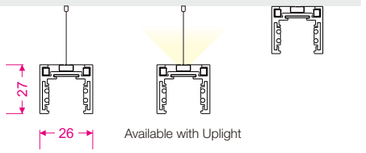


Standard Track

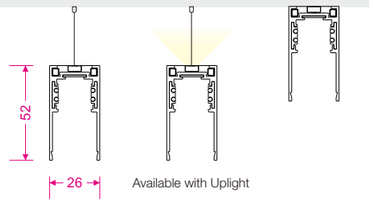


Trim Recessed Track




Trimless Recessed Track-EI




Trimless Recessed Track

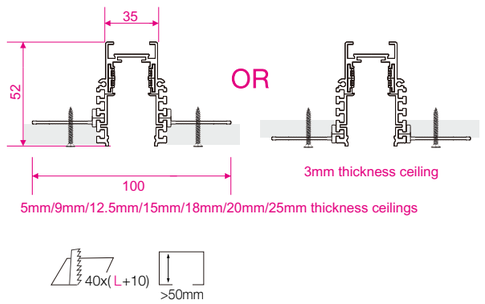

H Track



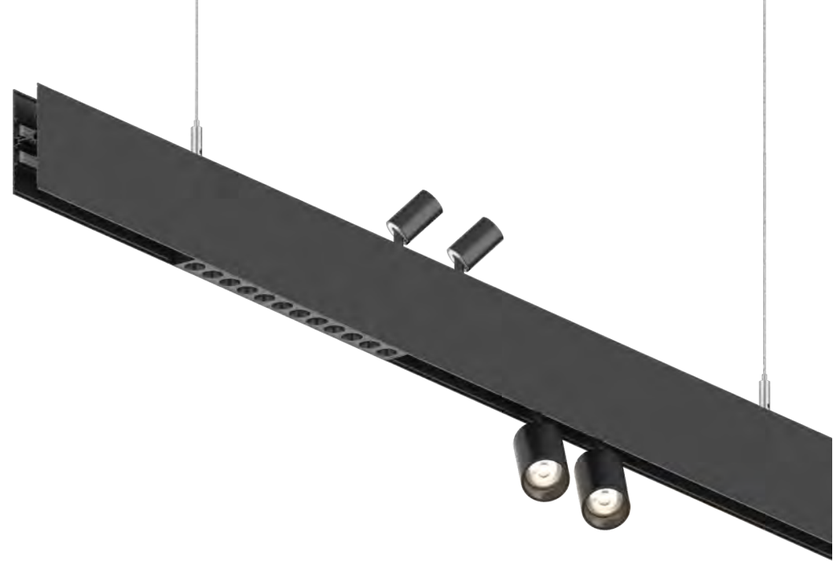



ML26-RS25-3W



ML26-RS25-5W



ML26-RS40-8W



ML26-RS40-16W



ML26-RS40-12W



ML26-FRS72-10W
ML26-FRS72-20W



ML26-RS96-9W



ML26-RS40-24W



ML26-RT55-10W



ML26-RS72-26W



ML26-AL190-3W
ML26-AL190-7W



ML26-AL280-9W
ML26-AL280-13W



ML26-AA315-14W



ML26-SA280-13W



ML26-WW280-7W
ML26-WW560-13W



ML26-GL280-7W/ 10W
ML26-GL560-13W/ 19W
ML26-GL840-19W/ 26W
ML26-GL1120-26W



ML26-SG280-7W/ 10W



ML26-AG315-10W



ML26-PS60-5W



ML26-PAD150-12W




ML26-PB120-10W



ML26-PS40-12W
ML26-PS55-14W



ML26-PD300-18W

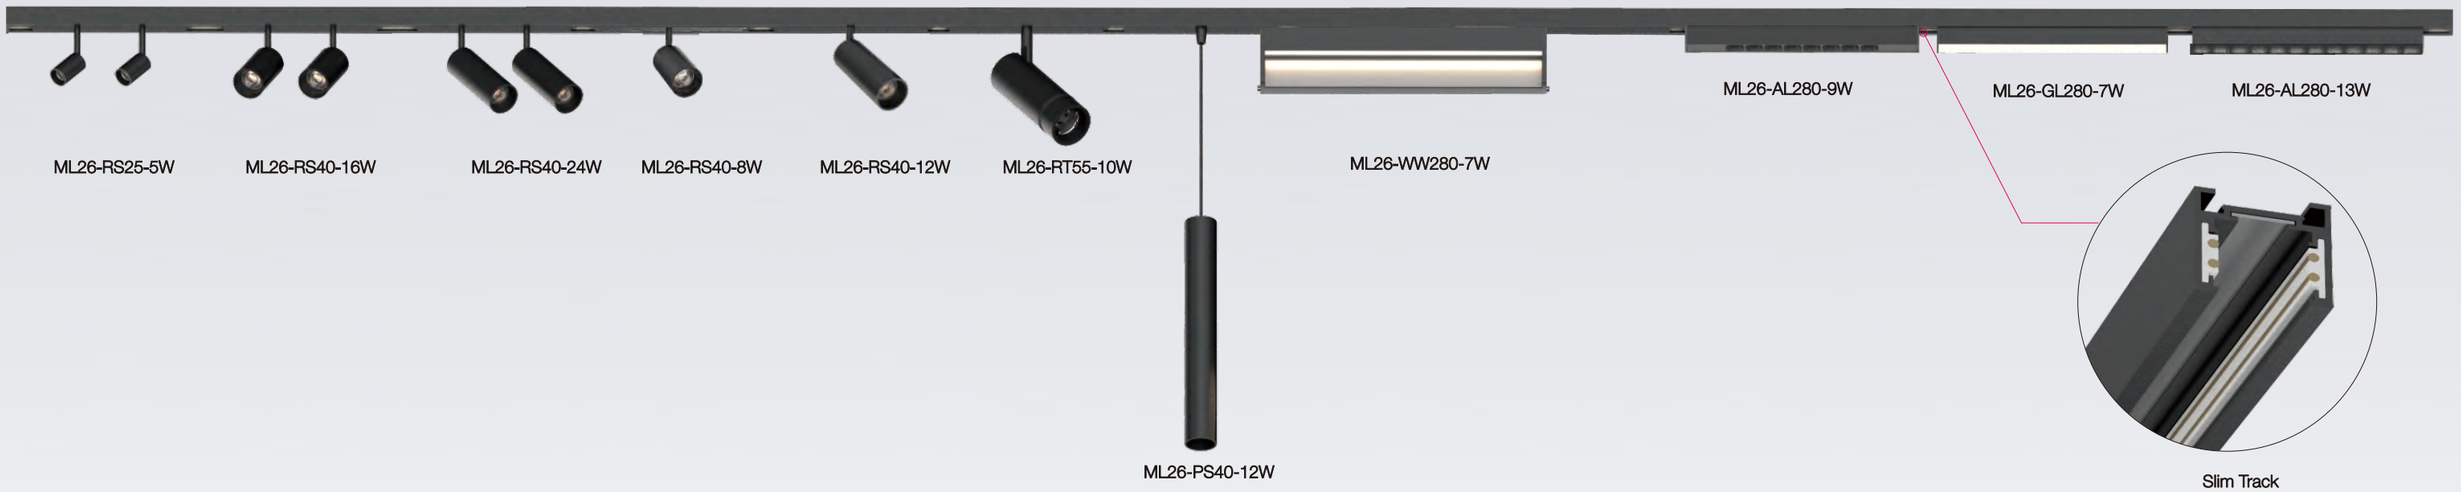



Slim Track







Standard Track



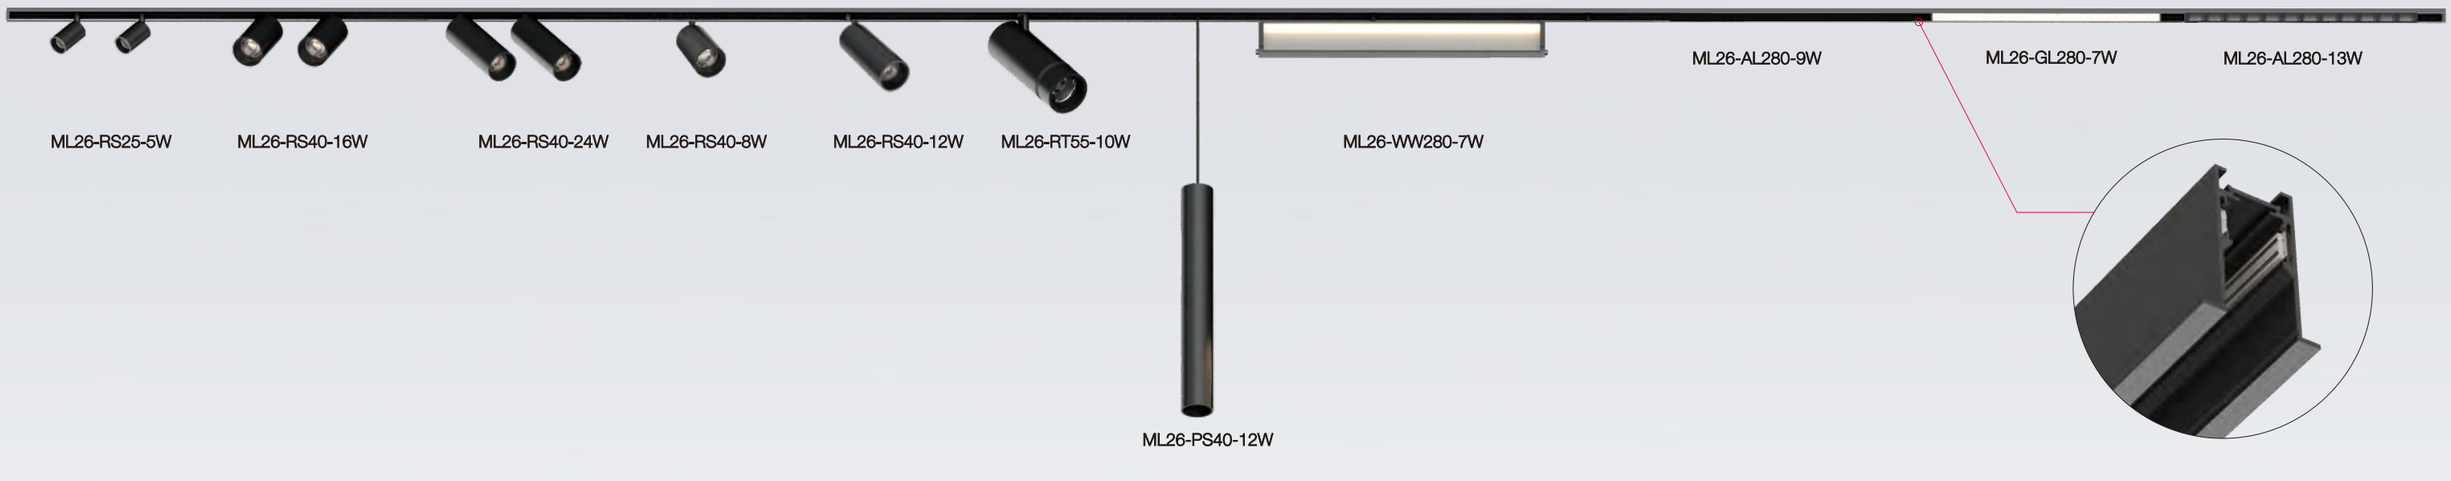

ML26-RS25-5W
ML26-RS40-16W
ML26-RS40-24W
ML26-RS40-8W
ML26-RS40-12W
ML26-RT55-10W
ML26-PS40-12W
ML26-WW280-7W
ML26-AL280-9W
ML26-GL280-7W
ML26-AL280-13W
Trim Recessed Track

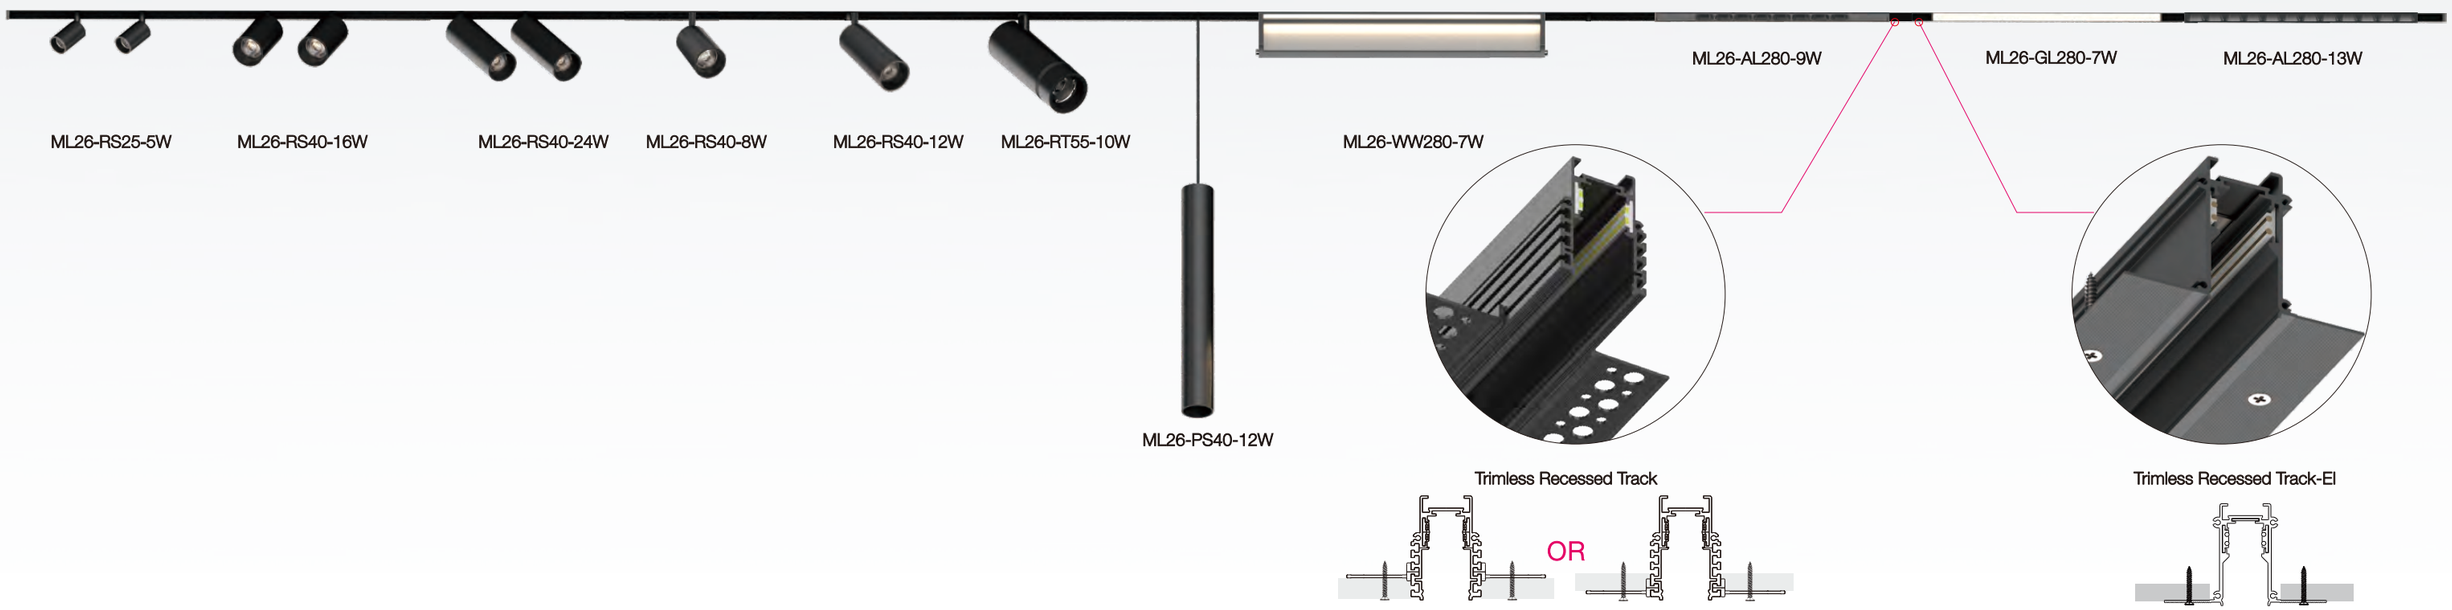
ML26-RS25-5W
ML26-RS40-16W
ML26-RS40-24W
ML26-RS40-8W
ML26-RS40-12W
ML26-RT55-10W
ML26-PS40-12W
ML26-WW280-7W
ML26-AL280-9W
ML26-GL280-7W
ML26-AL280-13W
Trimless Recessed Track
OR
Trimless Recessed Track-EI

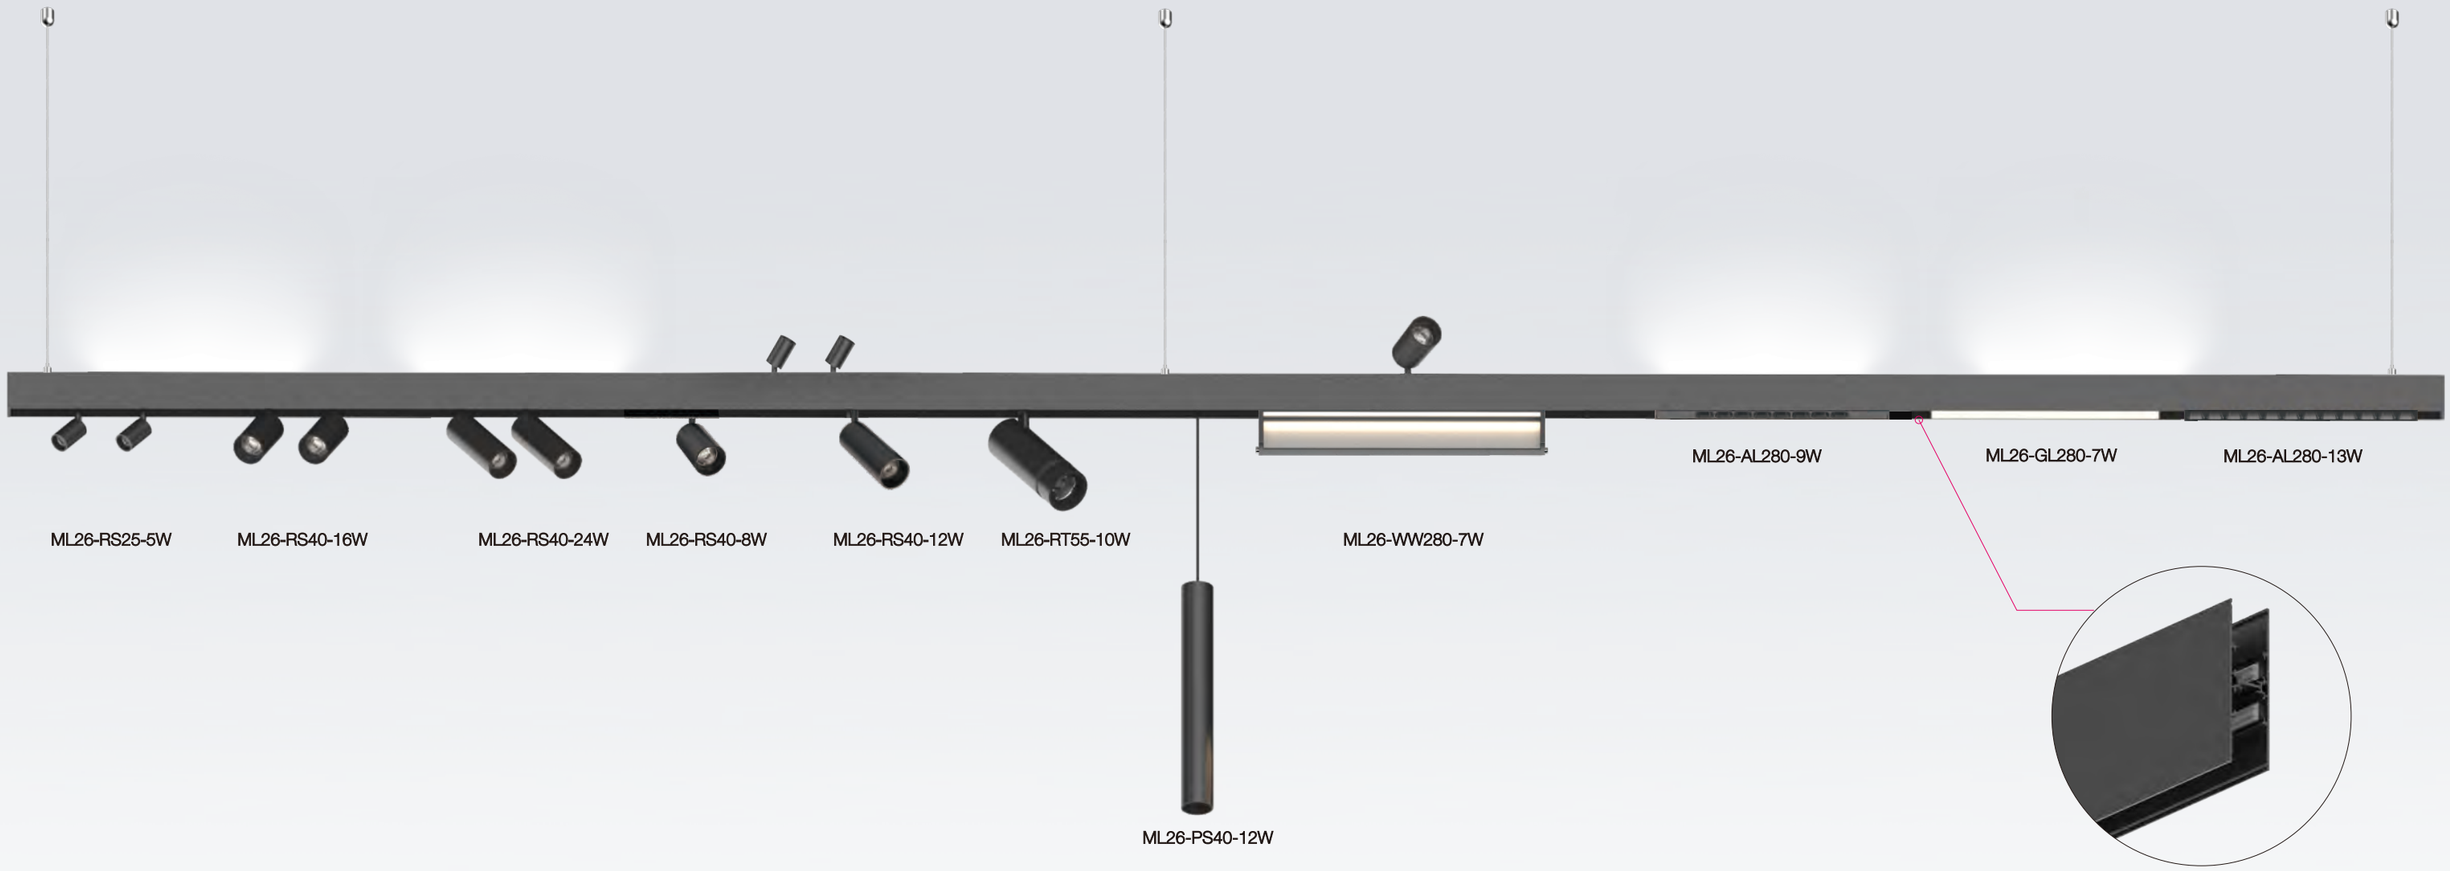


ML26-RS25-5W
ML26-RS40-16W
ML26-RS40-24W
ML26-RS40-8W
ML26-RS40-12W
ML26-RT55-10W
ML26-WW280-7W
ML26-AL280-9W
ML26-GL280-7W
ML26-AL280-13W
ML26-PS40-12W

H Track



NEKO / MODULINE 26 Linear System

48V Low Voltage Modular Linear System
Slim Track Configuration

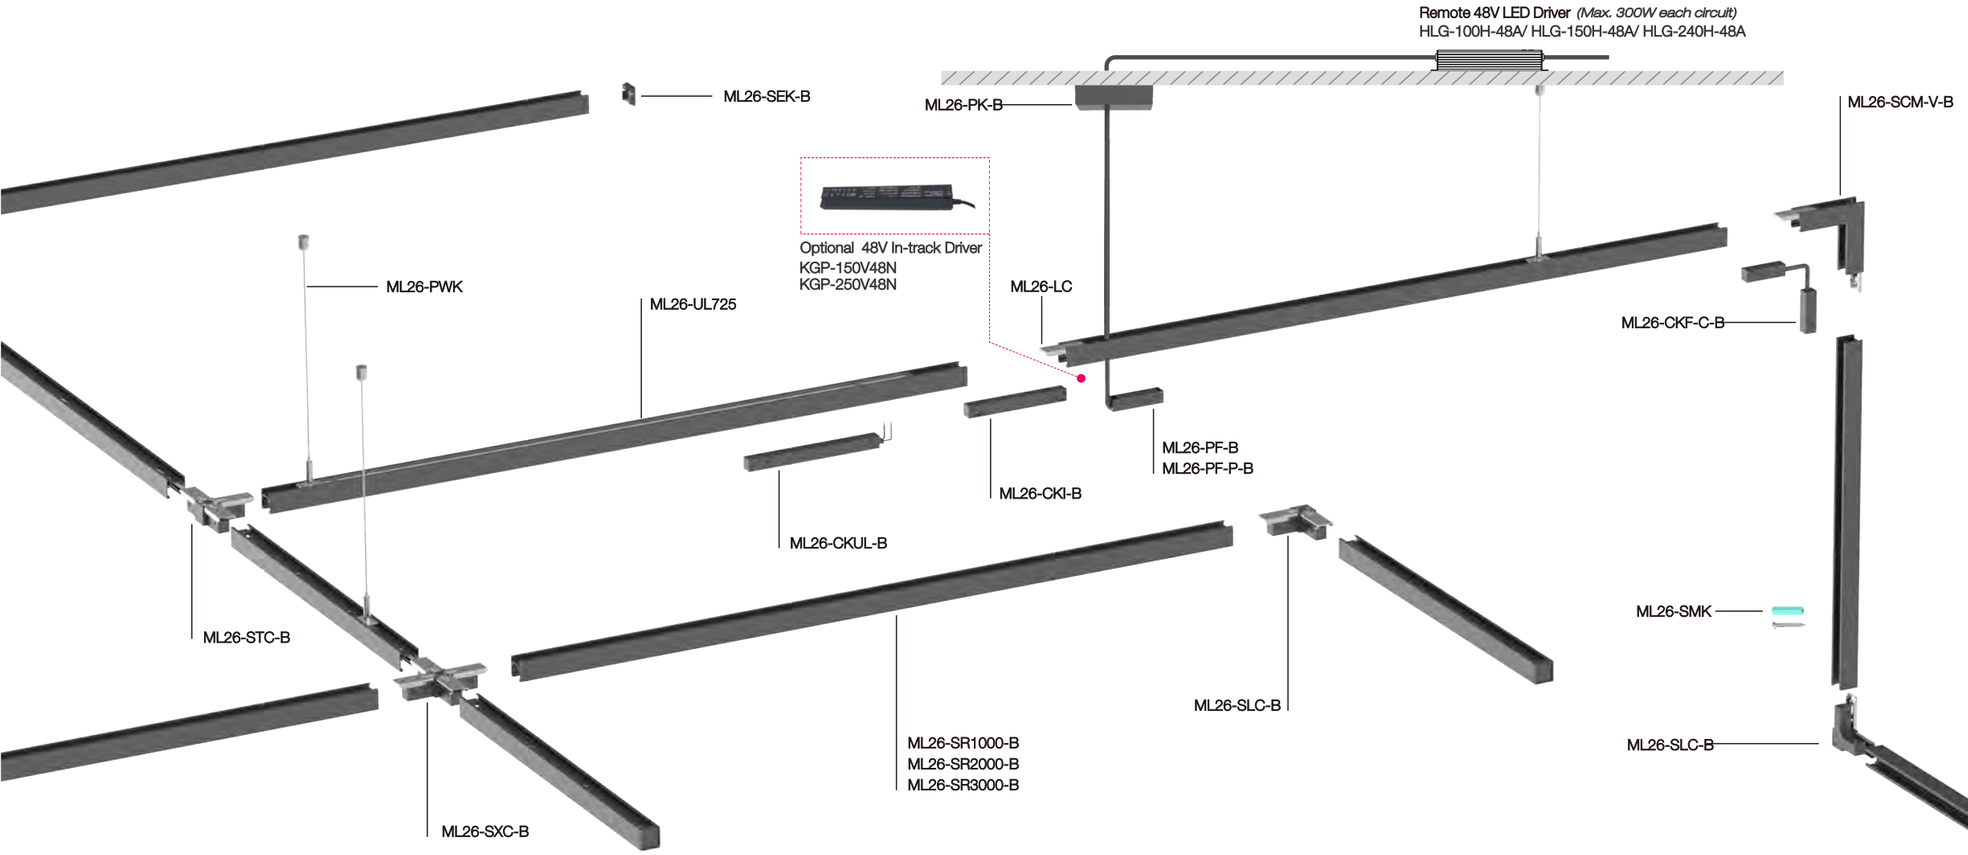

Short Info

- 48V low voltage system
- Slim Track Rail made of extruded aluminium with 26mm width groove and 27mm height
- Suitable for surface mounted or suspended with 2000mm steel cable
- Track Rail available with standard lengths 1000mm, 2000mm and 3000mm
- 'L' shape corner module, 'T' shape connector and 'X' shape connector available for flexible system
- Linear Connector and Continuous Kit provided for continuous Track Rail connection
- Various lighting insets with multiple lighting applications, Tool-free insert mounting by magnetic+click-in double locking mechanism
- Insets available with Non Dim, 1-10V Dim and DALI Dim

Moduline 26 Slim Track System

Please order installation track rail, light insets and mounting accessories separately.

Slim Track System Installation Track Rail | for surface or pendant mounting

Tracks can be shortened on site	Code/ Model (Black-Standard)	Code/ Model (White-Option)
L x W x H : 1000 x 26 x 27mm	ML26-SR1000-B	ML26-SR1000-W
L x W x H : 2000 x 26 x 27mm	ML26-SR2000-B	ML26-SR2000-W
L x W x H : 3000 x 26 x 27mm	ML26-SR3000-B	ML26-SR3000-W

*Track Rail including endcaps.

Accessories of Slim Track System

Vertical 'L' Shape Corner Module-Inner, 80 x 80mm	ML26-SCM-V-B	ML26-SCM-V-W
Vertical 'L' Shape Corner Module-Outer, 80 x 80mm	ML26-SCM-V-O-B	ML26-SCM-V-O-W
'L' Shape Connector Set, 26 x 26mm	ML26-SLC-B	ML26-SLC-W
'T' Shape Connector Set, 26 x 26mm	ML26-STC-B	ML26-STC-W
'X' Shape Connector Set, 26 x 26mm	ML26-SXC-B	ML26-SXC-W
Endcap Kit (2pcs/ set) of Slim Track Rail	ML26-SEK-B	ML26-SEK-W
Power Feeder Unit with feeder cables 500mm for surface mounted	ML26-PF-B	ML26-PF-W
Power Feeder Unit with feeder cables 2000mm for pendant	ML26-PF-P-B	ML26-PF-P-W
Linear Connector with screws	ML26-LC	ML26-LC
Straight Continuous Kit*, Electrical	ML26-CKI-B	ML26-CKI-W
Flexible Continuous Kit*, Electrical	ML26-CKF-C-B	ML26-CKF-C-W
Surface mounted installation kit, 1set for 1000mm track	ML26-SMK	ML26-SMK
Moduline 26 Pendant Installation Kits, with 1pcs Ceiling Box & 2pcs Pendant Wire (2000mm) Kits	ML26-PK-B	ML26-PK-W
Pendant Wire Kit, Wire in 2000mm Length, 2pcs/ set for 1000mm Track	ML26-PWK	ML26-PWK
48V In-track Driver, KGP48V Constant Voltage 100W LED Driver, Black	KGP-100V48N	
48V In-track Driver, KGP48V Constant Voltage 150W LED Driver, Black	KGP-150V48N	
48V In-track Driver, KGP48V Constant Voltage 250W LED Driver, Black	KGP-250V48N	
48V Remote Driver, Meanwell 48V Constant Voltage 100W LED Driver	HLG-100H-48A	
48V Remote Driver, Meanwell 48V Constant Voltage 150W LED Driver	HLG-150H-48A	
48V Remote Driver, Meanwell 48V Constant Voltage 240W LED Driver	HLG-240H-48A	

*Continuous Kit needs to be used together with Linear Connector as a set.

Insets

Spotlight
● Page 371-375



Accent Light
● Page 385-388



General Light
● Page 389-392



Wall Wash Light
● Page 401-402




Pendant Spotlight
● Page 393-394




NEKO / MODULINE 26 Linear System

48V Low Voltage Modular Linear System
Standard Track Configuration

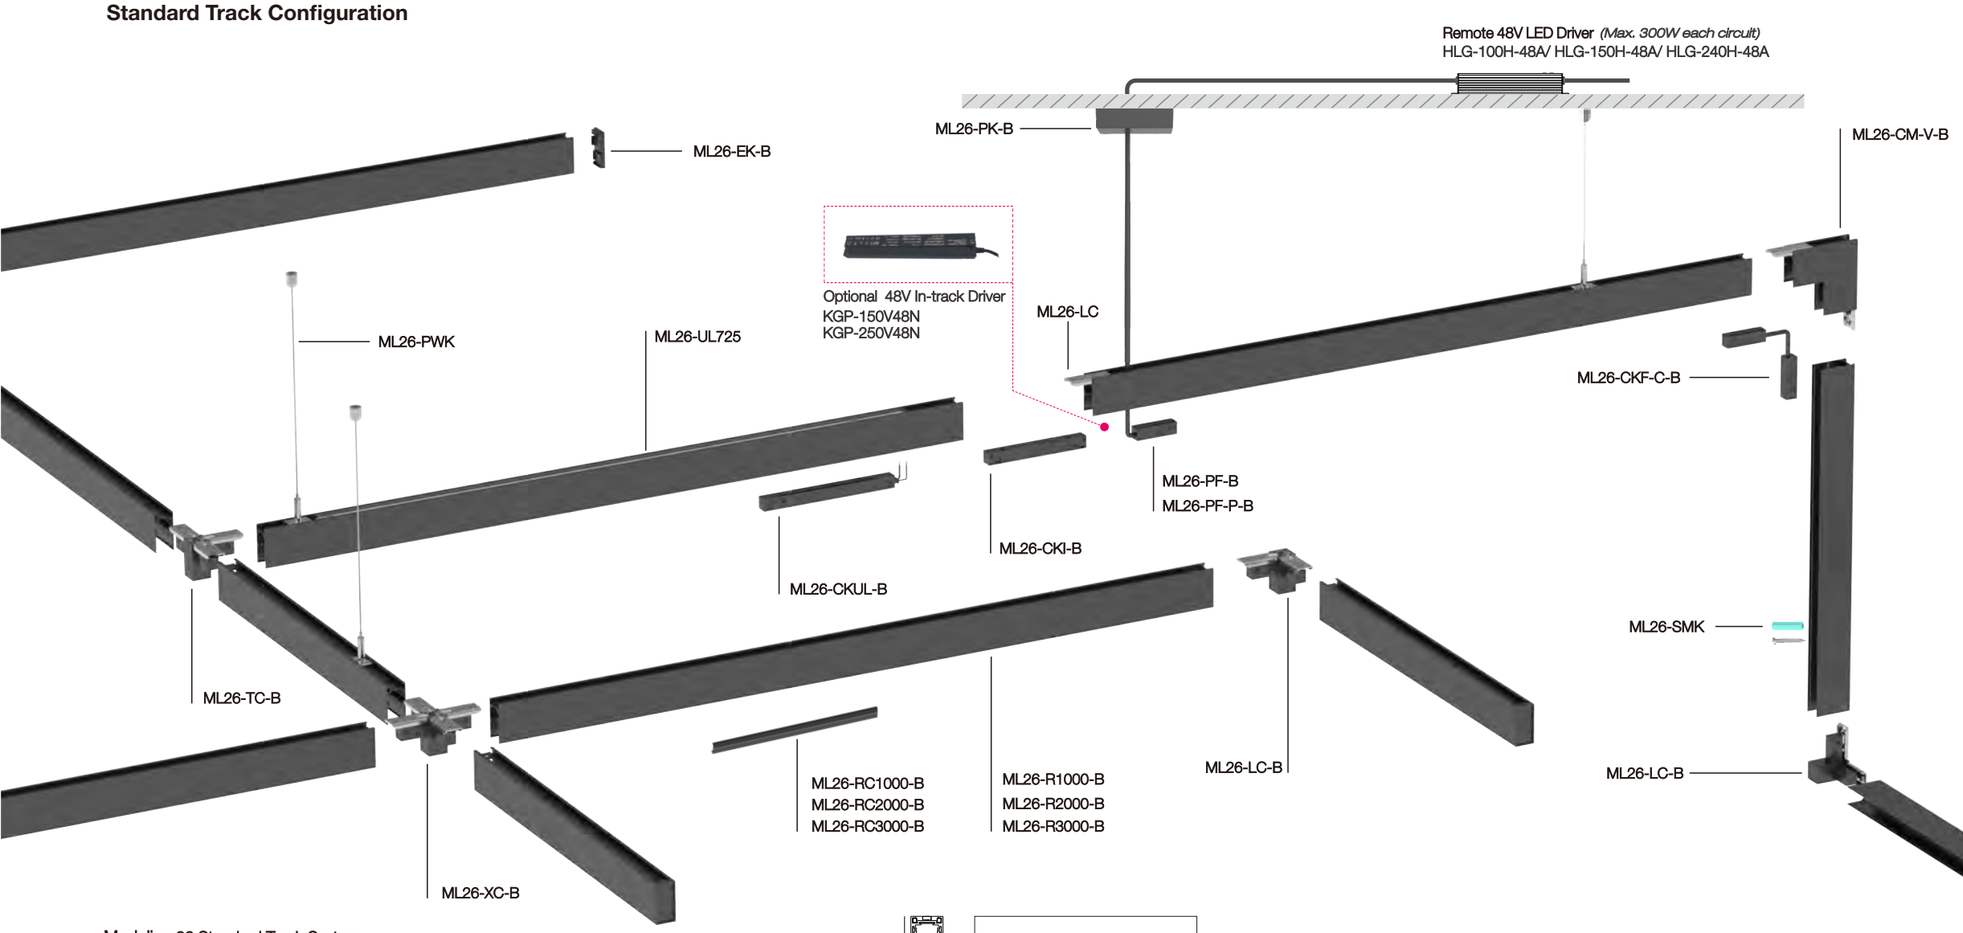

Moduline 26 Standard Track System

Please order installation track rail, light insets and mounting accessories separately.



Standard Track System Installation Track Rail | for surface or pendant mounting

Tracks can be shortened on site	Code/ Model (Black-Standard)	Code/ Model (White-Option)
L x W x H : 1000 x 26 x 52mm	ML26-R1000-B	ML26-R1000-W
L x W x H : 2000 x 26 x 52mm	ML26-R2000-B	ML26-R2000-W
L x W x H : 3000 x 26 x 52mm	ML26-R3000-B	ML26-R3000-W

*Track Rail including endcaps.

Accessories of Slim Track System

Vertical 'L' Shape Corner Module-Inner, 80 x 80mm	ML26-CM-V-B	ML26-CM-V-W
Vertical 'L' Shape Corner Module-Outer, 80 x 80mm	ML26-CM-V-O-B	ML26-CM-V-O-W
'L' Shape Connector Set, 26 x 26mm	ML26-LC-B	ML26-LC-W
'T' Shape Connector Set, 26 x 26mm	ML26-TC-B	ML26-TC-W
'X' Shape Connector Set, 26 x 26mm	ML26-XC-B	ML26-XC-W
Endcap Kit (2pcs/ set) of Slim Track Rail	ML26-EK-B	ML26-EK-W
Power Feeder Unit with feeder cables 500mm for surface mounted	ML26-PF-B	ML26-PF-W
Power Feeder Unit with feeder cables 2000mm for pendant	ML26-PF-P-B	ML26-PF-P-W
Linear Connector with screws	ML26-LC	ML26-LC
Straight Continuous Kit*, Electrical	ML26-CKI-B	ML26-CKI-W
Flexible Continuous Kit*, Electrical	ML26-CKF-C-B	ML26-CKF-C-W
Surface mounted installation kit, 1set for 1000mm track	ML26-SMK	ML26-SMK
Moduline 26 Pendant Installation Kits, with 1pcs Ceiling Box & 2pcs Pendant Wire (2000mm) Kits	ML26-PK-B	ML26-PK-W
Pendant Wire Kit, Wire in 2000mm Length, 2pcs/ set for 1000mm Track	ML26-PWK	ML26-PWK
Track Rail Cover 1000mm/2000mm/3000mm, can be shortened at site	ML26-RC1000-B	ML26-RC1000-W
48V In-track Driver, KGP48V Constant Voltage 100W LED Driver, Black	KGP-100V48N	
48V In-track Driver, KGP48V Constant Voltage 150W LED Driver, Black	KGP-150V48N	
48V In-track Driver, KGP48V Constant Voltage 250W LED Driver, Black	KGP-250V48N	
48V Remote Driver, Meanwell 48V Constant Voltage 100W LED Driver	HLG-100H-48A	
48V Remote Driver, Meanwell 48V Constant Voltage 150W LED Driver	HLG-150H-48A	
48V Remote Driver, Meanwell 48V Constant Voltage 240W LED Driver	HLG-240H-48A	

*Continuous Kit needs to be used together with Linear Connector as a set.

Short Info

- 48V low voltage system
- Standard Track Rail made of extruded aluminium with 26mm width groove and 52mm height
- Suitable for surface mounted or suspended with 2000mm steel cable
- Track Rail available with standard lengths 1000mm, 2000mm and 3000mm
- 'L' shape corner module, 'T' shape connector and 'X' shape connector available for flexible system
- Linear Connector and Continuous Kit provided for continuous Track Rail connection
- Various lighting insets with multiple lighting applications, Tool-free insert mounting by magnetic+click-in double locking mechanism
- Insets available with Non Dim, 1-10V Dim and DALI Dim

Insets

Spotlight
● Page 371-375



Accent Light
● Page 385-388



General Light
● Page 389-392



Wall Wash Light
● Page 401-402




Pendant Spotlight
● Page 393-394



NEKO / MODULINE 26 Linear System

48V Low Voltage Modular Linear System
H Track Configuration

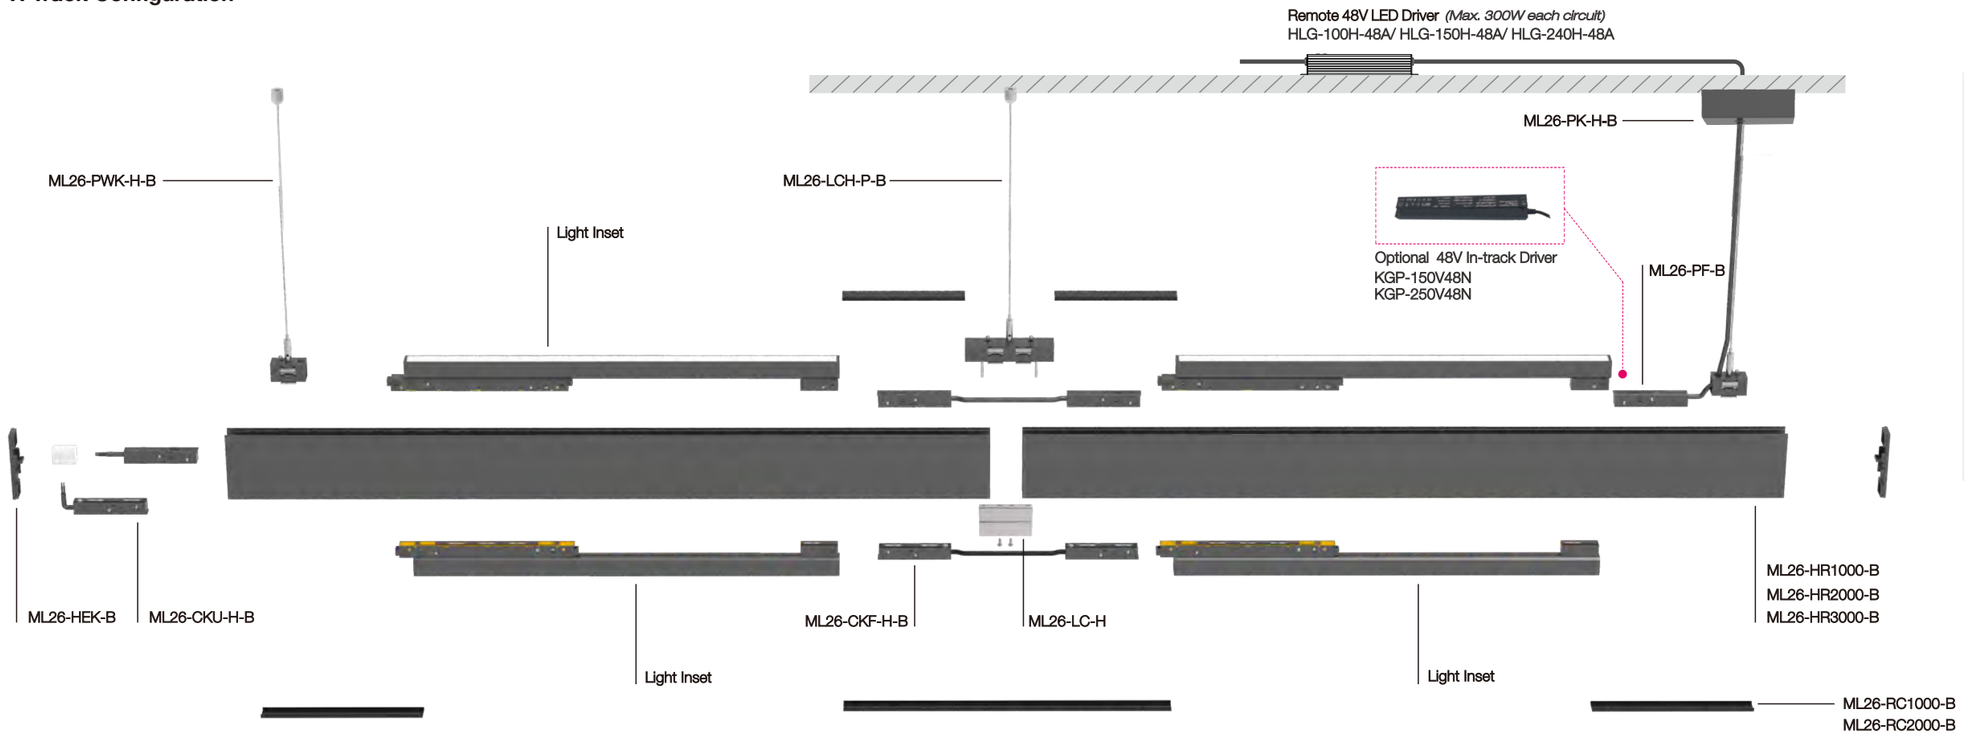

Short Info

- 48V low voltage system
- H Track Rail made of extruded aluminium with 26mm width groove and 90mm height
- Suitable for surface mounted or suspended with 2000mm steel cable
- Track Rail available with standard lengths 1000mm, 2000mm and 3000mm
- Linear Connector and Continuous Kit provided for continuous Track Rail connection
- Various lighting insets with multiple lighting applications, Tool-free insert mounting by magnetic+click-in double locking mechanism
- Insets available with Non Dim, 1-10V Dim and DALI Dim

Moduline 26 H Track System

Please order installation track rail, light insets and mounting accessories separately.

Standard Track System Installation Track Rail | for surface or pendant mounting

Tracks can be shortened on site	Code/ Model (Black-Standard)	Code/ Model (White-Option)
L x W x H : 1000 x 26 x 90mm	ML26-HR1000-B	ML26-HR1000-W
L x W x H : 2000 x 26 x 90mm	ML26-HR2000-B	ML26-HR2000-W
L x W x H : 3000 x 26 x 90mm	ML26-HR3000-B	ML26-HR3000-W

*Track Rail including endcaps.

Accessories of Slim Track System

Endcap Kit (2pcs/ set) of H Track Rail	ML26-HEK-B	ML26-HEK-W
Power Feeder Unit with feeder cables 2000mm for pendant	ML26-PF-P-B	ML26-PF-P-W
Flexible Continuous Kit, Electrical, for Up Track and Down Track connection	ML26-CKU-H-B	ML26-CKU-H-W
Flexible Continuous Kit, Electrical, for straight connection	ML26-CKF-H-B	ML26-CKF-H-W
Linear Connector with Pendant Kit of H Track System	ML26-LCH-P-B	ML26-LCH-P-W
Linear Connector Kit of H Track System*	ML26-LC-H	ML26-LC-H
Moduline 26 Pendant Installation Kits, with 1pcs Ceiling Box & 1pcs H Track Pendant Wire (2000mm) Kits	ML26-PK-H-B	ML26-PK-H-W
H Track Pendant Wire Kit, Wire in 2000mm Length, 2pcs/ set for 1000mm Track	ML26-PWK-H-B	ML26-PWK-H-W
Track Rail Cover 1000mm/2000mm/3000mm, can be shortened at site	ML26-RC1000-B	ML26-RC1000-W
48V In-track Driver, KGP48V Constant Voltage 100W LED Driver, Black	KGP-100V48N	
48V In-track Driver, KGP48V Constant Voltage 150W LED Driver, Black	KGP-150V48N	
48V In-track Driver, KGP48V Constant Voltage 250W LED Driver, Black	KGP-250V48N	
48V Remote Driver, Meanwell 48V Constant Voltage 100W LED Driver	HLG-100H-48A	
48V Remote Driver, Meanwell 48V Constant Voltage 150W LED Driver	HLG-150H-48A	
48V Remote Driver, Meanwell 48V Constant Voltage 240W LED Driver	HLG-240H-48A	

*Linear Connector Kit needs to be used together with Linear Connector with Pendant Kit

Insets

Spotlight
● Page 371–375



Accent Light
● Page 385-388



General Light
● Page 389-392



Wall Wash Light
● Page 401-402



Pendant Spotlight
● Page 393-394




NEKO / MODULINE 26 Linear System


48V Low Voltage Modular Linear System




Installation

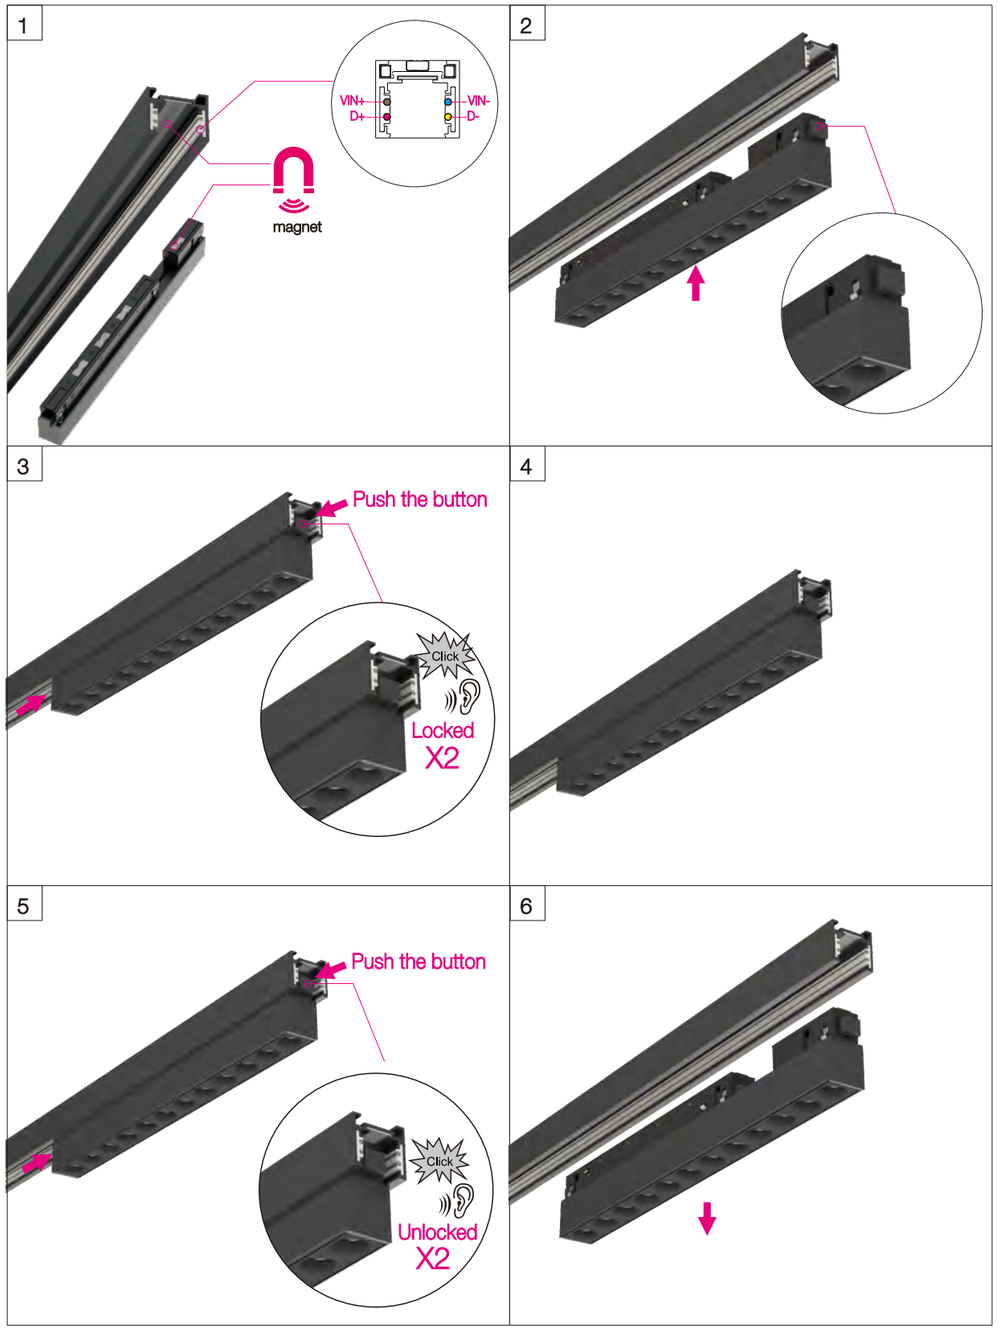

·Tool-free insert mounting by magnetic+click-in double locking mechanism

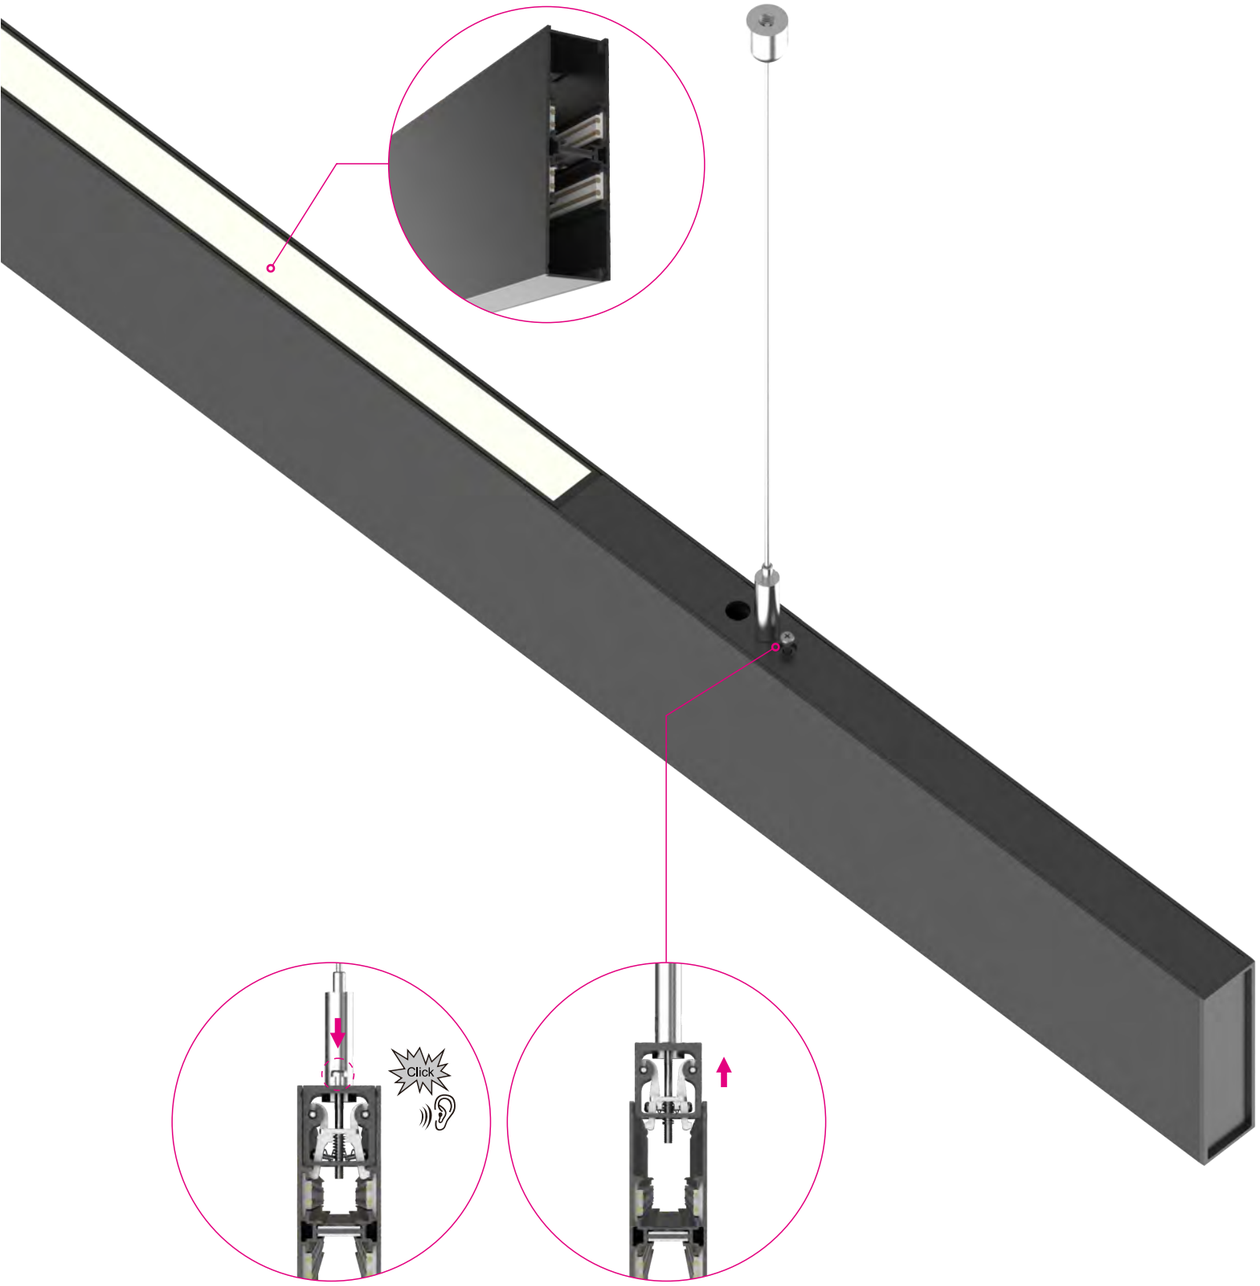

Installation

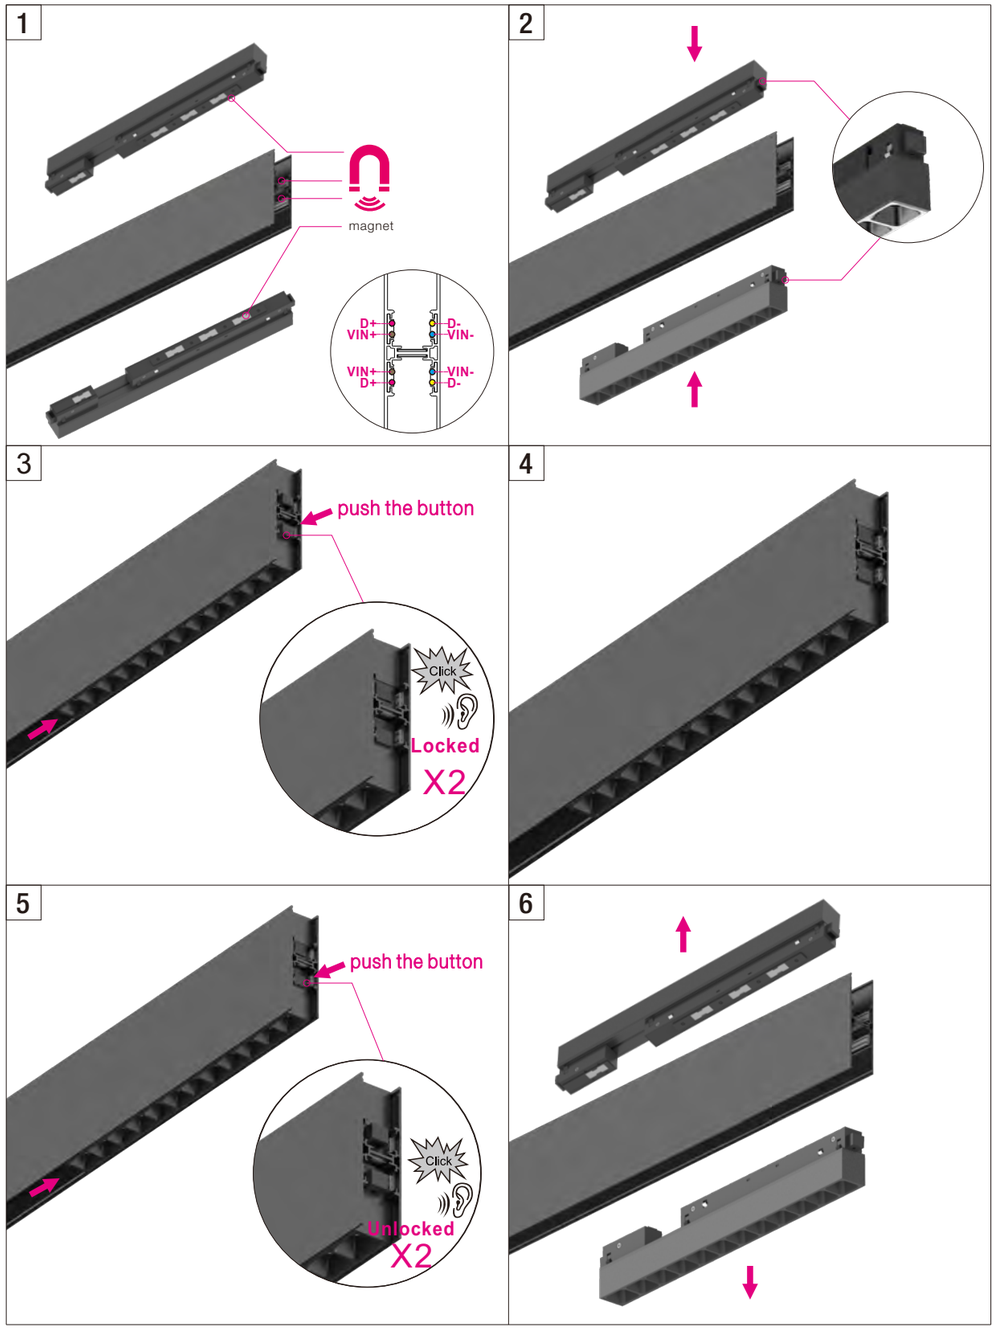

NEKO / MODULINE 26 Linear System


48V Low Voltage Modular Linear System
Recessed Track Configuration

1



ML26-FCM-V (Trim)
ML26-TCM-V (Trimless)
ML26-TCM-EI-V (Trimless-EI)

2




ML26-FTC (Trim)
ML26-TTC (Trimless)
ML26-TTC-EI (Trimless-EI)

3




ML26-FXC (Trim)
ML26-TXC (Trimless)
ML26-TXC-EI (Trimless-EI)

4




ML26-FCM (Trim)
ML26-TCM (Trimless)
ML26-TCM-EI (Trimless-EI)

5



ML26-FCM-O (Trim)
ML26-TCM-O (Trimless)
ML26-TCM-EI-O (Trimless-EI)

6




ML26-CKI + ML26-LC

NEKO / MODULINE 26 Linear System

48V Low Voltage Modular Linear System

Trim Recessed Track System

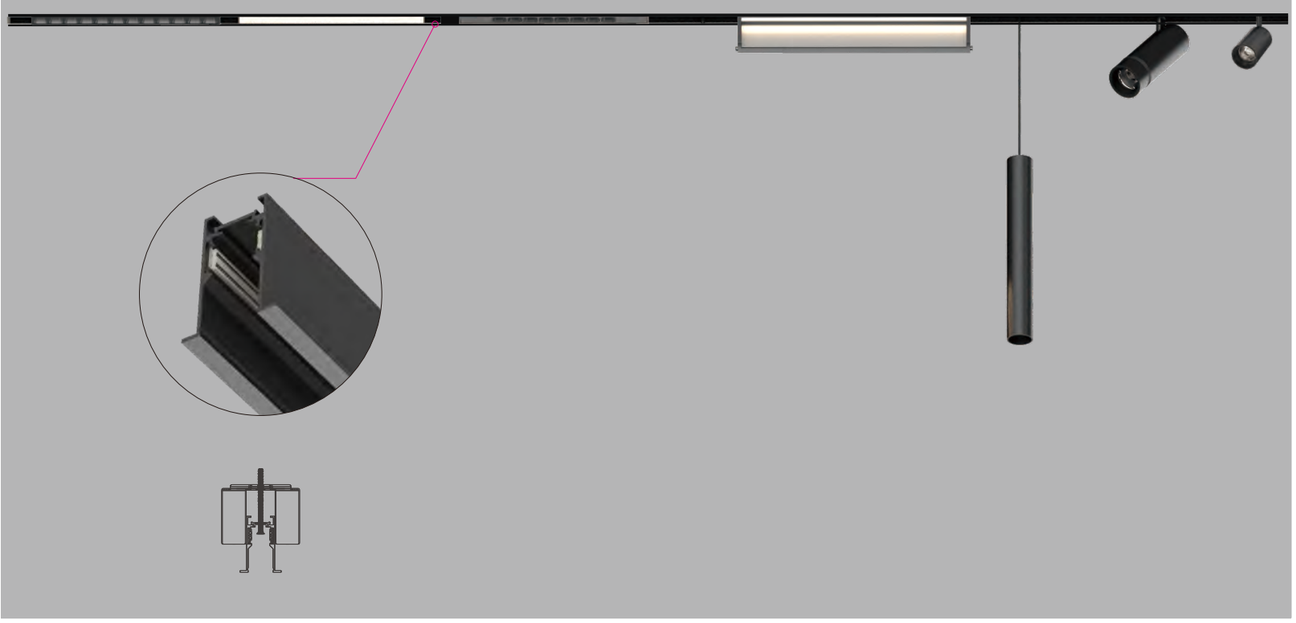

Short Info

·48V low voltage system
·Trim Recessed Track Rail Version made of extruded aluminium with 26mm width groove and 52mm height
·Mounted from inner track , suitable for all thickness ceiling heights
·Track Rail available with standard lengths 1000mm, 2000mm and 1000mm
·'L' shape corner module, 'T' shape connector and 'X' shape connector available for flexible system
·Linear Connector and Continuous Kit provided for continuous Track Rail connection
·Various lighting insets with multiple lighting applications, Tool-free insert mounting by magnetic+click-in double locking mechanism
·Insets available with Non Dim, 1-10V Dim and DALI Dim

Insets

Spotlight
● Page 371-375



Accent Light
● Page 385-388



General Light
● Page 389-392




Wall Wash Light
● Page 401-402



Pendant Spotlight
● Page 393-394



Features

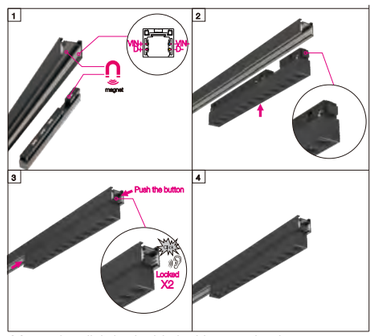

·Magnetic+click-in double locking mechanism

Short Info


Moduline 26 Trim Recessed Track System


Electrical

Non Dim
1-10V Dim
DALI Dim

Fixture Colour

Black White(Option)





Moduline 26 Trim Recessed Track System






Please order installation track rail, light insets and mounting accessories separately.

Trim Recessed Track System Version Installation Track Rail

L (mm)	Description	Code/ Model (Black-Standard)	Code/ Model (White-Option)
1000	Trim Recessed Track Rail	ML26-FR1000-B	ML26-FR1000-W
2000	Trim Recessed Track Rail	ML26-FR2000-B	ML26-FR2000-W
3000	Trim Recessed Track Rail	ML26-FR3000-B	ML26-FR3000-W

*Track Rail including endcaps.

Accessories of Trim Recessed Track System


	L (mm)	Cutout (mm)	Description	Code/ Model (Black-Standard)	Code/ Model (White-Option)
	80x80	(32x28)+(32x28)	Vertical 'L' shape corner module-Inner	ML26-FCM-V-B	ML26-FCM-V-W
	80X80	(32x80)+(32x80)	Vertical 'L' shape corner module-Outer	ML26-FCM-O-B	ML26-FCM-O-W
	80x80	(32x77)+(32x45)	Horizontal 'L' shape corner module	ML26-FCM-B	ML26-FCM-W
	120x80	(32x120)+(32x45)	'T' Shape Connector Set	ML26-FTC-B	ML26-FTC-W
	120X120	(32x120)+(32x120)	'X' Shape Connector Set	ML26-FXC-B	ML26-FXC-W

	Flexible Continuous Kit, Electrical	ML26-CKF-C-B	ML26-CKF-C-W
	•For Corner Connection.		
	Trim Recessed Track Rail Mounting Kit, 2pcs/ set	ML26-FIK	ML26-FIK
	Endcap Kit (2pcs/ set) of Trim Recessed Track	ML26-FEK-B	ML26-FEK-W
	Power Feeder Unit with feeder cables 500mm	ML26-PF-B	ML26-PF-W
	Track Rail Cover 1000mm	ML26-RC1000-B	ML26-RC1000-W
	Track Rail Cover 2000mm	ML26-RC2000-B	ML26-RC2000-W
	Track Rail Cover 3000mm	ML26-RC3000-B	ML26-RC3000-W
	•Track Rail Cover can be shortened as desired.		
	Linear Connector with screws	ML26-LC	ML26-LC
	Straight Continuous Kit•, Electrical	ML26-CKI-B	ML26-CKI-W
	•Continuous Kit needs to be used together with Linear Connector as a set.		
	48V In-track Driver, KGP48V Constant Voltage 100W LED Driver, Black	KGP-100V48N	
	48V In-track Driver, KGP48V Constant Voltage 150W LED Driver, Black	KGP-150V48N	
	48V In-track Driver, KGP48V Constant Voltage 250W LED Driver, Black	KGP-250V48N	
	48V Remote Driver, Meanwell 48V Constant Voltage 100W LED Driver	HLG-100H-48A	
	48V Remote Driver, Meanwell 48V Constant Voltage 150W LED Driver	HLG-150H-48A	
	48V Remote Driver, Meanwell 48V Constant Voltage 240W LED Driver	HLG-240H-48A	

NEKO / MODULINE 26 Linear System

48V Low Voltage Modular Linear System

Trimless Recessed Track System-EI
Easy Installation

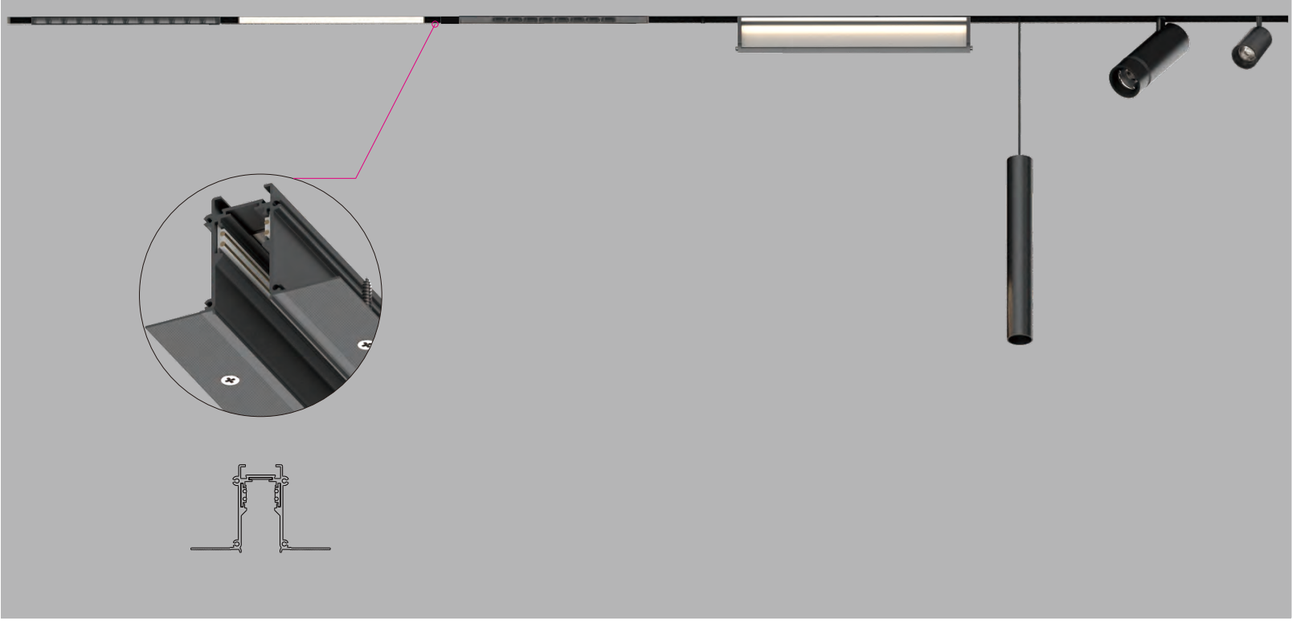

Short Info

·48V low voltage system
·Trimless Recessed Track Rail Easy Installation Version made of extruded aluminium with 26mm width groove and 52mm height
·Mounted from surface, suitable for all thickness ceiling heights
·Track Rail available with standard lengths 1000mm, 2000mm and 3000mm
·'L' shape corner module, 'T' shape connector and 'X' shape connector available for flexible system
·Linear Connector and Continuous Kit provided for continuous Track Rail connection
·Various lighting insets with multiple lighting applications, Tool-free insert mounting by magnetic+click-in double locking mechanism
·Insets available with Non Dim, 1-10V Dim and DALI Dim

Insets

Spotlight
● Page 371-375



Accent Light
● Page 385-388



General Light
● Page 389-392




Wall Wash Light
● Page 401-402



Pendant Spotlight
● Page 393-394



Features

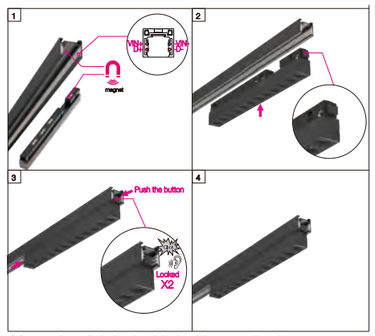

·Magnetic+click-in double locking mechanism

Short Info


Moduline 26 Trimless Recessed Track System
Easy Installation Version


Electrical

Non Dim
1-10V Dim
DALI Dim

Fixture Colour

Black White(Option)





Moduline 26 Trimless Recessed Track System
Easy Installation Version


Please order installation track rail, light insets and mounting accessories separately.

Trimless Recessed Track System Easy Installation Version Installation Track Rail

L (mm)	Description	Code/ Model (Black-Standard)	Code/ Model (White-Option)
1000	Trimless Recessed Track Rail-EI	ML26-TR1000-EI-B	ML26-TR1000-EI-W
2000	Trimless Recessed Track Rail-EI	ML26-TR2000-EI-B	ML26-TR2000-EI-W
3000	Trimless Recessed Track Rail-EI	ML26-TR3000-EI-B	ML26-TR3000-EI-W

*Track Rail including endcaps.


Accessories of Easy Installation Version Trimless Recessed Track System

	L (mm)	Cutout (mm)	Description	Code/ Model (Black-Standard)	Code/ Model (White-Option)
	100x100	(40x48)+(40x48)	Vertical 'L' shape corner module-Inner	ML26-TCM-EI-V-B	ML26-TCM-EI-V-W
	100x100	(40x100)+(40x100)	Vertical 'L' shape corner module-Outer	ML26-TCM-EI-O-B	ML26-TCM-EI-O-W
	100x100	(40x80)+(40x40)	Horizontal 'L' shape corner module	ML26-TCM-EI-B	ML26-TCM-EI-W
	100x120	(40x120)+(40x40)	'T' Shape Connector Set	ML26-TTC-EI-B	ML26-TTC-EI-W
	120X120	(40x120)+(40x120)	'X' Shape Connector Set	ML26-TXC-EI-B	ML26-TXC-EI-W
			Flexible Continuous Kit, Electrical	ML26-CKF-C-B	ML26-CKF-C-W
			*For Corner Connection.		
			Endcap Kit (2pcs/ set) of Trim Recessed Track	ML26-TEK-EI-B	ML26-TEK-EI-W
			Power Feeder Unit with feeder cables 500mm	ML26-PF-B	ML26-PF-W
			Track Rail Cover 1000mm	ML26-RC1000-B	ML26-RC1000-W
			Track Rail Cover 2000mm	ML26-RC2000-B	ML26-RC2000-W
			Track Rail Cover 3000mm	ML26-RC3000-B	ML26-RC3000-W
			*Track Rail Cover can be shortened as desired.		
			Linear Connector with screws	ML26-LC	ML26-LC
			Straight Continuous Kit*, Electrical	ML26-CKI-B	ML26-CKI-W
			*Continuous Kit needs to be used together with Linear Connector as a set.		
			Trimless Recessed Track mounting kit 1set for 1000mm track	ML26-RMK	ML26-RMK
			48V In-track Driver, KGP48V Constant Voltage 100W LED Driver, Black	KGP-100V48N	
			48V In-track Driver, KGP48V Constant Voltage 150W LED Driver, Black	KGP-150V48N	
			48V In-track Driver, KGP48V Constant Voltage 250W LED Driver, Black	KGP-250V48N	
			48V Remote Driver, Meanwell 48V Constant Voltage 100W LED Driver	HLG-100H-48A	
			48V Remote Driver, Meanwell 48V Constant Voltage 150W LED Driver	HLG-150H-48A	
			48V Remote Driver, Meanwell 48V Constant Voltage 240W LED Driver	HLG-240H-48A	

NEKO / MODULINE 26 Linear System

48V Low Voltage Modular Linear System

Trimless Recessed Track System-Ceiling Thickness Adjustable

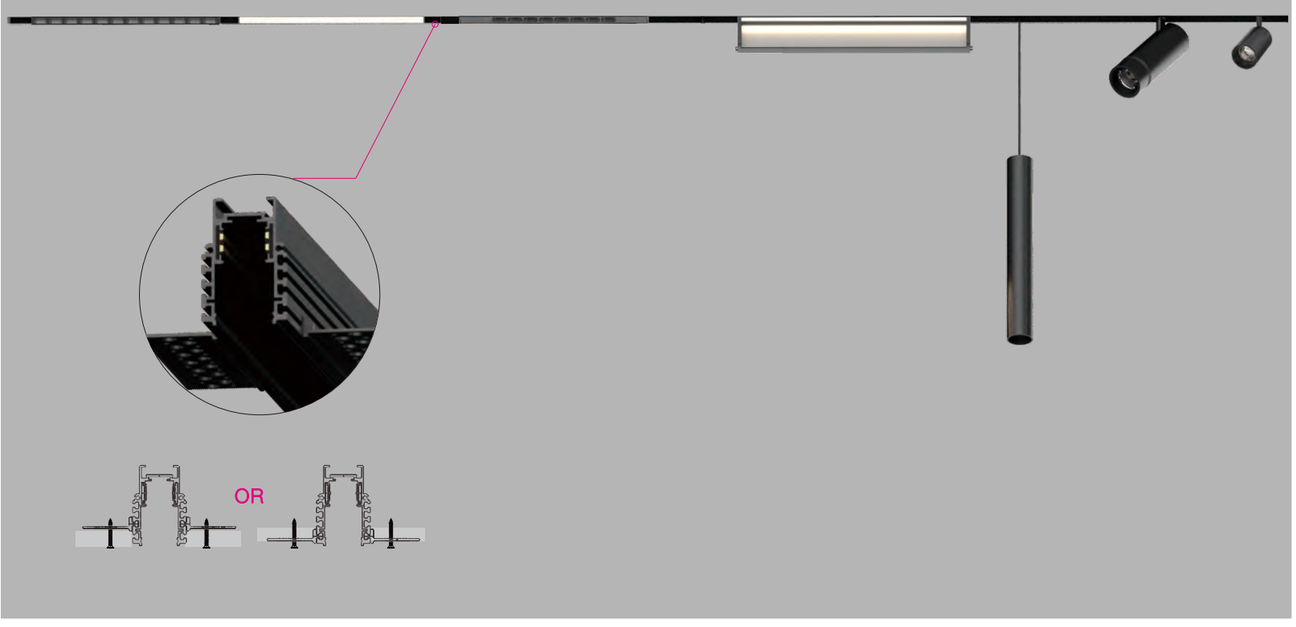

Short Info

·48V low voltage system
·Trimless Recessed Track Rail Version made of extruded aluminium with 35mm width groove and 52mm height
·Suitable for 3mm/5mm/9mm/12.5mm/15mm/18mm/20mm/25mm thickness ceilings heights
·Track Rail available with standard lengths 1000mm, 2000mm and 3000mm
·'L' shape corner module, 'T' shape connector and 'X' shape connector available for flexible system
·Linear Connector and Continuous Kit provided for continuous Track Rail connection
·Various lighting insets with multiple lighting applications, Tool-free insert mounting by magnetic+click-in double locking mechanism
·Insets available with Non Dim, 1-10V Dim and DALI Dim

Insets

Spotlight
● Page 371-375

Accent Light
● Page 385-388


General Light
● Page 389-392

Wall Wash Light
● Page 401-402

Pendant Spotlight
● Page 393-394



Features

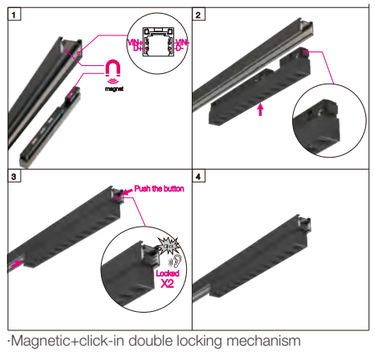


·Magnetic+click-in double locking mechanism

Short Info

Moduline 26 Trimless Recessed Track System
Ceiling Thickness Adjustable

Electrical


Non Dim
1-10V Dim
DALI Dim



Fixture Colour

Black White(Option)





Moduline 26 Trimless Recessed Track System
Ceiling Thickness Adjustable





Please order installation track rail, light insets and mounting accessories separately.


Trimless Recessed Track System Ceiling Thickness Adjustable Version Installation Track Rail

L (mm)	Description	Code/ Model (Black-Standard)	Code/ Model (White-Option)
1000	Trimless Recessed Track Rail	ML26-TAR1000-B	ML26-TAR1000-W
2000	Trimless Recessed Track Rail	ML26-TAR2000-B	ML26-TAR2000-W
3000	Trimless Recessed Track Rail	ML26-TAR3000-B	ML26-TAR3000-W

*Track Rail including endcaps.

Accessories of Ceiling Thickness Adjustable Trimless Recessed Track System

	L (mm)	Cutout (mm)	Description	Code/ Model (Black-Standard)	Code/ Model (White-Option)
	80x80	(40x28)+(40x28)	Vertical 'L' shape corner module-Inner	ML26-TACM-V-B	ML26-TACM-V-W
	80x80	(40x80)+(40x80)	Vertical 'L' shape corner module-Outer	ML26-TACM-O-B	ML26-TACM-O-W
	80x80	(40x82)+(40x42)	Horizontal 'L' shape corner module	ML26-TACM-B	ML26-TACM-W
	80x120	(40x120)+(40x42)	'T' Shape Connector Set	ML26-TATC-B	ML26-TATC-W
	120X120	(40x120)+(40x120)	'X' Shape Connector Set	ML26-TAXC-B	ML26-TAXC-W

	Flexible Continuous Kit, Electrical *For Corner Connection.	ML26-CKF-C-B	ML26-CKF-C-W
	Endcap Kit (2pcs/ set) of Trim Recessed Track	ML26-TAEK-B	ML26-TAEK-W
	Power Feeder Unit with feeder cables 500mm	ML26-PF-B	ML26-PF-W
	Track Rail Cover 1000mm	ML26-RC1000-B	ML26-RC1000-W
	Track Rail Cover 2000mm	ML26-RC2000-B	ML26-RC2000-W
	Track Rail Cover 3000mm *Track Rail Cover can be shortened as desired.	ML26-RC3000-B	ML26-RC3000-W
	Linear Connector with screws	ML26-LC	ML26-LC
	Straight Continuous Kit*, Electrical *Continuous Kit needs to be used together with Linear Connector as a set.	ML26-CKI-B	ML26-CKI-W
	Trimless Recessed installation kit 1set for 1000mm track	ML26-TAIK	ML26-TAIK
	48V In-track Driver, KGP48V Constant Voltage 100W LED Driver, Black	KGP-100V48N	
	48V In-track Driver, KGP48V Constant Voltage 150W LED Driver, Black	KGP-150V48N	
	48V In-track Driver, KGP48V Constant Voltage 250W LED Driver, Black	KGP-250V48N	
	48V Remote Driver, Meanwell 48V Constant Voltage 100W LED Driver	HLG-100H-48A	
	48V Remote Driver, Meanwell 48V Constant Voltage 150W LED Driver	HLG-150H-48A	
	48V Remote Driver, Meanwell 48V Constant Voltage 240W LED Driver	HLG-240H-48A	

NEKO / MODULINE 26 Linear System

48V Low Voltage Modular Linear System
Spotlight Inset




ML26-RS25-3W
Single Spot



ML26-RS25-5W
Double Spot

3W 5W | CRI90 | 2700K 3000K 4000K | 18° 30° 45° | OSRAM 50,000h@L80B10 | UGR < 19 | IP20 | 5 YEARS GUARANTEE | CB | CE | ETL Intertek





ML26-RS25-3W

LED	Power	System Power	LED Voltage	CRI	CCT	Beam	LED Output	System Output	Code
2W	3W	48 V	90	2700K	18°	220lm	170lm	MLR0-9271803F-BB
					30°	220lm	170lm	MLR0-9273003F-BB
					45°	220lm	170lm	MLR0-9274503F-BB
				3000K	18°	230lm	180lm	MLR0-9301803F-BB
					30°	230m	180lm	MLR0-9303003F-BB
					45°	230lm	180lm	MLR0-9304503F-BB
				4000K	18°	250lm	190lm	MLR0-9401803F-BB
					30°	250lm	190lm	MLR0-9403003F-BB
					45°	250lm	190lm	MLR0-9404503F-BB

Code Remark: F(ON-OFF) A=A(1-10V Dim) D=D(DALI Dim)



ML26-RS25-5W

4W	5W	48 V	90	2700K	18°	420lm	330lm	MLR1-9271805F-BB
					30°	420lm	330lm	MLR1-9273005F-BB
					45°	420lm	330lm	MLR1-9274505F-BB
				3000K	18°	450lm	350lm	MLR1-9301805F-BB
					30°	450lm	350lm	MLR1-9303005F-BB
					45°	450lm	350lm	MLR1-9304505F-BB
				4000K	18°	500lm	380lm	MLR1-9401805F-BB
					30°	500lm	380lm	MLR1-9403005F-BB
					45°	500lm	380lm	MLR1-9404505F-BB

Code Remark: F(ON-OFF) A=A(1-10V Dim) D=D(DALI Dim)

Optional



Brushed Gold



White

NEKO / MODULINE 26 Linear System

48V Low Voltage Modular Linear System
Spotlight Inset




ML26-RS40-8W
Single Spot



ML26-RS40-16W
Double Spot

8W 16W | CRI90 | 2700K 3000K 4000K | 18° 30° 45° | CITIZEN Micro Human Tech 50,000h@L80B10 | UGR < 19 | IP20 | 5 YEARS GUARANTEE | CB | CE | ETL Intertek





ML26-RS40-8W

LED	Power	System Power	LED Voltage	CRI	CCT	Beam	LED Output	System Output	Code
7.5W	8W	48 V	90	2700K	18°	700lm	550lm	MLR2-9271808F-BB
					30°	700lm	550lm	MLR2-9273008F-BB
					45°	700lm	400lm	MLR2-9274508F-BB
				3000K	18°	750lm	580lm	MLR2-9301808F-BB
					30°	750lm	580lm	MLR2-9303008F-BB
					45°	750lm	420lm	MLR2-9304508F-BB
				4000K	18°	800lm	640lm	MLR2-9401808F-BB
					30°	800lm	640lm	MLR2-9403008F-BB
					45°	800lm	460lm	MLR2-9404508F-BB

Code Remark: F(ON-OFF) A=A(1-10V Dim) D=D(DALI Dim)



ML26-RS40-16W

15W	16W	48 V	90	2700K	18°	1400lm	1000lm	MLR3-9271816F-BB
					30°	1400lm	1000lm	MLR3-9273016F-BB
					45°	1400lm	800lm	MLR3-9274516F-BB
				3000K	18°	1500lm	1100lm	MLR3-9301816F-BB
					30°	1500lm	1100lm	MLR3-9303016F-BB
					45°	1500lm	850lm	MLR3-9304516F-BB
				4000K	18°	1600lm	1200lm	MLR3-9401816F-BB
					30°	1600lm	1200lm	MLR3-9403016F-BB
					45°	1600lm	900lm	MLR3-9404516F-BB

Code Remark: F(ON-OFF) A=A(1-10V Dim) D=D(DALI Dim)

Optional



Brushed Gold



White

NEKO / MODULINE 26 Linear System

48V Low Voltage Modular Linear System
Spotlight Inset




ML26-RS40-12W
Single Spot



ML26-RS40-24W
Double Spot

12W 24W | CRI90 | 2700K 3000K 4000K | 18° 30° 45° | CITIZEN 50,000h@L80B10 | UGR < 19 | IP20 | 5 YEARS GUARANTEE | CB | CE | cETLus Intertek



LED Power	System Power	LED Voltage	CRI	CCT	Beam	LED Output	System Output	Code
11W	12W	48 V	90	2700K	18°	1000lm	700lm	MLR4-9271812F-BB
					30°	1000lm	700lm	MLR4-9273012F-BB
					45°	1000lm	550lm	MLR4-9274512F-BB
				3000K	18°	1100lm	750lm	MLR4-9301812F-BB
					30°	1100lm	750lm	MLR4-9303012F-BB
					45°	1100lm	600lm	MLR4-9304512F-BB
				4000K	18°	1200lm	800lm	MLR4-9401812F-BB
					30°	1200lm	800lm	MLR4-9403012F-BB
					45°	1200lm	650lm	MLR4-9404512F-BB

Code Remark: F(ON-OFF) A=A(1-10V Dim) D=D(DALI Dim)



ML26-RS40-12W

22W	24W	48 V	90	2700K	18°	2000lm	1400lm	MLR5-9271824F-BB
					30°	2000lm	1400lm	MLR5-9273024F-BB
					45°	2000lm	1100lm	MLR5-9274524F-BB
				3000K	18°	2200lm	1500lm	MLR5-9301824F-BB
					30°	2200lm	1500lm	MLR5-9303024F-BB
					45°	2200lm	1200lm	MLR5-9304524F-BB
				4000K	18°	2400lm	1600lm	MLR5-9401824F-BB
					30°	2400lm	1600lm	MLR5-9403024F-BB
					45°	2400lm	1300lm	MLR5-9404524F-BB

Code Remark: F(ON-OFF) A=A(1-10V Dim) D=D(DALI Dim)



ML26-RS40-24W

Optional



Brushed Gold



White


NEKO / MODULINE 26 Linear System

48V Low Voltage Modular Linear System
Spotlight Inset



ML26-RT55-10W
Zooming Spot

10W | CRI90 | 2700K 3000K 4000K | 20°-40° 35°-60° | CITIZEN 50,000h@L80B10 | UGR < 19 | IP20 | 5 YEARS GUARANTEE | CB | CE | cETLus Intertek



LED Power	System Power	LED Voltage	CRI	CCT	Beam	LED Output	System Output	Code
9W	10W	48 V	90	2700K	20°-40°	1200lm	1000lm	MLR6-927Z410F-BB
					35°-60°	1200lm	950lm	MLR6-927Z610F-BB
				3000K	20°-40°	1300lm	1100lm	MLR6-930Z410F-BB
					35°-60°	1300lm	1000lm	MLR6-930Z610F-BB
				4000K	20°-40°	1400lm	1200lm	MLR6-940Z410F-BB
					35°-60°	1400lm	1100lm	MLR6-940Z610F-BB

Code Remark: F=F(ON-OFF) A=A(1-10V Dim) D=D(DALI Dim)



ML26-RT55-10W

Optional



White


NEKO / MODULINE 26 Linear System

48V Low Voltage Modular Linear System
Spotlight Inset



ML26-RS72-19W
ML26-RS72-26W
Single Spot

19W 26W | CRI90 | 2700K 3000K 4000K | 20° 35° 55° | CITIZEN 50,000h@L80B10 | UGR < 19 | IP20 | 5 YEARS GUARANTEE | CB | CE | ETL Intertek



LED	Power System	Power	LED Voltage	CRI	CCT	Beam	LED Output	System Output	Code
18W	19W		48 V	90	2700K	20°	1800lm	1500lm	MLR7-9272019F-BB
						35°	1800lm	1600lm	MLR7-9273519F-BB
						55°	1800lm	1600lm	MLR7-9275519F-BB
					3000K	20°	1900lm	1600lm	MLR7-9302019F-BB
						35°	1900lm	1700lm	MLR7-9303519F-BB
						55°	1900lm	1700lm	MLR7-9305519F-BB
					4000K	20°	2100lm	1700lm	MLR7-9402019F-BB
						35°	2100lm	1800lm	MLR7-9403519F-BB
						55°	2100lm	1800lm	MLR7-9405519F-BB
25W		26W	48 V	90	2700K	20°	2500lm	2100lm	MLR7-9272026F-BB
						35°	2500lm	2300lm	MLR7-9273526F-BB
						55°	2500lm	2300lm	MLR7-9275526F-BB
					3000K	20°	2700lm	2200lm	MLR7-9302026F-BB
						35°	2700lm	2400lm	MLR7-9303526F-BB
						55°	2700lm	2400lm	MLR7-9305526F-BB
					4000K	20°	2900lm	2400lm	MLR7-9402026F-BB
						35°	2900lm	2600lm	MLR7-9403526F-BB
						55°	2900lm	2600lm	MLR7-9405526F-BB

Code Remark: F(ON-OFF) A=A(1-10V Dim) D=D(DALI Dim)




ML26-RS72-19W
ML26-RS72-26W

Optional



White

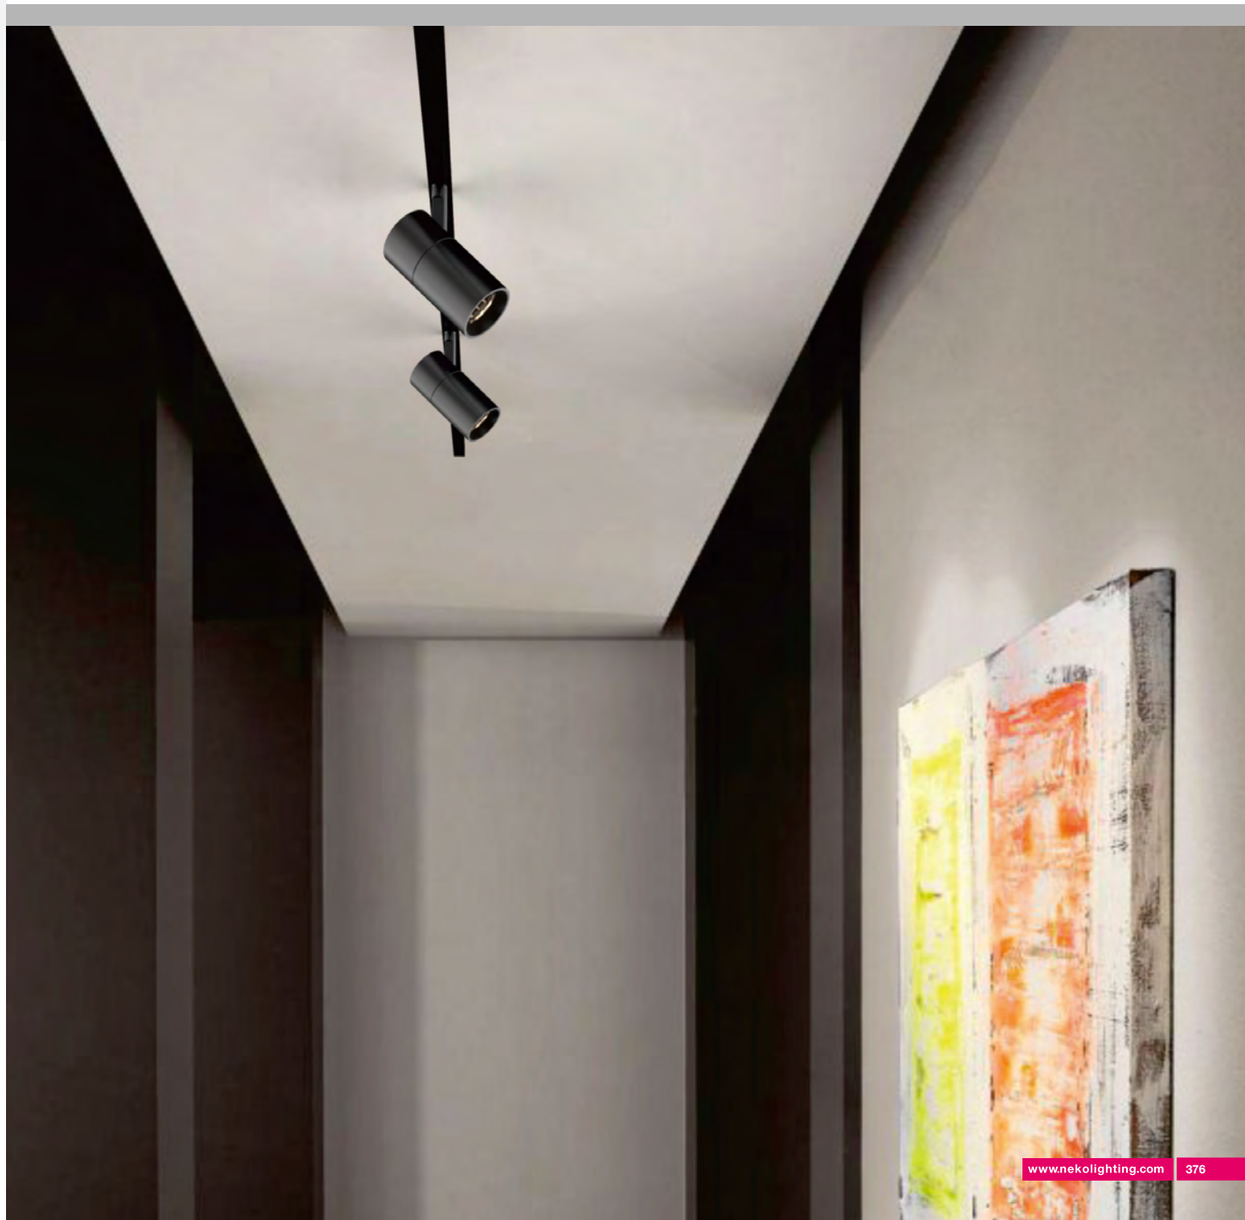


NEKO / MODULINE 26 Linear System

48V Low Voltage Modular Linear System
ML26-RS96 Spotlight Inset



ML26-RS96-9W

9W | CRI90 | 2700K 3000K 4000K | 15° 25° 35° | CITIZEN 50,000h@L80B10 | IP20 | 5 YEARS GUARANTEE | CB | CE | ETL Intertek



LED Power	System Power	LED Voltage	CRI	CCT	Beam	LED Output	System Output	Code
8W	9W	48 V	90	2700K	15°	900lm	700lm	MLR9-9271509F-BN
					25°	900lm	720lm	MLR9-9272509F-BN
					35°	900lm	720lm	MLR9-9273509F-BN
				3000K	15°	950lm	720lm	MLR9-9301509F-BN
					25°	950lm	750lm	MLR9-9302509F-BN
					35°	950lm	750lm	MLR9-9303509F-BN
				4000K	15°	1050lm	780lm	MLR9-9401509F-BN
					25°	1050lm	830lm	MLR9-9402509F-BN
					35°	1050lm	830lm	MLR9-9403509F-BN



ML26-RS96-10W

Code Remark: F(ON-OFF) A=A(1-10V Dim) D=D(DALI Dim)

Optional



Brushed Gold



White

NEW



NEW



Accessory



Honeycomb

Reflector



Black | White | Dark Light | Specular | Matt

NEKO / MODULINE 26 Linear System


48V Low Voltage Modular Linear System
ML26-FRS72 Spotlight Inset

NEW



ML26-FRS72-10W
Single Spot

10W | CRI90 | 2700K 3000K 4000K | 25° 36° 50° | CITIZEN 50,000h@L80B10 | UGR < 19 | IP20 | 5 YEARS GUARANTEE | CB | CE | ETL Intertek





Specular Reflector

LED	Power	System Power	LED Voltage	CRI	CCT	Beam	LED Output	System Output	Code
9W		10W	48 V	90	2700K	25°	900lm	620lm	MLF1-9272510F-BS
						36°	900lm	650lm	MLF1-9273610F-BS
						50°	900lm	650lm	MLF1-9275010F-BS
					3000K	25°	950lm	650lm	MLF1-9302510F-BS
						36°	950m	700lm	MLF1-9303610F-BS
						50°	950lm	700lm	MLF1-9305010F-BS
					4000K	25°	1050lm	700lm	MLF1-9402510F-BS
						36°	1050lm	780lm	MLF1-9403610F-BS
						50°	1050lm	780lm	MLF1-9405010F-BS

Code Remark: F(ON-OFF) A=A(1-10V Dim) D=D(DALI Dim)



Matt Reflector

LED	Power	System Power	LED Voltage	CRI	CCT	Beam	LED Output	System Output	Code
9W		10W	48 V	90	2700K	25°	900lm	620lm	MLF1-9272510F-BM
						36°	900lm	650lm	MLF1-9273610F-BM
						50°	900lm	650lm	MLF1-9275010F-BM
					3000K	25°	950lm	650lm	MLF1-9302510F-BM
						36°	950m	700lm	MLF1-9303610F-BM
						50°	950lm	700lm	MLF1-9305010F-BM
					4000K	25°	1050lm	700lm	MLF1-9402510F-BM
						36°	1050lm	780lm	MLF1-9403610F-BM
						50°	1050lm	780lm	MLF1-9405010F-BM

Code Remark: F(ON-OFF) A=A(1-10V Dim) D=D(DALI Dim)



Black Reflector

LED	Power	System Power	LED Voltage	CRI	CCT	Beam	LED Output	System Output	Code
9W		10W	48 V	90	2700K	25°	900lm	620lm	MLF1-9272510F-BB
						36°	900lm	650lm	MLF1-9273610F-BB
						50°	900lm	650lm	MLF1-9275010F-BB
					3000K	25°	950lm	650lm	MLF1-9302510F-BB
						36°	950m	700lm	MLF1-9303610F-BB
						50°	950lm	700lm	MLF1-9305010F-BB
					4000K	25°	1050lm	700lm	MLF1-9402510F-BB
						36°	1050lm	780lm	MLF1-9403610F-BB
						50°	1050lm	780lm	MLF1-9405010F-BB

Code Remark: F(ON-OFF) A=A(1-10V Dim) D=D(DALI Dim)



Dark Light Reflector

LED	Power	System Power	LED Voltage	CRI	CCT	Beam	LED Output	System Output	Code
9W		10W	48 V	90	2700K	25°	900lm	620lm	MLF1-9272510F-BC
						36°	900lm	650lm	MLF1-9273610F-BC
						50°	900lm	650lm	MLF1-9275010F-BC
					3000K	25°	950lm	650lm	MLF1-9302510F-BC
						36°	950m	700lm	MLF1-9303610F-BC
						50°	950lm	700lm	MLF1-9305010F-BC
					4000K	25°	1050lm	700lm	MLF1-9402510F-BC
						36°	1050lm	780lm	MLF1-9403610F-BC
						50°	1050lm	780lm	MLF1-9405010F-BC

Code Remark: F(ON-OFF) A=A(1-10V Dim) D=D(DALI Dim)



White Reflector

LED	Power	System Power	LED Voltage	CRI	CCT	Beam	LED Output	System Output	Code
9W		10W	48 V	90	2700K	25°	900lm	620lm	MLF1-9272510F-BW
						36°	900lm	650lm	MLF1-9273610F-BW
						50°	900lm	650lm	MLF1-9275010F-BW
					3000K	25°	950lm	650lm	MLF1-9302510F-BW
						36°	950m	700lm	MLF1-9303610F-BW
						50°	950lm	700lm	MLF1-9305010F-BW
					4000K	25°	1050lm	700lm	MLF1-9402510F-BW
						36°	1050lm	780lm	MLF1-9403610F-BW
						50°	1050lm	780lm	MLF1-9405010F-BW

Code Remark: F(ON-OFF) A=A(1-10V Dim) D=D(DALI Dim)

Accessory



Honeycomb

Optional



Brushed Gold



White

NEKO / MODULINE 26 Linear System


48V Low Voltage Modular Linear System
ML26-FRS72 Double Spotlight Inset

NEW



ML26-FRS72-20W
Double Inset

20W | CRI90 | 2700K 3000K 4000K | 25° 36° 50° | CITIZEN 50,000h@L80B10 | UGR < 19 | IP20 | 5 YEARS GUARANTEE | CB | CE | ETL Intertek





Specular Reflector

LED	Power	System Power	LED Voltage	CRI	CCT	Beam	LED Output	System Output	Code
18W		20W	48 V	90	2700K	25°	1800lm	1250lm	MLF2-9272520F-BS
						36°	1800lm	1300lm	MLF2-9273620F-BS
						50°	1800lm	1300lm	MLF2-9275020F-BS
					3000K	25°	1900lm	1300lm	MLF2-9302520F-BS
						36°	1900m	1400lm	MLF2-9303620F-BS
						50°	1900lm	1400lm	MLF2-9305020F-BS
					4000K	25°	2100lm	1400lm	MLF2-9402520F-BS
						36°	2100lm	1550lm	MLF2-9403620F-BS
						50°	2100lm	1550lm	MLF2-9405020F-BS

Code Remark: F(ON-OFF) A=A(1-10V Dim) D=D(DALI Dim)



Matt Reflector

LED	Power	System Power	LED Voltage	CRI	CCT	Beam	LED Output	System Output	Code
18W		20W	48 V	90	2700K	25°	1800lm	1250lm	MLF2-9272520F-BM
						36°	1800lm	1300lm	MLF2-9273620F-BM
						50°	1800lm	1300lm	MLF2-9275020F-BM
					3000K	25°	1900lm	1300lm	MLF2-9302520F-BM
						36°	1900m	1400lm	MLF2-9303620F-BM
						50°	1900lm	1400lm	MLF2-9305020F-BM
					4000K	25°	2100lm	1400lm	MLF2-9402520F-BM
						36°	2100lm	1550lm	MLF2-9403620F-BM
						50°	2100lm	1550lm	MLF2-9405020F-BM

Code Remark: F(ON-OFF) A=A(1-10V Dim) D=D(DALI Dim)



Black Reflector

LED	Power	System Power	LED Voltage	CRI	CCT	Beam	LED Output	System Output	Code
18W		20W	48 V	90	2700K	25°	1800lm	1250lm	MLF2-9272520F-BB
						36°	1800lm	1300lm	MLF2-9273620F-BB
						50°	1800lm	1300lm	MLF2-9275020F-BB
					3000K	25°	1900lm	1300lm	MLF2-9302520F-BB
						36°	1900m	1400lm	MLF2-9303620F-BB
						50°	1900lm	1400lm	MLF2-9305020F-BB
					4000K	25°	2100lm	1400lm	MLF2-9402520F-BB
						36°	2100lm	1550lm	MLF2-9403620F-BB
						50°	2100lm	1550lm	MLF2-9405020F-BB

Code Remark: F(ON-OFF) A=A(1-10V Dim) D=D(DALI Dim)



Dark Light Reflector

LED	Power	System Power	LED Voltage	CRI	CCT	Beam	LED Output	System Output	Code
18W		20W	48 V	90	2700K	25°	1800lm	1250lm	MLF2-9272520F-BC
						36°	1800lm	1300lm	MLF2-9273620F-BC
						50°	1800lm	1300lm	MLF2-9275020F-BC
					3000K	25°	1900lm	1300lm	MLF2-9302520F-BC
						36°	1900m	1400lm	MLF2-9303620F-BC
						50°	1900lm	1400lm	MLF2-9305020F-BC
					4000K	25°	2100lm	1400lm	MLF2-9402520F-BC
						36°	2100lm	1550lm	MLF2-9403620F-BC
						50°	2100lm	1550lm	MLF2-9405020F-BC

Code Remark: F(ON-OFF) A=A(1-10V Dim) D=D(DALI Dim)



White Reflector

LED	Power	System Power	LED Voltage	CRI	CCT	Beam	LED Output	System Output	Code
18W		20W	48 V	90	2700K	25°	1800lm	1250lm	MLF2-9272520F-BW
						36°	1800lm	1300lm	MLF2-9273620F-BW
						50°	1800lm	1300lm	MLF2-9275020F-BW
					3000K	25°	1900lm	1300lm	MLF2-9302520F-BW
						36°	1900m	1400lm	MLF2-9303620F-BW
						50°	1900lm	1400lm	MLF2-9305020F-BW
					4000K	25°	2100lm	1400lm	MLF2-9402520F-BW
						36°	2100lm	1550lm	MLF2-9403620F-BW
						50°	2100lm	1550lm	MLF2-9405020F-BW

Code Remark: F(ON-OFF) A=A(1-10V Dim) D=D(DALI Dim)

Accessory



Honeycomb

Optional



Brushed Gold



White

NEKO / MODULINE 26 Linear System

48V Low Voltage Modular Linear System
Accent Light Inset



ML26-AL190-3W



ML26-AL190-7W




ML26-AL280-9W




ML26-AL280-13W

3W 7W | CRI90 | 2700K 3000K 4000K | 20° 35° 55° | OSRAM 50,000h@L80B10 | UGR < 19 | IP20 | 5 YEARS GUARANTEE | CB CE ETL Intertek



9W 13W | CRI90 | 2700K 3000K 4000K | 20° 35° 55° | OSRAM 50,000h@L80B10 | UGR < 19 | IP20 | 5 YEARS GUARANTEE | CB CE ETL Intertek





ML26-AL190-3W

LED Power	System Power	LED Voltage	CRI	CCT	Beam	LED Output	System Output	Code
2W	3W	48 V	90	2700K	20°	230lm	170lm	MLA3-9272003F-BB
					35°	230lm	170lm	MLA3-9273503F-BB
					55°	230lm	160lm	MLA3-9275503F-BB
				3000K	20°	250lm	180lm	MLA3-9302003F-BB
					35°	250lm	180lm	MLA3-9303503F-BB
					55°	250lm	170lm	MLA3-9305503F-BB
				4000K	20°	270lm	200lm	MLA3-9402003F-BB
					35°	270lm	200lm	MLA3-9403503F-BB
					55	270lm	190lm	MLA3-9405503F-BB

Code Remark: F(ON-OFF) A=A(1-10V Dim) D=D(DALI Dim)



ML26-AL190-7W

LED Power	System Power	LED Voltage	CRI	CCT	Beam	LED Output	System Output	Code
6W	7W	48 V	90	2700K	20°	700lm	500lm	MLA4-9272007F-BB
					35°	700lm	500lm	MLA4-9273507F-BB
					55°	700lm	470lm	MLA4-9275507F-BB
				3000K	20°	750lm	550lm	MLA4-9302007F-BB
					35°	750lm	550lm	MLA4-9303507F-BB
					55°	750lm	500lm	MLA4-9305507F-BB
				4000K	20°	820lm	600lm	MLA4-9402007F-BB
					35°	820lm	600lm	MLA4-9403507F-BB
					55°	820lm	550lm	MLA4-9405507F-BB

Code Remark: F(ON-OFF) A=A(1-10V Dim) D=D(DALI Dim)

Optional



White



ML26-AL280-9W

LED Power	System Power	LED Voltage	CRI	CCT	Beam	LED Output	System Output	Code
8W	9W	48 V	90	2700K	20°	950lm	700lm	MLA1-9272009F-BB
					35°	950lm	700lm	MLA1-9273509F-BB
					55°	950lm	650lm	MLA1-9275509F-BB
				3000K	20°	1000lm	750lm	MLA1-9302009F-BB
					35°	1000lm	750lm	MLA1-9303509F-BB
					55°	1000lm	680lm	MLA1-9305509F-BB
				4000K	20°	1100lm	800lm	MLA1-9402009F-BB
					35°	1100lm	800lm	MLA1-9403509F-BB
					55°	1100lm	750lm	MLA1-9405509F-BB

Code Remark: F(ON-OFF) A=A(1-10V Dim) D=D(DALI Dim)



ML26-AL280-13W

LED Power	System Power	LED Voltage	CRI	CCT	Beam	LED Output	System Output	Code
12W	13W	48 V	90	2700K	20°	1400lm	1000lm	MLA2-9272013F-BB
					35°	1400lm	1000lm	MLA2-9273513F-BB
					55°	1400lm	950lm	MLA2-9275513F-BB
				3000K	20°	1500lm	1100lm	MLA2-9302013F-BB
					35°	1500lm	1100lm	MLA2-9303513F-BB
					55°	1500lm	1000lm	MLA2-9305513F-BB
				4000K	20°	1600lm	1200lm	MLA2-9402013F-BB
					35°	1600lm	1200lm	MLA2-9403513F-BB
					55°	1600lm	1100lm	MLA2-9405513F-BB

Code Remark: F(ON-OFF) A=A(1-10V Dim) D=D(DALI Dim)

Optional




White

NEKO / MODULINE 26 Linear System


48V Low Voltage Modular Linear System
Adjustable Accent Light Inset






ML26-SA280-13W
Adjustable Accent Light Inset

13W | CRI90 | 2700K 3000K 4000K | 20° 35° 55° | OSRAM 50,000h@L80B10 | UGR < 19 | IP20 | 90° 90° | 5 YEARS GUARANTEE | CB CE ETL Intertek







ML26-SA280-13W

LED Power	System Power	LED Voltage	CRI	CCT	Beam	LED Output	System Output	Code
12W	13W	48 V	90	2700K	20°	1400lm	1000lm	MLA5-9272013F-BB
					35°	1400lm	1000lm	MLA5-9273513F-BB
					55°	1400lm	950lm	MLA5-9275513F-BB
				3000K	20°	1500lm	1100lm	MLA5-9302013F-BB
					35°	1500lm	1100lm	MLA5-9303513F-BB
					55°	1500lm	1000lm	MLA5-9305513F-BB
				4000K	20°	1600lm	1200lm	MLA5-9403513F-BB
					35	1600lm	1200lm	MLA5-9403513F-BB
					55	1600lm	1100lm	MLA5-9405513F-BB

Code Remark: F(ON-OFF) A=A(1-10V Dim) D=D(DALI Dim)

Optional



White

NEKO / MODULINE 26 Linear System

48V Low Voltage Modular Linear System
ML26-AA315 Accent Light Inset


NEW





ML26-AA315-14W
Adjustable range 150°

14W | CRI90 | 2700K 3000K 4000K | 30° | OSRAM 50,000h@L80B10 | UGR < 19 | IP20 | 5 YEARS GUARANTEE | CB CE ETL Intertek







ML26-AA315-14W


LED Power	System Power	LED Voltage	CRI	CCT	Beam	LED Output	System Output	Code
13W	14W	48 V	90	2700K	30°	1200lm	1050lm	MLA7-9273014F-BB
				3000K	30°	1400lm	1100lm	MLA7-9303014F-BB
				4000K	30°	1500lm	1200lm	MLA7-9403014F-BB

Code Remark: F(ON-OFF) A=A(1-10V Dim) D=D(DALI Dim)

NEKO / MODULINE 26 Linear System

48V Low Voltage Modular Linear System
ML26-AG315 General Light Inset

NEW




ML26-AG315-10W



Adjustable range 150°

10W | CRI90 | 2700K 3000K 4000K | 120° | OSRAM 50,000h@L80B10 | IP20 | 5 YEARS GUARANTEE | CB | CE | cETLus Intertek





LED Power	System Power	LED Voltage	CRI	CCT	Beam	LED Output	System Output	Code
9W	10W	48 V	90	2700K	120°	750lm	500lm	MLG6-927A210F-BB
				3000K	120°	800lm	550lm	MLG6-930A210F-BB
				4000K	120°	850lm	600lm	MLG6-940A210F-BB

Code Remark: F(ON-OFF) A=A(1-10V Dim) D=D(DALI Dim)

NEKO / MODULINE 26 Linear System


48V Low Voltage Modular Linear System
Adjustable General Light Inset



ML26-SG280-7W
Adjustable General Light Inset



7W | CRI90 | 2700K 3000K 4000K | 110° | SAMSUNG 50,000h@L80B10 | IP20 | 90° 90° | 5 YEARS GUARANTEE | CB | CE | cETLus Intertek







ML26-SG280-7W

LED Power	System Power	LED Voltage	CRI	CCT	Beam	LED Output	System Output	Code
6W	7W	48 V	90	2700K	110°	550lm	430lm	MLG5-927A107F-BN
				3000K	110°	600lm	400lm	MLG5-930A107F-BN
				4000K	110°	650lm	450lm	MLG5-940A107F-BN

Code Remark: F(ON-OFF) A=A(1-10V Dim) D=D(DALI Dim)

Optional




White

NEKO / MODULINE 26 Linear System


48V Low Voltage Modular Linear System
General Light Inset




ML26-GL280-7W



ML26-GL560-13W




ML26-GL840-19W



ML26-GL1120-26W

7W 13W | CRI90 | 2700K 3000K 4000K | 110° | SAMSUNG 50,000h@L80B10 | IP20 | 5 YEARS GUARANTEE | CB | CE | c ETL us Intertek



LED Power	System Power	LED Voltage	CRI	CCT	Beam	LED Output	System Output	Code
6W	7W	48 V	90	2700K	110°	550lm	430lm	MLG1-927A107F-BN
				3000K	110°	600lm	400lm	MLG1-930A107F-BN
				4000K	110°	650lm	450lm	MLG1-940A107F-BN

Code Remark: F(ON-OFF) A=A(1-10V Dim) D=D(DALI Dim)

12W	13W	48 V	90	2700K	110°	1100lm	750lm	MLG2-927A113F-BN
				3000K	110°	1200lm	800lm	MLG2-930A113F-BN
				4000K	110°	1300lm	900lm	MLG2-940A113F-BN


Code Remark: F(ON-OFF) A=A(1-10V Dim) D=D(DALI Dim)

Optional



White

19W 26W | CRI90 | 2700K 3000K 4000K | 110° | SAMSUNG 50,000h@L80B10 | IP20 | 5 YEARS GUARANTEE | CB | CE | c ETL us Intertek



LED Power	System Power	LED Voltage	CRI	CCT	Beam	LED Output	System Output	Code
18 W	19 W	48 V	90	2700K	110°	1700lm	1100lm	MLG3-927A119F-BN
				3000K	110°	1800lm	1200lm	MLG3-930A119F-BN
				4000K	110°	1900lm	1300lm	MLG3-940A119F-BN

Code Remark: F(ON-OFF) A=A(1-10V Dim) D=D(DALI Dim)

24W	26W	48 V	90	2700K	110°	2200lm	1500lm	MLG4-927A126F-BN
				3000K	110°	2400lm	1600lm	MLG4-930A126F-BN
				4000K	110°	2600lm	1700lm	MLG4-940A126F-BN

Code Remark: F(ON-OFF) A=A(1-10V Dim) D=D(DALI Dim)

Optional




White

NEKO / MODULINE 26 Linear System

48V Low Voltage Modular Linear System
Pendant Spot Inset



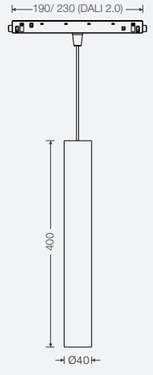

ML26-PS40-12W

12W | CRI90 | 2700K 3000K 4000K | 18° 30° 45° | CITIZEN 50,000h@L80B10 | UGR < 19 | IP20 | 5 YEARS GUARANTEE | CB | CE | ETL Intertek

LED Power	System Power	LED Voltage	CRI	CCT	Beam	LED Output	System Output	Code
11W	12W	48 V	90	2700K	18°	1000lm	700lm	MLP1-9271812F-BB
					30°	1000lm	700lm	MLP1-9273012F-BB
					45°	1000lm	550lm	MLP1-9274512F-BB
				3000K	18°	1100lm	750lm	MLP1-9301812F-BB
					30°	1100lm	750lm	MLP1-9303012F-BB
					45°	1100lm	600lm	MLP1-9304512F-BB
				4000K	18°	1200lm	800lm	MLP1-9401812F-BB
					30°	1200lm	800lm	MLP1-9403012F-BB
					45°	1200lm	650lm	MLP1-9404512F-BB

Code Remark: F(ON-OFF) A=A(1-10V Dim) D=D(DALI Dim)



ML26-PS40-12W

Optional




Brushed Gold White

NEKO / MODULINE 26 Linear System

48V Low Voltage Modular Linear System
Pendant Spot Inset



ML26-PS55-14W



14W | CRI90 | 2700K 3000K 4000K | 18° 24° 36° | CITIZEN 50,000h@L80B10 | UGR < 19 | IP20 | 5 YEARS GUARANTEE | CB | CE | ETL Intertek

LED Power	System Power	LED Voltage	CRI	CCT	Beam	LED Output	System Output	Code
13W	14W	48 V	90	2700K	18°	1100lm	900lm	MLP2-9271814F-BB
					24°	1100lm	900lm	MLP2-9272414F-BB
					36°	1100lm	750lm	MLP2-9273614F-BB
				3000K	18°	1200lm	950lm	MLP2-9301814F-BB
					24°	1200lm	950lm	MLP2-9302414F-BB
					36°	1200lm	800lm	MLP2-9303612F-BB
				4000K	18°	1300lm	1000lm	MLP2-9401814F-BB
					24°	1300lm	1000lm	MLP2-9402414F-BB
					36°	1300lm	850lm	MLP2-9403614F-BB

Code Remark: F=F(ON-OFF) A=A(1-10V Dim) D=D(DALI Dim)



ML26-PS55-14W

Optional



White


NEKO / MODULINE 26 Linear System

48V Low Voltage Modular Linear System
ML26-PS60 Pendant Light Inset

NEW



ML26-PS60-5W



5W | CRI90 | 2700K 3000K 4000K | 18° 24° 36° 50° | OSRAM 50,000h@L80B10 | UGR < 19 | IP20 | 5 YEARS GUARANTEE | CB | CE | c ETL us Intertek

LED Power	System Power	LED Voltage	CRI	CCT	Beam	LED Output	System Output	Code
4.5W	5W	48 V	90	2700K	18°	470lm	370lm	MLP3-9271805F-BB
					24°	470lm	370lm	MLP3-9272405F-BB
					36°	470lm	370lm	MLP3-9273605F-BB
					50°	470lm	370lm	MLP3-9275005F-BB
				3000K	18°	500lm	400lm	MLP3-9301805F-BB
					24°	500lm	400lm	MLP3-9302405F-BB
					36°	500lm	400lm	MLP3-9303605F-BB
					50°	500lm	400lm	MLP3-9305005F-BB
				4000K	18°	550lm	450lm	MLP3-9401805F-BB
					24°	550lm	450lm	MLP3-9402405F-BB
					36°	550lm	450lm	MLP3-9403605F-BB
					50°	550lm	450lm	MLP3-9405005F-BB

Code Remark: F(ON-OFF) A=A(1-10V Dim) D=D(DALI Dim)



ML26-PS60-5W

Optional



White


NEKO / MODULINE 26 Linear System

48V Low Voltage Modular Linear System
ML26-PAD150 Pendant Light Inset

NEW



ML26-PAD150-12W



12W | CRI90 | 2700K 3000K 4000K | 110° | OSRAM 50,000h@L80B10 | IP20 | 5 YEARS GUARANTEE | CB | CE | c ETL us Intertek

LED Power	System Power	LED Voltage	CRI	CCT	Beam	LED Output	System Output	Code
11W	12W	48 V	90	2700K	110°	900lm	720lm	MLPA-927A112F-BN
				3000K	110°	950lm	750lm	MLPA-930A112F-BN
				4000K	110°	1050lm	800lm	MLPA-940A112F-BN

Code Remark: F(ON-OFF) A=A(1-10V Dim) D=D(DALI Dim)



ML26-PAD150-12W

Optional



Brushed Gold




White

NEKO / MODULINE 26 Linear System

48V Low Voltage Modular Linear System
ML26-PD300 Pendant Light Inset



ML26-PD300-18W



18W | CRI90 | 2700K 3000K 4000K | 60° | CITIZEN 50,000h@L80B10 | UGR < 19 | IP20 | 5 YEARS GUARANTEE | CB | CE | ETL intertek



LED	Power	System Power	LED Voltage	CRI	CCT	Beam	LED Output	System Output	Code
17W		18W	48 V	90	2700K	60°	1600lm	1050lm	MLPD-9276018F-BB-H
					3000K	60°	1700lm	1100lm	MLPD-9306018F-BB-H
					4000K	60°	1800lm	1200lm	MLPD-9406018F-BB-H

Code Remark: F(ON-OFF) A=A(1-10V Dim) D=D(DALI Dim)



17W		18W	48 V	90	2700K	60°	1600lm	1050lm	MLPD-9276018F-BW-H
					3000K	60°	1700lm	1100lm	MLPD-9306018F-BW-H
					4000K	60°	1800lm	1200lm	MLPD-9406018F-BW-H

Code Remark: F(ON-OFF) A=A(1-10V Dim) D=D(DALI Dim)

Optional




White

NEW




NEKO / MODULINE 26 Linear System

48V Low Voltage Modular Linear System
ML26-PB120 Pendant Light Inset

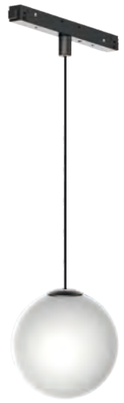

ML26-PB120-10W
(Frosted Glass)



10W | CRI90 | 2700K 3000K 4000K | 180° | CITIZEN 50,000h@L80B10 | IP20 | 5 YEARS GUARANTEE | CB | CE | ETL Intertek



ML26-PB120-10W

LED	Power	System Power	LED Voltage	CRI	CCT	Beam	LED Output	System Output	Code
9W		10W	48 V	90	2700K	180°	900lm	620lm	MLPB-927A810F-BN
					3000K	180°	950lm	650lm	MLPB-930A810F-BN
					4000K	180°	1050lm	700lm	MLPB-940A810F-BN

Code Remark: F(ON-OFF) A=A(1-10V Dim) D=D(DALI Dim)

Optional



White



NEKO / MODULINE 26 Linear System

48V Low Voltage Modular Linear System
Wall Washer Inset




ML26-WW280-7W



ML26-WW560-13W

7W
13W
CRI90
2700K
3000K
4000K
SAMSUNG
50,000h@L80B10
IP20
5 YEARS GUARANTEE
CB
CE
ETL SEMKO US
Intertek



LED	Power System Power	LED Voltage	CRI	CCT	Beam	LED Output	System Output	Code
6W	7W	48 V	90	2700K	Wall Washer	550lm	330lm	MLW1-927A107F-BM
				3000K	Wall Washer	600lm	350lm	MLW1-930A107F-BM
				4000K	Wall Washer	650lm	400lm	MLW1-940A107F-BM
12W	13W	48 V	90	2700K	Wall Washer	1100lm	670lm	MLW2-927A113F-BM
				3000K	Wall Washer	1200lm	700lm	MLW2-930A113F-BM
				4000K	Wall Washer	1300lm	750lm	MLW2-940A113F-BM

Code Remark: F(ON-OFF) A=A(1-10V Dim) D=D(DALI Dim)



ML26-WW280-7W




ML26-WW560-13W

Optional



White

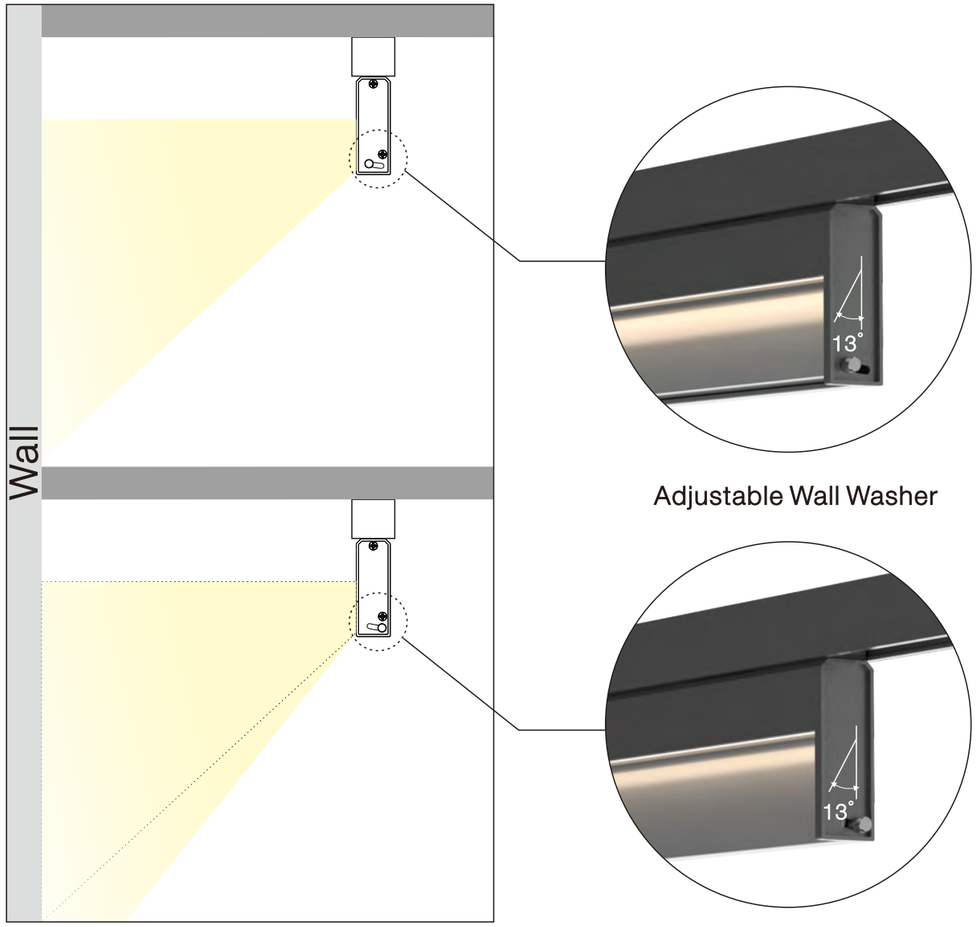


Adjustable Wall Washer


Microprismatic Cover
UGR<19

Pendant Installation Kit-Rod
Ceiling Box with Suspension Rod

Pendant Installation Kit-Wire
Ceiling Box with Suspension Wires

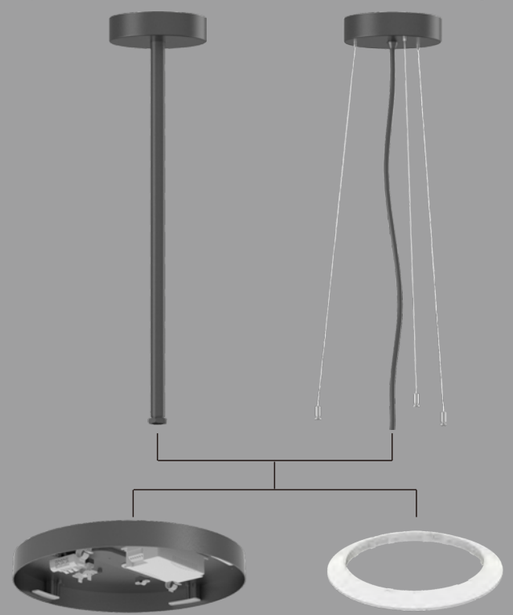


Surface Mounted Installation Kit

Magnetic Uplight Module



LED Light Engine
CRI>90/ CRI>80
2700/ 3000K/ 4000K/ Tunable White

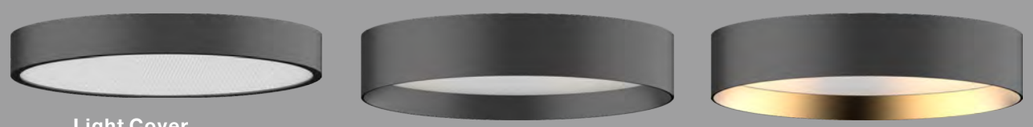


Light Cover
GAME Series
Black

Light Cover
SUGAR Series
Black-Black

Light Cover
SUGAR Series
Black-Gold

Pendant Installation Kit-Rod
Ceiling Box with Suspension Rod

Pendant Installation Kit-Wire
Ceiling Box with Suspension Wires

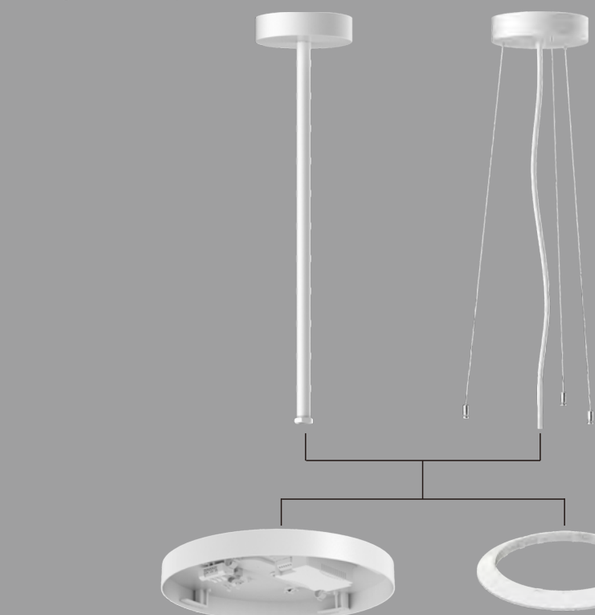

Surface Mounted Installation Kit

Magnetic Uplight Module




LED Light Engine
CRI>90/ CRI>80
2700/ 3000K/ 4000K/ Tunable White



Light Cover
GAME Series
White


Light Cover
SUGAR Series
White-White


Installation :

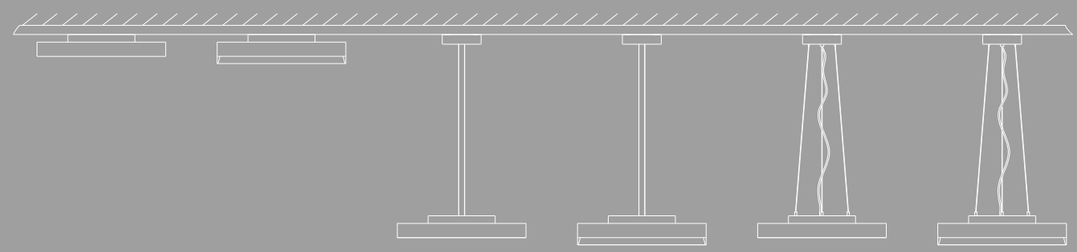


NEKO / GAME
Ceiling Light System



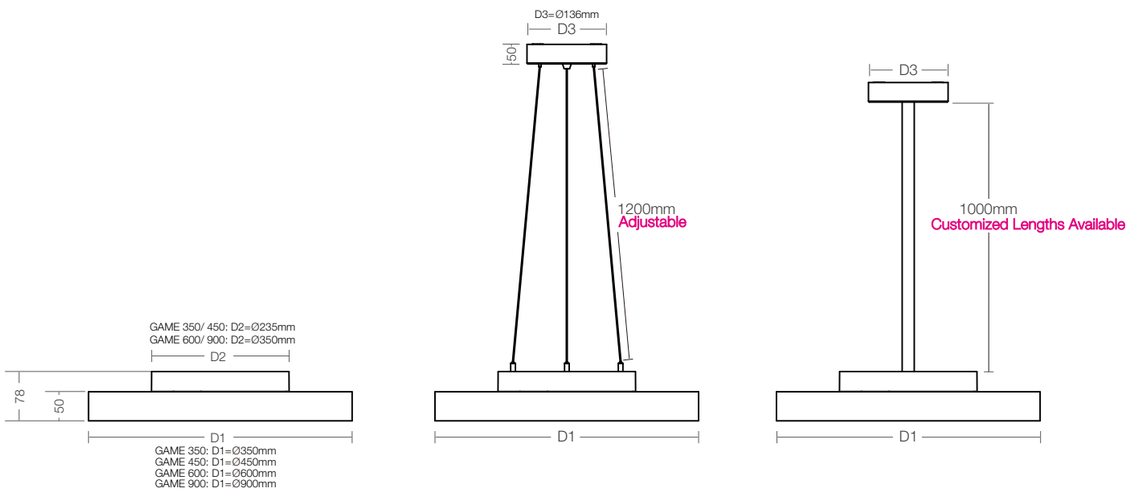





8W Up Light(250mA) 850lm
12W Down Light(350mA) 1400lm
16W Down Light(500mA) 2000lm
ON-OFF/Phase Dim/1-10V/DALI Dim



11W Up Light(350mA) 1100lm
16W Down Light(500mA) 2000lm
24W Down Light(700mA) 2800lm
ON-OFF/Phase Dim/1-10V/DALI Dim



18W Up Light(500mA) 1700lm
24W Down Light(700mA) 2800lm
36W Down Light(1050mA) 4700lm
46W Down Light(1050mA) 6100lm
ON-OFF/Phase Dim/1-10V/DALI Dim

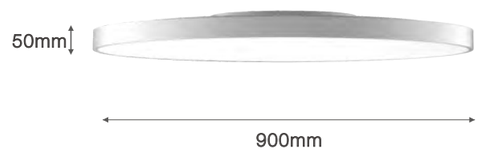

25W Up Light(700mA) 2400lm
65W Down Light(1400mA) 8000lm
ON-OFF/1-10V/DALI Dim

Magnetic Uplight Module





(GAME 350 for Reference)

(GAME 450 for Reference)


NEKO / SUGAR
Ceiling Light System



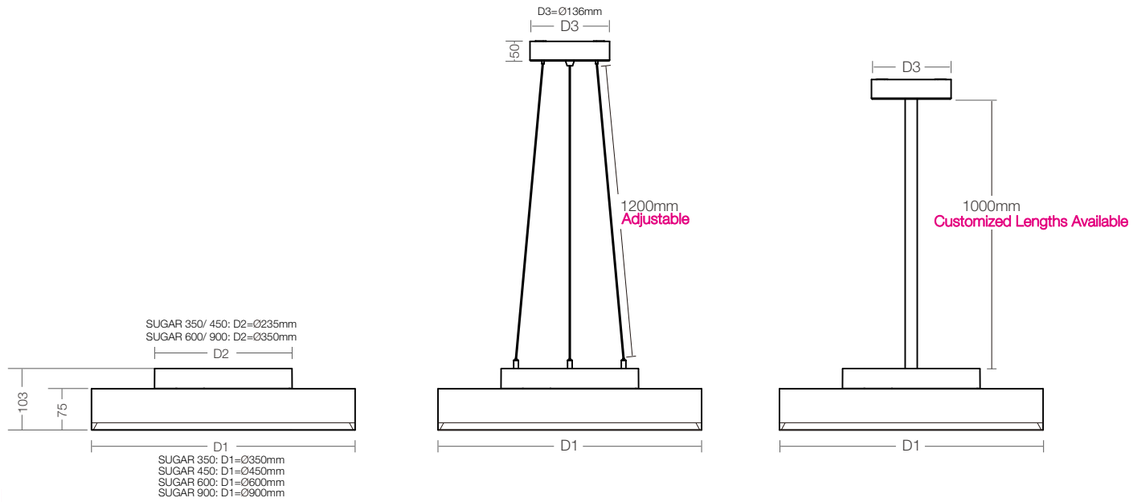




8W Up Light(250mA) 850lm
12W Down Light(350mA) 1400lm
16W Down Light(500mA) 2000lm
ON-OFF/Phase Dim/1-10V/DALI Dim



11W Up Light(350mA) 1100lm
16W Down Light(500mA) 2000lm
24W Down Light(700mA) 2800lm
ON-OFF/Phase Dim/1-10V/DALI Dim

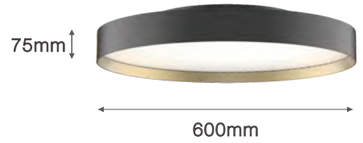

18W Up Light(500mA) 1700lm
24W Down Light(700mA) 2800lm
36W Down Light(1050mA) 4700lm
46W Down Light(1050mA) 6100lm
ON-OFF/Phase Dim/1-10V/DALI Dim



25W Up Light(700mA) 2400lm
65W Down Light(1400mA) 8000lm
ON-OFF/1-10V/DALI Dim

Magnetic Uplight Module



(SUGAR 350 for Reference) (SUGAR 450 for Reference)

NEKO / GAME
Project: Skyline Hill, Germany



NEKO / GAME350

Ceiling Light System



12W 16W | CRI80 CRI90 | 2700K 3000K 4000K | Tunable White Available | 90° | OSRAM 50,000h@L80B10 | UGR < 19 | IP40 | 5 YEARS GUARANTEE | CB | CE | ETL Intertek





Black


LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
12 W		14 W	34 V	350 mA	80	2700K	90°	1800lm	1300lm	GASM-8279012N-BN
						3000K	90°	1900lm	1400lm	GASM-8309012N-BN
						4000K	90°	2000lm	1500lm	GASM-8409012N-BN
16 W		18 W	34 V	500 mA	80	2700K	90°	2400lm	1900lm	GASM-8279016N-BN
						3000K	90°	2600lm	2000lm	GASM-8309016N-BN
						4000K	90°	2800lm	2200lm	GASM-8409016N-BN



White

LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
12 W		14 W	34 V	350 mA	80	2700K	90°	1800lm	1300lm	GASM-8279012N-WN
						3000K	90°	1900lm	1400lm	GASM-8309012N-WN
						4000K	90°	2000lm	1500lm	GASM-8409012N-WN
16 W		18 W	34 V	500 mA	80	2700K	90°	2400lm	1900lm	GASM-8279016N-WN
						3000K	90°	2600lm	2000lm	GASM-8309016N-WN
						4000K	90°	2800lm	2200lm	GASM-8409016N-WN


Code Remark: N=(NO Driver) F=(ON-OFF) P=(Phase Dim) A=(1-10V Dim) D=(DALI Dim)



Black

LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
12 W		14 W	34 V	350 mA	80	2700K	90°	1800lm	1300lm	GAPW-8279012N-BN
						3000K	90°	1900lm	1400lm	GAPW-8309012N-BN
						4000K	90°	2000lm	1500lm	GAPW-8409012N-BN
16 W		18 W	34 V	500 mA	80	2700K	90°	2400lm	1900lm	GAPW-8279016N-BN
						3000K	90°	2600lm	2000lm	GAPW-8309016N-BN
						4000K	90°	2800lm	2200lm	GAPW-8409016N-BN

Standard pendant length: 1200mm



White

LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
12 W		14 W	34 V	350 mA	80	2700K	90°	1800lm	1300lm	GAPW-8279012N-WN
						3000K	90°	1900lm	1400lm	GAPW-8309012N-WN
						4000K	90°	2000lm	1500lm	GAPW-8409012N-WN
16 W		18 W	34 V	500 mA	80	2700K	90°	2400lm	1900lm	GAPW-8279016N-WN
						3000K	90°	2600lm	2000lm	GAPW-8309016N-WN
						4000K	90°	2800lm	2200lm	GAPW-8409016N-WN

Standard pendant length: 1200mm



Black

LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
12 W		14 W	34 V	350 mA	80	2700K	90°	1800lm	1300lm	GAPR-8279012N-BN
						3000K	90°	1900lm	1400lm	GAPR-8309012N-BN
						4000K	90°	2000lm	1500lm	GAPR-8409012N-BN
16 W		18 W	34 V	500 mA	80	2700K	90°	2400lm	1900lm	GAPR-8279016N-BN
						3000K	90°	2600lm	2000lm	GAPR-8309016N-BN
						4000K	90°	2800lm	2200lm	GAPR-8409016N-BN

Standard pendant length: 1000mm (customized lengths available)

Remark: Field cuttable pendant rod solution optional



White

LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
12 W		14 W	34 V	350 mA	80	2700K	90°	1800lm	1300lm	GAPR-8279012N-WN
						3000K	90°	1900lm	1400lm	GAPR-8309012N-WN
						4000K	90°	2000lm	1500lm	GAPR-8409012N-WN
16 W		18 W	34 V	500 mA	80	2700K	90°	2400lm	1900lm	GAPR-8279016N-WN
						3000K	90°	2600lm	2000lm	GAPR-8309016N-WN
						4000K	90°	2800lm	2200lm	GAPR-8409016N-WN

Standard pendant length: 1000mm (customized lengths available)

Remark: Field cuttable pendant rod solution optional

Code Remark: N=(NO Driver) F=(ON-OFF) P=(Phase Dim) A=(1-10V Dim) D=(DALI Dim)

Optional accessory



Magnetic Uplight Module 350

LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
8 W		10 W	33 V	250 mA	80	2700K	110°	900lm	800lm	UM35-827A108N-NN
						3000K	110°	950lm	850lm	UM35-830A108N-NN
						4000K	110°	1050lm	950lm	UM35-840A108N-NN

Code Remark: N=(NO Driver) F=(ON-OFF) P=(Phase Dim) A=(1-10V Dim) D=(DALI Dim)

Code for GAPR-8309012N-WN with **U**plight Module
GAPR-8309012N-WN-**U**

NEKO / GAME450
Ceiling Light System



16W 24W | CRI80 CRI90 | 2700K 3000K 4000K | Tunable White Available | 90° | OSRAM 50,000h@L80B10 | UGR < 19 | IP 40 | 5 YEARS GUARANTEE | CB | CE | ETL Intertek





Black


LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
16 W	18 W	34 V	500 mA	80	2700K	90°	2400lm	1900lm	GBSM-8279016N-BN
					3000K	90°	2600lm	2000lm	GBSM-8309016N-BN
					4000K	90°	2800lm	2200lm	GBSM-8409016N-BN
24 W	26 W	34 V	700 mA	80	2700K	90°	3500lm	2600lm	GBSM-8279024N-BN
					3000K	90°	3700lm	2800lm	GBSM-8309024N-BN
					4000K	90°	4000lm	3000lm	GBSM-8409024N-BN



White

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
16 W	18 W	34 V	500 mA	80	2700K	90°	2400lm	1900lm	GBSM-8279016N-WN
					3000K	90°	2600lm	2000lm	GBSM-8309016N-WN
					4000K	90°	2800lm	2200lm	GBSM-8409016N-WN
24 W	26 W	34 V	700 mA	80	2700K	90°	3500lm	2600lm	GBSM-8279024N-WN
					3000K	90°	3700lm	2800lm	GBSM-8309024N-WN
					4000K	90°	4000lm	3000lm	GBSM-8409024N-WN


Code Remark: N=(NO Driver) F=(ON-OFF) P=(Phase Dim) A=(1-10V Dim) D=(DALI Dim)



Black

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
16 W	18 W	34 V	500 mA	80	2700K	90°	2400lm	1900lm	GBPW-8279016N-BN
					3000K	90°	2600lm	2000lm	GBPW-8309016N-BN
					4000K	90°	2800lm	2200lm	GBPW-8409016N-BN
24 W	26 W	34 V	700 mA	80	2700K	90°	3500lm	2600lm	GBPW-8279024N-BN
					3000K	90°	3700lm	2800lm	GBPW-8309024N-BN
					4000K	90°	4000lm	3000lm	GBPW-8409024N-BN

Standard pendant length: 1200mm



White

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
16 W	18 W	34 V	500 mA	80	2700K	90°	2400lm	1900lm	GBPW-8279016N-WN
					3000K	90°	2600lm	2000lm	GBPW-8309016N-WN
					4000K	90°	2800lm	2200lm	GBPW-8409016N-WN
24 W	26 W	34 V	700 mA	80	2700K	90°	3500lm	2600lm	GBPW-8279024N-WN
					3000K	90°	3700lm	2800lm	GBPW-8309024N-WN
					4000K	90°	4000lm	3000lm	GBPW-8409024N-WN

Standard pendant length: 1200mm



Black

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
16 W	18 W	34 V	500 mA	80	2700K	90°	2400lm	1900lm	GBPR-8279016N-BN
					3000K	90°	2600lm	2000lm	GBPR-8309016N-BN
					4000K	90°	2800lm	2200lm	GBPR-8409016N-BN
24 W	26 W	364 V	700 mA	80	2700K	90°	3500lm	2600lm	GBPR-8279024N-BN
					3000K	90°	3700lm	2800lm	GBPR-8309024N-BN
					4000K	90°	4000lm	3000lm	GBPR-8409024N-BN

Standard pendant length: 1000mm (customized lengths available)

Remark: Field cuttable pendant rod solution optional



White

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
16 W	18 W	34 V	500 mA	80	2700K	90°	2400lm	1900lm	GBPR-8279016N-WN
					3000K	90°	2600lm	2000lm	GBPR-8309016N-WN
					4000K	90°	2800lm	2200lm	GBPR-8409016N-WN
24 W	26 W	34 V	700 mA	80	2700K	90°	3500lm	2600lm	GBPR-8279024N-WN
					3000K	90°	3700lm	2800lm	GBPR-8309024N-WN
					4000K	90°	4000lm	3000lm	GBPR-8409024N-WN

Standard pendant length: 1000mm (customized lengths available)

Remark: Field cuttable pendant rod solution optional

Code Remark: N=(NO Driver) F=(ON-OFF) P=(Phase Dim) A=(1-10V Dim) D=(DALI Dim)

Optional accessory



Magnetic Uplight Module 450

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
11 W	13 W	33 V	350 mA	80	2700K	110°	1100lm	1000lm	UM45-827A111N-NN
					3000K	110°	1200lm	1100lm	UM45-830A111N-NN
					4000K	110°	1300lm	1200lm	UM45-840A111N-NN

Code Remark: N=(NO Driver) F=(ON-OFF) P=(Phase Dim) A=(1-10V Dim) D=(DALI Dim)

Code for GBPR-8309016N-WN with **Uplight Module**
GBPR-8309016N-WN-U

NEKO / GAME600

Ceiling Light System



24W 36W 46W | CRI80 CRI90 | 2700K 3000K 4000K | Tunable White Available | 90° | OSRAM 50,000h@L80B10 | UGR < 19 | IP 40 | 5 YEARS GUARANTEE | CB | CE | ETL Intertek





Black

LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
24 W		26 W	34 V	700 mA	80	2700K	90°	3500lm	2600lm	GCSM-8279024N-BN
						3000K	90°	3700lm	2800lm	GCSM-8309024N-BN
						4000K	90°	4000lm	3000lm	GCSM-8409024N-BN
36 W		40 W	34 V	1050 mA	80	2700K	90°	5800lm	4400lm	GCSM-8279036N-BN
						3000K	90°	6200lm	4700lm	GCSM-8309036N-BN
						4000K	90°	6600lm	4900lm	GCSM-8409036N-BN
46 W		50 W	34 V	1400 mA	80	2700K	90°	7200lm	5800lm	GCSM-8279046N-BN
						3000K	90°	8100lm	6100lm	GCSM-8309046N-BN
						4000K	90°	8600lm	6400lm	GCSM-8409046N-BN



White

LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
24 W		26 W	34 V	700 mA	80	2700K	90°	3500lm	2600lm	GCSM-8279024N-WN
						3000K	90°	3700lm	2800lm	GCSM-8309024N-WN
						4000K	90°	4000lm	3000lm	GCSM-8409024N-WN
36 W		40 W	34 V	1050 mA	80	2700K	90°	5800lm	4400lm	GCSM-8279036N-WN
						3000K	90°	6200lm	4700lm	GCSM-8309036N-WN
						4000K	90°	6600lm	4900lm	GCSM-8409036N-WN
46 W		50 W	34 V	1400 mA	80	2700K	90°	7200lm	5800lm	GCSM-8279046N-WN
						3000K	90°	8100lm	6100lm	GCSM-8309046N-WN
						4000K	90°	8600lm	6400lm	GCSM-8409046N-WN

Code Remark: N=(NO Driver) F=(ON-OFF) P=(Phase Dim) A=(1-10V Dim) D=(DALI Dim)



Black

LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
24 W		26 W	34 V	700 mA	80	2700K	90°	3500lm	2600lm	GCPW-8279024N-BN
						3000K	90°	3700lm	2800lm	GCPW-8309024N-BN
						4000K	90°	4000lm	3000lm	GCPW-8409024N-BN
36 W		40 W	34 V	1050 mA	80	2700K	90°	5800lm	4400lm	GCPW-8279036N-BN
						3000K	90°	6200lm	4700lm	GCPW-8309036N-BN
						4000K	90°	6600lm	4900lm	GCPW-8409036N-BN
46 W		50 W	34 V	1400 mA	80	2700K	90°	7200lm	5800lm	GCPW-8279046N-BN
						3000K	90°	8100lm	6100lm	GCPW-8309046N-BN
						4000K	90°	8600lm	6400lm	GCPW-8409046N-BN

Standard pendant length: 1200mm



White

LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
24 W		26 W	34 V	700 mA	80	2700K	90°	3500lm	2600lm	GCPW-8279024N-WN
						3000K	90°	3700lm	2800lm	GCPW-8309024N-WN
						4000K	90°	4000lm	3000lm	GCPW-8409024N-WN
36 W		40 W	34 V	1050 mA	80	2700K	90°	5800lm	4400lm	GCPW-8279036N-WN
						3000K	90°	6200lm	4700lm	GCPW-8309036N-WN
						4000K	90°	6600lm	4900lm	GCPW-8409036N-WN
46 W		50 W	34 V	1400 mA	80	2700K	90°	7200lm	5800lm	GCPW-8279046N-WN
						3000K	90°	8100lm	6100lm	GCPW-8309046N-WN
						4000K	90°	8600lm	6400lm	GCPW-8409046N-WN

Standard pendant length: 1200mm



Black

LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
24 W		26 W	34 V	700 mA	80	2700K	90°	3500lm	2600lm	GCPR-8279024N-BN
						3000K	90°	3700lm	2800lm	GCPR-8309024N-BN
						4000K	90°	4000lm	3000lm	GCPR-8409024N-BN
36 W		40 W	34 V	1050 mA	80	2700K	90°	5800lm	4400lm	GCPR-8279036N-BN
						3000K	90°	6200lm	4700lm	GCPR-8309036N-BN
						4000K	90°	6600lm	4900lm	GCPR-8409036N-BN
46 W		50 W	34 V	1400 mA	80	2700K	90°	7200lm	5800lm	GCPR-8279046N-BN
						3000K	90°	8100lm	6100lm	GCPR-8309046N-BN
						4000K	90°	8600lm	6400lm	GCPR-8409046N-BN

Standard pendant length: 1000mm (customized lengths available)

Remark: Field cuttable pendant rod solution optional



White

LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
24 W		26 W	34 V	700 mA	80	2700K	90°	3500lm	2600lm	GCPR-8279024N-WN
						3000K	90°	3700lm	2800lm	GCPR-8309024N-WN
						4000K	90°	4000lm	3000lm	GCPR-8409024N-WN
36 W		40 W	34 V	1050 mA	80	2700K	90°	5800lm	4400lm	GCPR-8279036N-WN
						3000K	90°	6200lm	4700lm	GCPR-8309036N-WN
						4000K	90°	6600lm	4900lm	GCPR-8409036N-WN
46 W		50 W	34 V	1400 mA	80	2700K	90°	7200lm	5800lm	GCPR-8279046N-WN
						3000K	90°	8100lm	6100lm	GCPR-8309046N-WN
						4000K	90°	8600lm	6400lm	GCPR-8409046N-WN

Standard pendant length: 1000mm (customized lengths available)

Remark: Field cuttable pendant rod solution optional

Code Remark: N=(NO Driver) F=(ON-OFF) P=(Phase Dim) A=(1-10V Dim) D=(DALI Dim)

Optional accessory



Magnetic Uplight Module 600

LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
18 W		20 W	36 V	500 mA	80	2700K	110°	1800lm	1600lm	UM60-827A118N-NN
						3000K	110°	1900lm	1700lm	UM60-830A118N-NN
						4000K	110°	2000lm	1800lm	UM60-840A118N-NN

Code Remark: N=(NO Driver) F=(ON-OFF) P=(Phase Dim) A=(1-10V Dim) D=(DALI Dim)


Code for GCPR-8309036N-WN **with Uplight Module**
GCPR-8309036N-WN-U

NEKO / GAME900

Ceiling Light System



65W | CRI80 CRI90 | 2700K 3000K 4000K | 90° | OSRAM 50,000h@L80B10 | UGR < 19 | IP 40 | 5 YEARS GUARANTEE | CB | CE | ETL Intertek





Black

LED	Power System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
65 W	68 W	46 V	1400 mA	80	2700K	90°	9900lm	7600lm	GDSM-8279065N-BN
					3000K	90°	10500lm	8000lm	GDSM-8309065N-BN
					4000K	90°	11000lm	8400lm	GDSM-8409065N-BN



White

65 W	68 W	46 V	1400 mA	80	2700K	90°	9900lm	7600lm	GDSM-8279065N-WN
					3000K	90°	10500lm	8000lm	GDSM-8309065N-WN
					4000K	90°	11000lm	8400lm	GDSM-8409065N-WN

Code Remark: N=(NO Driver) F=(ON-OFF) A=(1-10V Dim) D=(DALI Dim)



Black

LED	Power System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
65 W	68 W	46 V	1400 mA	80	2700K	90°	9900lm	7600lm	GDPW-8279065N-BN
					3000K	90°	10500lm	8000lm	GDPW-8309065N-BN
					4000K	90°	11000lm	8400lm	GDPW-8409065N-BN

Standard pendant length: 1200mm



White

65 W	68 W	46 V	1400 mA	80	2700K	90°	9900lm	7600lm	GDPW-8279065N-WN
					3000K	90°	10500lm	8000lm	GDPW-8309065N-WN
					4000K	90°	11000lm	8400lm	GDPW-8409065N-WN

Standard pendant length: 1200mm



Black

65 W	68 W	46 V	1400 mA	80	2700K	90°	9900lm	7600lm	GDPR-8279065N-BN
					3000K	90°	10500lm	8000lm	GDPR-8309065N-BN
					4000K	90°	11000lm	8400lm	GDPR-8409065N-BN

Standard pendant length: 1000mm (customized lengths available)

Remark: Field cuttable pendant rod solution optional



White

65 W	68 W	46 V	1400 mA	80	2700K	90°	9900lm	7600lm	GDPR-8279065N-WN
					3000K	90°	10500lm	8000lm	GDPR-8309065N-WN
					4000K	90°	11000lm	8400lm	GDPR-8409065N-WN

Standard pendant length: 1000mm (customized lengths available)

Remark: Field cuttable pendant rod solution optional

Code Remark: N=(NO Driver) F=(ON-OFF) A=(1-10V Dim) D=(DALI Dim)

Optional accessory



Magnetic Uplight Module 900

LED	Power System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
25 W	28 W	36 V	700 mA	80	2700K	110°	2500lm	2200lm	UM90-827A125N-NN
					3000K	110°	2700lm	2400lm	UM90-830A125N-NN
					4000K	110°	2900lm	2600lm	UM90-840A125N-NN

Code Remark: N=(NO Driver) F=(ON-OFF) P=(Phase Dim) A=(1-10V Dim) D=(DALI Dim)

Code for GDPR-8309065N-WN with **Uplight Module**
GDPR-8309065N-WN-U

NEKO / SUGAR
Project: Aurum University in Turku, Finland


NEKO / SUGAR
Project: Aurum University in Turku, Finland

NEKO / SUGAR350

Ceiling Light System



12W 16W | CRI80 CRI90 | 2700K 3000K 4000K | Tunable White Available | 90° | OSRAM 50,000h@L80B10 | UGR < 19 | IP 40 | 5 YEARS GUARANTEE | CB | CE | ETL Intertek





Black

LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
12 W		14 W	34 V	350 mA	80	2700K	90°	1800lm	1300lm	SASM-8279012N-BB
						3000K	90°	1900lm	1400lm	SASM-8309012N-BB
						4000K	90°	2000lm	1500lm	SASM-8409012N-BB
16 W		18 W	34 V	500 mA	80	2700K	90°	2400lm	1900lm	SASM-8279016N-BB
						3000K	90°	2600lm	2000lm	SASM-8309016N-BB
						4000K	90°	2800lm	2200lm	SASM-8409016N-BB



Black-Gold


LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
12 W		14 W	34 V	350 mA	80	2700K	90°	1800lm	1300lm	SASM-8279012N-BG
						3000K	90°	1900lm	1400lm	SASM-8309012N-BG
						4000K	90°	2000lm	1500lm	SASM-8409012N-BG
16 W		18 W	34 V	500 mA	80	2700K	90°	2400lm	1900lm	SASM-8279016N-BG
						3000K	90°	2600lm	2000lm	SASM-8309016N-BG
						4000K	90°	2800lm	2200lm	SASM-8409016N-BG



White

LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
12 W		14 W	34 V	350 mA	80	2700K	90°	1800lm	1300lm	SASM-8279012N-WW
						3000K	90°	1900lm	1400lm	SASM-8309012N-WW
						4000K	90°	2000lm	1500lm	SASM-8409012N-WW
16 W		18 W	34 V	500 mA	80	2700K	90°	2400lm	1900lm	SASM-8279016N-WW
						3000K	90°	2600lm	2000lm	SASM-8309016N-WW
						4000K	90°	2800lm	2200lm	SASM-8409016N-WW


Code Remark: N=(NO Driver) F=(ON-OFF) P=(Phase Dim) A=(1-10V Dim) D=(DALI Dim)



Black

LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
12 W		14 W	34 V	350 mA	80	2700K	90°	1800lm	1300lm	SAPW-8279012N-BB
						3000K	90°	1900lm	1400lm	SAPW-8309012N-BB
						4000K	90°	2000lm	1500lm	SAPW-8409012N-BB
16 W		18 W	34 V	500 mA	80	2700K	90°	2400lm	1900lm	SAPW-8279016N-BB
						3000K	90°	2600lm	2000lm	SAPW-8309016N-BB
						4000K	90°	2800lm	2200lm	SAPW-8409016N-BB


Standard pendant length: 1200mm



Black-Gold

LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
12 W		14 W	34 V	350 mA	80	2700K	90°	1800lm	1300lm	SAPW-8279012N-BG
						3000K	90°	1900lm	1400lm	SAPW-8309012N-BG
						4000K	90°	2000lm	1500lm	SAPW-8409012N-BG
16 W		18 W	34 V	500 mA	80	2700K	90°	2400lm	1900lm	SAPW-8279016N-BG
						3000K	90°	2600lm	2000lm	SAPW-8309016N-BG
						4000K	90°	2800lm	2200lm	SAPW-8409016N-BG

Standard pendant length: 1200mm



White

LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
12 W		14 W	34 V	350 mA	80	2700K	90°	1800lm	1300lm	SAPW-8279012N-WW
						3000K	90°	1900lm	1400lm	SAPW-8309012N-WW
						4000K	90°	2000lm	1500lm	SAPW-8409012N-WW
16 W		18 W	34 V	500 mA	80	2700K	90°	2400lm	1900lm	SAPW-8279016N-WW
						3000K	90°	2600lm	2000lm	SAPW-8309016N-WW
						4000K	90°	2800lm	2200lm	SAPW-8409016N-WW

Standard pendant length: 1200mm

Code Remark: N=(NO Driver) F=(ON-OFF) P=(Phase Dim) A=(1-10V Dim) D=(DALI Dim)

Optional accessory



Magnetic Uplight Module 350

LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
8 W		10 W	33 V	250 mA	80	2700K	110°	900lm	800lm	UM35-827A108N-NN
						3000K	110°	950lm	850lm	UM35-830A108N-NN
						4000K	110°	1050lm	950lm	UM35-840A108N-NN

Code Remark: N=(NO Driver) F=(ON-OFF) P=(Phase Dim) A=(1-10V Dim) D=(DALI Dim)

Code for SAPW-8309012N-WW with **U**plight Module
SAPW-8309012N-WW-U



Black

LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
12 W		14 W	34 V	350 mA	80	2700K	90°	1800lm	1300lm	SAPR-8279012N-BB
						3000K	90°	1900lm	1400lm	SAPR-8309012N-BB
						4000K	90°	2000lm	1500lm	SAPR-8409012N-BB
16 W		18 W	34 V	500 mA	80	2700K	90°	2400lm	1900lm	SAPR-8279016N-BB
						3000K	90°	2600lm	2000lm	SAPR-8309016N-BB
						4000K	90°	2800lm	2200lm	SAPR-8409016N-BB

Standard pendant length: 1000mm (customized lengths available)

Remark: Field cuttable pendant rod solution optional



Black-Gold

LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
12 W		14 W	34 V	350 mA	80	2700K	90°	1800lm	1300lm	SAPR-8279012N-BG
						3000K	90°	1900lm	1400lm	SAPR-8309012N-BG
						4000K	90°	2000lm	1500lm	SAPR-8409012N-BG
16 W		18 W	34 V	500 mA	80	2700K	90°	2400lm	1900lm	SAPR-8279016N-BG
						3000K	90°	2600lm	2000lm	SAPR-8309016N-BG
						4000K	90°	2800lm	2200lm	SAPR-8409016N-BG

Standard pendant length: 1000mm (customized lengths available)

Remark: Field cuttable pendant rod solution optional



White

LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
12 W		14 W	34 V	350 mA	80	2700K	90°	1800lm	1300lm	SAPR-8279012N-WW
						3000K	90°	1900lm	1400lm	SAPR-8309012N-WW
						4000K	90°	2000lm	1500lm	SAPR-8409012N-WW
16 W		18 W	34 V	500 mA	80	2700K	90°	2400lm	1900lm	SAPR-8279016N-WW
						3000K	90°	2600lm	2000lm	SAPR-8309016N-WW
						4000K	90°	2800lm	2200lm	SAPR-8409016N-WW

Standard pendant length: 1000mm (customized lengths available)

Remark: Field cuttable pendant rod solution optional

Code Remark: N=(NO Driver) F=(ON-OFF) P=(Phase Dim) A=(1-10V Dim) D=(DALI Dim)

Optional accessory



Magnetic Uplight Module 350

LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
8 W		10 W	33 V	250 mA	80	2700K	110°	900lm	800lm	UM35-827A108N-NN
						3000K	110°	950lm	850lm	UM35-830A108N-NN
						4000K	110°	1050lm	950lm	UM35-840A108N-NN

Code Remark: N=(NO Driver) F=(ON-OFF) P=(Phase Dim) A=(1-10V Dim) D=(DALI Dim)

Code for SAPW-8309012N-WW with **U**plight Module
SAPW-8309012N-WW-**U**



SUGAR with
UPLIGHT

NEKO / SUGAR450

Ceiling Light System



16W 24W | CRI80 CRI90 | 2700K 3000K 4000K | Tunable White Available | 90° | OSRAM 50,000h@L80B10 | UGR < 19 | IP 40 | PHASE GUARANTEE | CB | CE | ETL Intertek





Black

LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
16 W		18 W	34 V	500 mA	80	2700K	90°	2400lm	1900lm	SBSM-8279016N-BB
						3000K	90°	2600lm	2000lm	SBSM-8309016N-BB
						4000K	90°	2800lm	2200lm	SBSM-8409016N-BB
24 W		26 W	34 V	700 mA	80	2700K	90°	3500lm	2600lm	SBSM-8279024N-BB
						3000K	90°	3700lm	2800lm	SBSM-8309024N-BB
						4000K	90°	4000lm	3000lm	SBSM-8409024N-BB



Black-Gold


LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
16 W		18 W	34 V	500 mA	80	2700K	90°	2400lm	1900lm	SBSM-8279016N-BG
						3000K	90°	2600lm	2000lm	SBSM-8309016N-BG
						4000K	90°	2800lm	2200lm	SBSM-8409016N-BG
24 W		26 W	34 V	700 mA	80	2700K	90°	3500lm	2600lm	SBSM-8279024N-BG
						3000K	90°	3700lm	2800lm	SBSM-8309024N-BG
						4000K	90°	4000lm	3000lm	SBSM-8409024N-BG



White

LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
16 W		18 W	34 V	500 mA	80	2700K	90°	2400lm	1900lm	SBSM-8279016N-WW
						3000K	90°	2600lm	2000lm	SBSM-8309016N-WW
						4000K	90°	2800lm	2200lm	SBSM-8409016N-WW
24 W		26 W	34 V	700 mA	80	2700K	90°	3500lm	2600lm	SBSM-8279024N-WW
						3000K	90°	3700lm	2800lm	SBSM-8309024N-WW
						4000K	90°	4000lm	3000lm	SBSM-8409024N-WW


Code Remark: N=(NO Driver) F=(ON-OFF) P=(Phase Dim) A=(1-10V Dim) D=(DALI Dim)



Black

LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
16 W		18 W	34 V	500 mA	80	2700K	90°	2400lm	1900lm	SBPW-8279016N-BB
						3000K	90°	2600lm	2000lm	SBPW-8309016N-BB
						4000K	90°	2800lm	2200lm	SBPW-8409016N-BB
24 W		26 W	34 V	700 mA	80	2700K	90°	3500lm	2600lm	SBPW-8279024N-BB
						3000K	90°	3700lm	2800lm	SBPW-8309024N-BB
						4000K	90°	4000lm	3000lm	SBPW-8409024N-BB


Standard pendant length: 1200mm



Black-Gold

LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
16 W		18 W	34 V	500 mA	80	2700K	90°	2400lm	1900lm	SBPW-8279016N-BG
						3000K	90°	2600lm	2000lm	SBPW-8309016N-BG
						4000K	90°	2800lm	2200lm	SBPW-8409016N-BG
24 W		26 W	34 V	700 mA	80	2700K	90°	3500lm	2600lm	SBPW-8279024N-BG
						3000K	90°	3700lm	2800lm	SBPW-8309024N-BG
						4000K	90°	4000lm	3000lm	SBPW-8409024N-BG

Standard pendant length: 1200mm



White

LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
16 W		18 W	34 V	500 mA	80	2700K	90°	2400lm	1900lm	SBPW-8279016N-WW
						3000K	90°	2600lm	2000lm	SBPW-8309016N-WW
						4000K	90°	2800lm	2200lm	SBPW-8409016N-WW
24 W		26 W	34 V	700 mA	80	2700K	90°	3500lm	2600lm	SBPW-8279024N-WW
						3000K	90°	3700lm	2800lm	SBPW-8309024N-WW
						4000K	90°	4000lm	3000lm	SBPW-8409024N-WW

Standard pendant length: 1200mm

Code Remark: N=(NO Driver) F=(ON-OFF) P=(Phase Dim) A=(1-10V Dim) D=(DALI Dim)

Optional accessory



Magnetic Uplight Module 450

LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
11 W		13 W	33 V	350 mA	80	2700K	110°	1100lm	1000lm	UM45-827A111N-NN
						3000K	110°	1200lm	1100lm	UM45-830A111N-NN
						4000K	110°	1300lm	1200lm	UM45-840A111N-NN

Code Remark: N=(NO Driver) F=(ON-OFF) P=(Phase Dim) A=(1-10V Dim) D=(DALI Dim)

Code for SBPW-8309016N-WN with Uplight Module
SBPW-8309016N-WN-U



Black

LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
16 W		18 W	34 V	500 mA	80	2700K	90°	2400lm	1900lm	SBPR-8279016N-BB
						3000K	90°	2600lm	2000lm	SBPR-8309016N-BB
						4000K	90°	2800lm	2200lm	SBPR-8409016N-BB
24 W		26 W	34 V	700 mA	80	2700K	90°	3500lm	2600lm	SBPR-8279024N-BB
						3000K	90°	3700lm	2800lm	SBPR-8309024N-BB
						4000K	90°	4000lm	3000lm	SBPR-8409024N-BB

Standard pendant length: 1000mm (customized lengths available)

Remark: Field cuttable pendant rod solution optional



Black-Gold

16 W		18 W	34 V	500 mA	80	2700K	90°	2400lm	1900lm	SBPR-8279016N-BG
						3000K	90°	2600lm	2000lm	SBPR-8309016N-BG
						4000K	90°	2800lm	2200lm	SBPR-8409016N-BG
24 W		26 W	34 V	700 mA	80	2700K	90°	3500lm	2600lm	SBPR-8279024N-BG
						3000K	90°	3700lm	2800lm	SBPR-8309024N-BG
						4000K	90°	4000lm	3000lm	SBPR-8409024N-BG

Standard pendant length: 1000mm (customized lengths available)

Remark: Field cuttable pendant rod solution optional



White

16 W		18 W	34 V	500 mA	80	2700K	90°	2400lm	1900lm	SBPR-8279016N-WW
						3000K	90°	2600lm	2000lm	SBPR-8309016N-WW
						4000K	90°	2800lm	2200lm	SBPR-8409016N-WW
24 W		26 W	34 V	700 mA	80	2700K	90°	3500lm	2600lm	SBPR-8279024N-WW
						3000K	90°	3700lm	2800lm	SBPR-8309024N-WW
						4000K	90°	4000lm	3000lm	SBPR-8409024N-WW

Standard pendant length: 1000mm (customized lengths available)

Remark: Field cuttable pendant rod solution optional

Code Remark: N=(NO Driver) F=(ON-OFF) P=(Phase Dim) A=(1-10V Dim) D=(DALI Dim)

Optional accessory



Magnetic Uplight Module 450

LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
11 W		13 W	33 V	350 mA	80	2700K	110°	1100lm	1000lm	UM45-827A111N-NN
						3000K	110°	1200lm	1100lm	UM45-830A111N-NN
						4000K	110°	1300lm	1200lm	UM45-840A111N-NN

Code Remark: N=(NO Driver) F=(ON-OFF) P=(Phase Dim) A=(1-10V Dim) D=(DALI Dim)


Code for SBPR-8309016N-WW with **Uplight Module**
SBPR-8309016N-WW-**U**

NEKO / SUGAR600

Ceiling Light System



24W
36W
46W
CRI80
CRI90
2700K
3000K
4000K
Tunable White Available
90°
OSRAM 50,000h@L80B10
UGR < 19
IP40
5 YEARS GUARANTEE
CB
CE
ETL Intertek





Black

LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
24 W		24 W	34 V	700 mA	80	2700K	90°	3500lm	2600lm	SCSM-8279024N-BB
						3000K	90°	3700lm	2800lm	SCSM-8309024N-BB
						4000K	90°	4000lm	3000lm	SCSM-8409024N-BB
36 W		40 W	34 V	1050 mA	80	2700K	90°	5800lm	4400lm	SCSM-8279036N-BB
						3000K	90°	6200lm	4700lm	SCSM-8309036N-BB
						4000K	90°	6600lm	4900lm	SCSM-8409036N-BB
46 W		50 W	34 V	1400 mA	80	2700K	90°	7200lm	5800lm	SCSM-8279046N-BB
						3000K	90°	8100lm	6100lm	SCSM-8309046N-BB
						4000K	90°	8600lm	6400lm	SCSM-8409046N-BB



Black-Gold

24 W		24 W	34 V	700 mA	80	2700K	90°	3500lm	2600lm	SCSM-8279024N-BG
						3000K	90°	3700lm	2800lm	SCSM-8309024N-BG
						4000K	90°	4000lm	3000lm	SCSM-8409024N-BG
36 W		40 W	34 V	1050 mA	80	2700K	90°	5800lm	4400lm	SCSM-8279036N-BG
						3000K	90°	6200lm	4700lm	SCSM-8309036N-BG
						4000K	90°	6600lm	4900lm	SCSM-8409036N-BG
46 W		50 W	34 V	1400 mA	80	2700K	90°	7200lm	5800lm	SCSM-8279046N-BG
						3000K	90°	8100lm	6100lm	SCSM-8309046N-BG
						4000K	90°	8600lm	6400lm	SCSM-8409046N-BG



White

24 W		24 W	34 V	700 mA	80	2700K	90°	3500lm	2600lm	SCSM-8279024N-WW
						3000K	90°	3700lm	2800lm	SCSM-8309024N-WW
						4000K	90°	4000lm	3000lm	SCSM-8409024N-WW
36 W		40 W	34 V	1050 mA	80	2700K	90°	5800lm	4400lm	SCSM-8279036N-WW
						3000K	90°	6200lm	4700lm	SCSM-8309036N-WW
						4000K	90°	6600lm	4900lm	SCSM-8409036N-WW
46 W		50 W	34 V	1400 mA	80	2700K	90°	7200lm	5800lm	SCSM-8279046N-WW
						3000K	90°	8100lm	6100lm	SCSM-8309046N-WW
						4000K	90°	8600lm	6400lm	SCSM-8409046N-WW

Code Remark: N=(NO Driver) F=(ON-OFF) P=(Phase Dim) A=(1-10V Dim) D=(DALI Dim)



Black

LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
24 W		24 W	34 V	700 mA	80	2700K	90°	3500lm	2600lm	SCPW-8279024N-BB
						3000K	90°	3700lm	2800lm	SCPW-8309024N-BB
						4000K	90°	4000lm	3000lm	SCPW-8409024N-BB
36 W		40 W	34 V	1050 mA	80	2700K	90°	5800lm	4400lm	SCPW-8279036N-BB
						3000K	90°	6200lm	4700lm	SCPW-8309036N-BB
						4000K	90°	6600lm	4900lm	SCPW-8409036N-BB
46 W		50 W	34 V	1400 mA	80	2700K	90°	7200lm	5800lm	SCPW-8279046N-BB
						3000K	90°	8100lm	6100lm	SCPW-8309046N-BB
						4000K	90°	8600lm	6400lm	SCPW-8409046N-BB



Black-Gold

24 W		24 W	34 V	700 mA	80	2700K	90°	3500lm	2600lm	SCPW-8279024N-BG
						3000K	90°	3700lm	2800lm	SCPW-8309024N-BG
						4000K	90°	4000lm	3000lm	SCPW-8409024N-BG
36 W		40 W	34 V	1050 mA	80	2700K	90°	5800lm	4400lm	SCPW-8279036N-BG
						3000K	90°	6200lm	4700lm	SCPW-8309036N-BG
						4000K	90°	6600lm	4900lm	SCPW-8409036N-BG
46 W		50 W	34 V	1400 mA	80	2700K	90°	7200lm	5800lm	SCPW-8279046N-BG
						3000K	90°	8100lm	6100lm	SCPW-8309046N-BG
						4000K	90°	8600lm	6400lm	SCPW-8409046N-BG



White

LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
24 W		24 W	34 V	700 mA	80	2700K	90°	3500lm	2600lm	SCPW-8279024N-WW
						3000K	90°	3700lm	2800lm	SCPW-8309024N-WW
						4000K	90°	4000lm	3000lm	SCPW-8409024N-WW
36 W		40 W	34 V	1050 mA	80	2700K	90°	5800lm	4400lm	SCPW-8279036N-WW
						3000K	90°	6200lm	4700lm	SCPW-8309036N-WW
						4000K	90°	6600lm	4900lm	SCPW-8409036N-WW
46 W		50 W	34 V	1400 mA	80	2700K	90°	7200lm	5800lm	SCPW-8279046N-WW
						3000K	90°	8100lm	6100lm	SCPW-8309046N-WW
						4000K	90°	8600lm	6400lm	SCPW-8409046N-WW

Code Remark: N=(NO Driver) F=(ON-OFF) P=(Phase Dim) A=(1-10V Dim) D=(DALI Dim)

Optional accessory



Magnetic Uplight Module 600

LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
18 W		20 W	36 V	500 mA	80	2700K	110°	1800lm	1600lm	UM60-827A118N-NN
						3000K	110°	1900lm	1700lm	UM60-830A118N-NN
						4000K	110°	2000lm	1800lm	UM60-840A118N-NN

Code Remark: N=(NO Driver) F=(ON-OFF) P=(Phase Dim) A=(1-10V Dim) D=(DALI Dim)

Code for SCPW-8279036N-WW with **U**plight Module
SCPW-8279036N-WW-**U**



Black

LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
24 W	24 W	34 V	700 mA	80	2700K	90°	3500lm	2600lm	SCPR-8279024N-BB
					3000K	90°	3700lm	2800lm	SCPR-8309024N-BB
					4000K	90°	4000lm	3000lm	SCPR-8409024N-BB
36 W	40 W	34 V	1050 mA	80	2700K	90°	5800lm	4400lm	SCPR-8279036N-BB
					3000K	90°	6200lm	4700lm	SCPR-8309036N-BB
					4000K	90°	6600lm	4900lm	SCPR-8409036N-BB
46 W	50 W	34 V	1400 mA	80	2700K	90°	7200lm	5800lm	SCPR-8279046N-BB
					3000K	90°	8100lm	6100lm	SCPR-8309046N-BB
					4000K	90°	8600lm	6400lm	SCPR-8409046N-BB

Standard pendant length: 1000mm (customized lengths available)

Remark: Field cuttable pendant rod solution optional



Black-Gold

LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
24 W	24 W	34 V	700 mA	80	2700K	90°	3500lm	2600lm	SCPR-8279024N-BG
					3000K	90°	3700lm	2800lm	SCPR-8309024N-BG
					4000K	90°	4000lm	3000lm	SCPR-8409024N-BG
36 W	40 W	34 V	1050 mA	80	2700K	90°	5800lm	4400lm	SCPR-8279036N-BG
					3000K	90°	6200lm	4700lm	SCPR-8309036N-BG
					4000K	90°	6600lm	4900lm	SCPR-8409036N-BG
46 W	50 W	34 V	1400 mA	80	2700K	90°	7200lm	5800lm	SCPR-8279046N-BG
					3000K	90°	8100lm	6100lm	SCPR-8309046N-BG
					4000K	90°	8600lm	6400lm	SCPR-8409046N-BG

Standard pendant length: 1000mm (customized lengths available)

Remark: Field cuttable pendant rod solution optional



White

LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
24 W	24 W	34 V	700 mA	80	2700K	90°	3500lm	2600lm	SCPR-8279024N-WW
					3000K	90°	3700lm	2800lm	SCPR-8309024N-WW
					4000K	90°	4000lm	3000lm	SCPR-8409024N-WW
36 W	40 W	34 V	1050 mA	80	2700K	90°	5800lm	4400lm	SCPR-8279036N-WW
					3000K	90°	6200lm	4700lm	SCPR-8309036N-WW
					4000K	90°	6600lm	4900lm	SCPR-8409036N-WW
46 W	50 W	34 V	1400 mA	80	2700K	90°	7200lm	5800lm	SCPR-8279046N-WW
					3000K	90°	8100lm	6100lm	SCPR-8309046N-WW
					4000K	90°	8600lm	6400lm	SCPR-8409046N-WW

Standard pendant length: 1000mm (customized lengths available)

Remark: Field cuttable pendant rod solution optional

Code Remark: N=(NO Driver) F=(ON-OFF) P=(Phase Dim) A=(1-10V Dim) D=(DALI Dim)

Optional accessory



Magnetic Uplight Module 600

LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
18 W	20 W	36 V	500 mA	80	2700K	110°	1800lm	1600lm	UM60-827A118N-NN
					3000K	110°	1900lm	1700lm	UM60-830A118N-NN
					4000K	110°	2000lm	1800lm	UM60-840A118N-NN

Code Remark: N=(NO Driver) F=(ON-OFF) P=(Phase Dim) A=(1-10V Dim) D=(DALI Dim)

Code for SCPR-8309036N-WW with **Uplight Module**
SCPR-8309036N-WW-**U**



White-Gold Optional

NEKO / SUGAR900

Ceiling Light System



65W | CRI80 CRI90 | 2700K 3000K 4000K | 90° | OSRAM 50,000h@L80B10 | UGR < 19 | IP 40 | 5 YEARS GUARANTEE | CB | CE | ETL Intertek





Black

LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
65 W		68 W	46 V	1400 mA	80	2700K	90°	9900lm	7600lm	SDSM-8279065N-BB
						3000K	90°	10500lm	8000lm	SDSM-8309065N-BB
						4000K	90°	11000lm	8400lm	SDSM-8409065N-BB



Black-Gold

65 W		68 W	46 V	1400 mA	80	2700K	90°	9900lm	7600lm	SDSM-8279065N-BG
						3000K	90°	10500lm	8000lm	SDSM-8309065N-BG
						4000K	90°	11000lm	8400lm	SDSM-8409065N-BG



White

65 W		68 W	46 V	1400 mA	80	2700K	90°	9900lm	7600lm	SDSM-8279065N-WW
						3000K	90°	10500lm	8000lm	SDSM-8309065N-WW
						4000K	90°	11000lm	8400lm	SDSM-8409065N-WW

Code Remark: N=(NO Driver) F=(ON-OFF) A=(1-10V Dim) D=(DALI Dim)



Black

LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
65 W		68 W	46 V	1400 mA	80	2700K	90°	9900lm	7600lm	SDPW-8279065N-BB
						3000K	90°	10500lm	8000lm	SDPW-8309065N-BB
						4000K	90°	11000lm	8400lm	SDPW-8409065N-BB

Standard pendant length: 1200mm



Black-Gold

65 W		68 W	46 V	1400 mA	80	2700K	90°	9900lm	7600lm	SDPW-8279065N-BG
						3000K	90°	10500lm	8000lm	SDPW-8309065N-BG
						4000K	90°	11000lm	8400lm	SDPW-8409065N-BG

Standard pendant length: 1200mm



White

65 W		68 W	46 V	1400 mA	80	2700K	90°	9900lm	7600lm	SDPW-8279065N-WW
						3000K	90°	10500lm	8000lm	SDPW-8309065N-WW
						4000K	90°	11000lm	8400lm	SDPW-8409065N-WW

Standard pendant length: 1200mm

Code Remark: N=(NO Driver) F=(ON-OFF) A=(1-10V Dim) D=(DALI Dim)

Optional accessory



Magnetic Uplight Module 900

LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
25 W		28 W	36 V	700 mA	80	2700K	110°	2500lm	2200lm	UM90-827A125N-NN
						3000K	110°	2700lm	2400lm	UM90-830A125N-NN
						4000K	110°	2900lm	2600lm	UM90-840A125N-NN

Code Remark: N=(NO Driver) F=(ON-OFF) A=(1-10V Dim) D=(DALI Dim)

Code for SDPW-8309065N-WW with **U**plight Module
SDPW-8309065N-WW-**U**



Black

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
65 W	68 W	46 V	1400 mA	80	2700K	90°	9900lm	7600lm	SDPR-8279065N-BB
					3000K	90°	10500lm	8000lm	SDPR-8309065N-BB
					4000K	90°	11000lm	8400lm	SDPR-8409065N-BB

Standard pendant length: 1000mm (customized lengths available)

Remark: Field cuttable pendant rod solution optional



Black-Gold

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
65 W	68 W	46 V	1400 mA	80	2700K	90°	9900lm	7600lm	SDPR-8279065N-BG
					3000K	90°	10500lm	8000lm	SDPR-8309065N-BG
					4000K	90°	11000lm	8400lm	SDPR-8409065N-BG

Standard pendant length: 1000mm (customized lengths available)

Remark: Field cuttable pendant rod solution optional

White

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
65 W	68 W	46 V	1400 mA	80	2700K	90°	9900lm	7600lm	SDPR-8279065N-WW
					3000K	90°	10500lm	8000lm	SDPR-8309065N-WW
					4000K	90°	11000lm	8400lm	SDPR-8409065N-WW

Standard pendant length: 1000mm (customized lengths available)

Remark: Field cuttable pendant rod solution optional

Code Remark: N=(NO Driver) F=(ON-OFF) P=(Phase Dim) A=(1-10V Dim) D=(DALI Dim)

Optional accessory



Magnetic Uplight Module 900


LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
25 W	28 W	36 V	700 mA	80	2700K	110°	2500lm	2200lm	UM90-827A125N-NN
					3000K	110°	2700lm	2400lm	UM90-830A125N-NN
					4000K	110°	2900lm	2600lm	UM90-840A125N-NN

Code Remark: N=(NO Driver) F=(ON-OFF) P=(Phase Dim) A=(1-10V Dim) D=(DALI Dim)

Code for SDPR-8309065N-WW with **U**plight Module
SDPR-8309065N-WW-**U**



NEKO / GINGER & PEPPER
LED Ceiling Light

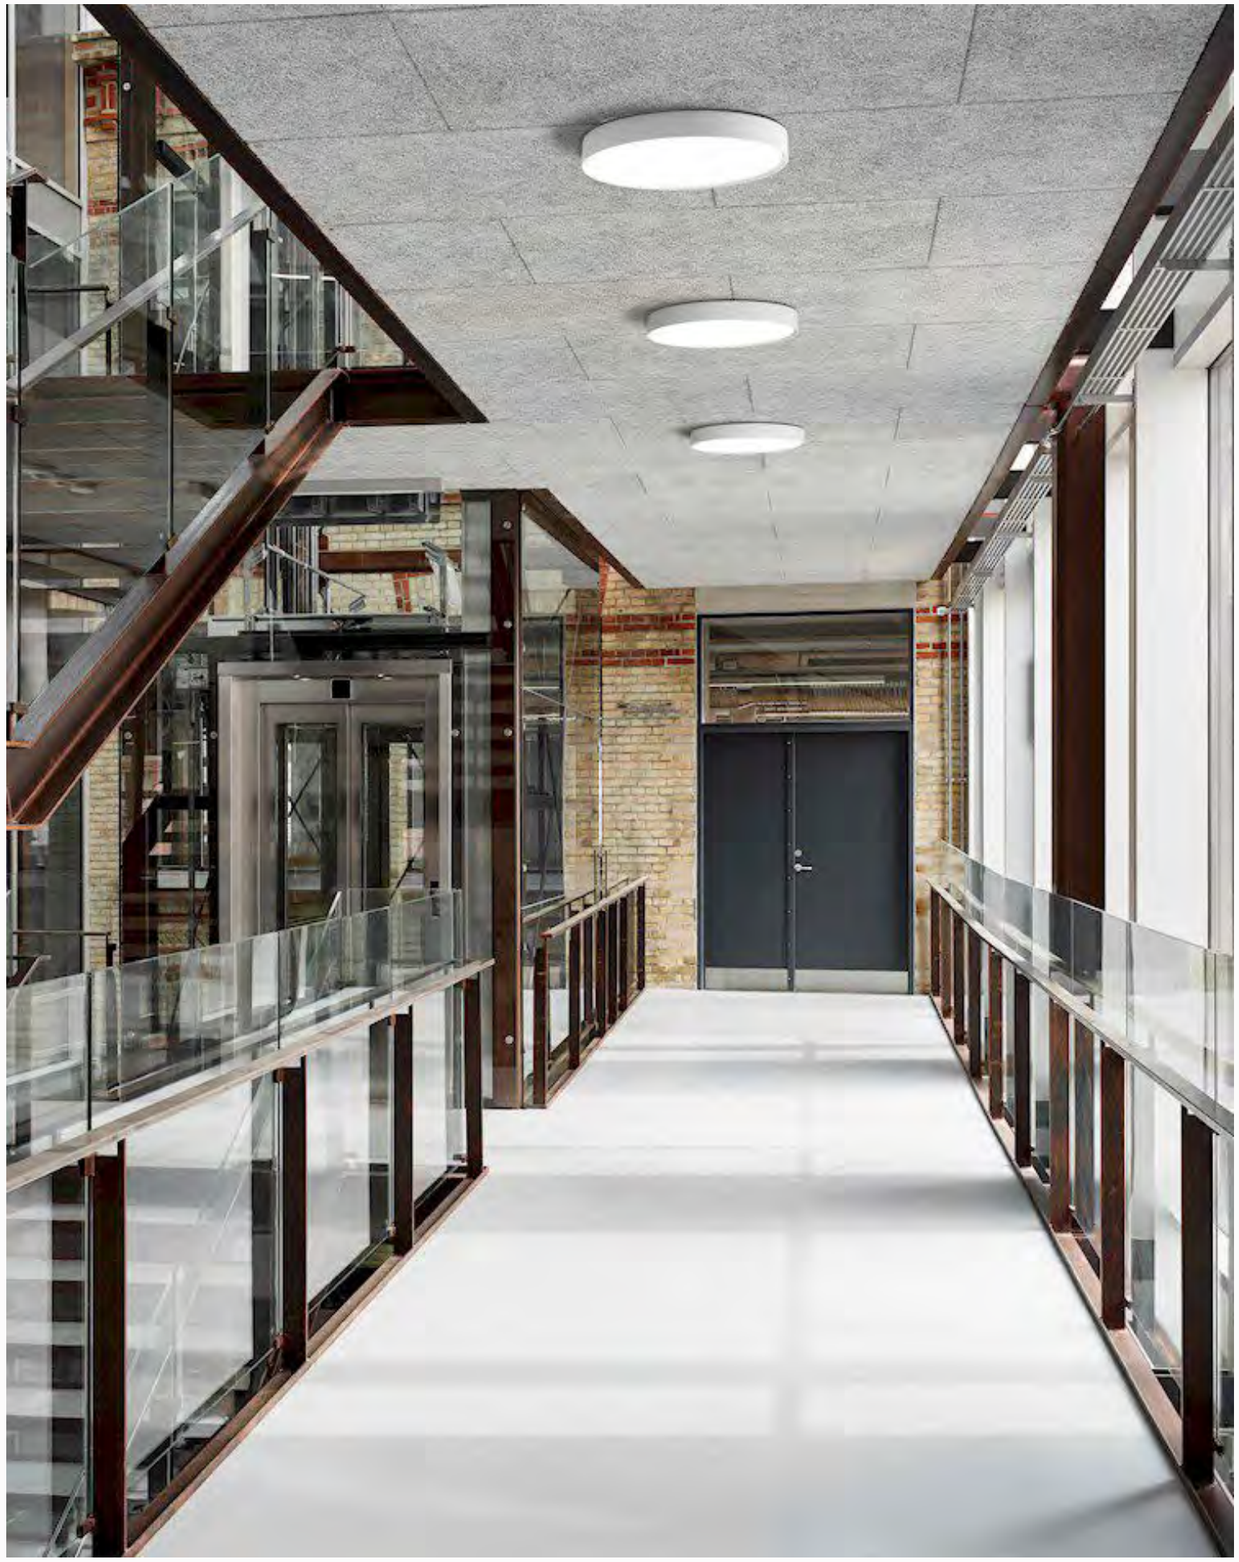



GINGER 400 G4RC-30W

GINGER 600 G6RC-50W

PEPPER 400 P4SC-30W


NEKO / GINGER 400

LED Ceiling Light

Aluminum Frame & Homogen Light
Incl. Phase Dim Driver



30W | CRI90 | 3000K/3500K/4000K CCT Switchable | 110° | bridgelux 50,000h@L80B10 | IP44 | 5 YEARS GUARANTEE | CE





LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
28 W	30 W	72 V	380 mA	90	3000K	110°	3000lm	2400lm	G4RC-9S3A130P-WN
					3500K	110°	3200lm	2500lm	G4RC-9S3A130P-WN
					4000K	110°	3100lm	2400lm	G4RC-9S3A130P-WN


Code Remark: P=(Phase Dim)



LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
28 W	30 W	72 V	380 mA	90	3000K	110°	3000lm	2400lm	G4RC-9S3A130P-BN
					3500K	110°	3200lm	2500lm	G4RC-9S3A130P-BN
					4000K	110°	3100lm	2400lm	G4RC-9S3A130P-BN

Code Remark: P=(Phase Dim)

Light Distribution




NEKO / GINGER 400


LED Ceiling Light

Aluminum Frame & Homogen Light
ON-OFF Driver+Microwave Sensor





30W | CRI90 | 3000K/3500K/4000K CCT Switchable | 110° | bridgelux 50,000h@L80B10 | IP44 | 5 YEARS GUARANTEE | CE | Microwave Sensor





LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
28 W	30 W	72 V	380 mA	90	3000K	110°	3000lm	2400lm	G4RC-9S3A130S-WN
					3500K	110°	3200lm	2500lm	G4RC-9S3A130S-WN
					4000K	110°	3100lm	2400lm	G4RC-9S3A130S-WN


Code Remark: S=On-Off LED Driver+Microwave Sensor



LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
28 W	30 W	72 V	380 mA	90	3000K	110°	3000lm	2400lm	G4RC-9S3A130S-BN
					3500K	110°	3200lm	2500lm	G4RC-9S3A130S-BN
					4000K	110°	3100lm	2400lm	G4RC-9S3A130S-BN

Code Remark: S=On-Off LED Driver+Microwave Sensor

Light Distribution




NEKO / GINGER 600

LED Ceiling Light

Aluminum Frame & Homogen Light
Incl. Phase Dim Driver



44W | CRI90 | 3000K/3500K/4000K CCT Switchable | 110° | bridgelux 50,000h@L80B10 | IP44 | 5 YEARS GUARANTEE | CE





LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
40 W	44 W	95 V	480 mA	90	3000K	110°	4000lm	3350lm	G6RC-9S3A150P-WN
					3500K	110°	4200lm	3550lm	G6RC-9S3A150P-WN
					4000K	110°	4100lm	3350lm	G6RC-9S3A150P-WN

Code Remark: P=(Phase Dim)




LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
40 W	44 W	95 V	480 mA	90	3000K	110°	4000lm	3350lm	G6RC-9S3A150P-BN
					3500K	110°	4200lm	3550lm	G6RC-9S3A150P-BN
					4000K	110°	4100lm	3350lm	G6RC-9S3A150P-BN

Code Remark: P=(Phase Dim)

Light Distribution


3000K




NEKO / PEPPER 400

LED Ceiling Light

Aluminum Frame & Homogen Light
Incl. Phase Dim Driver



30W | CRI90 | 3000K/3500K/4000K CCT Switchable | 110° | bridgelux 50,000h@L80B10 | IP44 | 5 YEARS GUARANTEE | CE



LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
28 W	30 W	78 V	350 mA	90	3000K	110°	2800lm	2000lm	P4SC-9S3A130P-WN
					3500K	110°	2900lm	2100lm	P4SC-9S3A130P-WN
					4000K	110°	2900lm	2100lm	P4SC-9S3A130P-WN


Code Remark: P=(Phase Dim)



LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
28 W	30 W	78 V	350 mA	90	3000K	110°	2800lm	2000lm	P4SC-9S3A130P-BN
					3500K	110°	2900lm	2100lm	P4SC-9S3A130P-BN
					4000K	110°	2900lm	2100lm	P4SC-9S3A130P-BN

Code Remark: P=(Phase Dim)


Light Distribution




NEKO / PEPPER 400


LED Ceiling Light

Aluminum Frame & Homogen Light
ON-OFF Driver+Microwave Sensor





30W | CRI90 | 3000K/3500K/4000K CCT Switchable | 110° | bridgelux 50,000h@L80B10 | IP44 | 5 YEARS GUARANTEE | CE | Microwave Sensor



LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
28 W	30 W	78 V	350 mA	90	3000K	110°	2800lm	2000lm	P4SC-9S3A130S-WN
					3500K	110°	2900lm	2100lm	P4SC-9S3A130S-WN
					4000K	110°	2900lm	2100lm	P4SC-9S3A130S-WN


Code Remark: S=On-Off LED Driver+Microwave Sensor



LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
28 W	30 W	78 V	350 mA	90	3000K	110°	2800lm	2000lm	P4SC-9S3A130S-BN
					3500K	110°	2900lm	2100lm	P4SC-9S3A130S-BN
					4000K	110°	2900lm	2100lm	P4SC-9S3A130S-BN

Code Remark: S=On-Off LED Driver+Microwave Sensor

Light Distribution





NEKO/MINT
LED Ceiling Light


NEW

NEKO/MINT
LED Ceiling Light
CCT Switchable & Power Switchable

NEW



13W/18W/24W Power Switchable | CRI80 | 2700K/3000K/4000K CCT Switchable | 120° | IP54 | IK10 | 5 YEARS GUARANTEE | CE







LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
12 W	13 W	78 V	155 mA	80	2700K	120°	1600lm	1350lm	MASM-8S3A224F-WN
					3000K	120°	1700lm	1400lm	
					4000K	120°	1800lm	1500lm	
16 W	18 W	78 V	200 mA	80	2700K	120°	2000lm	1700lm	MASM-8S3A224F-WN
					3000K	120°	2100lm	1800lm	
					4000K	120°	2200lm	1900lm	
22 W	24 W	78 V	280 mA	80	2700K	120°	2400lm	2100lm	MASM-8S3A224F-WN
					3000K	120°	2550lm	2200lm	
					4000K	120°	2600lm	2350lm	


Code Remark: F=(On-Off LED Driver, Power Switchable)

Light Distribution

3000K









NEKO/MINT
LED Ceiling Light
Microwave Sensor Version

NEW





13W/18W/24W Power Switchable | CRI80 | 2700K/3000K/4000K CCT Switchable | 120° | IP54 | IK10 | 5 YEARS GUARANTEE | CE | Microwave Sensor







LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
12 W	13 W	78 V	155 mA	80	2700K	120°	1600lm	1350lm	MASM-8S3A224S-WN
					3000K	120°	1700lm	1400lm	
					4000K	120°	1800lm	1500lm	
16 W	18 W	78 V	200 mA	80	2700K	120°	2000lm	1700lm	MASM-8S3A224S-WN
					3000K	120°	2100lm	1800lm	
					4000K	120°	2200lm	1900lm	
22 W	24 W	78 V	280 mA	80	2700K	120°	2400lm	2100lm	MASM-8S3A224S-WN
					3000K	120°	2550lm	2200lm	
					4000K	120°	2600lm	2350lm	


Code Remark: S=(On-Off LED Driver+Microwave Sensor)

Light Distribution

3000K








NEKO/MINT
LED Ceiling Light
Emergency Version

NEW



13W/18W/24W Power Switchable | CRI80 | 2700K/3000K/4000K CCT Switchable | 120° | IP54 | IK10 | 5 YEARS GUARANTEE | CE | Emergency






LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
12 W	13 W	78 V	155 mA	80	2700K	120°	1600lm	1350lm	MASM-8S3A224E-WN
					3000K	120°	1700lm	1400lm	
					4000K	120°	1800lm	1500lm	
16 W	18 W	78 V	200 mA	80	2700K	120°	2000lm	1700lm	MASM-8S3A224E-WN
					3000K	120°	2100lm	1800lm	
					4000K	120°	2200lm	1900lm	
22 W	24 W	78 V	280 mA	80	2700K	120°	2400lm	2100lm	MASM-8S3A224E-WN
					3000K	120°	2550lm	2200lm	
					4000K	120°	2600lm	2350lm	


Emergency lighting duration : 120mins
Emergency power : 5W


Code Remark: E=(On-Off LED Driver+Emergency Backup)

Light Distribution


3000K







NEKO / SKY Family
LED Ceiling Light

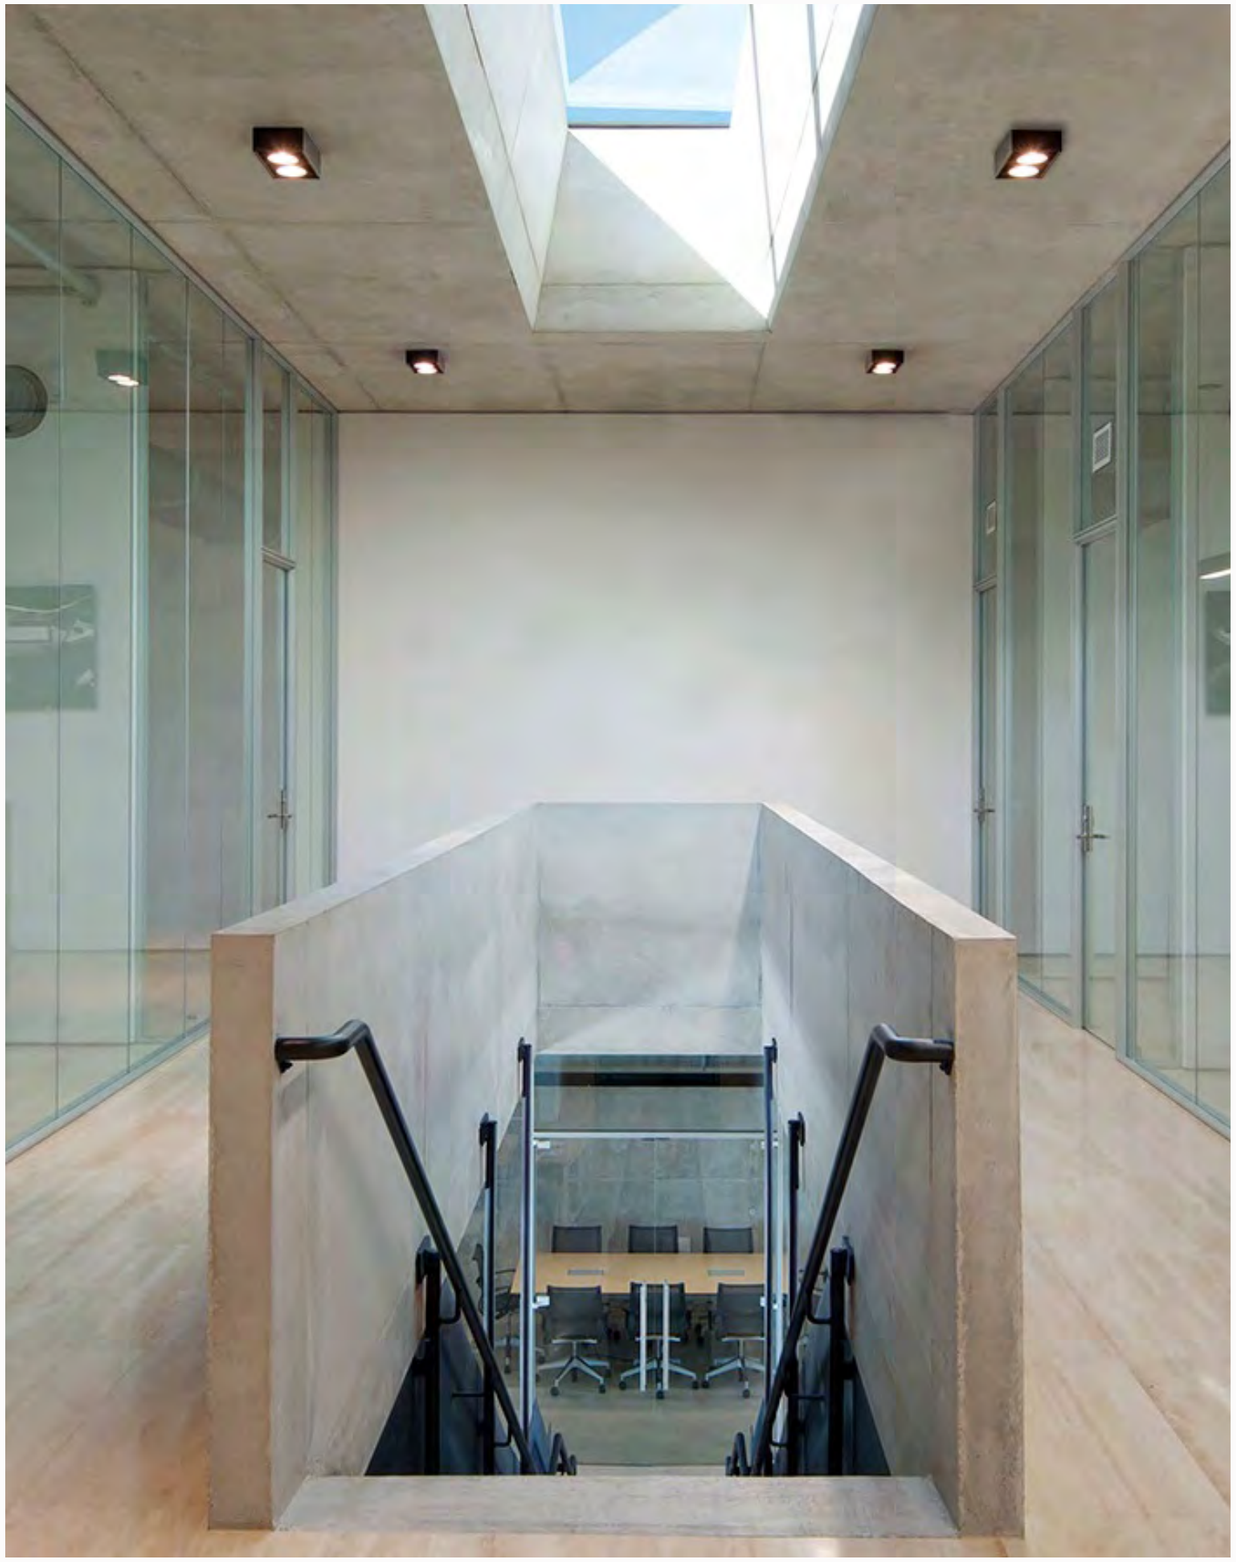



SKYDRIVER SDRC-10W



SKYDRIVER SDSC-10W



SKYJOY Single SJSC-8W



SKYJOY Double SJDC-16W



SKYLINE SL5C-10W

NEKO / SKYDRIVER SDRC

LED Ceiling Light

Incl. Phase Dim Driver



10W | CRI90 | 2700K 3000K | 36° | CITIZEN 50,000h@L80B10 | UGR < 19 | IP20 | 5 YEARS GUARANTEE | CE





LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
8 W	10 W	36 V	230 mA	90	2700K	36°	950lm	750lm	SDRC-9273610P-WW
					3000K	36°	1000lm	780lm	SDRC-9303610P-WW

Code Remark: P=(Phase Dim)



LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
8 W	10 W	36 V	230 mA	90	2700K	36°	950lm	750lm	SDRC-9273610P-BB
					3000K	36°	1000lm	780lm	SDRC-9303610P-BB


Code Remark: P=(Phase Dim)

Feature



25°Tiltable and 355° Rotation

Light Distribution

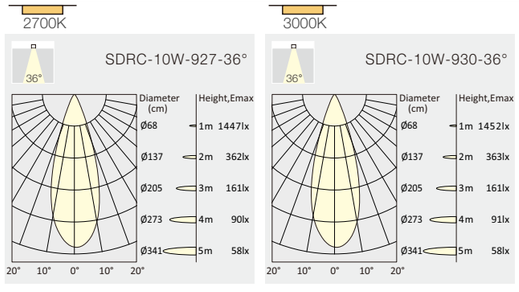


NEKO / SKYDRIVER SDSC

LED Ceiling Light

Incl. Phase Dim Driver



10W | CRI90 | 2700K 3000K | 36° | CITIZEN 50,000h@L80B10 | UGR < 19 | IP20 | 5 YEARS GUARANTEE | CE





LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
8 W	10 W	36 V	230 mA	90	2700K	36°	950lm	750lm	SDSC-9273610P-WW
					3000K	36°	1000lm	780lm	SDSC-9303610P-WW

Code Remark: P=(Phase Dim)



LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
8 W	10 W	36 V	230 mA	90	2700K	36°	950lm	750lm	SDSC-9273610P-BB
					3000K	36°	1000lm	780lm	SDSC-9303610P-BB


Code Remark: P=(Phase Dim)

Feature



25°Tiltable and 355° Rotation

Light Distribution

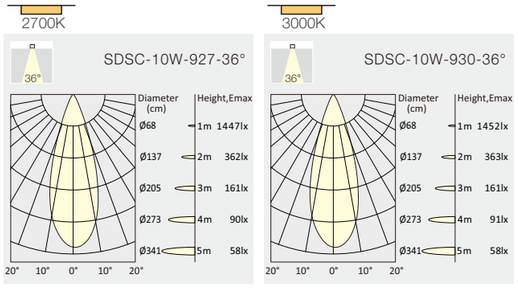


NEKO / SKYJOY Single SJSC

LED Ceiling Light

Incl. Phase Dim Driver




8W | CRI90 | 2700K | 36° | CITIZEN 50,000h@L80B10 | UGR < 19 | IP20 | 5 YEARS GUARANTEE | CE




	LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
	7 W	8 W	35 V	200 mA	90	2700K	36°	750lm	580lm	SJSC-9273608P-WW
	Code Remark: P=(Phase Dim)									
	7 W	8 W	35 V	200 mA	90	2700K	36°	750lm	580lm	SJSC-9273608P-BB
	Code Remark: P=(Phase Dim)									

Feature




Tilt 25° in all direction (360°)

Light Distribution




10W | CRI90 | 1800K-3000K Dim to Warm | 36° | bridgelux 50,000h@L80B10 | UGR < 19 | IP20 | 5 YEARS GUARANTEE | CE




	LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
	9 W	10 W	35 V	250 mA	90	1800K -3000K	36°	850lm	Max.650lm	SJSC-9D33610P-WW
	Code Remark: P=(Phase Dim)									
	9 W	10 W	35 V	250 mA	90	1800K -3000K	36°	850lm	Max.650lm	SJSC-9D33610P-BB
	Code Remark: P=(Phase Dim)									

Feature



Tilt 25° in all direction (360°)

Light Distribution



DIM to WARM




NEKO / SKYJOY Double SJDC

LED Ceiling Light

Incl. Phase Dim Driver



16W | CRI90 | 2700K | 36° | CITIZEN 50,000h@L80B10 | UGR < 19 | IP20 | 5 YEARS GUARANTEE | CE




	LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
	14 W	16 W	35 V	400 mA	90	2700K	36°	1600lm	1300lm	SJDC-9273616P-WW

Code Remark: P=(Phase Dim)

	LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
	14 W	16 W	35 V	400 mA	90	2700K	36°	1600lm	1300lm	SJDC-9273616P-BB


Code Remark: P=(Phase Dim)

Feature




Tilt 25° in all direction (360°)

Light Distribution



20W | CRI90 | 1800K-3000K Dim to Warm | 36° | bridgelux 50,000h@L80B10 | UGR < 19 | IP20 | 5 YEARS GUARANTEE | CE




	LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
	18 W	20 W	35 V	500 mA	90	1800K -3000K	36°	1700lm	Max.1300lm	SJDC-9D33620P-WW

Code Remark: P=(Phase Dim)

	LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
	18 W	20 W	35 V	500 mA	90	1800K -3000K	36°	1700lm	Max.1300lm	SJDC-9D33620P-BB


Code Remark: P=(Phase Dim)

Feature



Tilt 25° in all direction (360°)

Light Distribution



DIM to WARM




NEKO / SKYLINE SL5C

LED Ceiling Light

Incl. Phase Dim Driver



8.5W | CRI90 | 2700K 3000K | 30° | bridgelux 50,000hrsL80B10 | UGR < 19 | IP20 | 5 YEARS GUARANTEE | CE




LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
8.5 W	10 W	14.5 V	600 mA	90	2700K	30°	950lm	720lm	SL5C-9273010P-WS
					3000K	30°	1000lm	750lm	SL5C-9303010P-WS

Code Remark: P=(Phase Dim)


LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
8.5 W	10 W	14.5 V	600 mA	90	2700K	30°	950lm	720lm	SL5C-9273010P-BS
					3000K	30°	1000lm	750lm	SL5C-9303010P-BS

Code Remark: P=(Phase Dim)

Light Distribution

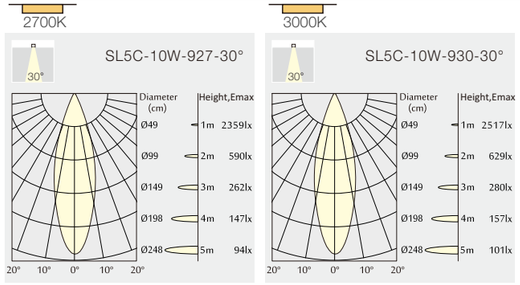

Project: Hovenloen Restaurant, Norway

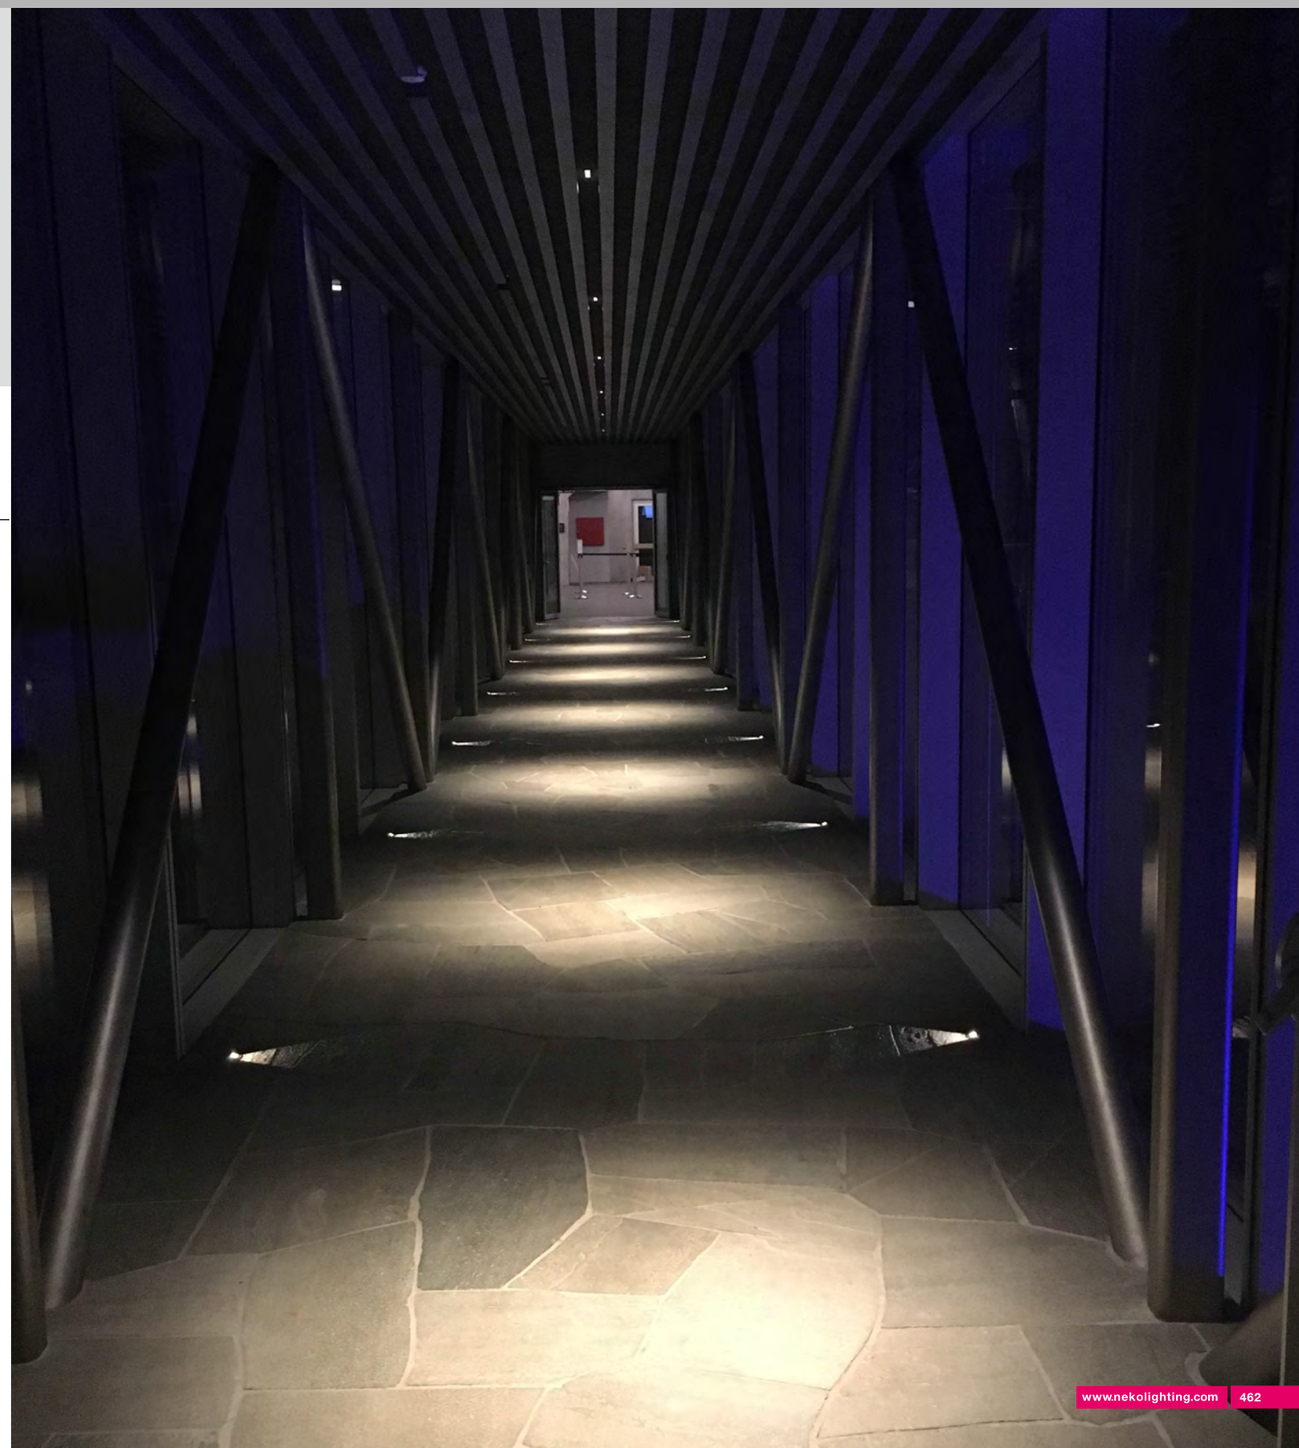



NEKO / MIU

Project: Office Borg Forvaltning Trondheim, Norway



MIU-C M



MIU-C L



MIU-P S



MIU-P M




MIU-P L

NEKO / MIU / MIU-C M

Ceiling Mounted Light



21W 15W | CRI90 | 2700K 3000K 4000K | 15° 25° 30° | CITIZEN 50,000h@L80B10 | UGR < 19 | IP20 | 5 YEARS GUARANTEE | CB | CE





Black

LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
13 W	15 W		36 V	350 mA	90	2700K	15°	1400lm	1100lm	MCM1-9271515F-BB
							25°	1400lm	1100lm	MCM1-9272515F-BB
							30°	1400lm	1100lm	MCM1-9273015F-BB
						3000K	15°	1500lm	1200lm	MCM1-9301515F-BB
							25°	1500lm	1200lm	MCM1-9302515F-BB
							30°	1500lm	1200lm	MCM1-9303015F-BB
						4000K	15°	1600lm	1300lm	MCM1-9401515F-BB
							25°	1600lm	1300lm	MCM1-9402515F-BB
							30°	1600lm	1300lm	MCM1-9403015F-BB
18 W	21 W		36 V	500 mA	90	2700K	15°	1900lm	1500lm	MCM2-9271521F-BB
							25°	1900lm	1500lm	MCM2-9272521F-BB
							30°	1900lm	1500lm	MCM2-9273021F-BB
						3000K	15°	2000lm	1600lm	MCM2-9301521F-BB
							25°	2000lm	1600lm	MCM2-9302521F-BB
							30°	2000lm	1600lm	MCM2-9303021F-BB
						4000K	15°	2100lm	1700lm	MCM2-9401521F-BB
							25°	2100lm	1700lm	MCM2-9402521F-BB
							30°	2100lm	1700lm	MCM2-9403021F-BB



Gold

LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
13 W	15 W		36 V	350 mA	90	2700K	15°	1400lm	1100lm	MCM1-9271515F-BG
							25°	1400lm	1100lm	MCM1-9272515F-BG
							30°	1400lm	1100lm	MCM1-9273015F-BG
						3000K	15°	1500lm	1200lm	MCM1-9301515F-BG
							25°	1500lm	1200lm	MCM1-9302515F-BG
							30°	1500lm	1200lm	MCM1-9303015F-BG
						4000K	15°	1600lm	1300lm	MCM1-9401515F-BG
							25°	1600lm	1300lm	MCM1-9402515F-BG
							30°	1600lm	1300lm	MCM1-9403015F-BG
18 W	21 W		36 V	500 mA	90	2700K	15°	1900lm	1500lm	MCM2-9271521F-BG
							25°	1900lm	1500lm	MCM2-9272521F-BG
							30°	1900lm	1500lm	MCM2-9273021F-BG
						3000K	15°	2000lm	1600lm	MCM2-9301521F-BG
							25°	2000lm	1600lm	MCM2-9302521F-BG
							30°	2000lm	1600lm	MCM2-9303021F-BG
						4000K	15°	2100lm	1700lm	MCM2-9401521F-BG
							25°	2100lm	1700lm	MCM2-9402521F-BG
							30°	2100lm	1700lm	MCM2-9403021F-BG

Code Remark: F=(ON-OFF) P=(Phase Dim)



Black



White

LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
13 W	15 W		36 V	350 mA	90	2700K	15°	1400lm	1100lm	MCM1-9271515F-WB
							25°	1400lm	1100lm	MCM1-9272515F-WB
							30°	1400lm	1100lm	MCM1-9273015F-WB
						3000K	15°	1500lm	1200lm	MCM1-9301515F-WB
							25°	1500lm	1200lm	MCM1-9302515F-WB
							30°	1500lm	1200lm	MCM1-9303015F-WB
						4000K	15°	1600lm	1300lm	MCM1-9401515F-WB
							25°	1600lm	1300lm	MCM1-9402515F-WB
							30°	1600lm	1300lm	MCM1-9403015F-WB
18 W	21 W		36 V	500 mA	90	2700K	15°	1900lm	1500lm	MCM2-9271521F-WB
							25°	1900lm	1500lm	MCM2-9272521F-WB
							30°	1900lm	1500lm	MCM2-9273021F-WB
						3000K	15°	2000lm	1600lm	MCM2-9301521F-WB
							25°	2000lm	1600lm	MCM2-9302521F-WB
							30°	2000lm	1600lm	MCM2-9303021F-WB
						4000K	15°	2100lm	1700lm	MCM2-9401521F-WB
							25°	2100lm	1700lm	MCM2-9402521F-WB
							30°	2100lm	1700lm	MCM2-9403021F-WB
13 W	15 W		36 V	350 mA	90	2700K	15°	1400lm	1100lm	MCM1-9271515F-WW
							25°	1400lm	1100lm	MCM1-9272515F-WW
							30°	1400lm	1100lm	MCM1-9273015F-WW
						3000K	15°	1500lm	1200lm	MCM1-9301515F-WW
							25°	1500lm	1200lm	MCM1-9302515F-WW
							30°	1500lm	1200lm	MCM1-9303015F-WW
						4000K	15°	1600lm	1300lm	MCM1-9401515F-WW
							25°	1600lm	1300lm	MCM1-9402515F-WW
							30°	1600lm	1300lm	MCM1-9403015F-WW
18 W	21 W		36 V	500 mA	90	2700K	15°	1900lm	1500lm	MCM2-9271521F-WW
							25°	1900lm	1500lm	MCM2-9272521F-WW
							30°	1900lm	1500lm	MCM2-9273021F-WW
						3000K	15°	2000lm	1600lm	MCM2-9301521F-WW
							25°	2000lm	1600lm	MCM2-9302521F-WW
							30°	2000lm	1600lm	MCM2-9303021F-WW
						4000K	15°	2100lm	1700lm	MCM2-9401521F-WW
							25°	2100lm	1700lm	MCM2-9402521F-WW
							30°	2100lm	1700lm	MCM2-9403021FWW
13 W	15 W		36 V	350 mA	90	2700K	15°	1400lm	1100lm	MCM1-9271515F-WG
							25°	1400lm	1100lm	MCM1-9272515F-WG
							30°	1400lm	1100lm	MCM1-9273015F-WG
						3000K	15°	1500lm	1200lm	MCM1-9301515F-WG
							25°	1500lm	1200lm	MCM1-9302515F-WG
							30°	1500lm	1200lm	MCM1-9303015F-WG
						4000K	15°	1600lm	1300lm	MCM1-9401515F-WG
							25°	1600lm	1300lm	MCM1-9402515F-WG
							30°	1600lm	1300lm	MCM1-9403015F-WG
18 W	21 W		36 V	500 mA	90	2700K	15°	1900lm	1500lm	MCM2-9271521F-WG
							25°	1900lm	1500lm	MCM2-9272521F-WG
							30°	1900lm	1500lm	MCM2-9273021F-WG
						3000K	15°	2000lm	1600lm	MCM2-9301521F-WG
							25°	2000lm	1600lm	MCM2-9302521F-WG
							30°	2000lm	1600lm	MCM2-9303021F-WG
						4000K	15°	2100lm	1700lm	MCM2-9401521F-WG
							25°	2100lm	1700lm	MCM2-9402521F-WG
							30°	2100lm	1700lm	MCM2-9403021F-WG



Gold

Code Remark: F=(ON-OFF) P=(Phase Dim)

Optional accessory



Honeycomb


Code for MCM1-930 1515F-WB with **H**oneycomb
MCM1-930 1515F-WB-**H**

NEKO / MIU / MIU-C L

Ceiling Mounted Light



28W | CRI90 | 2700K 3000K 4000K | 18° 30° 45° | CITIZEN 50,000h@L80B10 | UGR < 19 | IP 20 | 5 YEARS GUARANTEE | CB | CE





Black



Gold

LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
25 W		28 W	36 V	700 mA	90	2700K	18°	3200lm	2500lm	MCL1-9271828F-BB
							30°	3200lm	2500lm	MCL1-9273028F-BB
							45°	3200lm	2500lm	MCL1-9274528F-BB
						3000K	18°	3400lm	2700lm	MCL1-9301828F-BB
							30°	3400lm	2700lm	MCL1-9303028F-BB
							45°	3400lm	2700lm	MCL1-9304528F-BB
						4000K	18°	3600lm	2900lm	MCL1-9401828F-BB
							30°	3600lm	2900lm	MCL1-9403028F-BB
							45°	3600lm	2900lm	MCL1-9404528F-BB
25 W		28 W	36 V	700 mA	90	2700K	18°	3200lm	2500lm	MCL1-9271828F-BG
							30°	3200lm	2500lm	MCL1-9273028F-BG
							45°	3200lm	2500lm	MCL1-9274528F-BG
						3000K	18°	3400lm	2700lm	MCL1-9301828F-BG
							30°	3400lm	2700lm	MCL1-9303028F-BG
							45°	3400lm	2700lm	MCL1-9304528F-BG
						4000K	18°	3600lm	2900lm	MCL1-9401828F-BG
							30°	3600lm	2900lm	MCL1-9403028F-BG
							45°	3600lm	2900lm	MCL1-9404528F-BG

Code Remark: F=(ON-OFF) D=D(DALI Dim)



Black



White



Gold

LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
25 W		28 W	36 V	700 mA	90	2700K	18°	3200lm	2500lm	MCL1-9271828F-WB
							30°	3200lm	2500lm	MCL1-9273028F-WB
							45°	3200lm	2500lm	MCL1-9274528F-WB
						3000K	18°	3400lm	2700lm	MCL1-9301828F-WB
							30°	3400lm	2700lm	MCL1-9303028F-WB
							45°	3400lm	2700lm	MCL1-9304528F-WB
						4000K	18°	3600lm	2900lm	MCL1-9401828F-WB
							30°	3600lm	2900lm	MCL1-9403028F-WB
							45°	3600lm	2900lm	MCL1-9404528F-WB
25 W		28 W	36 V	700 mA	90	2700K	18°	3200lm	2500lm	MCL1-9271828F-WW
							30°	3200lm	2500lm	MCL1-9273028F-WW
							45°	3200lm	2500lm	MCL1-9274528F-WW
						3000K	18°	3400lm	2700lm	MCL1-9301828F-WW
							30°	3400lm	2700lm	MCL1-9303028F-WW
							45°	3400lm	2700lm	MCL1-9304528F-WW
						4000K	18°	3600lm	2900lm	MCL1-9401828F-WW
							30°	3600lm	2900lm	MCL1-9403028F-WW
							45°	3600lm	2900lm	MCL1-9404528F-WW
25 W		28 W	36 V	700 mA	90	2700K	18°	3200lm	2500lm	MCL1-9271828F-WG
							30°	3200lm	2500lm	MCL1-9273028F-WG
							45°	3200lm	2500lm	MCL1-9274528F-WG
						3000K	18°	3400lm	2700lm	MCL1-9301828F-WG
							30°	3400lm	2700lm	MCL1-9303028F-WG
							45°	3400lm	2700lm	MCL1-9304528F-WG
						4000K	18°	3600lm	2900lm	MCL1-9401828F-WG
							30°	3600lm	2900lm	MCL1-9403028F-WG
							45°	3600lm	2900lm	MCL1-9404528F-WG

Code Remark: F=(ON-OFF) D=D(DALI Dim)

Optional accessory



Honeycomb


Code for MCL1-930 1828F-WB with Honeycomb
MCL1-930 1828F-WB-H

NEKO / MIU / MIU-P
Pendant Light

NEKO / MIU / MIU-P S

Pendant Light





11W | CRI90 | 2700K 3000K 4000K | 18° 24° 36° | CITIZEN 50,000h@L80B10 | UGR < 19 | IP20 | 5 YEARS GUARANTEE | CB | CE

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
9 W	11 W	36 V	250 mA	90	2700K	18°	850lm	700lm	MPS1-9271811F-BB
						24°	850lm	700lm	MPS1-9272411F-BB
						36°	850lm	700lm	MPS1-9273611F-BB
					3000K	18°	950lm	720lm	MPS1-9301811F-BB
						24°	950lm	720lm	MPS1-9302411F-BB
						36°	950lm	720lm	MPS1-9303611F-BB
					4000K	18°	1050lm	800lm	MPS1-9401811F-BB
						24°	1050lm	800lm	MPS1-9402411F-BB
						36°	1050lm	800lm	MPS1-9403611F-BB



Black

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
9 W	11 W	36 V	250 mA	90	2700K	18°	850lm	700lm	MPS1-9271811F-BG
						24°	850lm	700lm	MPS1-9272411F-BG
						36°	850lm	700lm	MPS1-9273611F-BG
					3000K	18°	950lm	720lm	MPS1-9301811F-BG
						24°	950lm	720lm	MPS1-9302411F-BG
						36°	950lm	720lm	MPS1-9303611F-BG
					4000K	18°	1050lm	800lm	MPS1-9401811F-BG
						24°	1050lm	800lm	MPS1-9402411F-BG
						36°	1050lm	800lm	MPS1-9403611F-BG



Gold

Code Remark: F=(ON-OFF) P=(Phase Dim)



Black

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
9 W	11 W	36 V	250 mA	90	2700K	18°	850lm	700lm	MPS1-9271811F-WB
						24°	850lm	700lm	MPS1-9272411F-WB
						36°	850lm	700lm	MPS1-9273611F-WB
					3000K	18°	950lm	720lm	MPS1-9301811F-WB
						24°	950lm	720lm	MPS1-9302411F-WB
						36°	950lm	720lm	MPS1-9303611F-WB
					4000K	18°	1050lm	800lm	MPS1-9401811F-WB
						24°	1050lm	800lm	MPS1-9402411F-WB
						36°	1050lm	800lm	MPS1-9403611F-WB



White

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
9 W	11 W	36 V	250 mA	90	2700K	18°	850lm	700lm	MPS1-9271811F-WW
						24°	850lm	700lm	MPS1-9272411F-WW
						36°	850lm	700lm	MPS1-9273611F-WW
					3000K	18°	950lm	720lm	MPS1-9301811F-WW
						24°	950lm	720lm	MPS1-9302411F-WW
						36°	950lm	720lm	MPS1-9303611F-WW
					4000K	18°	1050lm	800lm	MPS1-9401811F-WW
						24°	1050lm	800lm	MPS1-9402411FWW
						36°	1050lm	800lm	MPS1-9403611F-WW



Gold

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
9 W	11 W	36 V	250 mA	90	2700K	18°	850lm	700lm	MPS1-9271811F-WG
						24°	850lm	700lm	MPS1-9272411F-WG
						36°	850lm	700lm	MPS1-9273611F-WG
					3000K	18°	950lm	720lm	MPS1-9301811F-WG
						24°	950lm	720lm	MPS1-9302411F-WG
						36°	950lm	720lm	MPS1-9303611F-WG
					4000K	18°	1050lm	800lm	MPS1-9401811F-WG
						24°	1050lm	800lm	MPS1-9402411F-WG
						36°	1050lm	800lm	MPS1-9403611F-WG

Code Remark: F=(ON-OFF) P=(Phase Dim)

Optional accessory




Honeycomb

Code for MPS1-9301811F-WB with Honeycomb
MPS1-9301811F-WB-H

NEKO / MIU / MIU-P M

Pendant Light





21W 15W | CRI90 | 2700K 3000K 4000K | 15° 25° 30° | CITIZEN 50,000h@L80B10 | UGR < 19 | IP20 | 5 YEARS GUARANTEE | CB | CE



Black

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
13 W	15 W	36 V	350 mA	90	2700K	15°	1400lm	1100lm	MPM1-9271515F-BB
						25°	1400lm	1100lm	MPM1-9272515F-BB
						30°	1400lm	1100lm	MPM1-9273015F-BB
					3000K	15°	1500lm	1200lm	MPM1-9301515F-BB
						25°	1500lm	1200lm	MPM1-9302515F-BB
						30°	1500lm	1200lm	MPM1-9303015F-BB
					4000K	15°	1600lm	1300lm	MPM1-9401515F-BB
						25°	1600lm	1300lm	MPM1-9402515F-BB
						30°	1600lm	1300lm	MPM1-9403015F-BB
18 W	21 W	36 V	500 mA	90	2700K	15°	1900lm	1500lm	MPM2-9271521F-BB
						25°	1900lm	1500lm	MPM2-9272521FBB
						30°	1900lm	1500lm	MPM2-9273021F-BB
					3000K	15°	2000lm	1600lm	MPM2-9301521F-BB
						25°	2000lm	1600lm	MPM2-9302521F-BB
						30°	2000lm	1600lm	MPM2-9303021F-BB
					4000K	15°	2100lm	1700lm	MPM2-9401521F-BB
						25°	2100lm	1700lm	MPM2-9402521F-BB
						30°	2100lm	1700lm	MPM2-9403021F-BB



Gold

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
13 W	15 W	36 V	350 mA	90	2700K	15°	1400lm	1100lm	MPM1-9271515F-BG
						25°	1400lm	1100lm	MPM1-9272515F-BG
						30°	1400lm	1100lm	MPM1-9273015F-BG
					3000K	15°	1500lm	1200lm	MPM1-9301515F-BG
						25°	1500lm	1200lm	MPM1-9302515F-BG
						30°	1500lm	1200lm	MPM1-9303015F-BG
					4000K	15°	1600lm	1300lm	MPM1-9401515F-BG
						25°	1600lm	1300lm	MPM1-9402515F-BG
						30°	1600lm	1300lm	MPM1-9403015F-BG
18 W	21 W	36 V	500 mA	90	2700K	15°	1900lm	1500lm	MPM2-9271521F-BG
						25°	1900lm	1500lm	MPM2-9272521F-BG
						30°	1900lm	1500lm	MPM2-9273021F-BG
					3000K	15°	2000lm	1600lm	MPM2-9301521F-BG
						25°	2000lm	1600lm	MPM2-9302521F-BG
						30°	2000lm	1600lm	MPM2-9303021F-BG
					4000K	15°	2100lm	1700lm	MPM2-9401521F-BG
						25°	2100lm	1700lm	MPM2-9402521F-BG
						30°	2100lm	1700lm	MPM2-9403021F-BG

Code Remark: F=(ON-OFF) P=(Phase Dim)



Black



White



Gold

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
13 W	15 W	36 V	350 mA	90	2700K	15°	1400lm	1100lm	MPM1-9271515F-WB
						25°	1400lm	1100lm	MPM1-9272515F-WB
						30°	1400lm	1100lm	MPM1-9273015F-WB
					3000K	15°	1500lm	1200lm	MPM1-9301515F-WB
						25°	1500lm	1200lm	MPM1-9302515F-WB
						30°	1500lm	1200lm	MPM1-9303015F-WB
					4000K	15°	1600lm	1300lm	MPM1-9401515F-WB
						25°	1600lm	1300lm	MPM1-9402515F-WB
						30°	1600lm	1300lm	MPM1-9403015F-WB
18 W	21 W	36 V	500 mA	90	2700K	15°	1900lm	1500lm	MPM2-9271521F-WB
						25°	1900lm	1500lm	MPM2-9272521F-WB
						30°	1900lm	1500lm	MPM2-9273021F-WB
					3000K	15°	2000lm	1600lm	MPM2-9301521F-WB
						25°	2000lm	1600lm	MPM2-9302521F-WB
						30°	2000lm	1600lm	MPM2-9303021F-WB
					4000K	15°	2100lm	1700lm	MPM2-9401521F-WB
						25°	2100lm	1700lm	MPM2-9402521F-WB
						30°	2100lm	1700lm	MPM2-9403021F-WB
13 W	15 W	36 V	350 mA	90	2700K	15°	1400lm	1100lm	MPM1-9271515F-WW
						25°	1400lm	1100lm	MPM1-9272515F-WW
						30°	1400lm	1100lm	MPM1-9273015F-WW
					3000K	15°	1500lm	1200lm	MPM1-9301515F-WW
						25°	1500lm	1200lm	MPM1-9302515F-WW
						30°	1500lm	1200lm	MPM1-9303015F-WW
					4000K	15°	1600lm	1300lm	MPM1-9401515F-WW
						25°	1600lm	1300lm	MPM1-9402515F-WW
						30°	1600lm	1300lm	MPM1-9403015F-WW
18 W	21 W	36 V	500 mA	90	2700K	15°	1900lm	1500lm	MPM2-9271521F-WW
						25°	1900lm	1500lm	MPM2-9272521F-WW
						30°	1900lm	1500lm	MPM2-9273021F-WW
					3000K	15°	2000lm	1600lm	MPM2-9301521F-WW
						25°	2000lm	1600lm	MPM2-9302521F-WW
						30°	2000lm	1600lm	MPM2-9303021F-WW
					4000K	15°	2100lm	1700lm	MPM2-9401521F-WW
						25°	2100lm	1700lm	MPM2-9402521F-WW
						30°	2100lm	1700lm	MPM2-9403021F-WW
13 W	15 W	36 V	350 mA	90	2700K	15°	1400lm	1100lm	MPM1-9271515F-WG
						25°	1400lm	1100lm	MPM1-9272515F-WG
						30°	1400lm	1100lm	MPM1-9273015F-WG
					3000K	15°	1500lm	1200lm	MPM1-9301515F-WG
						25°	1500lm	1200lm	MPM1-9302515F-WG
						30°	1500lm	1200lm	MPM1-9303015F-WG
					4000K	15°	1600lm	1300lm	MPM1-9401515F-WG
						25°	1600lm	1300lm	MPM1-9402515F-WG
						30°	1600lm	1300lm	MPM1-9403015F-WG
18 W	21 W	36 V	500 mA	90	2700K	15°	1900lm	1500lm	MPM2-9271521F-WG
						25°	1900lm	1500lm	MPM2-9272521F-WG
						30°	1900lm	1500lm	MPM2-9273021F-WG
					3000K	15°	2000lm	1600lm	MPM2-9301521F-WG
						25°	2000lm	1600lm	MPM2-9302521F-WG
						30°	2000lm	1600lm	MPM2-9303021F-WG
					4000K	15°	2100lm	1700lm	MPM2-9401521F-WG
						25°	2100lm	1700lm	MPM2-9402521F-WG
						30°	2100lm	1700lm	MPM2-9403021F-WG

Code Remark: F=(ON-OFF) P=(Phase Dim)

Optional accessory




Honeycomb

Code for MCM1-930 1515F-WB with Honeycomb
MCM1-930 1515F-WB-H

NEKO / MIU / MIU-P L

Pendant Light





28W | CRI90 | 2700K 3000K 4000K | 18° 30° 45° | CITIZEN 50,000h@L80B10 | UGR < 19 | IP 20 | 5 YEARS GUARANTEE | CB | CE



Black

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
25 W	28 W	36 V	700 mA	90	2700K	18°	3200lm	2500lm	MPL1-9271828F-BB
						30°	3200lm	2500lm	MPL1-9273028F-BB
						45°	3200lm	2500lm	MPL1-9274528F-BB
					3000K	18°	3400lm	2700lm	MPL1-9301828F-BB
						30°	3400lm	2700lm	MPL1-9303028F-BB
						45°	3400lm	2700lm	MPL1-9304528F-BB
					4000K	18°	3600lm	2900lm	MPL1-9401828F-BB
						30°	3600lm	2900lm	MPL1-9403028F-BB
						45°	3600lm	2900lm	MPL1-9404528F-BB



Gold

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
25 W	28 W	36 V	700 mA	90	2700K	18°	3200lm	2500lm	MPL1-9271828F-BG
						30°	3200lm	2500lm	MPL1-9273028F-BG
						45°	3200lm	2500lm	MPL1-9274528F-BG
					3000K	18°	3400lm	2700lm	MPL1-9301828F-BG
						30°	3400lm	2700lm	MPL1-9303028F-BG
						45°	3400lm	2700lm	MPL1-9304528F-BG
					4000K	18°	3600lm	2900lm	MPL1-9401828F-BG
						30°	3600lm	2900lm	MPL1-9403028F-BG
						45°	3600lm	2900lm	MPL1-9404528F-BG

Code Remark: F=(ON-OFF) D=D(DALI Dim)



Black

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
25 W	28 W	36 V	700 mA	90	2700K	18°	3200lm	2500lm	MPL1-9271828F-WB
						30°	3200lm	2500lm	MPL1-9273028F-WB
						45°	3200lm	2500lm	MPL1-9274528F-WB
					3000K	18°	3400lm	2700lm	MPL1-9301828F-WB
						30°	3400lm	2700lm	MPL1-9303028F-WB
						45°	3400lm	2700lm	MPL1-9304528F-WB
					4000K	18°	3600lm	2900lm	MPL1-9401828F-WB
						30°	3600lm	2900lm	MPL1-9403028F-WB
						45°	3600lm	2900lm	MPL1-9404528F-WB



White

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
25 W	28 W	36 V	700 mA	90	2700K	18°	3200lm	2500lm	MPL1-9271828F-WW
						30°	3200lm	2500lm	MPL1-9273028F-WW
						45°	3200lm	2500lm	MPL1-9274528F-WW
					3000K	18°	3400lm	2700lm	MPL1-9301828F-WW
						30°	3400lm	2700lm	MPL1-9303028F-WW
						45°	3400lm	2700lm	MPL1-9304528F-WW
					4000K	18°	3600lm	2900lm	MPL1-9401828FWW
						30°	3600lm	2900lm	MPL1-9403028F-WW
						45°	3600lm	2900lm	MPL1-9404528F-WW



Gold

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
25 W	28 W	36 V	700 mA	90	2700K	18°	3200lm	2500lm	MPL1-9271828F-WG
						30°	3200lm	2500lm	MPL1-9273028F-WG
						45°	3200lm	2500lm	MPL1-9274528F-WG
					3000K	18°	3400lm	2700lm	MPL1-9301828F-WG
						30°	3400lm	2700lm	MPL1-9303028F-WG
						45°	3400lm	2700lm	MPL1-9304528F-WG
					4000K	18°	3600lm	2900lm	MPL1-9401828F-WG
						30°	3600lm	2900lm	MPL1-9403028F-WG
						45°	3600lm	2900lm	MPL1-9404528F-WG

Code Remark: F=(ON-OFF) D=D(DALI Dim)

Optional accessory



Honeycomb

Code for MPL1-930 1828F-WB with **H**oneycomb
MPL1-930 1828F-WB-**H**

NEKO / BREEZE
Ceiling Mounted Spotlight





BREEZE Single





BREEZE Double



BREEZE Triple

NEKO / BREEZE
Ceiling Mounted Spotlight

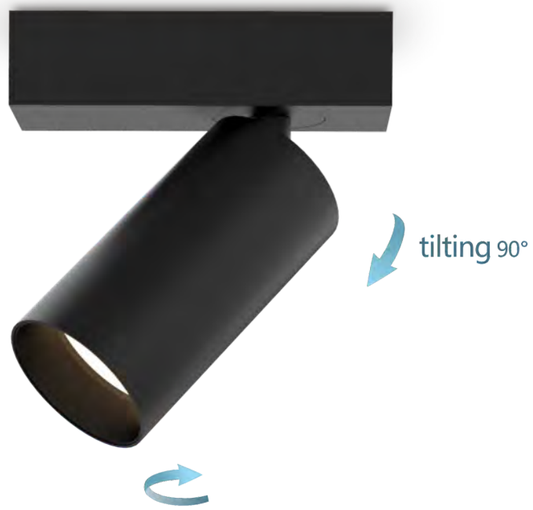


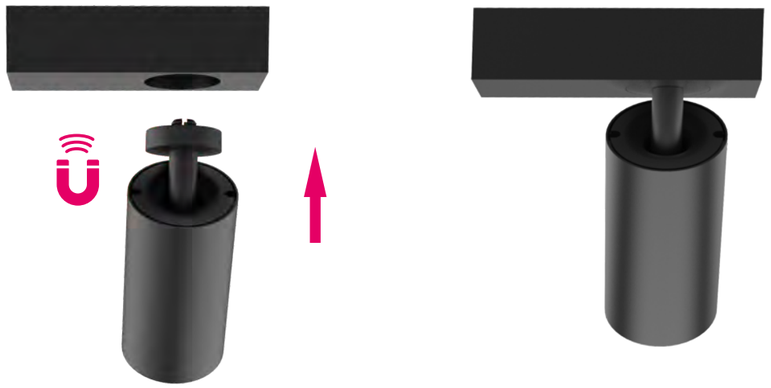

NEKO / BREEZE Single
Ceiling Mounted Spotlight
Incl. Phase Dim Driver



9W | CRI90 | 2700K | 36° | bridgelux 50,000h@L80B10 | UGR < 19 | IP20 | 5 YEARS GUARANTEE | CE








LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
7 W	9 W	36 V	200 mA	90	2700K	36°	800lm	700lm	B1SC-9273609P-WB

Code Remark: P=(Phase Dim)

7 W	9 W	36 V	200 mA	90	2700K	36°	800lm	700lm	B1SC-9273609P-BB

Code Remark: P=(Phase Dim)

Light Distribution




NEKO / BREEZE Double

Ceiling Mounted Spotlight

Incl. Phase Dim Driver



2x9W | CRI90 | 2700K | 36° | bridgelux 50,000h@L80B10 | UGR < 19 | IP20 | 5 YEARS GUARANTEE | CE





LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
2x7 W	2x9 W	36 V	2x200 mA	90	2700K	36°	1600lm	1400lm	B2SC-9273618P-WB


Code Remark: P=Phase Dim



LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
2x7 W	2x9 W	36 V	2x200 mA	90	2700K	36°	1600lm	1400lm	B2SC-9273618P-BB

Code Remark: P=Phase Dim

Light Distribution




NEKO / BREEZE Triple

Ceiling Mounted Spotlight

Incl. Phase Dim Driver



3x9W | CRI90 | 2700K | 36° | bridgelux 50,000h@L80B10 | UGR < 19 | IP20 | 5 YEARS GUARANTEE | CE





LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
3x7 W	3x9 W	36 V	3x200 mA	90	2700K	36°	2400lm	2100lm	B3SC-9273627P-WB


Code Remark: P=(Phase Dim)



LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
3x7 W	3x9 W	36 V	3x200 mA	90	2700K	36°	2400lm	2100lm	B3SC-9273627P-BB

Code Remark: P=(Phase Dim)

Light Distribution



NEW





Tilting 90°

Rotation 360°



Different Mounting Bases (White/ Black)

Surface Mounted



1RC Base



1SC Base



2RC Base



2SC Base

Recessed Mounted



1RR Base



1SR Base




2RR Base



2SR Base

Accessory



Honeycomb

Module Color



Black



Brushed Gold



Chrome



White

NEKO / VIBES / V1RC


Ceiling Mounted Spotlight

Incl. Phase Dim Driver

NEW




14W | CRI90 | 2700K 3000K | 36° | **IP20** | CITIZEN 50,000h@L80B10 | 5 YEARS GUARANTEE | CE



	LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
	12.5 W	14 W	36 V	350 mA	90	2700K 3000K	36° 36°	1400lm 1500lm	1100lm 1200lm	V1RC-9273614P-WW V1RC-9303614P-WW
	12.5 W	14 W	36 V	350 mA	90	2700K 3000K	36° 36°	1400lm 1500lm	1100lm 1200lm	V1RC-9273614P-BB V1RC-9303614P-BB
	12.5 W	14 W	36 V	350 mA	90	2700K 3000K	36° 36°	1400lm 1500lm	1100lm 1200lm	V1RC-9273614P-CB V1RC-9303614P-CB
	12.5 W	14 W	36 V	350 mA	90	2700K 3000K	36° 36°	1400lm 1500lm	1100lm 1200lm	V1RC-9273614P-GB V1RC-9303614P-GB

Code Remark: P=(Phase Dim)

Light Distribution

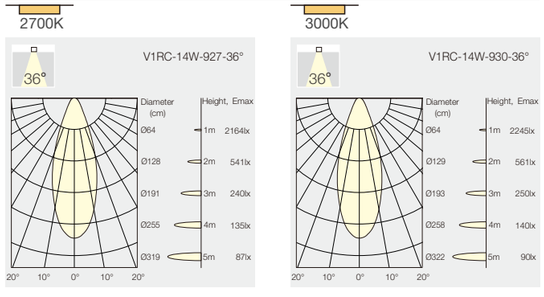

NEKO / VIBES / V2RC


Ceiling Mounted Spotlight

Incl. Phase Dim Driver

NEW




28W | CRI90 | 2700K 3000K | 36° | **IP20** | CITIZEN 50,000h@L80B10 | 5 YEARS GUARANTEE | CE



	LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
	2x12.5 W	2x14 W	36 V	2x350 mA	90	2700K 3000K	36° 36°	2900lm 3000lm	2300lm 2400lm	V2RC-9273628P-WW V2RC-9303628P-WW
	2x12.5 W	2x14 W	36 V	2x350 mA	90	2700K 3000K	36° 36°	2900lm 3000lm	2300lm 2400lm	V2RC-9273628P-BB V2RC-9303628P-BB
	2x12.5 W	2x14 W	36 V	2x350 mA	90	2700K 3000K	36° 36°	2900lm 3000lm	2300lm 2400lm	V2RC-9273628P-CB V2RC-9303628P-CB
	2x12.5 W	2x14 W	36 V	2x350 mA	90	2700K 3000K	36° 36°	2900lm 3000lm	2300lm 2400lm	V2RC-9273628P-GB V2RC-9303628P-GB

Code Remark: P=(Phase Dim)

Light Distribution

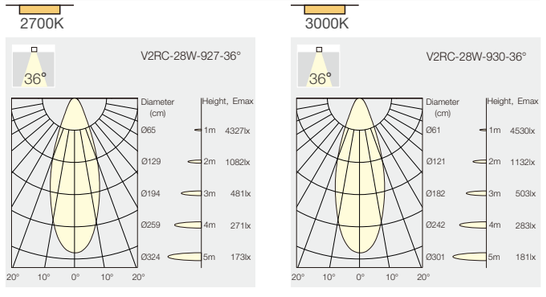

NEKO / VIBES / V1SC


Ceiling Mounted Spotlight

Incl. Phase Dim Driver

NEW



14W | CRI90 | 2700K 3000K | 36° | **IP20** | CITIZEN 50,000h@L80B10 | 5 YEARS GUARANTEE | CE





LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
12.5 W	14 W	36 V	350 mA	90	2700K	36°	1400lm	1100lm	V1SC-9273614P-WW
					3000K	36°	1500lm	1200lm	V1SC-9303614P-WW

Code Remark: P=(Phase Dim)



LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
12.5 W	14 W	36 V	350 mA	90	2700K	36°	1400lm	1100lm	V1SC-9273614P-BB
					3000K	36°	1500lm	1200lm	V1SC-9303614P-BB

Code Remark: P=(Phase Dim)



LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
12.5 W	14 W	36 V	350 mA	90	2700K	36°	1400lm	1100lm	V1SC-9273614P-CB
					3000K	36°	1500lm	1200lm	V1SC-9303614P-CB

Code Remark: P=(Phase Dim)




LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
12.5 W	14 W	36 V	350 mA	90	2700K	36°	1400lm	1100lm	V1SC-9273614P-GB
					3000K	36°	1500lm	1200lm	V1SC-9303614P-GB


Code Remark: P=(Phase Dim)

Light Distribution

2700K



3000K



NEKO / VIBES / V2SC


Ceiling Mounted Spotlight

Incl. Phase Dim Driver

NEW



28W | CRI90 | 2700K 3000K | 36° | **IP20** | CITIZEN 50,000h@L80B10 | 5 YEARS GUARANTEE | CE





LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
2x12.5 W	2x14 W	36 V	2x350 mA	90	2700K	36°	2900lm	2300lm	V2SC-9273628P-WN
					3000K	36°	3000lm	2400lm	V2SC-9303628P-WN

Code Remark: P=(Phase Dim)



LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
2x12.5 W	2x14 W	36 V	2x350 mA	90	2700K	36°	2900lm	2300lm	V2SC-9273628P-BN
					3000K	36°	3000lm	2400lm	V2SC-9303628P-BN

Code Remark: P=(Phase Dim)



LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
2x12.5 W	2x14 W	36 V	2x350 mA	90	2700K	36°	2900lm	2300lm	V2SC-9273628P-CB
					3000K	36°	3000lm	2400lm	V2SC-9303628P-CB

Code Remark: P=(Phase Dim)




LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
2x12.5 W	2x14 W	36 V	2x350 mA	90	2700K	36°	2900lm	2300lm	V2SC-9273628P-GB
					3000K	36°	3000lm	2400lm	V2SC-9303628P-GB


Code Remark: P=(Phase Dim)

Light Distribution

2700K



3000K



NEKO / VIBES / V1RR


Recessed Spotlight

Incl. Phase Dim Driver

NEW



14W | CRI90 | 2700K 3000K | 36° | IP20 | CITIZEN 50,000h@L80B10 | 5 YEARS GUARANTEE | CE





LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
12.5 W	14 W	36 V	350 mA	90	2700K	36°	1400lm	1100lm	V1RR-9273614P-WW
					3000K	36°	1500lm	1200lm	V1RR-9303614P-WW

Code Remark: P=(Phase Dim)



LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
12.5 W	14 W	36 V	350 mA	90	2700K	36°	1400lm	1100lm	V1RR-9273614P-BB
					3000K	36°	1500lm	1200lm	V1RR-9303614P-BB

Code Remark: P=(Phase Dim)



LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
12.5 W	14 W	36 V	350 mA	90	2700K	36°	1400lm	1100lm	V1RR-9273614P-CB
					3000K	36°	1500lm	1200lm	V1RR-9303614P-CB

Code Remark: P=(Phase Dim)




LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
12.5 W	14 W	36 V	350 mA	90	2700K	36°	1400lm	1100lm	V1RR-9273614P-GB
					3000K	36°	1500lm	1200lm	V1RR-9303614P-GB


Code Remark: P=(Phase Dim)

Light Distribution

2700K



3000K



NEKO / VIBES / V2RR


Recessed Spotlight

Incl. Phase Dim Driver

NEW



28W | CRI90 | 2700K 3000K | 36° | IP20 | CITIZEN 50,000h@L80B10 | 5 YEARS GUARANTEE | CE





LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
2x12.5 W	2x14 W	36 V	2x350 mA	90	2700K	36°	2900lm	2300lm	V2RR-9273628P-WW
					3000K	36°	3000lm	2400lm	V2RR-9303628P-WW

Code Remark: P=(Phase Dim)



LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
2x12.5 W	2x14 W	36 V	2x350 mA	90	2700K	36°	2900lm	2300lm	V2RR-9273628P-BB
					3000K	36°	3000lm	2400lm	V2RR-9303628P-BB

Code Remark: P=(Phase Dim)



LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
2x12.5 W	2x14 W	36 V	2x350 mA	90	2700K	36°	2900lm	2300lm	V2RR-9273628P-CB
					3000K	36°	3000lm	2400lm	V2RR-9303628P-CB

Code Remark: P=(Phase Dim)




LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
2x12.5 W	2x14 W	36 V	2x350 mA	90	2700K	36°	2900lm	2300lm	V2RR-9273628P-GB
					3000K	36°	3000lm	2400lm	V2RR-9303628P-GB


Code Remark: P=(Phase Dim)

Light Distribution

2700K



3000K



NEKO / VIBES / V1SR


Recessed Spotlight

Incl. Phase Dim Driver

NEW



14W | CRI90 | 2700K 3000K | 36° | IP20 | CITIZEN 50,000h@L80B10 | 5 YEARS GUARANTEE | CE





LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
12.5 W	14 W	36 V	350 mA	90	2700K	36°	1400lm	1100lm	V1SR-9273614P-WW
					3000K	36°	1500lm	1200lm	V1SR-9303614P-WW

Code Remark: P=(Phase Dim)



LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
12.5 W	14 W	36 V	350 mA	90	2700K	36°	1400lm	1100lm	V1SR-9273614P-BB
					3000K	36°	1500lm	1200lm	V1SR-9303614P-BB

Code Remark: P=(Phase Dim)



LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
12.5 W	14 W	36 V	350 mA	90	2700K	36°	1400lm	1100lm	V1SR-9273614P-CB
					3000K	36°	1500lm	1200lm	V1SR-9303614P-CB

Code Remark: P=(Phase Dim)




LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
12.5 W	14 W	36 V	350 mA	90	2700K	36°	1400lm	1100lm	V1SR-9273614P-GB
					3000K	36°	1500lm	1200lm	V1SR-9303614P-GB


Code Remark: P=(Phase Dim)

Light Distribution

2700K



3000K



NEKO / VIBES / V2SR


Recessed Spotlight

Incl. Phase Dim Driver

NEW



28W | CRI90 | 2700K 3000K | 36° | IP20 | CITIZEN 50,000h@L80B10 | 5 YEARS GUARANTEE | CE





LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
2x12.5 W	2x14 W	36 V	2x350 mA	90	2700K	36°	2900lm	2300lm	V2SR-9273628P-WW
					3000K	36°	3000lm	2400lm	V2SR-9303628P-WW

Code Remark: P=(Phase Dim)



LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
2x12.5 W	2x14 W	36 V	2x350 mA	90	2700K	36°	2900lm	2300lm	V2SR-9273628P-BB
					3000K	36°	3000lm	2400lm	V2SR-9303628P-BB

Code Remark: P=(Phase Dim)



LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
2x12.5 W	2x14 W	36 V	2x350 mA	90	2700K	36°	2900lm	2300lm	V2SR-9273628P-CB
					3000K	36°	3000lm	2400lm	V2SR-9303628P-CB

Code Remark: P=(Phase Dim)




LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
2x12.5 W	2x14 W	36 V	2x350 mA	90	2700K	36°	2900lm	2300lm	V2SR-9273628P-GB
					3000K	36°	3000lm	2400lm	V2SR-9303628P-GB


Code Remark: P=(Phase Dim)

Light Distribution

2700K



3000K





PURE Art-C



PURE S-C


Ceiling Mounted



NEKO / PURE Art-C
Ceiling Mounted PURE Art



11W 15W | CRI90 | 2700K 3000K 4000K | 18° 24° 36° | CITIZEN 50,000h@L80B10 | UGR < 10 | IP20 | 5 YEARS GUARANTEE | CB CE





LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
9 W	11 W	36 V	250 mA	90	2700K	18°	850lm	640lm	PUAC-9271811F-WB
						24°	850lm	640lm	PUAC-9272411F-WB
						36°	850lm	640lm	PUAC-9273611F-WB
					3000K	18°	950lm	720lm	PUAC-9301811F-WB
						24°	950lm	720lm	PUAC-9302411F-WB
						36°	950lm	720lm	PUAC-9303611F-WB
					4000K	18°	1050lm	800lm	PUAC-9401811F-WB
						24°	1050lm	800lm	PUAC-9402411F-WB
						36°	1050lm	800lm	PUAC-9403611F-WB
13 W	15 W	36 V	350 mA	90	2700K	18°	1100lm	900lm	PUAC-9271815F-WB
						24°	1100lm	900lm	PUAC-9272415F-WB
						36°	1100lm	900lm	PUAC-9273615F-WB
					3000K	18°	1200lm	950lm	PUAC-9301815F-WB
						24°	1200lm	950lm	PUAC-9302415F-WB
						36°	1200lm	950lm	PUAC-9303615F-WB
					4000K	18°	1300lm	1000lm	PUAC-9401815F-WB
						24°	1300lm	1000lm	PUAC-9402415F-WB
						36°	1300lm	1000lm	PUAC-9403615F-WB



LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
9 W	11 W	36 V	250 mA	90	2700K	18°	850lm	640lm	PUAC-9271811F-BB
						24°	850lm	640lm	PUAC-9272411F-BB
						36°	850lm	640lm	PUAC-9273611F-BB
					3000K	18°	950lm	720lm	PUAC-9301811F-BB
						24°	950lm	720lm	PUAC-9302411F-BB
						36°	950lm	720lm	PUAC-9303611F-BB
					4000K	18°	1050lm	800lm	PUAC-9401811F-BB
						24°	1050lm	800lm	PUAC-9402411F-BB
						36°	1050lm	800lm	PUAC-9403611F-BB
13 W	15 W	36 V	350 mA	90	2700K	18°	1100lm	900lm	PUAC-9271815F-BB
						24°	1100lm	900lm	PUAC-9272415F-BB
						36°	1100lm	900lm	PUAC-9273615F-BB
					3000K	18°	1200lm	950lm	PUAC-9301815F-BB
						24°	1200lm	950lm	PUAC-9302415F-BB
						36°	1200lm	950lm	PUAC-9303615F-BB
					4000K	18°	1300lm	1000lm	PUAC-9401815F-BB
						24°	1300lm	1000lm	PUAC-9402415F-BB
						36°	1300lm	1000lm	PUAC-9403615F-BB

Code Remark: F=(ON-OFF) P=(Phase Dim)

Optional accessory




Honeycomb

Code for PUAC-9302511F-WB with Honeycomb
PUAC-9302511F-WB-**H**

NEKO / PURE S-C
Ceiling Mounted PURE S



15W 21W | CRI90 | 2700K 3000K 4000K | 15° 25° 30° | CITIZEN 50,000h@L80B10 | UGR < 10 | IP20 | 5 YEARS GUARANTEE | CB CE





LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
13 W	15 W	36 V	350 mA	90	2700K	15°	1400lm	1100lm	PUSC-9271515F-WB
						25°	1400lm	1100lm	PUSC-9272515F-WB
						30°	1400lm	1100lm	PUSC-9273015F-WB
					3000K	15°	1500lm	1200lm	PUSC-9301515F-WB
						25°	1500lm	1200lm	PUSC-9302515F-WB
						30°	1500lm	1200lm	PUSC-9303015F-WB
					4000K	15°	1600lm	1300lm	PUSC-9401515F-WB
						25°	1600lm	1300lm	PUSC-9402515F-WB
						30°	1600lm	1300lm	PUSC-9403015F-WB
18 W	21 W	36 V	500 mA	90	2700K	15°	1900lm	1500lm	PUSC-9271521F-WB
						25°	1900lm	1500lm	PUSC-9272521F-WB
						30°	1900lm	1500lm	PUSC-9273021F-WB
					3000K	15°	2000lm	1600lm	PUSC-9301521F-WB
						25°	2000lm	1600lm	PUSC-9302521F-WB
						30°	2000lm	1600lm	PUSC-9303021F-WB
					4000K	15°	2100lm	1700lm	PUSC-9401521F-WB
						25°	2100lm	1700lm	PUSC-9402521F-WB
						30°	2100lm	1700lm	PUSC-9403021F-WB



LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
13 W	15 W	36 V	350 mA	90	2700K	15°	1400lm	1100lm	PUSC-9271515F-BB
						25°	1400lm	1100lm	PUSC-9272515F-BB
						30°	1400lm	1100lm	PUSC-9273015F-BB
					3000K	15°	1500lm	1200lm	PUSC-9301515F-BB
						25°	1500lm	1200lm	PUSC-9302515F-BB
						30°	1500lm	1200lm	PUSC-9303015F-BB
					4000K	15°	1600lm	1300lm	PUSC-9401515F-BB
						25°	1600lm	1300lm	PUSC-9402515F-BB
						30°	1600lm	1300lm	PUSC-9403015F-BB
18 W	21 W	36 V	500 mA	90	2700K	15°	1900lm	1500lm	PUSC-9271521F-BB
						25°	1900lm	1500lm	PUSC-9272521F-BB
						30°	1900lm	1500lm	PUSC-9273021F-BB
					3000K	15°	2000lm	1600lm	PUSC-9301521F-BB
						25°	2000lm	1600lm	PUSC-9302521F-BB
						30°	2000lm	1600lm	PUSC-9303021F-BB
					4000K	15°	2100lm	1700lm	PUSC-9401521F-BB
						25°	2100lm	1700lm	PUSC-9402521F-BB
						30°	2100lm	1700lm	PUSC-9403021F-BB

Code Remark: F=(ON-OFF) P=(Phase Dim) D=(DALI Dim)

Optional accessory



Honeycomb

Code for PUSC-9302515F-WB with Honeycomb
PUSC-9302515F-WB-**H**

NEKO/PURE
Project: HSG Perfumery Stuttgart Airport, Germany








PURE

PURE Art	PURE S	PURE M
15W 950-1000lm	15W 1200-1300lm 21W 1600-1700lm	28W 2700-2900lm


Narrow, medium and wide beam angles are available for different lighting applications

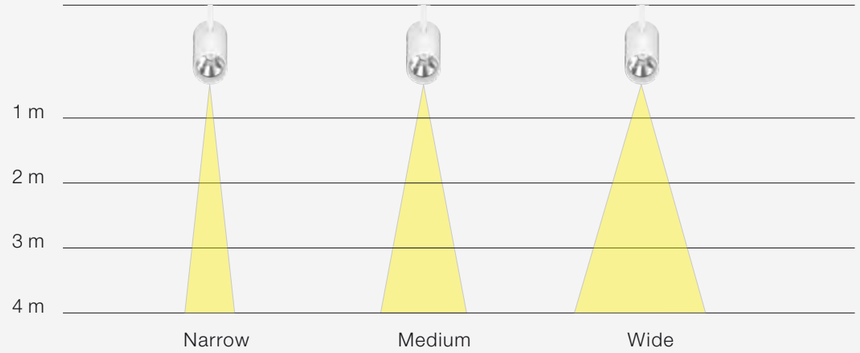

NEKO / PURE Art
LED Tracklight



15W | CRI90 | 2700K 3000K 4000K | 18° 24° 36° | CITIZEN 50,000h@L80B10 | UGR < 19 | IP20 | 5 YEARS GUARANTEE | CB | CE



LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
13 W	15 W	36 V	350 mA	90	2700K	18°	1100lm	900lm	PUA2- 9271815F-WB
						24°	1100lm	900lm	PUA2- 9272415F-WB
						36°	1100lm	900lm	PUA2- 9273615F-WB
					3000K	18°	1200lm	950lm	PUA2- 9301815F-WB
						24°	1200lm	950lm	PUA2- 9302415F-WB
						36°	1200lm	950lm	PUA2- 9303615F-WB
					4000K	18°	1300lm	1000lm	PUA2- 9401815F-WB
						24°	1300lm	1000lm	PUA2- 9402415F-WB
						36°	1300lm	1000lm	PUA2- 9403615F-WB



LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
13 W	15 W	36 V	350 mA	90	2700K	18°	1100lm	900lm	PUA2- 9271815F-BB
						24°	1100lm	900lm	PUA2- 9272415F-BB
						36°	1100lm	900lm	PUA2- 9273615F-BB
					3000K	18°	1200lm	950lm	PUA2- 9301815F-BB
						24°	1200lm	950lm	PUA2- 9302415F-BB
						36°	1200lm	950lm	PUA2- 9303615F-BB
					4000K	18°	1300lm	1000lm	PUA2- 9401815F-BB
						24°	1300lm	1000lm	PUA2- 9402415F-BB
						36°	1300lm	1000lm	PUA2- 9403615F-BB

Code Remark: F=(ON-OFF) P=(Phase Dim)

Optional accessory



Honeycomb

Code for PUA2-930 1815F-WB with Honeycomb
PUA2-930 1815F-WB-H

Track System




Compatible with GLOBAL / POWERGEAR 3-Circuit Track System

Project: VALO Hotel Helsinki, Finland

NEKO / PURE S
LED Tracklight



21W 15W | CRI90 | 2700K 3000K 4000K | 15° 25° 30° | CITIZEN 50,000h@L80B10 | UGR < 19 | IP20 | 5 YEARS GUARANTEE | CB | CE





LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
13 W	15 W	36 V	350 mA	90	2700K	15°	1400lm	1100lm	PUS1- 9271515F-WB
						25°	1400lm	1100lm	PUS1- 9272515F-WB
						30°	1400lm	1100lm	PUS1- 9273015F-WB
					3000K	15°	1500lm	1200lm	PUS1- 9301515F-WB
						25°	1500lm	1200lm	PUS1- 9302515F-WB
						30°	1500lm	1200lm	PUS1- 9303015F-WB
					3000K	15°	1600lm	1300lm	PUS1- 9401515F-WB
						25°	1600lm	1300lm	PUS1- 9402515F-WB
						30°	1600lm	1300lm	PUS1- 9403015F-WB
18 W	21 W	36 V	500 mA	90	2700K	15°	1900lm	1500lm	PUS2- 9271521F-WB
						25°	1900lm	1500lm	PUS2- 9272521F-WB
						30°	1900lm	1500lm	PUS2- 9273021F-WB
					3000K	15°	2000lm	1600lm	PUS2- 9301521F-WB
						25°	2000lm	1600lm	PUS2- 9302521F-WB
						30°	2000lm	1600lm	PUS2- 9303021F-WB
					4000K	15°	2100lm	1700lm	PUS2- 9401521F-WB
						25°	2100lm	1700lm	PUS2- 9402521F-WB
						30°	2100lm	1700lm	PUS2- 9403021F-WB



LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
13 W	15 W	36 V	350 mA	90	2700K	15°	1400lm	1100lm	PUS1- 9271515F-BB
						25°	1400lm	1100lm	PUS1- 9272515F-BB
						30°	1400lm	1100lm	PUS1- 9273015F-BB
					3000K	15°	1500lm	1200lm	PUS1- 9301515F-BB
						25°	1500lm	1200lm	PUS1- 9302515F-BB
						30°	1500lm	1200lm	PUS1- 9303015F-BB
					4000K	15°	1600lm	1300lm	PUS1- 9401515F-BB
						25°	1600lm	1300lm	PUS1- 9402515F-BB
						30°	1600lm	1300lm	PUS1- 9403015F-BB
18 W	21 W	36 V	500 mA	90	2700K	15°	1900lm	1500lm	PUS2- 9271521F-BB
						25°	1900lm	1500lm	PUS2- 9272521F-BB
						30°	1900lm	1500lm	PUS2- 9273021F-BB
					3000K	15°	2000lm	1600lm	PUS2- 9301521F-BB
						25°	2000lm	1600lm	PUS2- 9302521F-BB
						30°	2000lm	1600lm	PUS2- 9303021F-BB
					4000K	15°	2100lm	1700lm	PUS2- 9401521F-BB
						25°	2100lm	1700lm	PUS2- 9402521F-BB
						30°	2100lm	1700lm	PUS2- 9403021F-BB

Code Remark: F=(ON-OFF) P=(Phase Dim)

Optional accessory


Honeycomb


Code for PUS1-930 1515F-WB with Honeycomb
PUS1-930 1515F-WB-H

Track System



Compatible with GLOBAL / POWERGEAR 3-Circuit Track System

21W 15W | CRI90 | 2700K 3000K 4000K | 15° 25° 30° | CITIZEN 50,000h@L80B10 | GLOBAL | UGR < 19 | IP20 | DALI | 5 YEARS GUARANTEE | CB | CE





LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
13 W	15 W	36 V	350 mA	90	2700K	15°	1400lm	1100lm	PUS1- 9271515D-WB
						25°	1400lm	1100lm	PUS1- 9272515D-WB
						30°	1400lm	1100lm	PUS1- 9273015D-WB
					3000K	15°	1500lm	1200lm	PUS1- 9301515D-WB
						25°	1500lm	1200lm	PUS1- 9302515D-WB
						30°	1500lm	1200lm	PUS1- 9303015D-WB
					4000K	15°	1600lm	1300lm	PUS1- 9401515D-WB
						25°	1600lm	1300lm	PUS1- 9402515D-WB
						30°	1600lm	1300lm	PUS1- 9403015D-WB
18 W	21 W	36 V	500 mA	90	2700K	15°	1900lm	1500lm	PUS2- 9271521D-WB
						25°	1900lm	1500lm	PUS2- 9272521D-WB
						30°	1900lm	1500lm	PUS2- 9273021D-WB
					3000K	15°	2000lm	1600lm	PUS2- 9301521D-WB
						25°	2000lm	1600lm	PUS2- 9302521D-WB
						30°	2000lm	1600lm	PUS2- 9303021D-WB
					4000K	15°	2100lm	1700lm	PUS2- 9401521D-WB
						25°	2100lm	1700lm	PUS2- 9402521D-WB
						30°	2100lm	1700lm	PUS2- 9403021D-WB



LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
13 W	15 W	36 V	350 mA	90	2700K	15°	1400lm	1100lm	PUS1- 9271515D-BB
						25°	1400lm	1100lm	PUS1- 9272515D-BB
						30°	1400lm	1100lm	PUS1- 9273015D-BB
					3000K	15°	1500lm	1200lm	PUS1- 9301515D-BB
						25°	1500lm	1200lm	PUS1- 9302515D-BB
						30°	1500lm	1200lm	PUS1- 9303015D-BB
					4000K	15°	1600lm	1300lm	PUS1- 9401515D-BB
						25°	1600lm	1300lm	PUS1- 9402515D-BB
						30°	1600lm	1300lm	PUS1- 9403015D-BB
18 W	21 W	36 V	500 mA	90	2700K	15°	1900lm	1500lm	PUS2- 9271521D-BB
						25°	1900lm	1500lm	PUS2- 9272521D-BB
						30°	1900lm	1500lm	PUS2- 9273021D-BB
					3000K	15°	2000lm	1600lm	PUS2- 9301521D-BB
						25°	2000lm	1600lm	PUS2- 9302521D-BB
						30°	2000lm	1600lm	PUS2- 9303021D-BB
					4000K	15°	2100lm	1700lm	PUS2- 9401521D-BB
						25°	2100lm	1700lm	PUS2- 9402521D-BB
						30°	2100lm	1700lm	PUS2- 9403021D-BB

Code Remark: D=(DALI Dim)

Optional accessory


Honeycomb

Code for PUS1-930 1515D-WB with Honeycomb
PUS1-930 1515D-WB-H

Track System




Compatible with GLOBAL 3-Circuit Track System

NEKO / PURE M
LED Tracklight



28W | CRI90 | 2700K 3000K 4000K | 18° 30° 45° | CITIZEN 50,000h@L80B10 | UGR < 19 | IP 20 | CB CE





LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
25 W	28 W	36 V	700 mA	90	2700K	18°	3200lm	2500lm	PUM1-9271828F-WB
						30°	3200lm	2500lm	PUM1-9273028F-WB
						45°	3200lm	2500lm	PUM1-9274528F-WB
					3000K	18°	3400lm	2700lm	PUM1-9301828F-WB
						30°	3400lm	2700lm	PUM1-9303028F-WB
						45°	3400lm	2700lm	PUM1-9304528F-WB
					4000K	18°	3600lm	2900lm	PUM1-9401828F-WB
						30°	3600lm	2900lm	PUM1-9403028F-WB
						45°	3600lm	2900lm	PUM1-9404528F-WB



LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
25 W	28 W	36 V	700 mA	90	2700K	18°	3200lm	2500lm	PUM1-9271828F-BB
						30°	3200lm	2500lm	PUM1-9273028F-BB
						45°	3200lm	2500lm	PUM1-9274528F-BB
					3000K	18°	3400lm	2700lm	PUM1-9301828F-BB
						30°	3400lm	2700lm	PUM1-9303028F-BB
						45°	3400lm	2700lm	PUM1-9304528F-BB
					4000K	18°	3600lm	2900lm	PUM1-9401828F-BB
						30°	3600lm	2900lm	PUM1-9403028F-BB
						45°	3600lm	2900lm	PUM1-9404528F-BB

Code Remark: F=(ON-OFF)

Optional accessory



Honeycomb


Code for PUM1-930 1828F-WB with Honeycomb
PUM1-930 1828F-WB-H

Track System



Compatible with GLOBAL / POWERGEAR 3-Circuit Track System

28W | CRI90 | 2700K 3000K 4000K | 18° 30° 45° | CITIZEN 50,000h@L80B10 | GLOBAL | UGR < 19 | IP 20 | DALI | CB CE





LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
25 W	28 W	36 V	700 mA	90	2700K	18°	3200lm	2500lm	PUM1-9271828D-WB
						30°	3200lm	2500lm	PUM1-9273028D-WB
						45°	3200lm	2500lm	PUM1-9274528D-WB
					3000K	18°	3400lm	2700lm	PUM1-9301828D-WB
						30°	3400lm	2700lm	PUM1-9303028D-WB
						45°	3400lm	2700lm	PUM1-9304528D-WB
					4000K	18°	3600lm	2900lm	PUM1-9401828D-WB
						30°	3600lm	2900lm	PUM1-9403028D-WB
						45°	3600lm	2900lm	PUM1-9404528D-WB



LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
25 W	28 W	36 V	700 mA	90	2700K	18°	3200lm	2500lm	PUM1-9271828D-BB
						30°	3200lm	2500lm	PUM1-9273028D-BB
						45°	3200lm	2500lm	PUM1-9274528D-BB
					3000K	18°	3400lm	2700lm	PUM1-9301828D-BB
						30°	3400lm	2700lm	PUM1-9303028D-BB
						45°	3400lm	2700lm	PUM1-9304528D-BB
					4000K	18°	3600lm	2900lm	PUM1-9401828D-BB
						30°	3600lm	2900lm	PUM1-9403028D-BB
						45°	3600lm	2900lm	PUM1-9404528D-BB

Code Remark: D=(DALI Dim)

Optional accessory

Honeycomb

Code for PUM1-930 1828D-WB with Honeycomb
PUM1-930 1828D-WB-H

Track System

Compatible with GLOBAL 3-Circuit Track System

NEKO / ROXY

In-track Driver LED Tracklight



ROXY Art

15W 950lm-1000lm

ROXY S

15W 1200lm-1300lm
21W 1600lm-1700lm

ROXY K

28W 2400lm-2600lm






On-Off Version



15W | CRI90 | 2700K 3000K 4000K | 18° 24° 36° 50° | CITIZEN 50,000h@L80B10 | UGR < 19 | IP 20 | 5 YEARS GUARANTEE | CB | CE





LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
13 W	15 W	36 V	350 mA	90	2700K	18°	1200lm	900lm	ROA1-9271815F-WB
						24°	1200lm	900lm	ROA1-9272415F-WB
						36°	1200lm	900lm	ROA1-9273615F-WB
						50°	1200lm	900lm	ROA1-9275015F-WB
					3000K	18°	1300lm	950lm	ROA1-9301815F-WB
						24°	1300lm	950lm	ROA1-9302415F-WB
						36°	1300lm	950lm	ROA1-9303615F-WB
						50°	1300lm	950lm	ROA1-9306015F-WB
					4000K	18°	1400lm	1000lm	ROA1-9401815F-WB
						24°	1400lm	1000lm	ROA1-9402415F-WB
						36°	1400lm	1000lm	ROA1-9403615F-WB
						50°	1400lm	1000lm	ROA1-9405015F-WB




LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
13 W	15 W	36 V	350 mA	90	2700K	18°	1200lm	900lm	ROA1-9271815F-BB
						24°	1200lm	900lm	ROA1-9272415F-BB
						36°	1200lm	900lm	ROA1-9273615F-BB
						50°	1200lm	900lm	ROA1-9275015F-BB
					3000K	18°	1300lm	950lm	ROA1-9301815F-BB
						24°	1300lm	950lm	ROA1-9302415F-BB
						36°	1300lm	950lm	ROA1-9303615F-BB
						50°	1300lm	950lm	ROA1-9306015F-BB
					4000K	18°	1400lm	1000lm	ROA1-9401815F-BB
						24°	1400lm	1000lm	ROA1-9402415F-BB
						36°	1400lm	1000lm	ROA1-9403615F-BB
						50°	1400lm	1000lm	ROA1-9405015F-BB

Code Remark: F=(ON-OFF)

DALI Dim Version



15W | CRI90 | 2700K 3000K 4000K | 18° 24° 36° 50° | CITIZEN 50,000h@L80B10 | UGR < 19 | IP 20 | 5 YEARS GUARANTEE | CB | CE | DALI 2





LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
13 W	15 W	36 V	350 mA	90	2700K	18°	1200lm	900lm	ROA1-9271815D-WB
						24°	1200lm	900lm	ROA1-9272415D-WB
						36°	1200lm	900lm	ROA1-9273615D-WB
						50°	1200lm	900lm	ROA1-9275015D-WB
					3000K	18°	1300lm	950lm	ROA1-9301815D-WB
						24°	1300lm	950lm	ROA1-9302415D-WB
						36°	1300lm	950lm	ROA1-9303615D-WB
						50°	1300lm	950lm	ROA1-9306015D-WB
					4000K	18°	1400lm	1000lm	ROA1-9401815D-WB
						24°	1400lm	1000lm	ROA1-9402415D-WB
						36°	1400lm	1000lm	ROA1-9403615D-WB
						50°	1400lm	1000lm	ROA1-9405015D-WB



LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
13 W	15 W	36 V	350 mA	90	2700K	18°	1200lm	900lm	ROA1-9271815D-BB
						24°	1200lm	900lm	ROA1-9272415D-BB
						36°	1200lm	900lm	ROA1-9273615D-BB
						50°	1200lm	900lm	ROA1-9275015D-BB
					3000K	18°	1300lm	950lm	ROA1-9301815D-BB
						24°	1300lm	950lm	ROA1-9302415D-BB
						36°	1300lm	950lm	ROA1-9303615D-BB
						50°	1300lm	950lm	ROA1-9306015D-BB
					4000K	18°	1400lm	1000lm	ROA1-9401815D-BB
						24°	1400lm	1000lm	ROA1-9402415D-BB
						36°	1400lm	1000lm	ROA1-9403615D-BB
						50°	1400lm	1000lm	ROA1-9405015D-BB

Code Remark: D=(DALI Dim)

Optional accessory



Honeycomb

Code for ROA1-930 1815D-WB with Honeycomb
ROA1-930 1815D-WB-H

Track System



Compatible with GLOBAL / POWERGEAR 3-Circuit Track System

NEKO / ROXY S


Standard Shop Lighting

In-track Driver LED Tracklight

On-Off Version



15W 21W | CRI90 | 2700K 3000K 4000K | 15° 30° 50° | CITIZEN 50,000h@L80B10 | UGR < 19 | IP 20 | 5 YEARS GUARANTEE | CB | CE



LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
13 W	15 W	36 V	350 mA	90	2700K	15°	1400lm	1100lm	ROS1-9271515F-WB
						30°	1400lm	1100lm	ROS1-9273015F-WB
						50°	1400lm	850lm	ROS1-9275015F-WB
					3000K	15°	1500lm	1200lm	ROS1-9301515F-WB
						30°	1500lm	1200lm	ROS1-9303015F-WB
						50°	1500lm	900lm	ROS1-9305015F-WB
					4000K	15°	1600lm	1300lm	ROS1-9401515F-WB
						30°	1600lm	1300lm	ROS1-9403015F-WB
						50°	1600lm	1000lm	ROS1-9405015F-WB
18 W	21 W	36 V	500 mA	90	2700K	15°	1900lm	1500lm	ROS2-9271521F-WB
						30°	1900lm	1500lm	ROS2-9273021F-WB
						50°	1900lm	1100lm	ROS2-9275021F-WB
					3000K	15°	2000lm	1600lm	ROS2-9301521F-WB
						30°	2000lm	1600lm	ROS2-9303021F-WB
						50°	2000lm	1200lm	ROS2-9305021F-WB
					4000K	15°	2100lm	1700lm	ROS2-9401821F-WB
						30°	2100lm	1700lm	ROS2-9403021F-WB
						50°	2100lm	1300lm	ROS2-9405021F-WB




LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
13 W	15 W	36 V	350 mA	90	2700K	15°	1400lm	1100lm	ROS1-9271515F-BB
						30°	1400lm	1100lm	ROS1-9273015F-BB
						50°	1400lm	850lm	ROS1-9275015F-BB
					3000K	15°	1500lm	1200lm	ROS1-9301515F-BB
						30°	1500lm	1200lm	ROS1-9303015F-BB
						50°	1500lm	900lm	ROS1-9305015F-BB
					4000K	15°	1600lm	1300lm	ROS1-9401515F-BB
						30°	1600lm	1300lm	ROS1-9403015F-BB
						50°	1600lm	1000lm	ROS1-9405015F-BB
18 W	21 W	36 V	500 mA	90	2700K	15°	1900lm	1500lm	ROS2-9271521F-BB
						30°	1900lm	1500lm	ROS2-9273021F-BB
						50°	1900lm	1100lm	ROS2-9275021F-BB
					3000K	15°	2000lm	1600lm	ROS2-9301521F-BB
						30°	2000lm	1600lm	ROS2-9303021F-BB
						50°	2000lm	1200lm	ROS2-9305021F-BB
					4000K	15°	2100lm	1700lm	ROS2-9401821F-BB
						30°	2100lm	1700lm	ROS2-9403021F-BB
						50°	2100lm	1300lm	ROS2-9405021F-BB

Code Remark: F=(ON-OFF)

DALI Dim Version



15W 21W | CRI90 | 2700K 3000K 4000K | 15° 30° 50° | CITIZEN 50,000h@L80B10 | UGR < 19 | IP 20 | 5 YEARS GUARANTEE | CB | CE | DALI 2



LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
13 W	15 W	36 V	350 mA	90	2700K	15°	1400lm	1100lm	ROS1-9271515D-WB
						30°	1400lm	1100lm	ROS1-9273015D-WB
						50°	1400lm	850lm	ROS1-9275015D-WB
					3000K	15°	1500lm	1200lm	ROS1-9301515D-WB
						30°	1500lm	1200lm	ROS1-9303015D-WB
						50°	1500lm	900lm	ROS1-9305015D-WB
					4000K	15°	1600lm	1300lm	ROS1-9401515D-WB
						30°	1600lm	1300lm	ROS1-9403015D-WB
						50°	1600lm	1000lm	ROS1-9405015D-WB
18 W	21 W	36 V	500 mA	90	2700K	15°	1900lm	1500lm	ROS2-9271521D-WB
						30°	1900lm	1500lm	ROS2-9273021D-WB
						50°	1900lm	1500lm	ROS2-9275021D-WB
					3000K	15°	2000lm	1600lm	ROS2-9301521D-WB
						30°	2000lm	1600lm	ROS2-9303021D-WB
						50°	2000lm	1600lm	ROS2-9305021D-WB
					4000K	15°	2100lm	1700lm	ROS2-9401821D-WB
						30°	2100lm	1700lm	ROS2-9403021D-WB
						50°	2100lm	1700lm	ROS2-9405021D-WB



LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
13 W	15 W	36 V	350 mA	90	2700K	15°	1400lm	1100lm	ROS1-9271515D-BB
						30°	1400lm	1100lm	ROS1-9273015D-BB
						50°	1400lm	850lm	ROS1-9275015D-BB
					3000K	15°	1500lm	1200lm	ROS1-9301515D-BB
						30°	1500lm	1200lm	ROS1-9303015D-BB
						50°	1500lm	900lm	ROS1-9305015D-BB
					4000K	15°	1600lm	1300lm	ROS1-9401515D-BB
						30°	1600lm	1300lm	ROS1-9403015D-BB
						50°	1600lm	1000lm	ROS1-9405015F-BB
18 W	21 W	36 V	500 mA	90	2700K	15°	1900lm	1500lm	ROS2-9271521D-BB
						30°	1900lm	1500lm	ROS2-9273021D-BB
						50°	1900lm	1100lm	ROS2-9275021D-BB
					3000K	15°	2000lm	1600lm	ROS2-9301521D-BB
						30°	2000lm	1600lm	ROS2-9303021D-BB
						50°	2000lm	1200lm	ROS2-9305021D-BB
					4000K	15°	2100lm	1700lm	ROS2-9401821D-BB
						30°	2100lm	1700lm	ROS2-9403021D-BB
						50°	2100lm	1300lm	ROS2-9405021D-BB

Code Remark: D=(DALI Dim)

Optional accessory



Honeycomb

Code for ROS1-930 2515D-WB with **H**oneycomb
ROS1-930 2515D-WB-**H**

Track System



Compatible with GLOBAL / POWERGEAR 3-Circuit Track System

NEKO / ROXY K


High Height Ceiling Shop Lighting

In-track Driver LED Tracklight

On-Off Version



28W | CRI90 | 2700K 3000K 4000K | 20° 35° 55° | CITIZEN 50,000h@L80B10 | UGR < 19 | IP 20 | CB | CE





LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
25 W	28 W	36 V	700 mA	90	2700K	20°	2500lm	2000lm	ROK1-9272028F-WB
						35°	2500lm	2200lm	ROK1-9273528F-WB
						55°	2500lm	2200lm	ROK1-9275528F-WB
					3000K	20°	2700lm	2200lm	ROK1-9302028F-WB
						35°	2700lm	2400lm	ROK1-9303528F-WB
						55°	2700lm	2400lm	ROK1-9305528F-WB
					4000K	20°	2900lm	2400lm	ROK1-9402028F-WB
						35°	2900lm	2600lm	ROK1-9403528F-WB
						55°	2900lm	2600lm	ROK1-9405528F-WB




LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
25 W	28 W	36 V	700 mA	90	2700K	20°	2500lm	2000lm	ROK1-9272028F-BB
						35°	2500lm	2200lm	ROK1-9273528F-BB
						55°	2500lm	2200lm	ROK1-9275528F-BB
					3000K	20°	2700lm	2200lm	ROK1-9302028F-BB
						35°	2700lm	2400lm	ROK1-9303528F-BB
						55°	2700lm	2400lm	ROK1-9305528F-BB
					4000K	20°	2900lm	2400lm	ROK1-9402028F-BB
						35°	2900lm	2600lm	ROK1-9403528F-BB
						55°	2900lm	2600lm	ROK1-9405528F-BB

Code Remark: F=(ON-OFF)

DALI Dim Version



28W | CRI90 | 2700K 3000K 4000K | 20° 35° 55° | CITIZEN 50,000h@L80B10 | UGR < 19 | IP 20 | CB | CE | DALI 2





LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
25 W	28 W	36 V	700 mA	90	2700K	20°	2500lm	2000lm	ROK1-9272028D-WB
						35°	2500lm	2200lm	ROK1-9273528D-WB
						55°	2500lm	2200lm	ROK1-9275528D-WB
					3000K	20°	2700lm	2200lm	ROK1-9302028D-WB
						35°	2700lm	2400lm	ROK1-9303528D-WB
						55°	2700lm	2400lm	ROK1-9305528D-WB
					4000K	20°	2900lm	2400lm	ROK1-9402028D-WB
						35°	2900lm	2600lm	ROK1-9403528D-WB
						55°	2900lm	2600lm	ROK1-9405528D-WB



LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
25 W	28 W	36 V	700 mA	90	2700K	20°	2500lm	2000lm	ROK1-9272028D-BB
						35°	2500lm	2200lm	ROK1-9273528D-BB
						55°	2500lm	2200lm	ROK1-9275528D-BB
					3000K	20°	2700lm	2200lm	ROK1-9302028D-BB
						35°	2700lm	2400lm	ROK1-9303528D-BB
						55°	2700lm	2400lm	ROK1-9305528D-BB
					4000K	20°	2900lm	2400lm	ROK1-9402028D-BB
						35°	2900lm	2600lm	ROK1-9403528D-BB
						55°	2900lm	2600lm	ROK1-9405528D-BB

Code Remark: D=(DALI Dim)

Optional accessory



Honeycomb

Code for ROK1-930 3528F-WB with **H**oneycomb
ROK1-930 3528F-WB-**H**

Track System



Compatible with GLOBAL / POWERGEAR 3-Circuit Track System

NEKO / ROXY-Z

In-track Driver LED Tracklight
Beam Angle Zooming Version



ROXY Art-Z


15W 1000lm-1200lm
20°-35° Zooming
35°-60° Zooming




ROXY S-Z

15W 1200lm-1400lm
21W 1600lm-1800lm
18°-35° Zooming
35°-60° Zooming





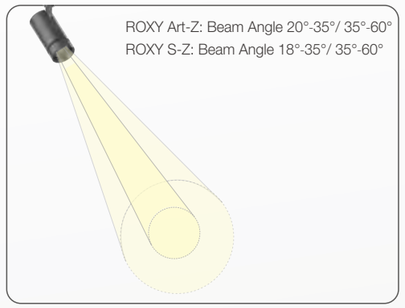



18°-60° Zooming




NEKO / ROXY Art-Z

In-track Driver LED Tracklight
Beam Angle Zooming Version



15W | CRI90 | 2700K 3000K 4000K | 20°~35° | 35°~60° | CITIZEN 50,000h@L80B10 | UGR < 19 | IP20 | 5 YEARS GUARANTEE | CB | CE | DALI 2





LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
13 W	15 W	36 V	350 mA	90	2700K	20°~35°	1200lm	1000lm	ROA1-927Z315F-WB
					3000K	20°~35°	1300lm	1100lm	ROA1-930Z315F-WB
					4000K	20°~35°	1400lm	1200lm	ROA1-940Z315F-WB
					2700K	35°~60°	1200lm	950lm	ROA1-927Z615F-WB
					3000K	35°~60°	1300lm	1000lm	ROA1-930Z615F-WB
					4000K	35°~60°	1400lm	1100lm	ROA1-940Z615F-WB



LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
13 W	15 W	36 V	350 mA	90	2700K	20°~35°	1200lm	1000lm	ROA1-927Z315F-BB
					3000K	20°~35°	1300lm	1100lm	ROA1-930Z315F-BB
					4000K	20°~35°	1400lm	1200lm	ROA1-940Z315F-BB
					2700K	35°~60°	1200lm	950lm	ROA1-927Z615F-BB
					3000K	35°~60°	1300lm	1000lm	ROA1-930Z615F-BB
					4000K	35°~60°	1400lm	1100lm	ROA1-940Z615F-BB

Code Remark: F=(ON-OFF) D=(DALI Dim)

Optional accessory



Honeycomb

Code for ROA1-930Z315F-WB with Honeycomb
ROA1-930Z315F-WB-H

Track System




Compatible with GLOBAL / POWERGEAR 3-Circuit Track System.

NEKO / ROXY S-Z

In-track Driver LED Tracklight
Beam Angle Zooming Version



15W 21W | CRI90 | 2700K 3000K 4000K | 18°~35° | 35°~60° | CITIZEN 50,000h@L80B10 | UGR < 19 | IP20 | 5 YEARS GUARANTEE | CB | CE | DALI 2

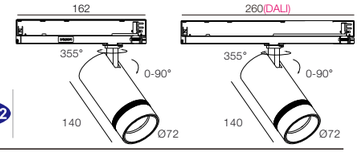



LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
13 W	15 W	36 V	350 mA	90	2700K	18°~35°	1400lm	1200lm	ROS1-927Z315F-WB
					3000K	18°~35°	1500lm	1300lm	ROS1-930Z315F-WB
					4000K	18°~35°	1600lm	1400lm	ROS1-940Z315F-WB
					2700K	35°~60°	1400lm	1100lm	ROS1-927Z615F-WB
					3000K	35°~60°	1500lm	1200lm	ROS1-930Z615F-WB
					4000K	35°~60°	1600lm	1300lm	ROS1-940Z615F-WB
18 W	21 W	36 V	500 mA	90	2700K	18°~35°	1900lm	1600lm	ROS2-927Z321F-WB
					3000K	18°~35°	2000lm	1700lm	ROS2-930Z321F-WB
					4000K	18°~35°	2100lm	1800lm	ROS2-940Z321F-WB
					2700K	35°~60°	1900lm	1500lm	ROS2-927Z621F-WB
					3000K	35°~60°	2000lm	1600lm	ROS2-930Z621F-WB
					4000K	35°~60°	2100lm	1700lm	ROS2-940Z621F-WB



LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
13 W	15 W	36 V	350 mA	90	2700K	18°~35°	1400lm	1200lm	ROS1-927Z315F-BB
					3000K	18°~35°	1500lm	1300lm	ROS1-930Z315F-BB
					4000K	18°~35°	1600lm	1400lm	ROS1-940Z315F-BB
					2700K	35°~60°	1400lm	1100lm	ROS1-927Z615F-BB
					3000K	35°~60°	1500lm	1200lm	ROS1-930Z615F-BB
					4000K	35°~60°	1600lm	1300lm	ROS1-940Z615F-BB
18 W	21 W	36 V	500 mA	90	2700K	18°~35°	1900lm	1600lm	ROS2-927Z321F-BB
					3000K	18°~35°	2000lm	1700lm	ROS2-930Z321F-BB
					4000K	18°~35°	2100lm	1800lm	ROS2-940Z321F-BB
					2700K	35°~60°	1900lm	1500lm	ROS2-927Z621F-BB
					3000K	35°~60°	2000lm	1600lm	ROS2-930Z621F-BB
					4000K	35°~60°	2100lm	1700lm	ROS2-940Z621F-BB

Code Remark: F=(ON-OFF) D=(DALI Dim)

Optional accessory



Honeycomb

Code for ROS1-930Z315F-WB with Honeycomb
ROS1-930Z315F-WB-H

Track System



Compatible with GLOBAL / POWERGEAR 3-Circuit Track System.

NEKO / INLINE

Single Phase LED Tracklight System

Incl. Phase Dim Driver
Direct Connection 230V – No External Driver





INLINE ST-11W



INLINE SP-8W

NEKO / INLINE

Single Phase LED Tracklight System

Incl. Phase Dim Driver
Direct Connection 230V – No External Driver



INLINE ST-11W
11W, 36°, 700lm at CRI>90 2700K




INLINE SP-8W
8W, 36°, 500lm at CRI>90 2700K

NEKO / INLINE

Single Phase LED Tracklight System



11W | CRI90 | 2700K | 36° | CITIZEN 50,000h@L80B50 | UGR < 19 | IP20 | 5 YEARS GUARANTEE | CE





LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
9 W	11 W	18 V	500 mA	90	2700K	36°	900lm	700lm	ILST-9273611P-WB


Code Remark: P=(Phase Dim)



LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
9 W	11 W	18 V	500 mA	90	2700K	36°	900lm	700lm	ILST-9273611P-BB


Code Remark: P=(Phase Dim)

Track System




Compatible with NEKO INLINE Single Circuit Track System

Light Distribution



8W | CRI90 | 2700K | 36° | CITIZEN 50,000h@L80B50 | UGR < 19 | IP20 | 5 YEARS GUARANTEE | CE





LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
6 W	8 W	18 V	350 mA	90	2700K	36°	700lm	500lm	ILSP-9273608P-WB


Code Remark: P=(Phase Dim)



LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
6 W	8 W	18 V	350 mA	90	2700K	36°	700lm	500lm	ILSP-9273608P-BB


Code Remark: P=(Phase Dim)

Track System



Compatible with NEKO INLINE Single Circuit Track System


Light Distribution



NEKO / INLINE

Single Phase LED Tracklight System




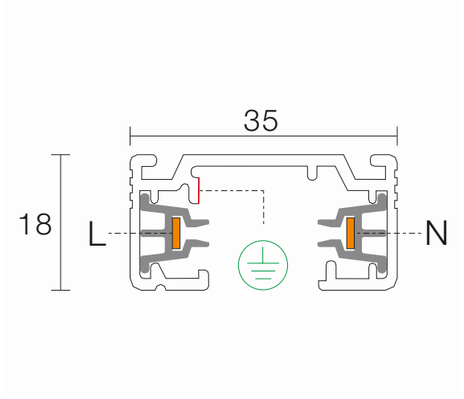

Quick Info


- Aluminum extrusion track shell
- 2 pieces copper busbars, insulated by plastic
- Single circuit track system for 16A (3500W) input
- Track length available in 1000mm and 2000mm
- Various connectors and accessories available for building comprehensive lighting system
- Color finish in White(RAL9003) or Black(RAL9005)
- Surface mounted

Load of Track




Connection Diagram


Example A:

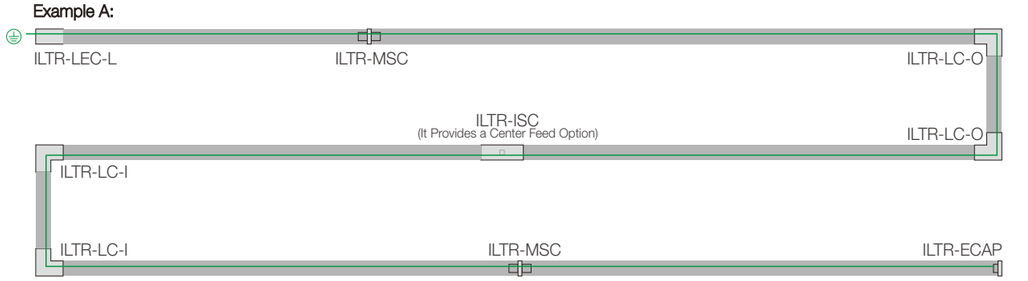

Example B:

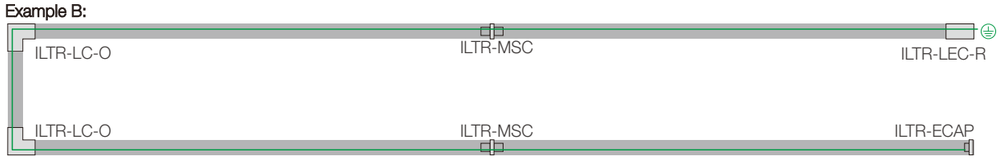






INLINE Single Phase Track

Description	Code/Model
INLINE Single Phase Track, 1000mm Length, White	ILTR-1000-FP-W
INLINE Single Phase Track, 1000mm Length, Black	ILTR-1000-FP-W
INLINE Single Phase Track, 2000mm Length, White	ILTR-2000-FP-W
INLINE Single Phase Track, 2000mm Length, Black	ILTR-2000-FP-B






Live End Connector

Description	Code/Model
Live End Connector, Left, White	ILTR-LEC-L-W
Live End Connector, Left, Black	ILTR-LEC-L-B
Live End Connector, Right, White	ILTR-LEC-R-W
Live End Connector, Right, Black	ILTR-LEC-R-B






I Straight Connector

Description	Code/Model
I Straight Connector, It Provides a Center Feed Option, White	ILTR-ISC-W
I Straight Connector, It Provides a Center Feed Option, Black	ILTR-ISC-B






L Connector

Description	Code/Model
L Connector, Outer, White	ILTR-LC-O-W
L Connector, Outer, Black	ILTR-LC-O-B
L Connector, Inner, White	ILTR-LC-I-W
L Connector, Inner, Black	ILTR-LC-I-B





Mini Straight Connector

Description	Code/Model
Mini Straight Connector, White	ILTR-MSC-W
Mini Straight Connector, Black	ILTR-MSC-B





Endcap

Description	Code/Model
Endcap, White	ILTR-ECAP-W
Endcap, Black	ILTR-ECAP-B





Small KOI SKOI-5W




Large KOI LKOI-18W

No Visible Screws
Slim Architectural Design
Powder Coated Matt Finish
Incl. Phase Dim Driver

NEKO / Small KOI
LED Wall Light




5W | CRI90 | 3000K | ZIGEN 50,000h@L80B10 | IP20 | 5 YEARS GUARANTEE | CE





LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
5 W	7 W	9 V	500 mA	90	3000K	Up&Down	600lm	450lm	SKOI-930UD05F-WW

Code Remark: F=(ON-OFF)




LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
5 W	7 W	9 V	500 mA	90	3000K	Up&Down	600lm	280lm	SKOI-930UD05F-BB

Code Remark: F=(ON-OFF)




9W | CRI90 | 2000K-3000K Dim to Warm | ZIGEN 50,000h@L80B10 | IP20 | 5 YEARS GUARANTEE | CE





LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
9 W	11 W	36 V	250 mA	90	2000K-3000K	Up&Down	950lm	650lm	SKOI-9D3UD09P-WW

Code Remark: P=(Phase Dim)



LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
9 W	11 W	36 V	250 mA	90	2000K-3000K	Up&Down	950lm	400lm	SKOI-9D3UD09P-BB

Code Remark: P=(Phase Dim)

DIM to WARM




NEKO / Large KOI
LED Wall Light





18W | CRI90 | 3000K | ZIGEN 50,000h@L80B10 | IP20 | 5 YEARS GUARANTEE | CE





LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
18 W	20 W	36 V	500 mA	90	3000K	30°	2100lm	1900lm	LKOI-930UD18P-WW

Code Remark: P=(Phase Dim)



LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
18 W	20 W	36 V	500 mA	90	3000K	30°	2100lm	1300lm	LKOI-930UD18P-BB

Code Remark: P=(Phase Dim)

NEKO / VANILLA
360° Circular Neon Strip Lighting

NEW

Quick Info:

Wattage: 14.5W/ M

Voltage: 24VDC

IP65

CRI>90


Color Temperature: 3000K/ 4000K


Diameter: Ø23mm

Maximum Length: 5M (Arbitrary Cutting)

360° Light Emission

Output lumen: 1000lm/ M @3000K

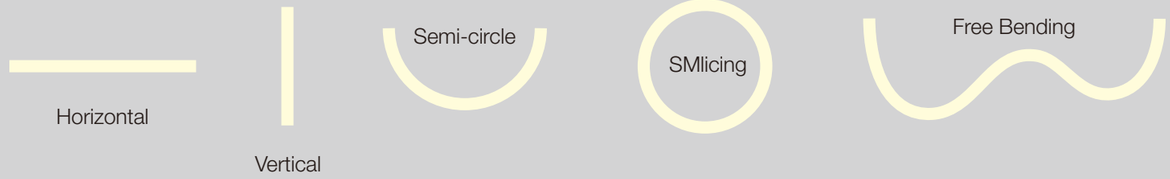

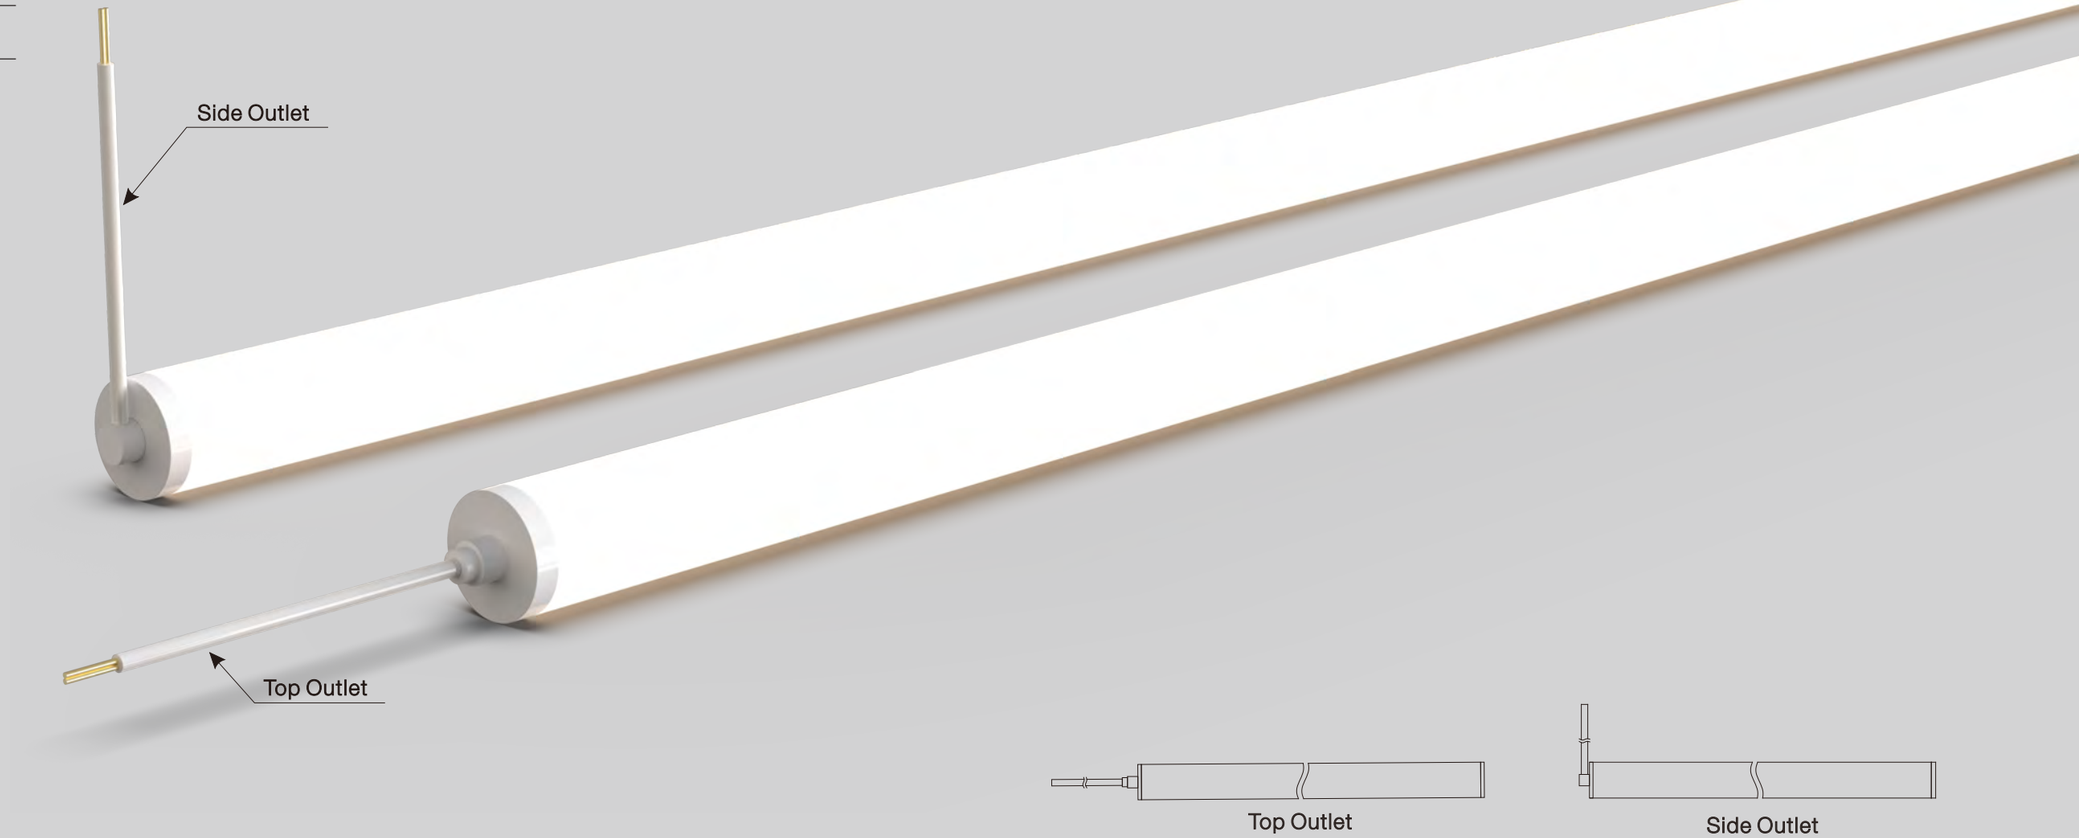

Top Outlet

Side Outlet

NEKO / VANILLA
360° Circular Neon Strip Lighting

NEW

Semi-Recessed


Surface Mounted

Surface Mounted

Suspension

Surface Mounted


Housing/ Canopy Color:

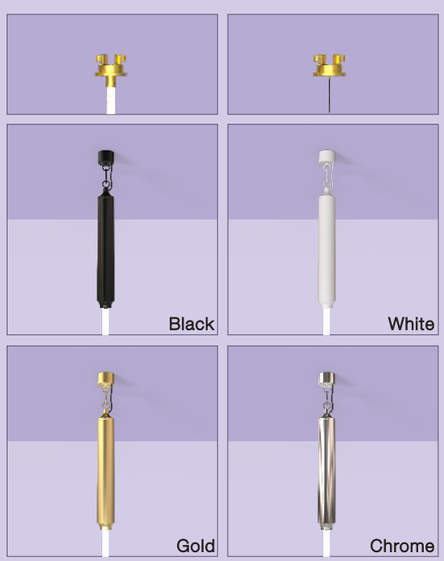

NEKO / VANILLA / VANF-C5A3

360° Circular Neon Strip Lighting


NEW

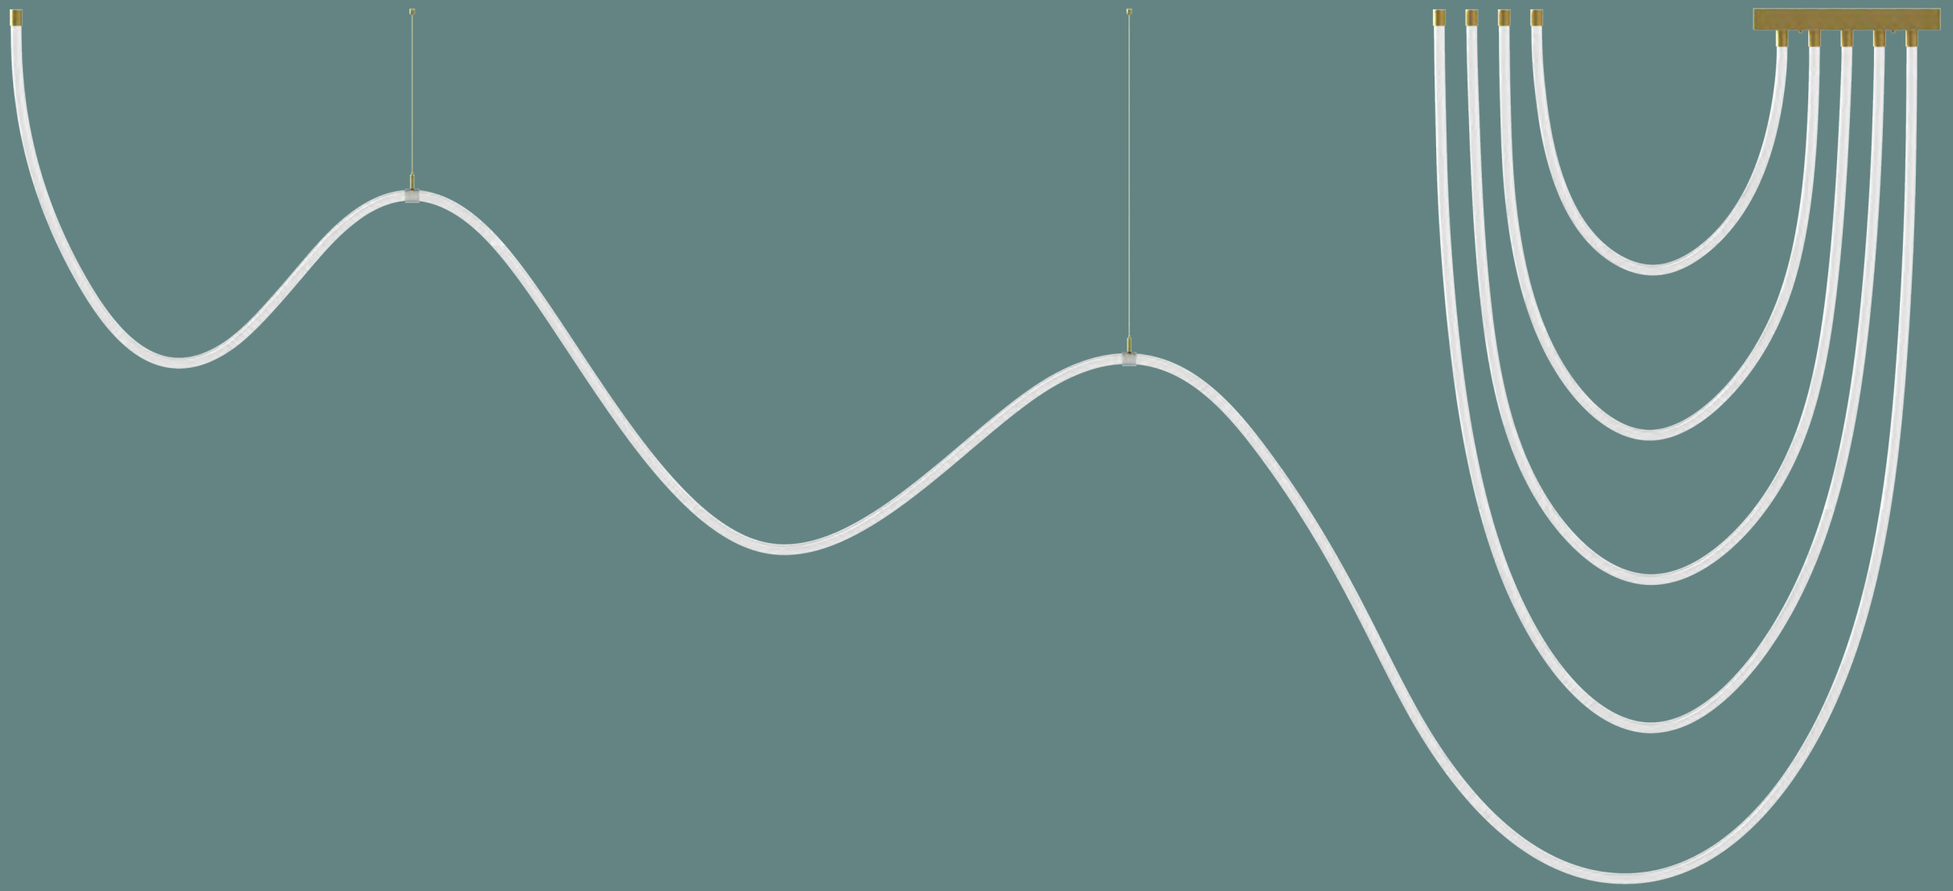

178W | CRI90 | 3000K 4000K | 360° | IP65 | 3 YEAR GUARANTEE | CB | CE

LED Power	System power	LED Voltage	CRI	CCT	Beam	System Output	Canopy Color	Model	Code
178 W	182 W	24 VDC	90	3000K	360°	12300lm	White	VANF-C5A3-178W-930-WN	VANF-C5A3-930C6A8F-WN
							Black	VANF-C5A3-178W-930-BN	VANF-C5A3-930C6A8F-BN
							Chrome	VANF-C5A3-178W-930-CN	VANF-C5A3-930C6A8F-CN
							Gold	VANF-C5A3-178W-930-GN	VANF-C5A3-930C6A8F-GN
				4000K	360°	13500lm	White	VANF-C5A3-178W-940-WN	VANF-C5A3-940C6A8F-WN
							Black	VANF-C5A3-178W-940-BN	VANF-C5A3-940C6A8F-BN
							Chrome	VANF-C5A3-178W-940-CN	VANF-C5A3-940C6A8F-CN
							Gold	VANF-C5A3-178W-940-GN	VANF-C5A3-940C6A8F-GN

Code Remark: N=N(No Driver) F=F(ON-OFF)

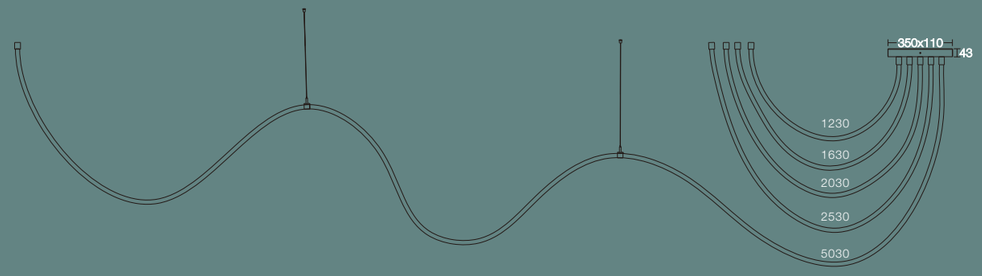

NEKO / VANILLA / VANF-C5A3
360° Circular Neon Strip Lighting


NEW




NEKO / VANILLA / VANF-C1A

360° Circular Neon Strip Lighting

NEW

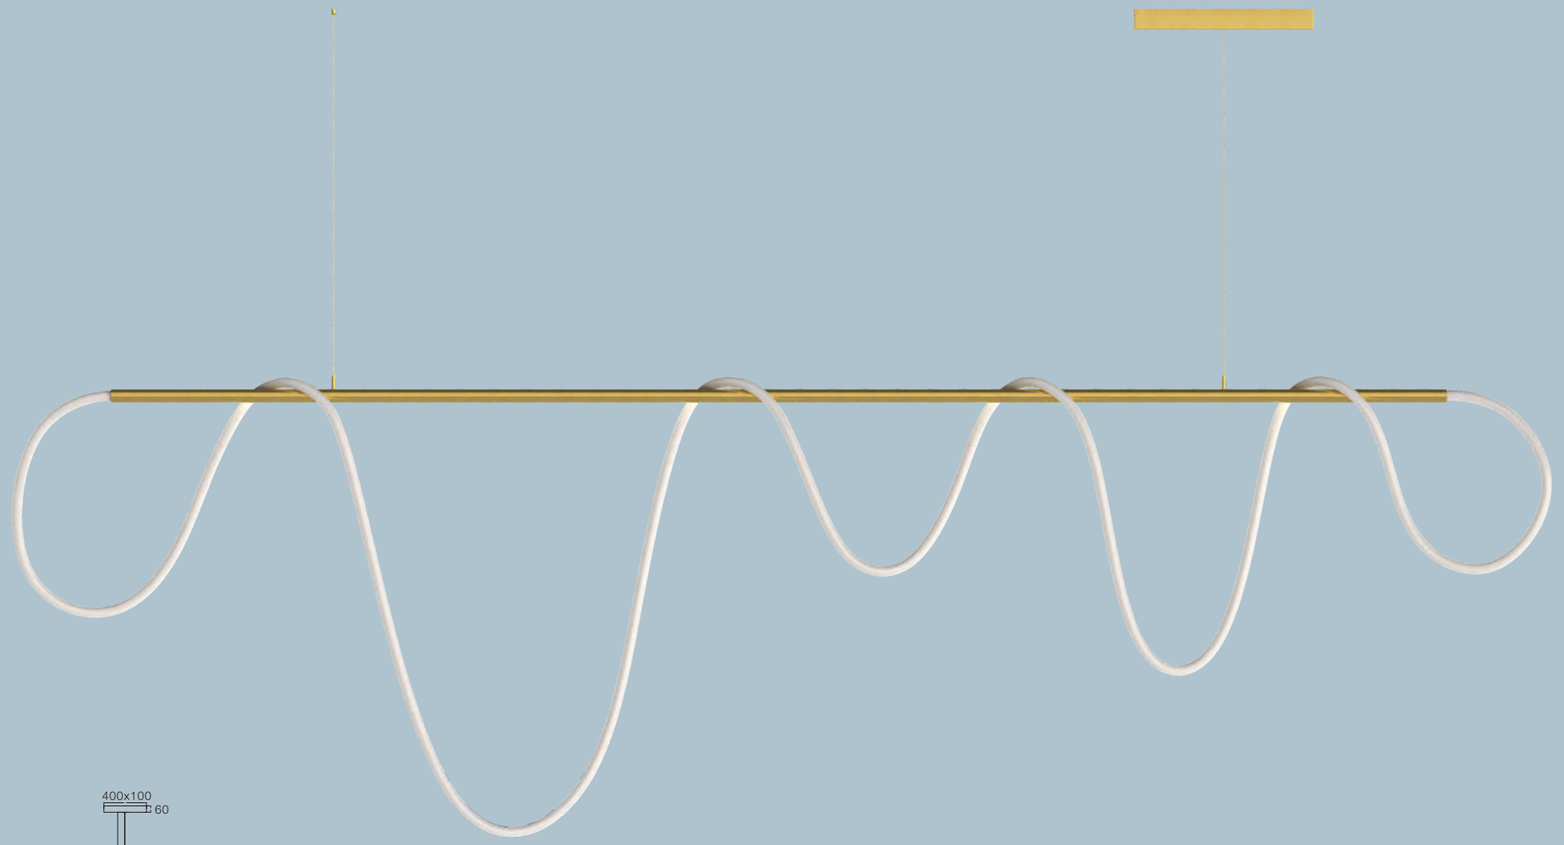

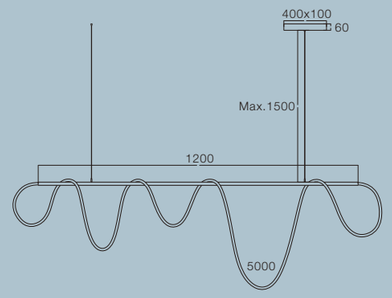

73W | CRI90 | 3000K 4000K | 360° | IP65 | 3 YEAR GUARANTEE | CB | CE

LED Power	System power	LED Voltage	CRI	CCT	Beam	System Output	Canopy Color	Model	Code
73 W	77 W	24 VDC	90	3000K	360°	5000lm	White	VANF-C1A-73W-930-WN	VANF-C1A-930C673F-WN
							Black	VANF-C1A-73W-930-BN	VANF-C1A-930C673F-BN
							Chrome	VANF-C1A-73W-930-CN	VANF-C1A-930C673F-CN
							Gold	VANF-C1A-73W-930-GN	VANF-C1A-930C673F-GN
				4000K	360°	5500lm	White	VANF-C1A-73W-940-WN	VANF-C1A-940C673F-WN
							Black	VANF-C1A-73W-940-BN	VANF-C1A-940C673F-BN
							Chrome	VANF-C1A-73W-940-CN	VANF-C1A-940C673F-CN
							Gold	VANF-C1A-73W-940-GN	VANF-C1A-940C673F-GN

Code Remark: N=N(No Driver) F=F(ON-OFF)

NEKO / VANILLA / VANF-C1A
360° Circular Neon Strip Lighting


NEW




NEKO / VANILLA / VANF-SV06-SM & VANF-SV06-SUS

360° Circular Neon Strip Lighting

NEW

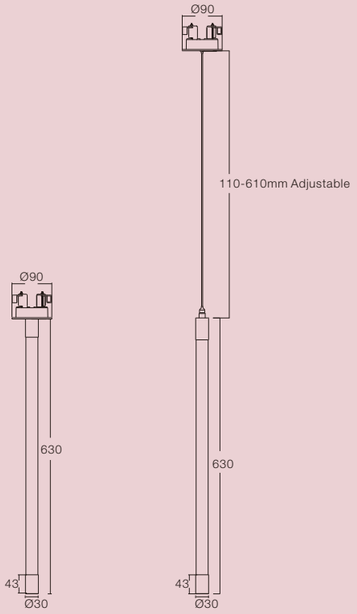

VANF-SV06-SM VANF-SV06-SUS

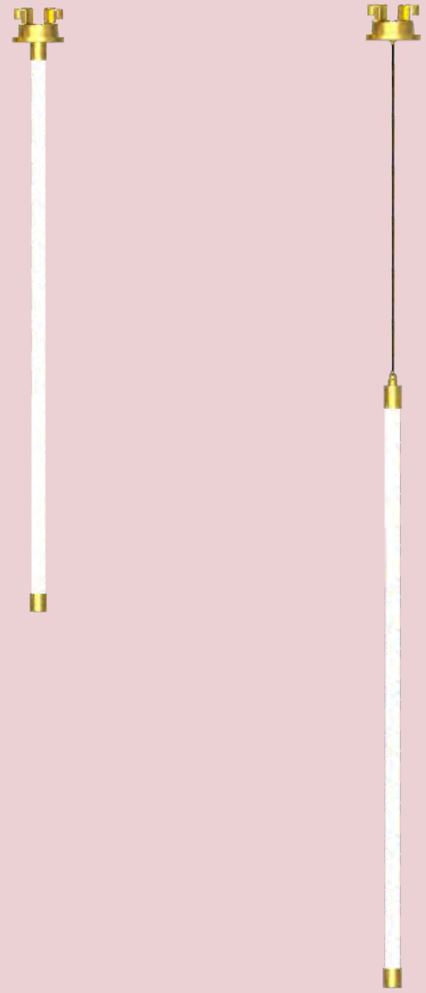


8.5W | CRI90 | 3000K 4000K | 360° | IP65 | CB | CE | 75

LED Power	System power	LED Voltage	CRI	CCT	Beam	System Output	Canopy Color	Model	Code
8.5 W	10 W	24 VDC	90	3000K	360°	600lm	White	VANF-SV06-SM-8.5W-930-WN	VANF-SV06-SM-930C609F-WN
							Black	VANF-SV06-SM-8.5W-930-BN	VANF-SV06-SM-930C609F-BN
							Chrome	VANF-SV06-SM-8.5W-930-CN	VANF-SV06-SM-930C609F-CN
							Gold	VANF-SV06-SM-8.5W-930-GN	VANF-SV06-SM-930C609F-GN
				4000K	360°	650lm	White	VANF-SV06-SM-8.5W-940-WN	VANF-SV06-SM-940C609F-WN
							Black	VANF-SV06-SM-8.5W-940-BN	VANF-SV06-SM-940C609F-BN
							Chrome	VANF-SV06-SM-8.5W-940-CN	VANF-SV06-SM-940C609F-CN
							Gold	VANF-SV06-SM-8.5W-940-GN	VANF-SV06-SM-940C609F-GN
8. 5 W	10 W	24 VDC	90	3000K	360°	600lm	White	VANF-SV06-SUS-8.5W-930-WN	VANF-SV06-SUS-930C609F-WN
							Black	VANF-SV06-SUS-8.5W-930-BN	VANF-SV06-SUS-930C609F-BN
							Chrome	VANF-SV06-SUS-8.5W-930-CN	VANF-SV06-SUS-930C609F-CN
							Gold	VANF-SV06-SUS-8.5W-930-GN	VANF-SV06-SUS-930C609F-GN
				4000K	360°	650lm	White	VANF-SV06-SUS-8.5W-940-WN	VANF-SV06-SUS-940C609F-WN
							Black	VANF-SV06-SUS-8.5W-940-BN	VANF-SV06-SUS-940C609F-BN
							Chrome	VANF-SV06-SUS-8.5W-940-CN	VANF-SV06-SUS-940C609F-CN
							Gold	VANF-SV06-SUS-8.5W-940-GN	VANF-SV06-SUS-940C609F-GN

Code Remark: N=N(No Driver) F=F(ON-OFF)

NEKO / VANILLA / VANF-SV06-SUS
360° Circular Neon Strip Lighting


NEW

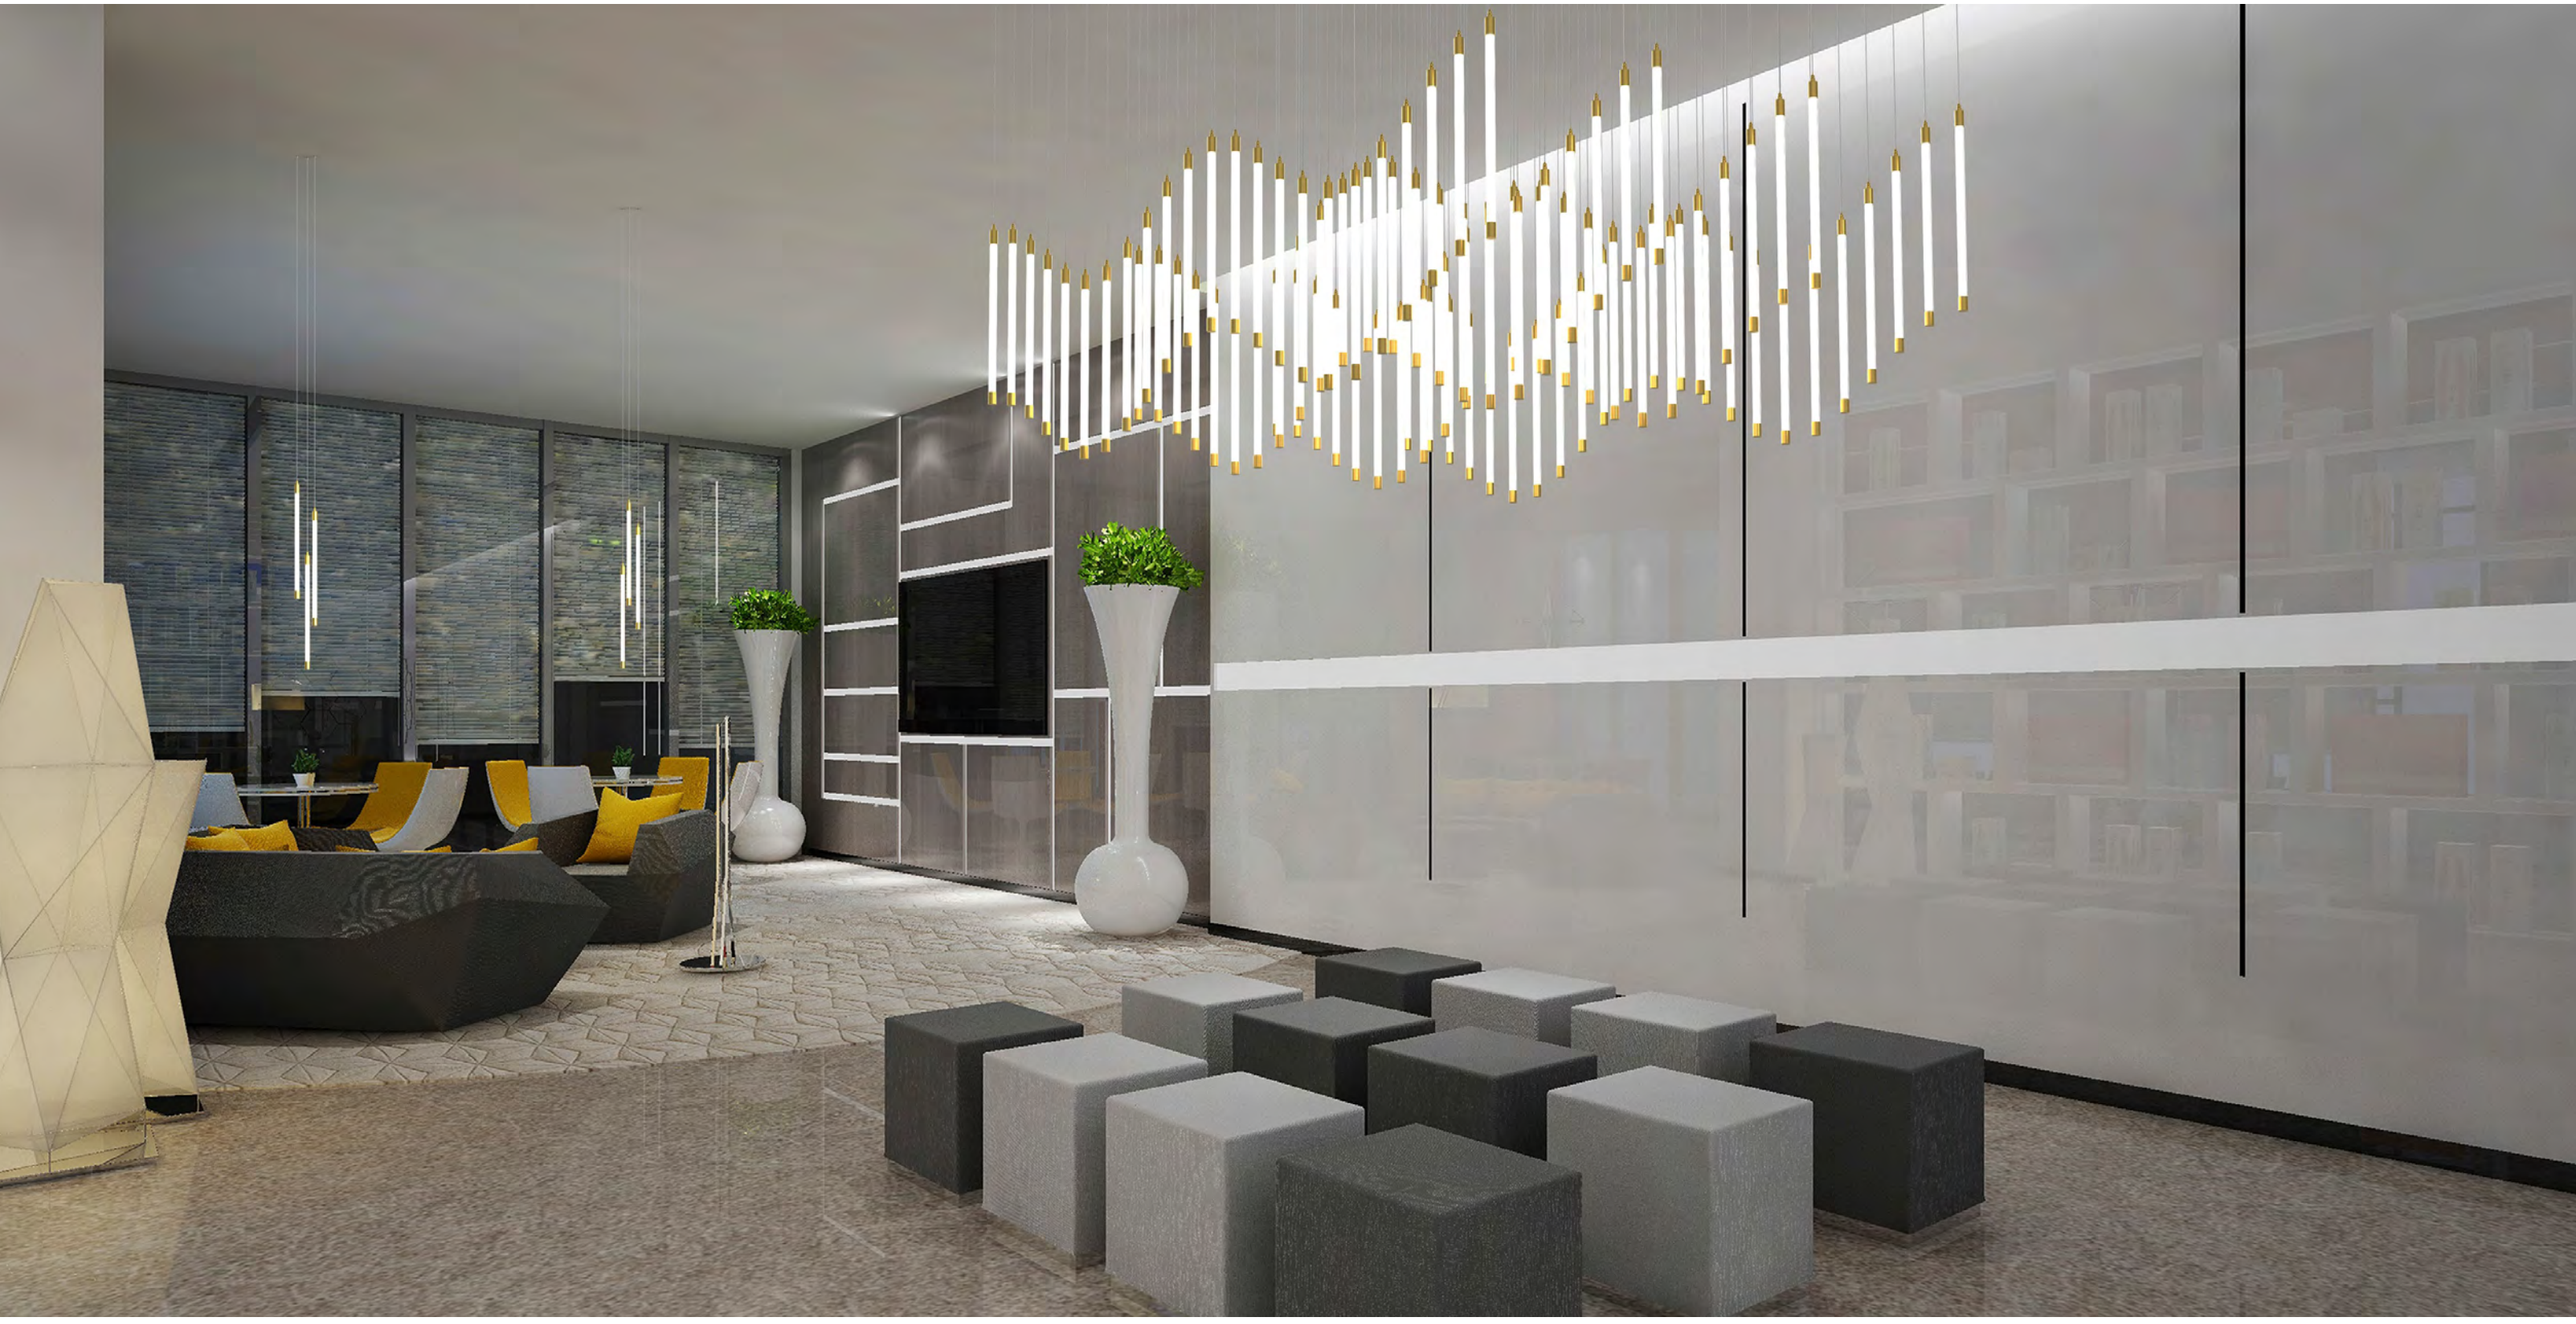

NEKO / VANILLA / VANF-C3A2 & C4A2 & C5A2

360° Circular Neon Strip Lighting

NEW

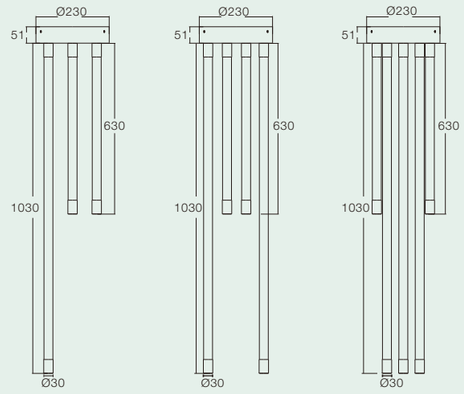

VANF-C3A2

VANF-C4A2

VANF-C5A2

32W
46W
61W
CRI90
3000K
4000K
360°
IP65

LED Power	System power	LED Voltage	CRI	CCT	Beam	System Output	Canopy Color	Model	Code
32 W	34 W	24 VDC	90	3000K	360°	2150lm	White	VANF-C3A2-32W-930-WN	VANF-C3A2-930C632F-WN
							Black	VANF-C3A2-32W-930-BN	VANF-C3A2-930C632F-BN
							Chrome	VANF-C3A2-32W-930-CN	VANF-C3A2-930C632F-CN
							Gold	VANF-C3A2-32W-930-GN	VANF-C3A2-930C632F-GN
				4000K	360°	2350lm	White	VANF-C3A2-32W-940-WN	VANF-C3A2-940C632F-WN
							Black	VANF-C3A2-32W-940-BN	VANF-C3A2-940C632F-BN
							Chrome	VANF-C3A2-32W-940-CN	VANF-C3A2-940C632F-CN
							Gold	VANF-C3A2-32W-940-GN	VANF-C3A2-940C632F-GN
46 W	48 W	24 VDC	90	3000K	360°	3200lm	White	VANF-C4A2-46W-930-WN	VANF-C4A2-930C646F-WN
							Black	VANF-C4A2-46W-930-BN	VANF-C4A2-930C646F-BN
							Chrome	VANF-C4A2-46W-930-CN	VANF-C4A2-930C646F-CN
							Gold	VANF-C4A2-46W-930-GN	VANF-C4A2-930C646F-GN
				4000K	360°	3500lm	White	VANF-C4A2-46W-940-WN	VANF-C4A2-940C646F-WN
							Black	VANF-C4A2-46W-940-BN	VANF-C4A2-940C646F-BN
							Chrome	VANF-C4A2-46W-940-CN	VANF-C4A2-940C646F-CN
							Gold	VANF-C4A2-46W-940-GN	VANF-C4A2-940C646F-GN
61 W	64 W	24 VDC	90	3000K	360°	4200lm	White	VANF-C5A2-61W-930-WN	VANF-C5A2-930C661F-WN
							Black	VANF-C5A2-61W-930-BN	VANF-C5A2-930C661F-BN
							Chrome	VANF-C5A2-61W-930-CN	VANF-C5A2-930C661F-CN
							Gold	VANF-C5A2-61W-930-GN	VANF-C5A2-930C661F-GN
				4000K	360°	4600lm	White	VANF-C5A2-61W-940-WN	VANF-C5A2-940C661F-WN
							Black	VANF-C5A2-61W-940-BN	VANF-C5A2-940C661F-BN
							Chrome	VANF-C5A2-61W-940-CN	VANF-C5A2-940C661F-CN
							Gold	VANF-C5A2-61W-940-GN	VANF-C5A2-940C661F-GN

Code Remark: N=N(No Driver) F=F(ON-OFF)







NEKO / VANILLA / VANF-C3A2 & C4A2 & C5A2

360° Circular Neon Strip Lighting

NEW





NEKO / VANILLA / VANF-C3A1 & C4A1 & C5A1 & C7A1


360° Circular Neon Strip Lighting

NEW




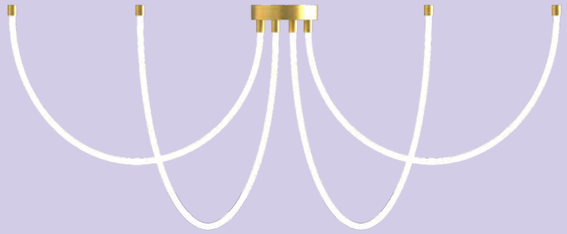

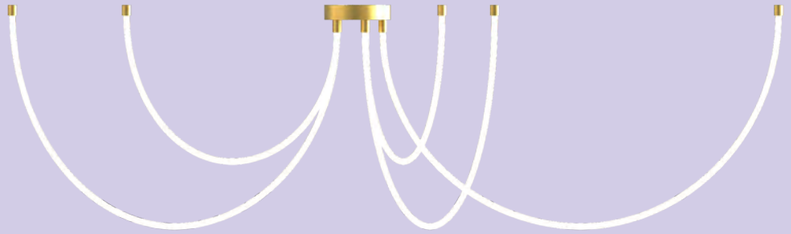




VANF-C3A1

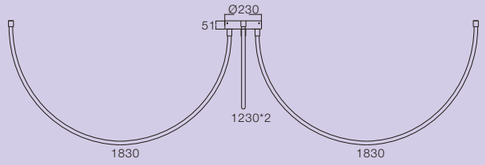

VANF-C4A1





VANF-C5A1

52W
87W
113W
156W
CRI90
3000K
4000K
360°
IP65
3 YEAR WARRANTY
CB
CE

LED Power	System power	LED Voltage	CRI	CCT	Beam	System Output	Canopy Color	Model	Code
52 W	54 W	24 VDC	90	3000K	360°	3600lm	White	VANF-C3A1-52W-930-WN	VANF-C3A1-930C652F-WN
							Black	VANF-C3A1-52W-930-BN	VANF-C3A1-930C652F-BN
							Chrome	VANF-C3A1-52W-930-CN	VANF-C3A1-930C652F-CN
							Gold	VANF-C3A1-52W-930-GN	VANF-C3A1-930C652F-GN
				4000K	360°	3900lm	White	VANF-C3A1-52W-940-WN	VANF-C3A1-940C652F-WN
							Black	VANF-C3A1-52W-940-BN	VANF-C3A1-940C652F-BN
							Chrome	VANF-C3A1-52W-940-CN	VANF-C3A1-940C652F-CN
							Gold	VANF-C3A1-52W-940-GN	VANF-C3A1-940C652F-GN
87 W	90 W	24 VDC	90	3000K	360°	6000lm	White	VANF-C4A1-87W-930-WN	VANF-C4A1-930C687F-WN
							Black	VANF-C4A1-87W-930-BN	VANF-C4A1-930C687F-BN
							Chrome	VANF-C4A1-87W-930-CN	VANF-C4A1-930C687F-CN
							Gold	VANF-C4A1-87W-930-GN	VANF-C4A1-930C687F-GN
				4000K	360°	6500lm	White	VANF-C4A1-87W-940-WN	VANF-C4A1-940C687F-WN
							Black	VANF-C4A1-87W-940-BN	VANF-C4A1-940C687F-BN
							Chrome	VANF-C4A1-87W-940-CN	VANF-C4A1-940C687F-CN
							Gold	VANF-C4A1-87W-940-GN	VANF-C4A1-940C687F-GN
113 W	116 W	24 VDC	90	3000K	360°	7800lm	White	VANF-C5A1-113W-930-WN	VANF-C5A1-930C6A1F-WN
							Black	VANF-C5A1-113W-930-BN	VANF-C5A1-930C6A1F-BN
							Chrome	VANF-C5A1-113W-930-CN	VANF-C5A1-930C6A1F-CN
							Gold	VANF-C5A1-113W-930-GN	VANF-C5A1-930C6A1F-GN
				4000K	360°	8500lm	White	VANF-C5A1-113W-940-WN	VANF-C5A1-940C6A1F-WN
							Black	VANF-C5A1-113W-940-BN	VANF-C5A1-940C6A1F-BN
							Chrome	VANF-C5A1-113W-940-CN	VANF-C5A1-940C6A1F-CN
							Gold	VANF-C5A1-113W-940-GN	VANF-C5A1-940C6A1F-GN
156 W	160 W	24 VDC	90	3000K	360°	11000lm	White	VANF-C7A1-156W-930-WN	VANF-C7A1-930C6A6F-WN
							Black	VANF-C7A1-156W-930-BN	VANF-C7A1-930C6A6F-BN
							Chrome	VANF-C7A1-156W-930-CN	VANF-C7A1-930C6A6F-CN
							Gold	VANF-C7A1-156W-930-GN	VANF-C7A1-930C6A6F-GN
				4000K	360°	12000lm	White	VANF-C7A1-156W-940-WN	VANF-C7A1-940C6A6F-WN
							Black	VANF-C7A1-156W-940-BN	VANF-C7A1-940C6A6F-BN
							Chrome	VANF-C7A1-156W-940-CN	VANF-C7A1-940C6A6F-CN
							Gold	VANF-C7A1-156W-940-GN	VANF-C7A1-940C6A6F-GN

Code Remark: N=N(No Driver) F=F(ON-OFF)

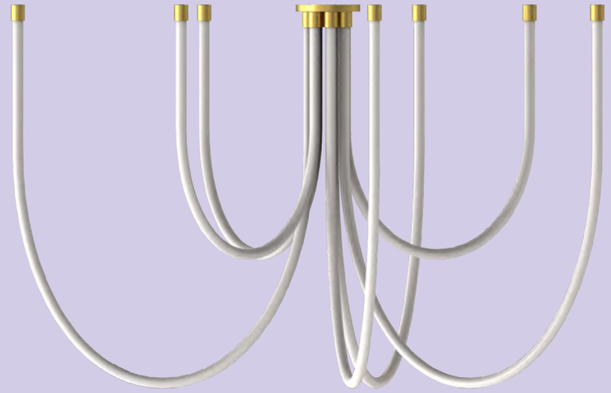



VANF-C7A1

NEKO / VANILLA / VANF-C3A1 & C4A1 & C5A1 & C7A1

360° Circular Neon Strip Lighting

NEW



NEKO / VANILLA / VANF-SH50-SP
360° Circular Neon Strip Lighting

NEW



73W | CRI90 | 3000K 4000K | 360° | IP65 | 3 YEAR WARRANTY | CB | CE


LED Power	System power	LED Voltage	CRI	CCT	Beam	System Output	Canopy Color	Model	Code
73 W	77 W	24 VDC	90	3000K	360°	5000lm	White	VANF-SH50-SP-73W-930-WN	VANF-SH50-SP-930C673F-WN
							Black	VANF-SH50-SP-73W-930-BN	VANF-SH50-SP-930C673F-BN
							Chrome	VANF-SH50-SP-73W-930-CN	VANF-SH50-SP-930C673F-CN
							Gold	VANF-SH50-SP-73W-930-GN	VANF-SH50-SP-930C673F-GN
				4000K	360°	5500lm	White	VANF-SH50-SP-73W-940-WN	VANF-SH50-SP-940C673F-WN
							Black	VANF-SH50-SP-73W-940-BN	VANF-SH50-SP-940C673F-BN
							Chrome	VANF-SH50-SP-73W-940-CN	VANF-SH50-SP-940C673F-CN
							Gold	VANF-SH50-SP-73W-940-GN	VANF-SH50-SP-940C673F-GN

Code Remark: N=N(No Driver) F=F(ON-OFF)


NEKO / VANILLA / VANF-SH50-SP

360° Circular Neon Strip Lighting

NEW

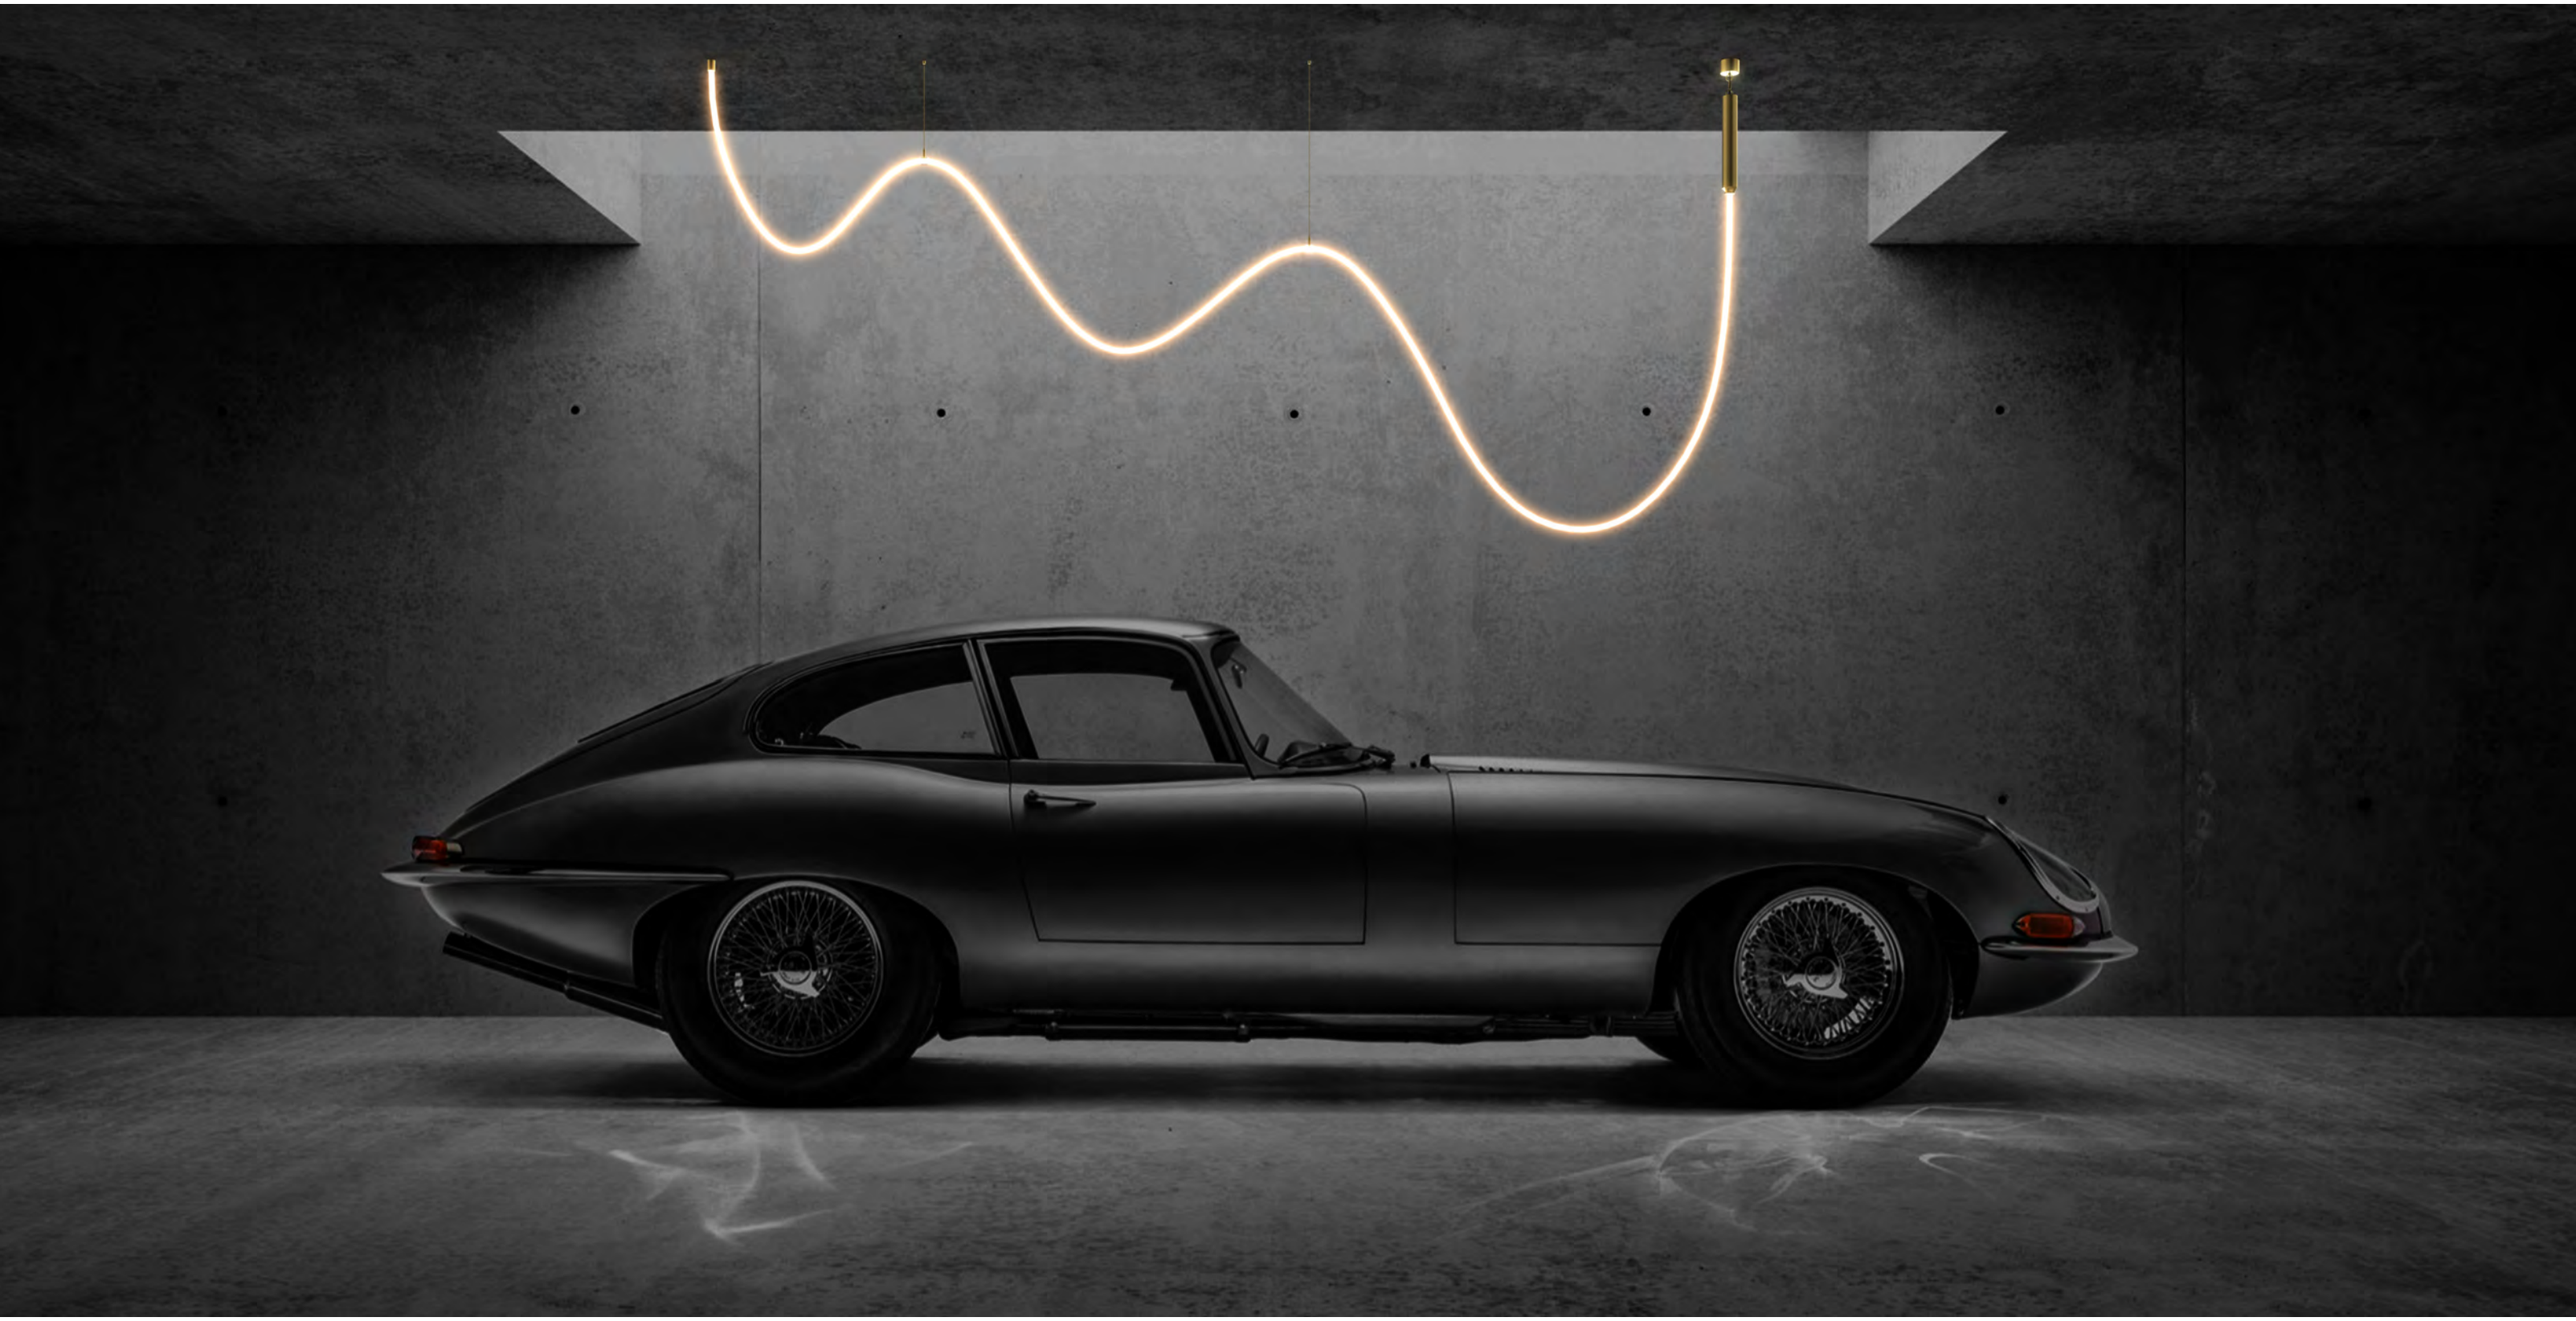


NEW

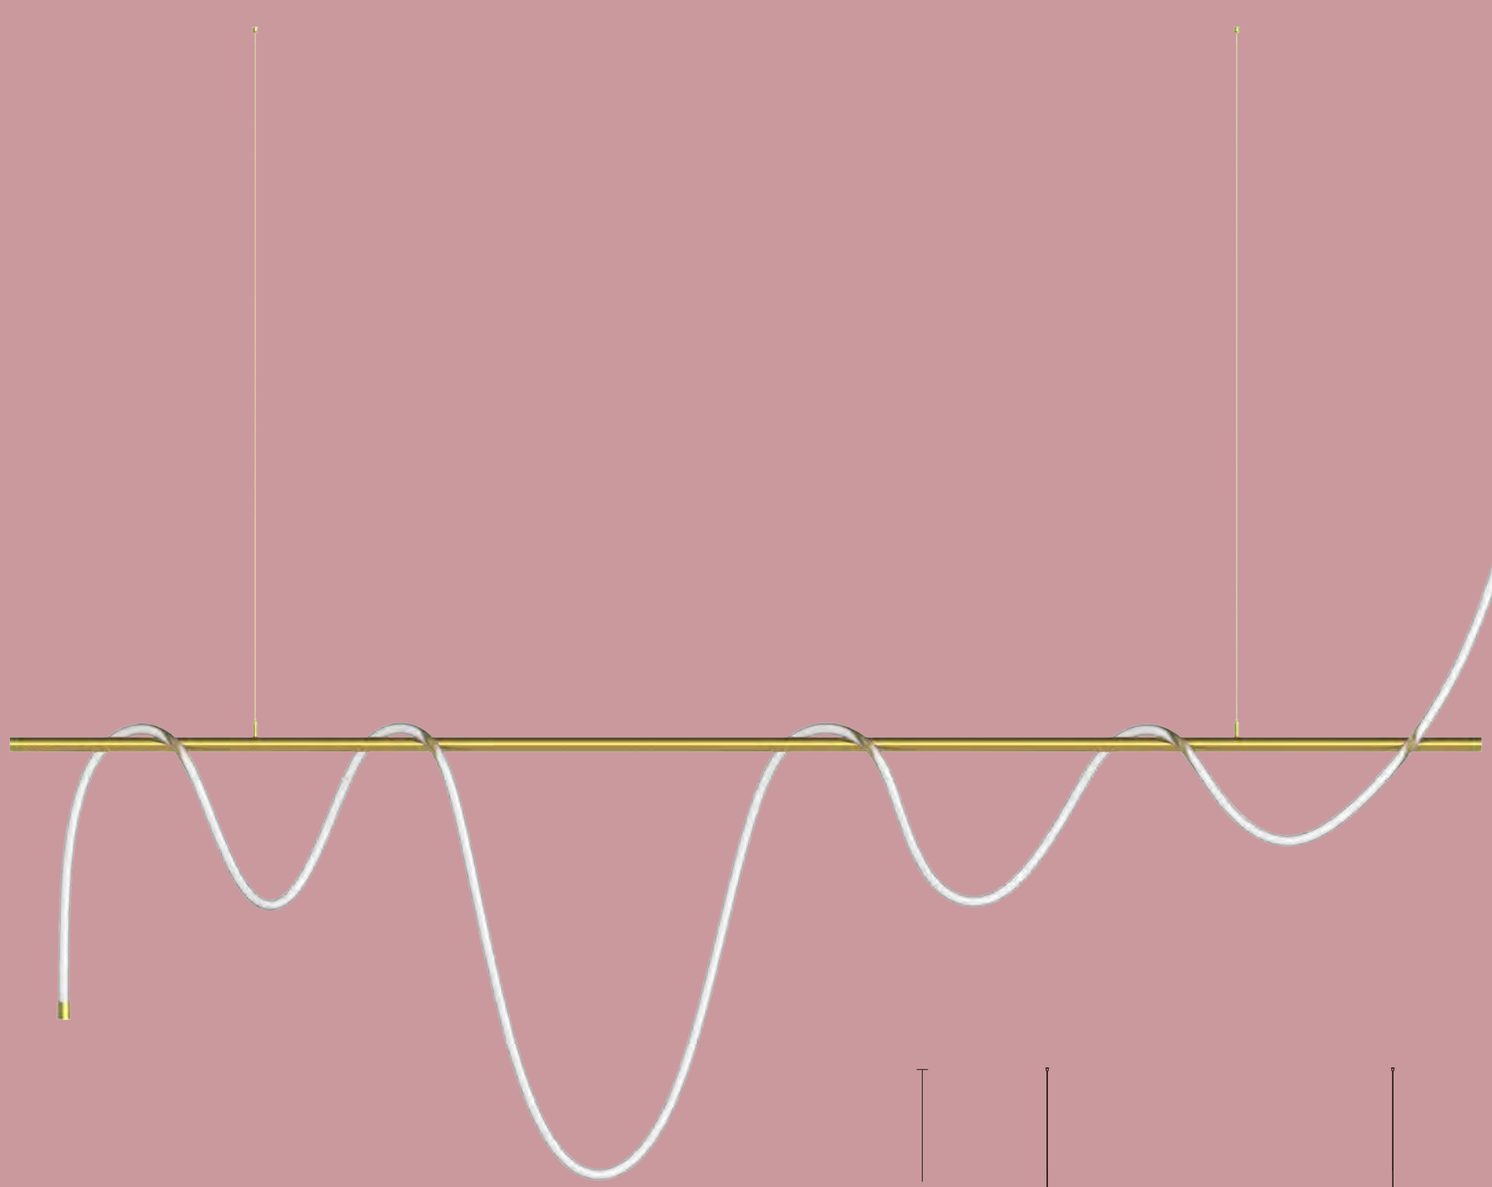

73W | CRI90 | 3000K 4000K | 360° | IP65 | 3 YEARS WARRANTY | CB | CE

LED Power	System power	LED Voltage	CRI	CCT	Beam	System Output	Canopy Color	Model	Code
73 W	77 W	24 VDC	90	3000K	360°	5000lm	White	VANF-C1B-73W-930-WN	VANF-C1B-930C673F-WN
							Black	VANF-C1B-73W-930-BN	VANF-C1B-930C673F-BN
							Chrome	VANF-C1B-73W-930-CN	VANF-C1B-930C673F-CN
							Gold	VANF-C1B-73W-930-GN	VANF-C1B-930C673F-GN
				4000K	360°	5500lm	White	VANF-C1B-73W-940-WN	VANF-C1B-940C673F-WN
							Black	VANF-C1B-73W-940-BN	VANF-C1B-940C673F-BN
							Chrome	VANF-C1B-73W-940-CN	VANF-C1B-940C673F-CN
							Gold	VANF-C1B-73W-940-GN	VANF-C1B-940C673F-GN

Code Remark: N=N(No Driver) F=F(ON-OFF)

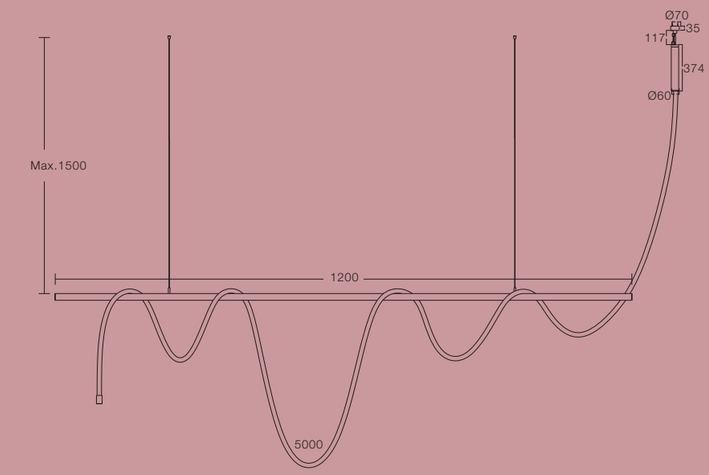

NEKO / VANILLA / VANF-SH50-SM & VANF-SH50-SUS

360° Circular Neon Strip Lighting

NEW





73W | CRI90 | 3000K 4000K | 360° | IP65 | 3 YEARS | CB | CE | 75



VANF-SH50-SM

LED Power	System power	LED Voltage	CRI	CCT	Beam	System Output	Canopy Color	Model	Code
73 W	77 W	24 VDC	90	3000K	360°	5000lm	White	VANF-SH50-SM-73W-930-WN	VANF-SH50-SM-930C673F-WN
							Black	VANF-SH50-SM-73W-930-BN	VANF-SH50-SM-930C673F-BN
							Chrome	VANF-SH50-SM-73W-930-CN	VANF-SH50-SM-930C673F-CN
							Gold	VANF-SH50-SM-73W-930-GN	VANF-SH50-SM-930C673F-GN
				4000K	360°	5500lm	White	VANF-SH50-SM-73W-940-WN	VANF-SH50-SM-940C673F-WN
							Black	VANF-SH50-SM-73W-940-BN	VANF-SH50-SM-940C673F-BN
							Chrome	VANF-SH50-SM-73W-940-CN	VANF-SH50-SM-940C673F-CN
							Gold	VANF-SH50-SM-73W-940-GN	VANF-SH50-SM-940C673F-GN

Code Remark: N=N(No Driver) F=F(ON-OFF)



VANF-SH50-SUS


73W | CRI90 | 3000K 4000K | 360° | IP65 | 3 YEARS | CB | CE | 75

LED Power	System power	LED Voltage	CRI	CCT	Beam	System Output	Canopy Color	Model	Code
73 W	77 W	24 VDC	90	3000K	360°	5000lm	White	VANF-SH50-SUS-73W-930-WN	VANF-SH50-SUS-930C673F-WN
							Black	VANF-SH50-SUS-73W-930-BN	VANF-SH50-SUS-930C673F-BN
							Chrome	VANF-SH50-SUS-73W-930-CN	VANF-SH50-SUS-930C673F-CN
							Gold	VANF-SH50-SUS-73W-930-GN	VANF-SH50-SUS-930C673F-GN
				4000K	360°	5500lm	White	VANF-SH50-SUS-73W-940-WN	VANF-SH50-SUS-940C673F-WN
							Black	VANF-SH50-SUS-73W-940-BN	VANF-SH50-SUS-940C673F-BN
							Chrome	VANF-SH50-SUS-73W-940-CN	VANF-SH50-SUS-940C673F-CN
							Gold	VANF-SH50-SUS-73W-940-GN	VANF-SH50-SUS-940C673F-GN

Code Remark: N=N(No Driver) F=F(ON-OFF)

NEKO / VANILLA / VANF-SH50-SM & VANF-SH50-SUS
360° Circular Neon Strip Lighting


NEW

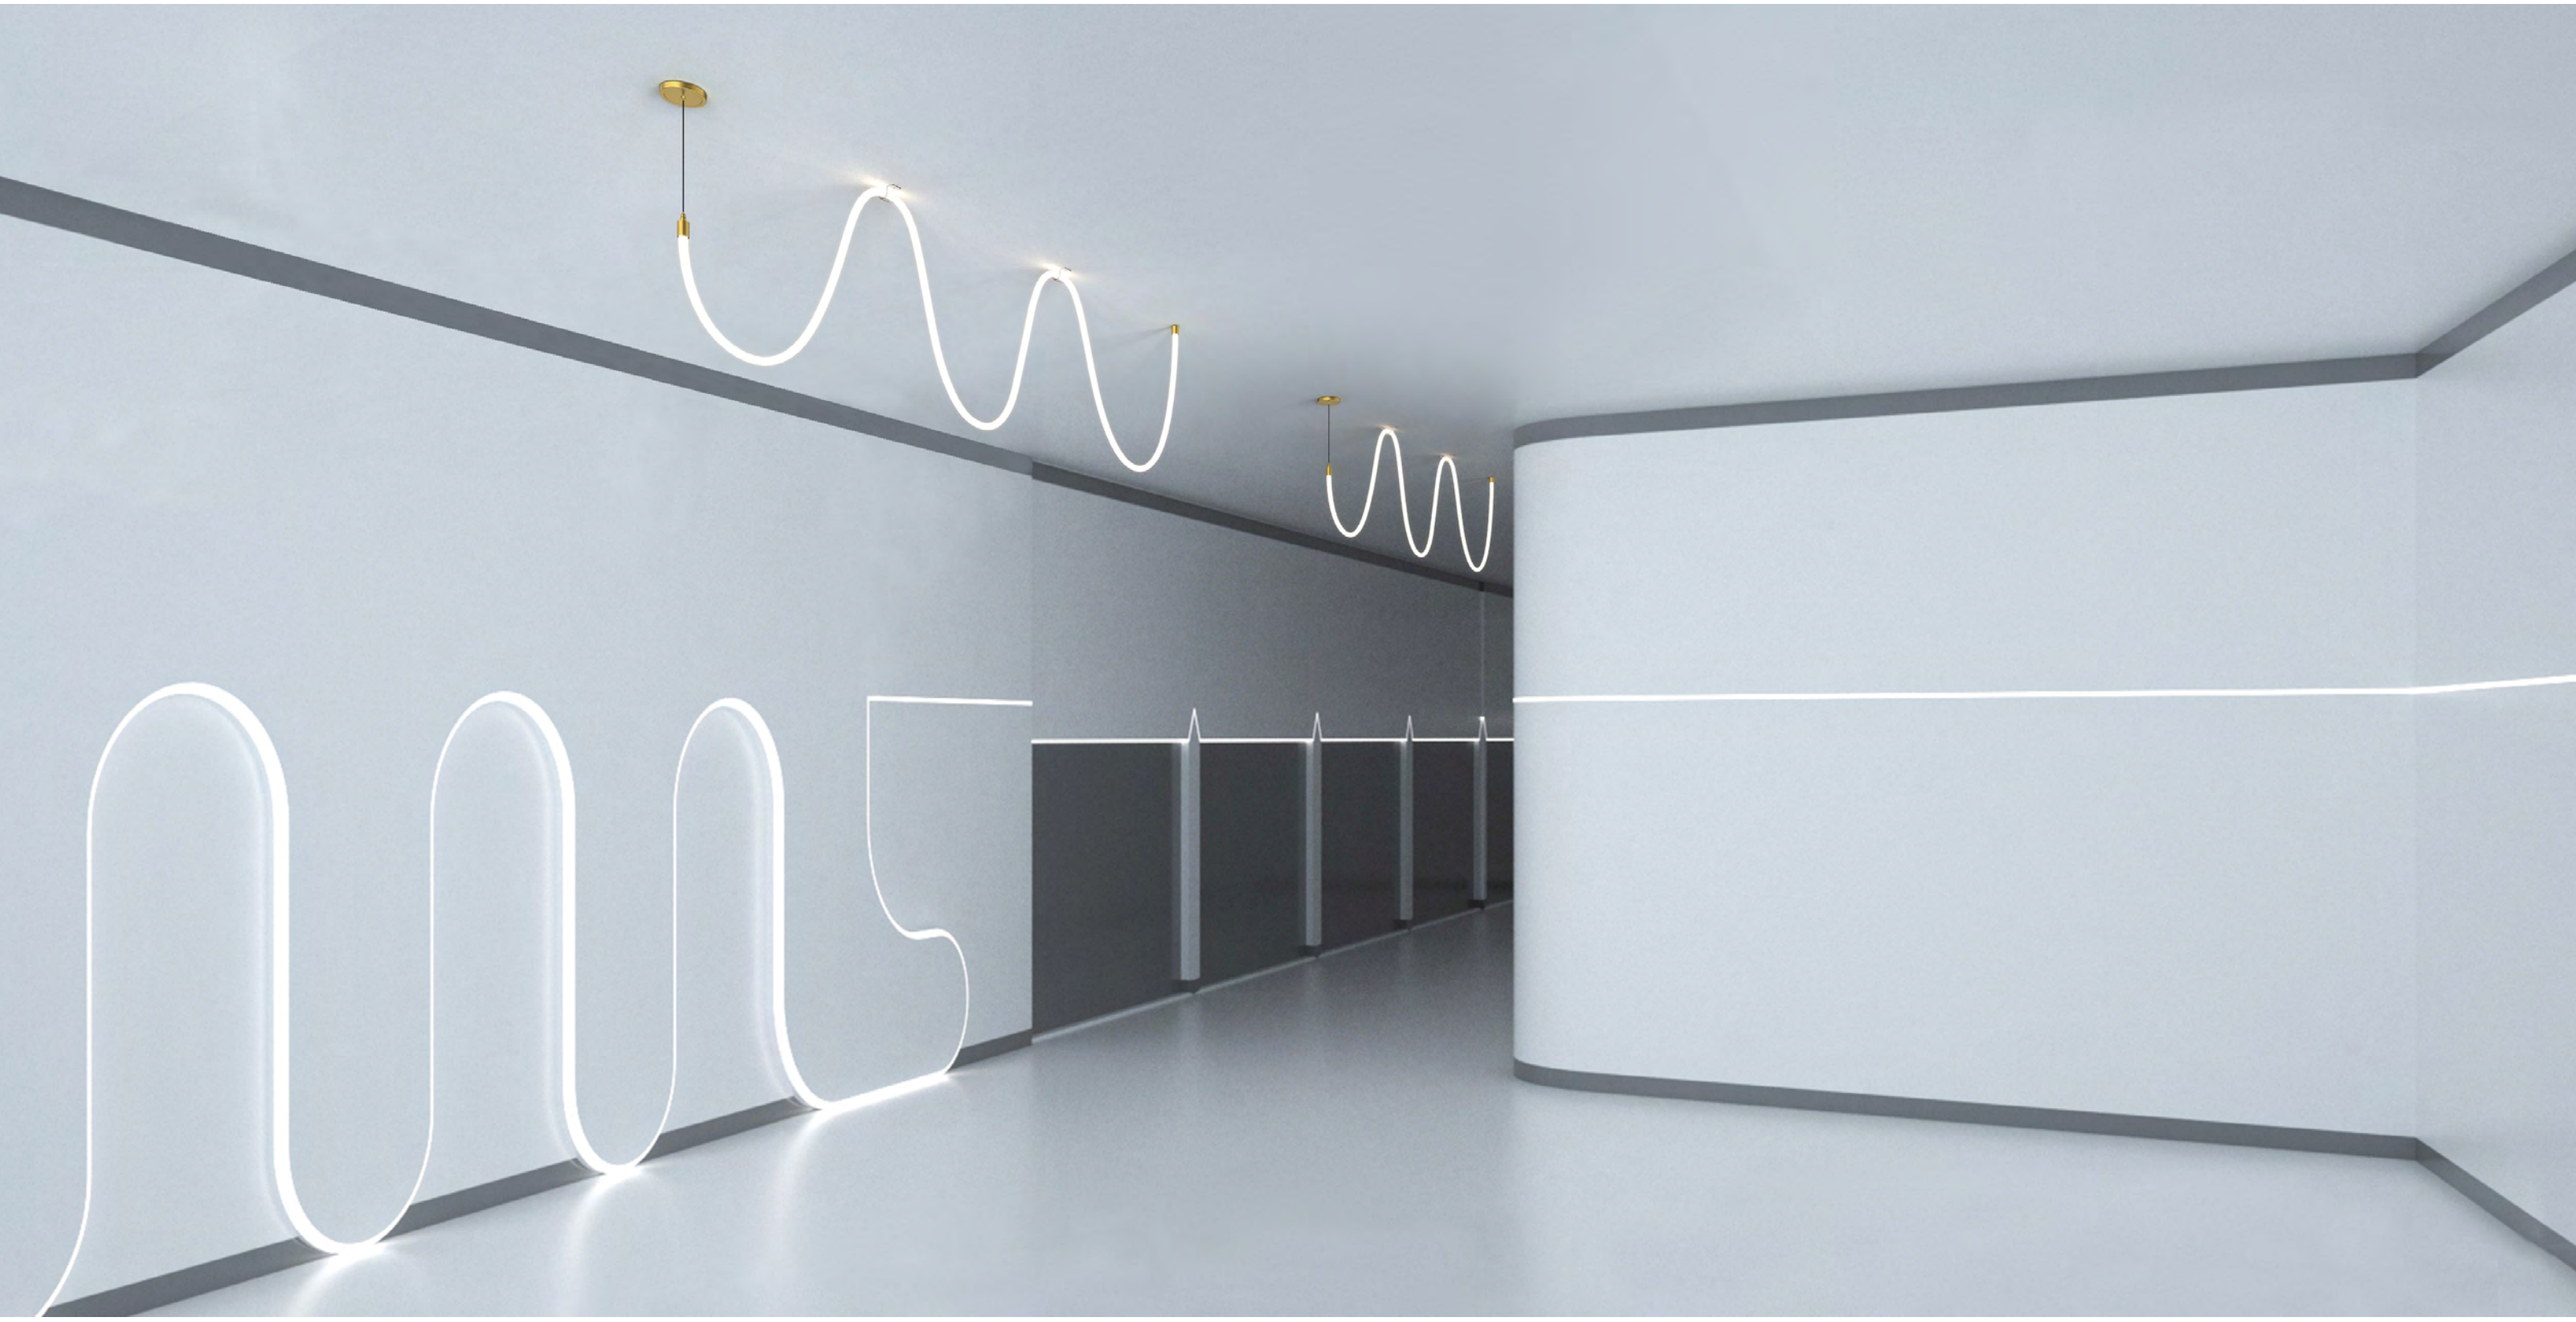


NEKO / VANILLA / VANF-SH12-SUS

360° Circular Neon Strip Lighting

NEW

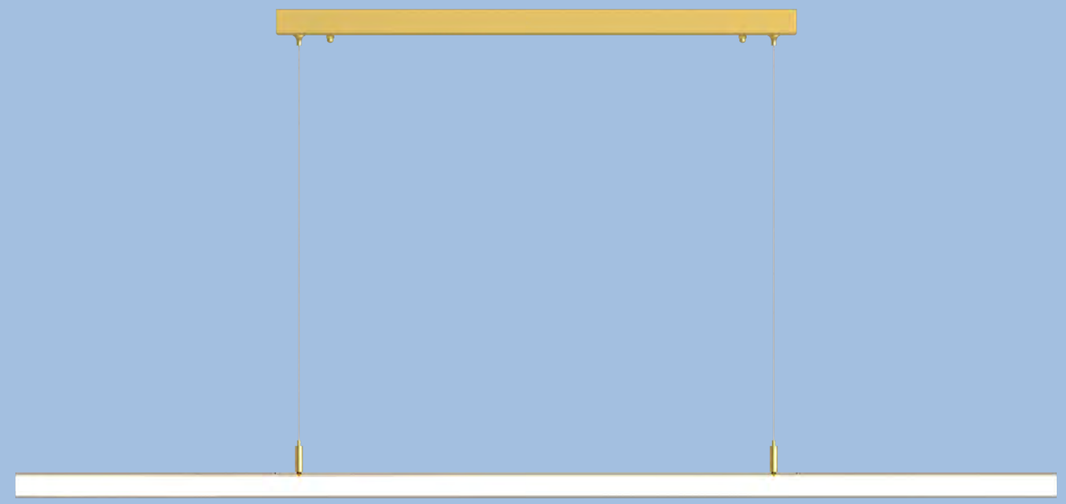

17W | CRI90 | 3000K 4000K | 360° | IP65 | 3 YEAR GUARANTEE | CB | CE

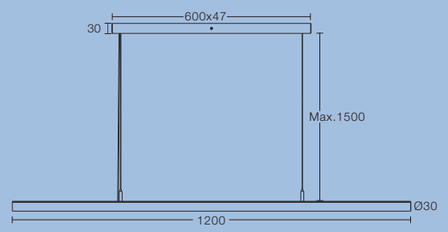

LED Power	System power	LED Voltage	CRI	CCT	Beam	System Output	Canopy Color	Model	Code
17 W	19 W	24 VDC	90	3000K	360°	1150lm	White	VANF-SH12-SUS-17W-930-WN	VANF-SH12-SUS-930C617F-WN
							Black	VANF-SH12-SUS-17W-930-BN	VANF-SH12-SUS-930C617F-BN
							Chrome	VANF-SH12-SUS-17W-930-CN	VANF-SH12-SUS-930C617F-CN
							Gold	VANF-SH12-SUS-17W-930-GN	VANF-SH12-SUS-930C617F-GN
				4000K	360°	1250lm	White	VANF-SH12-SUS-17W-940-WN	VANF-SH12-SUS-940C617F-WN
							Black	VANF-SH12-SUS-17W-940-BN	VANF-SH12-SUS-940C617F-BN
							Chrome	VANF-SH12-SUS-17W-940-CN	VANF-SH12-SUS-940C617F-CN
							Gold	VANF-SH12-SUS-17W-940-GN	VANF-SH12-SUS-940C617F-GN

Code Remark: N=N(No Driver) F=F(ON-OFF)

NEKO / VANILLA / VANF-SH12-SUS

360° Circular Neon Strip Lighting

NEW



NEKO / VANILLA / VANF-SH06-SM

360° Circular Neon Strip Lighting



9W | CRI90 | 3000K 4000K | 360° | IP65 | 3 YEAR GUARANTEE | CB | CE




LED Power	System power	LED Voltage	CRI	CCT	Beam	System Output	Canopy Color	Model	Code
9 W	11 W	24 VDC	90	3000K	360°	600lm	White	VANF-SH06-SM-9W-930-WN	VANF-SH06-SM-930C609F-WN
							Black	VANF-SH06-SM-9W-930-BN	VANF-SH06-SM-930C609F-BN
							Chrome	VANF-SH06-SM-9W-930-CN	VANF-SH06-SM-930C609F-CN
							Gold	VANF-SH06-SM-9W-930-GN	VANF-SH06-SM-930C609F-GN
				4000K	360°	650lm	White	VANF-SH06-SM-9W-940-WN	VANF-SH06-SM-940C609F-WN
							Black	VANF-SH06-SM-9W-940-BN	VANF-SH06-SM-940C609F-BN
							Chrome	VANF-SH06-SM-9W-940-CN	VANF-SH06-SM-940C609F-CN
							Gold	VANF-SH06-SM-9W-940-GN	VANF-SH06-SM-940C609F-GN

Code Remark: N=N(No Driver) F=F(ON-OFF)



EXTERIOR

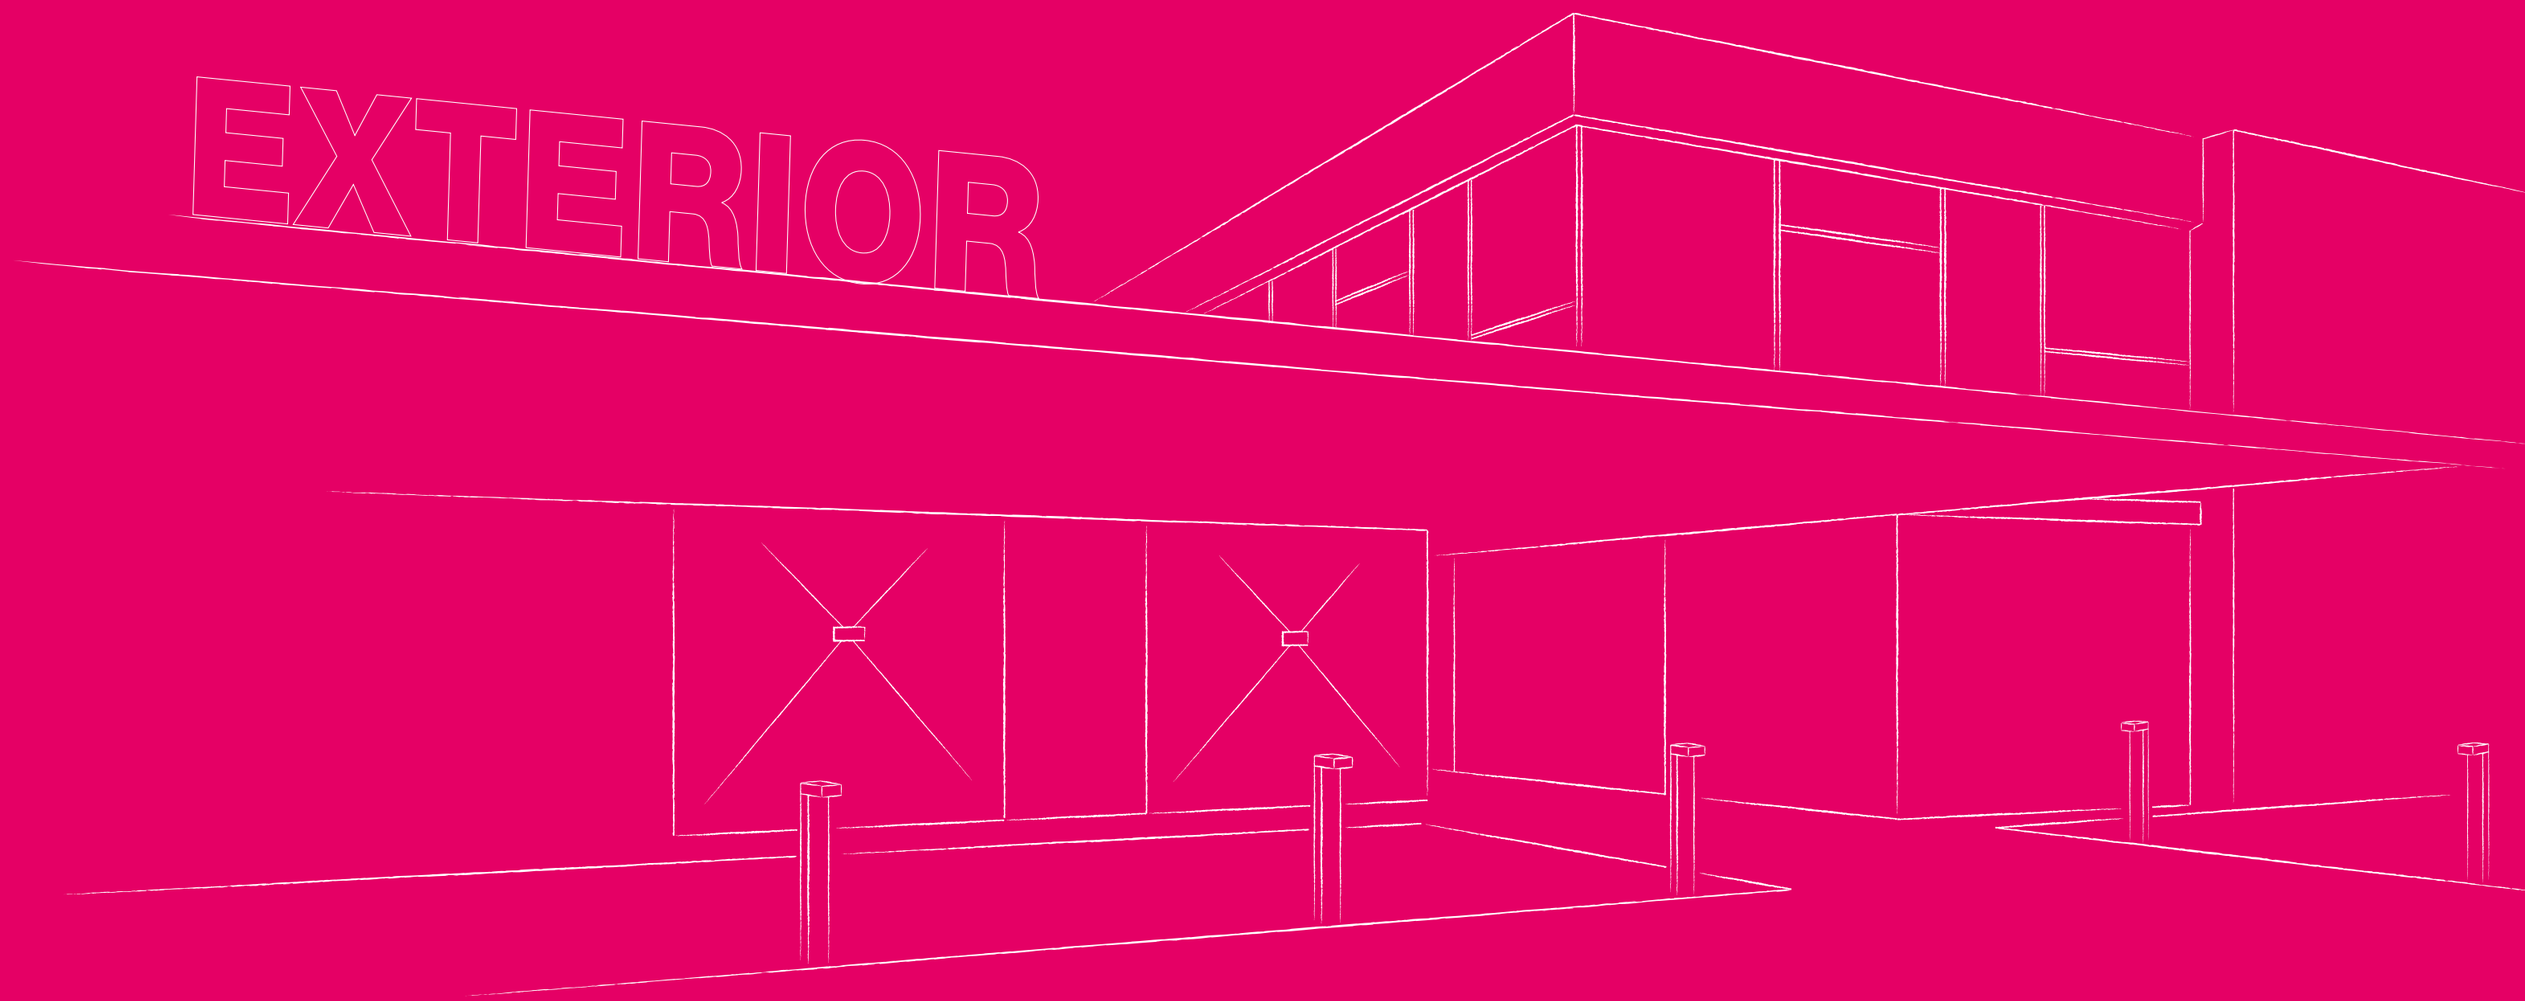

INDEX

SEAPOINT Series



SEAPOINT
■557

LAKEPOINT Series NEW



LAKEPOINT Fixed
■579



LAKEPOINT Adjustable
■581

CARMEL Series



SKYSURFER SSRC
■395



CARMEL Round
■585




CARMEL Square
■585

CLIFTON Series



CLIFTON
■587

RIVA Series NEW



RIVA Round
■589



RIVA Square
■591

CAMPSBAY Series



CAMPSBAY Single
■593



CAMPSBAY Double
■593

LAGOON Series



LAGOON
■595

CRUZ D Series NEW



CRUZ D
■597

CAPRI Series NEW



CAPRI
■599

BAY Series



BAY
■601

ASCONA Series




ASCONA
■603

NICE Series NEW



NICE 250S & NICE 250D
■605



NICE 500S & NICE 500D
■607

St.Tropez Series



St.Tropez
■609

Capetown-Recessed Series




Capetown Round-Recessed
■611



Capetown Square-Recessed
■611

Capetown-Surface Series



Capetown Round-Surface
■613




Capetown Square-Surface
■613

CALIFORNIA Series



CALIFORNIA 12
■615

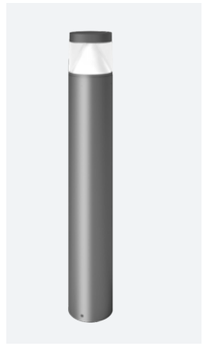

CALIFORNIA 16
■615

DURBAN Series



DURBAN
■617

POSITANO Series ! NEW



POSITANO 300
■619



POSITANO 600
■619

PORTOFINO Series



PORTOFINO S
■621



PORTOFINO M
■621



PORTOFINO L
■621



PORTOFINO Adjustable
■623

AFTER7 Series



AFTER7 Mini
■625



AFTER7 Maxi
■626

TERARACE Series



TERARACE Micro
■627



TERARACE Nano
■628



TERARACE Mini
■629



TERARACE Maxi
■630




NEKO / SEAPOINT
EXTERIOR LED Downlight






6W | CRI80 | 3000K | 25° | IP67 | IK07 | CREE 50,000h@L80B10 | CE | Body: Aluminum Color: Black





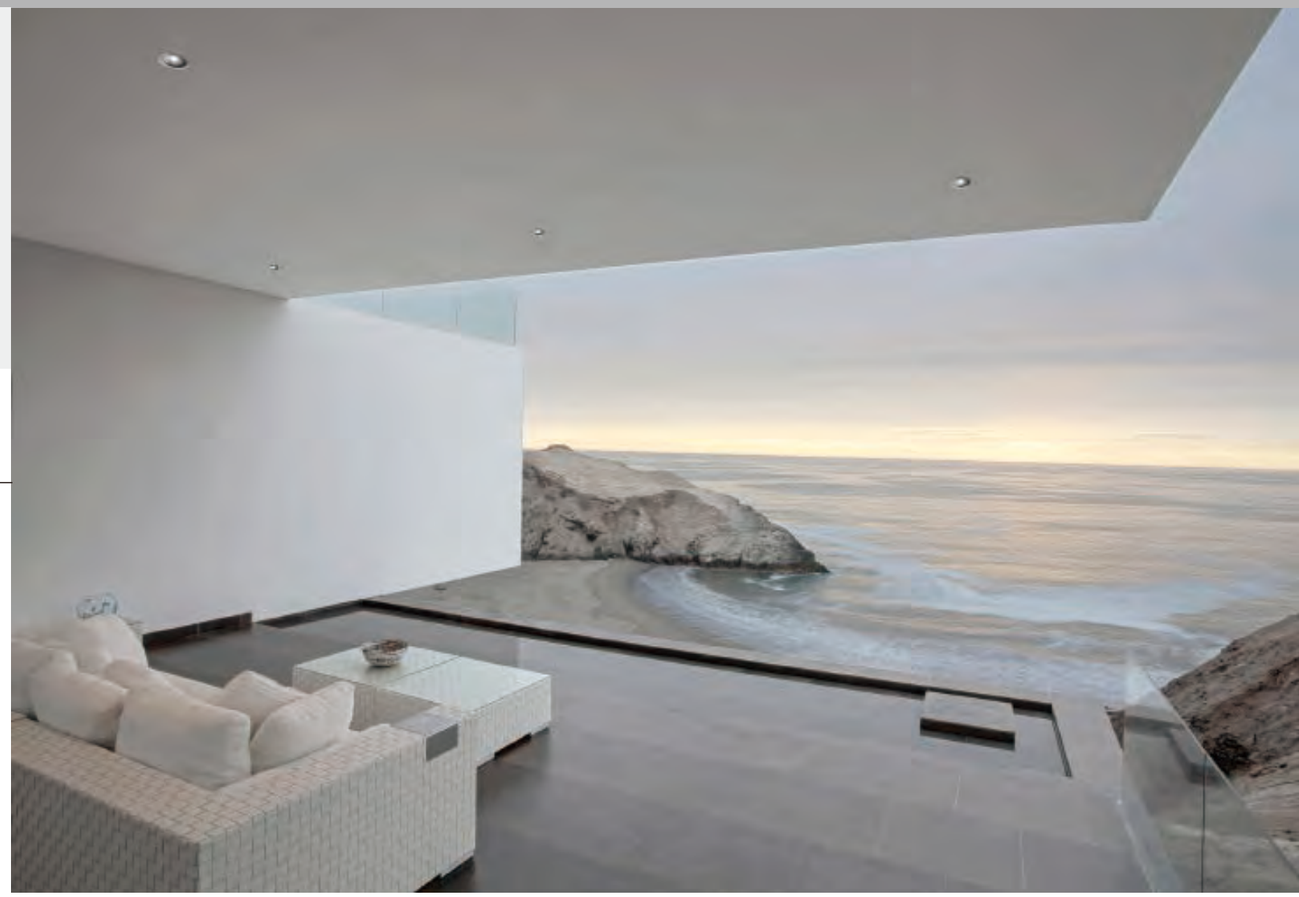




LED Power	System Power	Input	CRI	CCT	Beam	System Output	Model	Code
5 W	6 W	220-240 VAC	80	3000K	25°	450lm	SEAPOINT-830-25°	SEAP-8302506F-BN

Remark: With internal Non-Dimmable LED driver

Light Distribution

3000K




NEKO / LAKEPOINT Fixed
EXTERIOR LED Downlight

NEW



8W | CRI80 | 3000K | 30° | IP65 | CREE 50,000h@L80B10 | CE | Body: Aluminum Color: White/Black



LED Power	System Power	Input	CRI	CCT	Beam	System Output	Model	Code
6 W	8 W	220-240 VAC	80	3000K	30°	500lm	LAPF-8W-830-30°	LAPF-8303008F-WW

Remark: With internal Non-Dimmable LED driver




6 W	8 W	220-240 VAC	80	3000K	30°	500lm	LAPF-8W-830-30°	LAPF-8303008F-BB

Remark: With internal Non-Dimmable LED driver



Light Distribution

3000K





NEKO / LAKEPOINT Adjustable
EXTERIOR LED Downlight

NEW



8W | CRI80 | 3000K | 30° | IP65 | ±30° Tiltable | CREE 50,000h@L80B10 | CE | Body: Aluminum Color: White/Black





LED Power	System Power	Input	CRI	CCT	Beam	System Output	Model	Code
6 W	8 W	220-240 VAC	80	3000K	30°	500lm	LAPA-8W-830-30°	LAPA-8303008F-WW

Remark: With internal Non-Dimmable LED driver




6 W	8 W	220-240 VAC	80	3000K	30°	500lm	LAPA-8W-830-30°	LAPA-8303008F-BB

Remark: With internal Non-Dimmable LED driver

Light Distribution

3000K




NEKO / SKYSURFER SSRC

IP65 LED Ceiling Light



10W | CRI90 | 3000K | 36° | UGR < 19 | IP65 | CITIZEN 50,000h@L80B10 | CE | Body: Aluminum Color: Black






LED Power	System Power	Input	CRI	CCT	Beam	System Output	Model	Code
8 W	10 W	220-240 VAC	90	3000K	36°	850lm	SSRC-10W-930-36°	SSRC-9303610F-BN

Remark: With internal Non-Dimmable LED driver

Light Distribution

3000K






NEKO / CARMEL

LED Ceiling Light





6W | CRI80 | 3000K | 55° | **IP54** | **IK07** | CREE 50,000h@L80B10 | CE | Body: Aluminum Color: Dark-Grey



LED Power	System Power	Input	CRI	CCT	Beam	System Output	Model	Code
5 W	6 W	220-240 VAC	80	3000K	55°	500lm	CARMEL R-830-55°	CARR-8305506F-DN

Remark: With internal Non-Dimmable LED driver



CARMEL Round

LED Power	System Power	Input	CRI	CCT	Beam	System Output	Model	Code
5 W	6 W	220-240 VAC	80	3000K	55°	500lm	CARMEL S-830-55°	CARS-8305506F-DN


Remark: With internal Non-Dimmable LED driver





CARMEL Square

Light Distribution

3000K






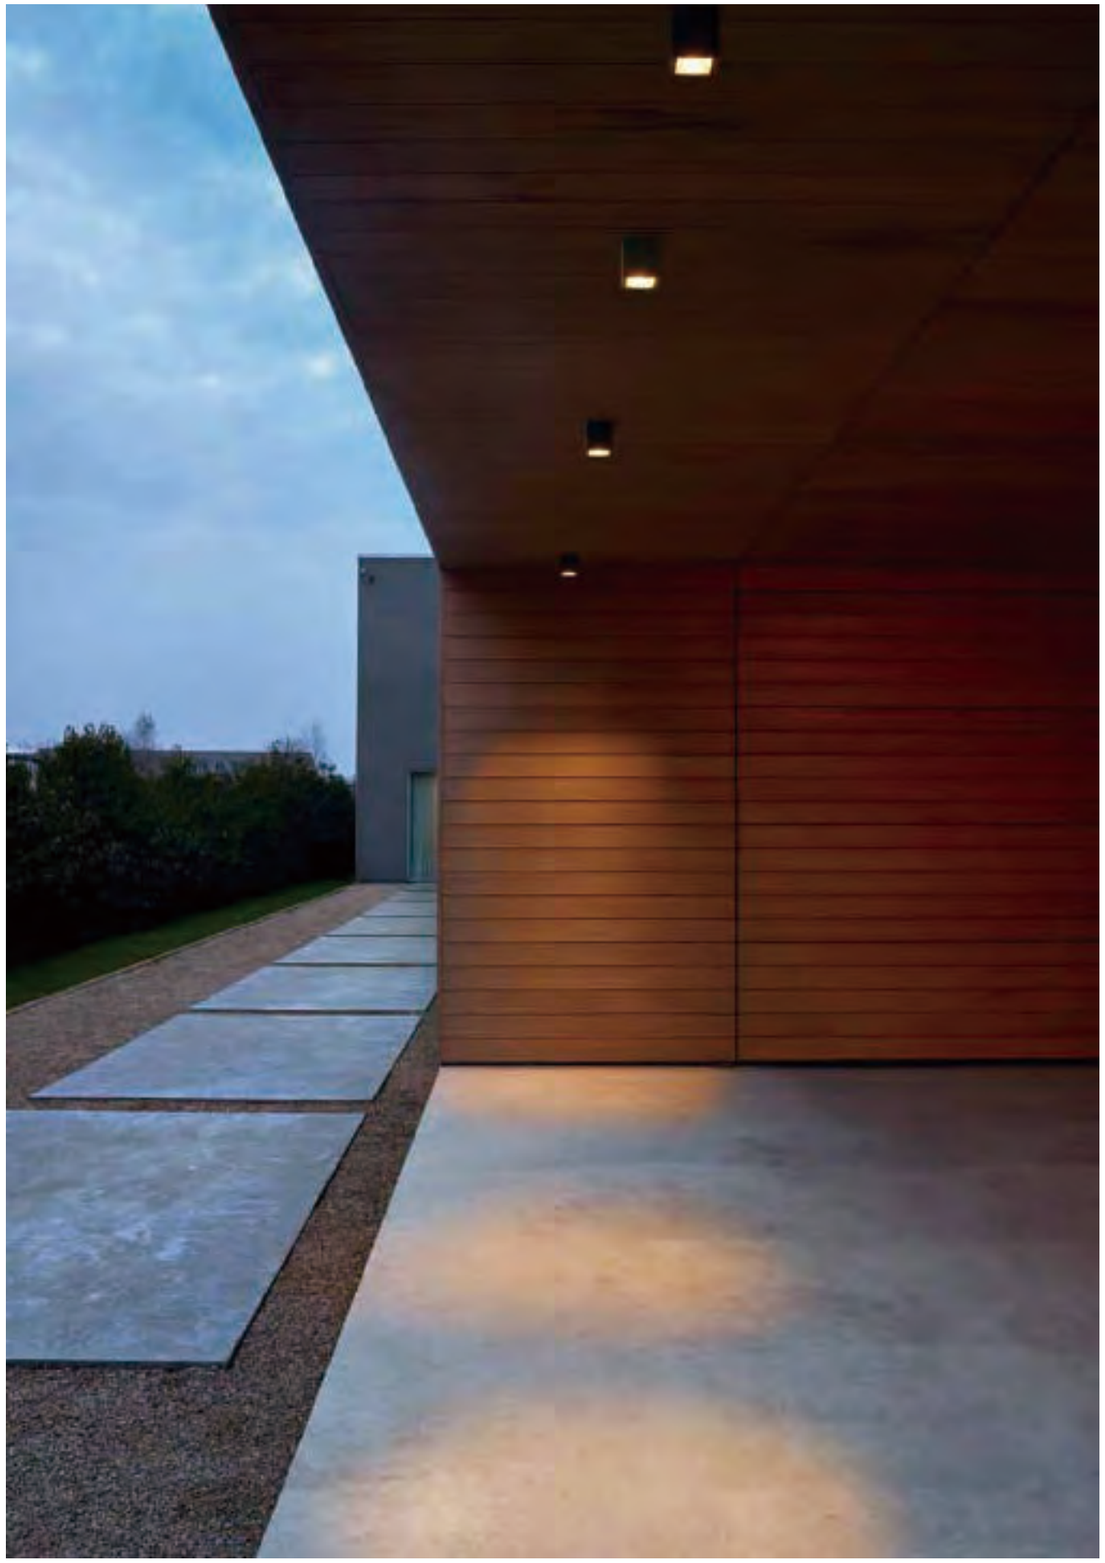

NEKO / CLIFTON
LED Ceiling Light



25W | CRI80 | 3000K | 110° | IP54 | Ik10 | EDISON 50,000h@L80B10 | CE | Body: Aluminum Color: Dark-Grey




LED Power	System Power	Input	CRI	CCT	Beam	System Output	Model	Code
22 W	25 W	220-240 VAC	80	3000K	110°	2350lm	CLIFTON-830-110°	CLIF-830A125F-DN

Remark: With internal Non-Dimmable LED driver



Light Distribution

3000K






NEKO / RIVA Round

LED Ceiling Light

NEW



14W | CRI80 | 3000K | 110° | IP54 | PHILIPS 50,000h@L80B10 | CE | Body: Aluminum Color: Dark-Grey






LED Power	System Power	Input	CRI	CCT	Beam	System Output	Model	Code
12 W	14 W	220-240 VAC	80	3000K	110°	1150lm	RIVR-14W-830-110°	RIVR-830A114F-DN

Remark: With internal Non-Dimmable LED driver

Light Distribution


3000K




NEKO / RIVA Square

LED Ceiling Light

NEW



14W | CRI80 | 3000K | 110° | IP54 | PHILIPS 50,000h@L80B10 | CE | Body: Aluminum Color: Dark-Grey






LED Power	System Power	Input	CRI	CCT	Beam	System Output	Model	Code
12 W	14 W	220-240 VAC	80	3000K	110°	1150lm	RIVS-14W-830-110°	RIVS-830A114F-DN

Remark: With internal Non-Dimmable LED driver

Light Distribution

3000K



NEKO / CAMPSBAY

LED Wall Light




CAMPSBAY Single



CAMPSBAY Double



6W
12W | CRI80 | 3000K | 45° | IP65 | IK07 | CREE 50,000h@L80B10 | CE | Body: Aluminum Color: Dark-Grey



LED Power	System Power	Input	CRI	CCT	Beam	System Output	Model	Code
5 W	6 W	220-240 VAC	80	3000K	45°	500lm	CAMPSBAY Single-830-45°	CAMS-8304506F-DN

Remark: With internal Non-Dimmable LED driver



CAMPSBAY Single

10 W	12 W	220-240 VAC	80	3000K	45°	1000lm	CAMPSBAY Double-830-45°	CAMD-8304512F-DN


Remark: With internal Non-Dimmable LED driver




CAMPSBAY Double

Light Distribution

3000K






NEKO / LAGOON

LED Wall Light





11W | CRI80 | 3000K | 100° | IP65 | IK07 | CREE 50,000h@L80B10 | CE | Body: Aluminum Color: Dark-Grey




LED Power	System Power	Input	CRI	CCT	Beam	System Output	Model	Code
9 W	11 W	220-240 VAC	80	3000K	100°	950lm	LAGOON-830-100°	LAG-830A011F-DN

Remark: With internal Non-Dimmable LED driver

Light Distribution

3000K








NEKO / CRUZ D

LED Wall Light

NEW



14W | CRI80 | 3000K | 120° | IP65 | OSRAM 50,000h@L80B10 | CE | Body: Aluminum Color: Dark-Grey







LED Power	System Power	Input	CRI	CCT	Beam	System Output	Model	Code
12 W	14 W	220-240 VAC	80	3000K	120°	1400lm	RCRUD-830-120°	CRUD-830A214F-DN

Remark: With internal Non-Dimmable LED driver

Light Distribution

3000K



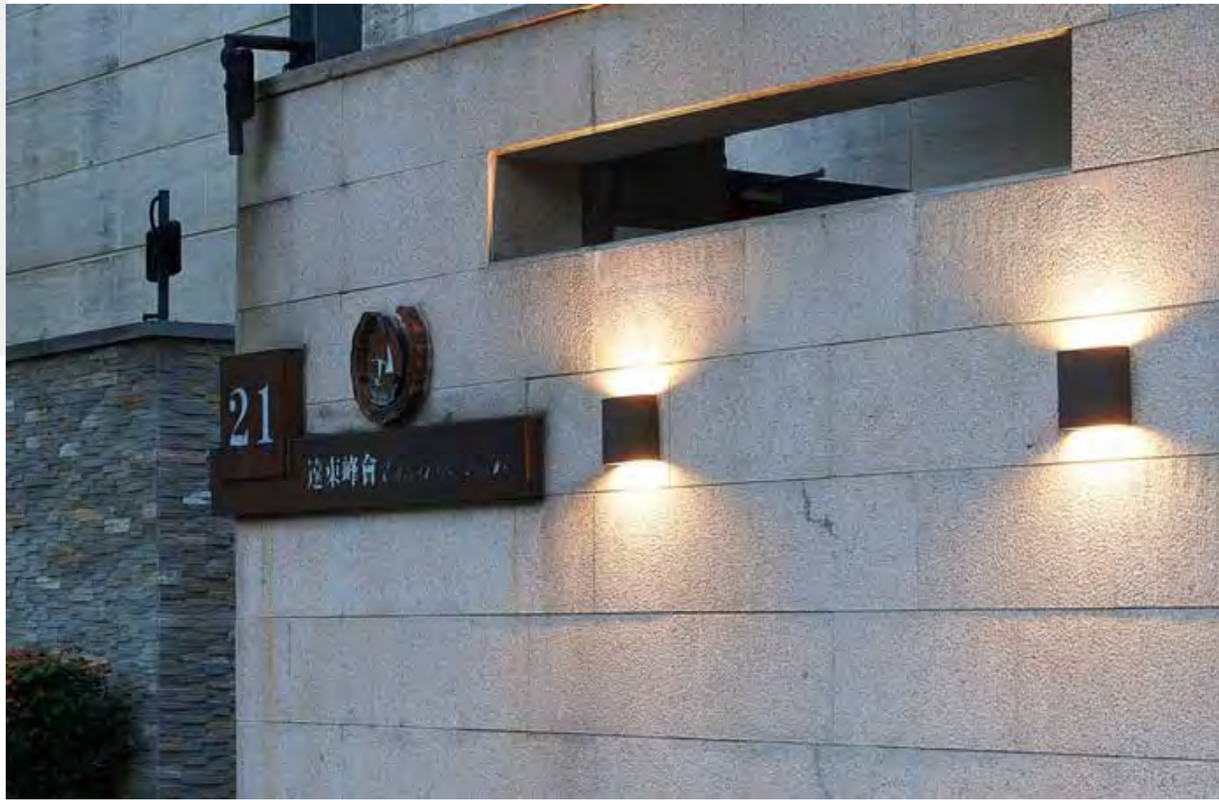


NEKO / CAPRI

LED Wall Light

NEW



16W | CRI80 | 3000K | 100° | IP65 | CREE 50,000h@L80B10 | CE | Body: Aluminum Color: Dark-Grey






LED Power	System Power	Input	CRI	CCT	Beam	System Output	Model	Code
14 W	16 W	220-240 VAC	80	3000K	100°	1300lm	CAPI-830-100°	CAPI-830A016F-DN

Remark: With internal Non-Dimmable LED driver

Light Distribution


3000K






NEKO / BAY

LED Wall Light





6W | CRI80 | 3000K | 90° | IP65 | IK07 | CREE 50,000h@L80B10 | CE | Body: Aluminum Color: Dark-Grey


LED Power	System Power	Input	CRI	CCT	Beam	System Output	Model	Code
5 W	6 W	220-240 VAC	80	3000K	90°	430lm	BAY-830-90°	BAY-8309006F-DN

Remark: With internal Non-Dimmable LED driver



Light Distribution

3000K






NEKO / ASCONA

LED Wall Light



10W | CRI80 | 3000K | 110° | IP65 | IK10 | EDISON 50,000h@L80B10 | CE | Body: Aluminum Color: Dark-Grey




LED Power	System Power	Input	CRI	CCT	Beam	System Output	Model	Code
8 W	10 W	220-240 VAC	80	3000K	110°	630lm	ASCONA-830-110°	ASCO-830A110F-DN

Remark: With internal Non-Dimmable LED driver



Light Distribution

3000K






NEKO / NICE 250

LED Wall Light

NEW



7W
14W | CRI80 | 3000K | 110° | **IP65** | PHILIPS 50,000h@L80B10 | CE | Body: Aluminum
Color: Dark-Grey



LED Power	System Power	Input	CRI	CCT	Beam	System Output	Model	Code
5 W	7 W	220-240 VAC	80	3000K	110°	650lm	NICE 250S-830-110°	N25S-830A107F-DN
							Remark: With internal	Non-Dimmable LED driver



NICE 250 Single


12 W	14 W	220-240 VAC	80	3000K	110°	1300lm	NICE 250D-830-110°	N25D-830A114F-DN
							Remark: With internal	Non-Dimmable LED driver




NICE 250 Double

Light Distribution

3000K








NEKO / NICE 500

LED Wall Light

NEW





14W
20W | CRI80 | 3000K | 110° | **IP65** | PHILIPS 50,000h@L80B10 | CE | Body: Aluminum
Color: Dark-Grey

LED Power	System Power	Input	CRI	CCT	Beam	System Output	Model	Code
12 W	14 W	220-240 VAC	80	3000K	110°	1300lm	NICE 500S-830-110°	N50S-830A114F-DN

Remark: With internal Non-Dimmable LED driver



NICE 500 Single

LED Power	System Power	Input	CRI	CCT	Beam	System Output	Model	Code
18 W	20 W	220-240 VAC	80	3000K	110°	1800lm	NICE 500D-830-110°	N50D-830A120F-DN


Remark: With internal Non-Dimmable LED driver





NICE 500 Double

Light Distribution


3000K






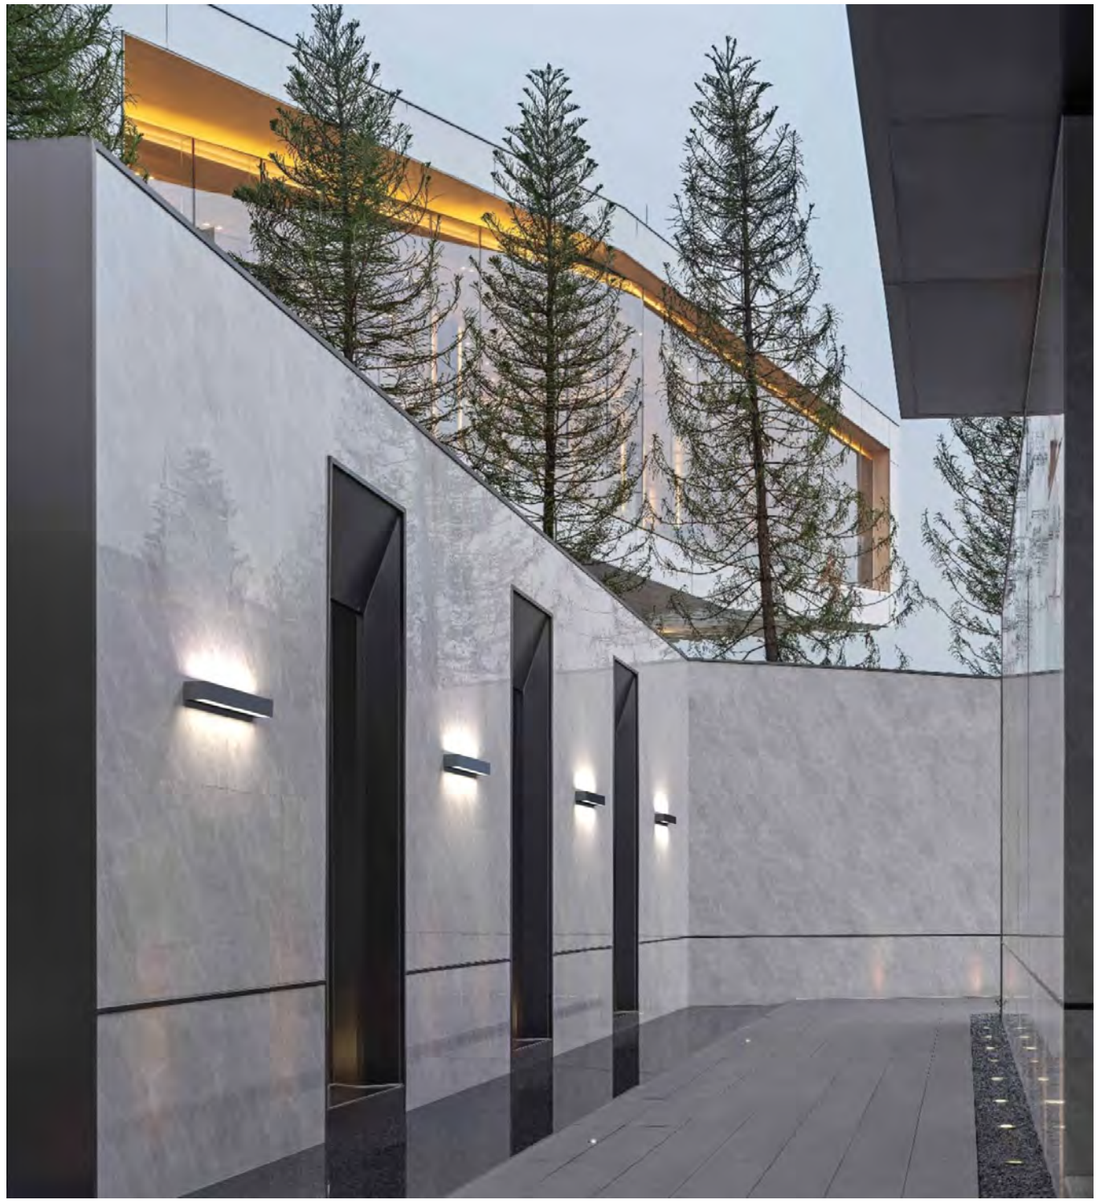

NEKO / St.Tropez
Window Light

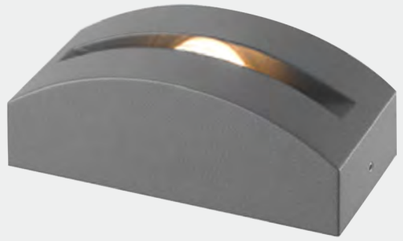


6W | CRI80 | 3000K | 3° | **IP65** | **IK10** | CREE 50,000h@L80B10 | CE | 3 YEARS | Body: Aluminum Color: Dark-Grey




LED Power	System Power	Input	CRI	CCT	Beam	System Output	Model	Code
4 W	6 W	220-240 VAC	80	3000K	3°	300lm	St.Tropez-830-3°	STTZ-8300306F-DN

Remark: With internal Non-Dimmable LED driver



Light Distribution

3000K









Ceiling / windows frame mounted light
Ideally lighting up the frame of doors, windows, corridors, etc
With its self-balancing system making the un-even surface a proper lighting effect

NEKO / Capetown-Recessed


Recessed LED Step Light




Capetown Round-Recessed




Capetown Square-Recessed






4.5W | CRI80 | 3000K | 65° | IP65 | IK07 | EDISON 50,000h@L80B10 | CE | Body: Aluminum Color: Dark-Grey



Round-Mounting Box



Square-Mounting Box

LED Power	System Power	Input	Cutout	CRI	CCT	Beam	System Output	Model	Code
3 W	4.5 W	220-240 VAC	Ø110*55	80	3000K	65°	155lm	Capetown RR-830-65°	CTRR-8306505F-DN

Remark: With internal Non-Dimmable LED driver



Capetown Round-Recessed

LED Power	System Power	Input	Cutout	CRI	CCT	Beam	System Output	Model	Code
3 W	4.5 W	220-240 VAC	110*110*55	80	3000K	65°	165lm	Capetown SR-830-65°	CTSR-8306505F-DN


Remark: With internal Non-Dimmable LED driver





Capetown Square-Recessed

Light Distribution

3000K





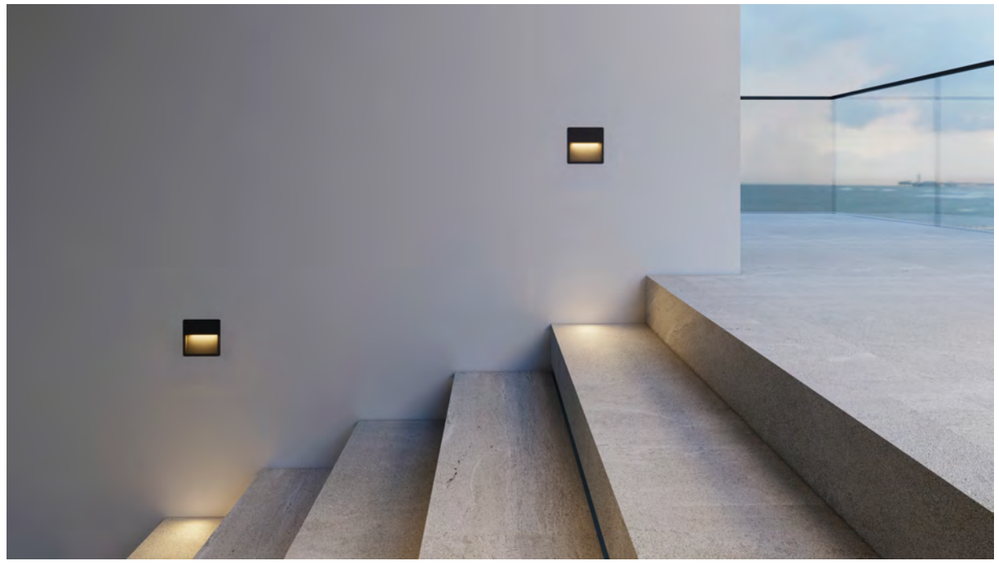



NEKO / Capetown-Surface

LED Step Light




Capetown Round-Surface



Capetown Square-Surface

4.5W | CRI80 | 3000K | 65° | IP65 | IK07 | EDISON 50,000hr@L80B10 | CE | Body: Aluminum Color: Dark-Grey



Capetown Round-Surface Capetown Square-Surface

LED Power	System Power	Input	CRI	CCT	Beam	System Output	Model	Code
3 W	4.5 W	220-240 VAC	80	3000K	65°	150lm	Capetown RS-830-65°	CTRS-8306505F-DN

Remark: With internal Non-Dimmable LED driver



Capetown Round-Surface

LED Power	System Power	Input	CRI	CCT	Beam	System Output	Model	Code
3 W	4.5 W	220-240 VAC	80	3000K	65°	170lm	Capetown SS-830-65°	CTSS-8306505F-DN


Remark: With internal Non-Dimmable LED driver




Capetown Square-Surface


Light Distribution

3000K







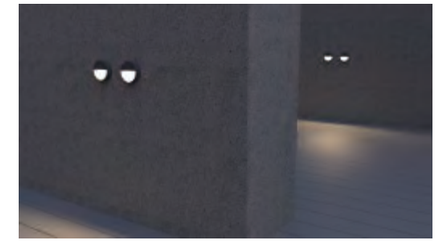

NEKO / CALIFORNIA


LED Bollard Lamp



CALIFORNIA 12



CALIFORNIA 16



13W
19W | CRI80 | 3000K | IP65 | IK10 | EDISON 50,000h@L80B10 | CE | Body: Aluminum Color: Dark-Grey



CALIFORNIA 12

LED Power	System Power	Input	CRI	CCT	System Output	Model	Code
11 W	13 W	220-240 VAC	80	3000K	660lm	CALIFORNIA 12-830	CA12-830C613F-DN

Remark: With internal Non-Dimmable LED driver



CALIFORNIA 16


17 W	19 W	220-240 VAC	80	3000K	1220lm	CALIFORNIA 16-830	CA16-830C619F-DN

Remark: With internal Non-Dimmable LED driver


Light Distribution


3000K

CALIFORNIA 12-830



CALIFORNIA 16-830






Light Emission 360



NEKO / DURBAN
LED Bollard Lamp

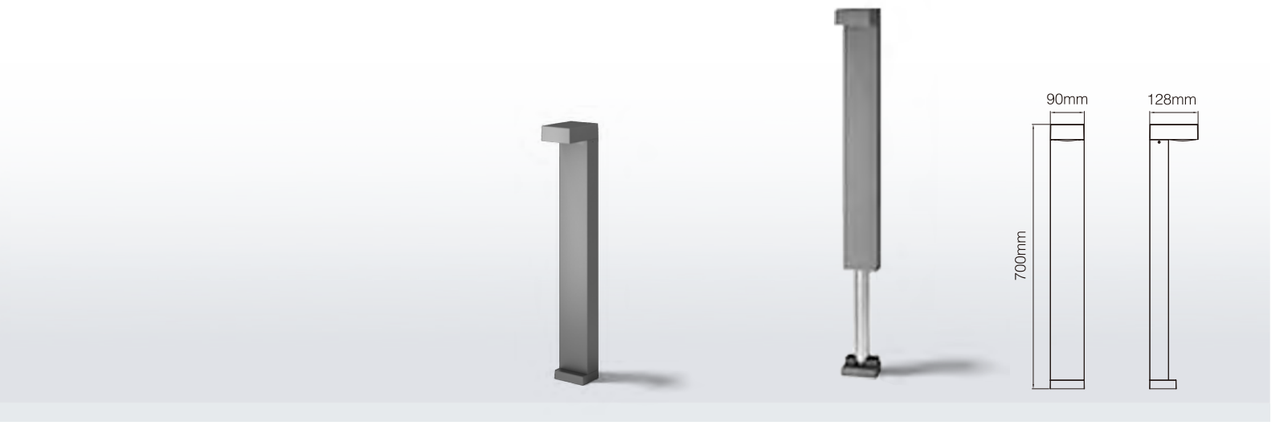

6W | CRI80 | 3000K | IP65 | IK07 | CREE 50,000h@L80B10 | CE | Body: Aluminum Color: Dark-Grey


LED Power	System Power	Input	CRI	CCT	Beam	System Output	Model	Code
5 W	6 W	220-240 VAC	80	3000K		450lm	DURBAN-830	DURB-830B706F-DN


Remark: With internal Non-Dimmable LED driver




Light Distribution

3000K





Anchorage installation

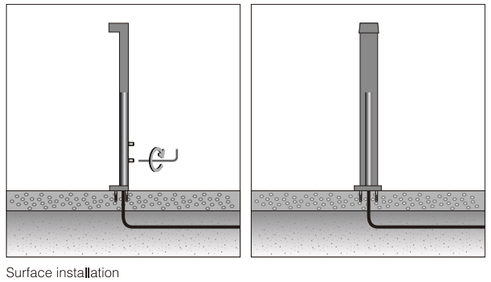

Surface installation







NEKO / POSITANO

LED Bollard Lamp

NEW




POSITANO 300



POSITANO 600

7W | CRI80 | 3000K | 50° | IP65 | PHILIPS 50,000h@L80B10 | CE | Body: Aluminum Color: Dark-Grey



LED Power	System Power	Input	CRI	CCT	Beam	System Output	Model	Code
5 W	7 W	220-240 VAC	80	3000K	50°	200lm	PTO3-830-50°	PTO3-8305007F-DN

Remark: With internal Non-Dimmable LED driver



POSITANO 300

LED Power	System Power	Input	CRI	CCT	Beam	System Output	Model	Code
5 W	7 W	220-240 VAC	80	3000K	50°	200lm	PTO6-830-50°	PTO6-8305007F-DN


Remark: With internal Non-Dimmable LED driver




POSITANO 600

Light Distribution

3000K







NEKO / PORTOFINO
Projector Light



PORTOFINO S




PORTOFINO M



PORTOFINO L

4W
11W
13W | CRI80 | 3000K | 20°
35° | IP65 | IK07 | CREE 50,000h@L80B10 | CE | Body: Aluminum
Color: Dark-Grey

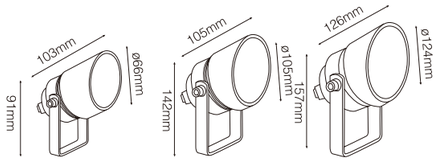

LED Power	System Power	Input	CRI	CCT	Beam	System Output	Model	Code
3 W	4 W	220-240 VAC	80	3000K	35°	250lm	PORTOFINO S-830-35°	PORS-8303504F-DN

Remark: With internal Non-Dimmable LED driver



Cable in 1.5 meters

9 W	11 W	220-240 VAC	80	3000K	20°	900lm	PORTOFINO M-830-20°	PORM-8302011F-DN

Remark: With internal Non-Dimmable LED driver



Cable in 1.5 meters

11 W	13 W	220-240 VAC	80	3000K	20°	1050lm	PORTOFINO L-830-20°	PORL-8302013F-DN


Remark: With internal Non-Dimmable LED driver



Cable in 1.5 meters

Light Distribution

3000K

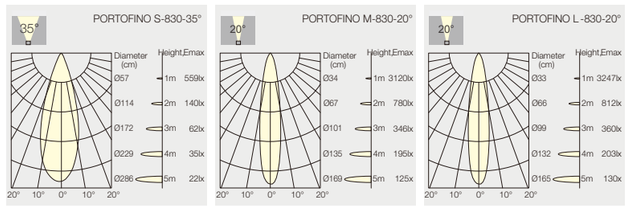




Stake for PORTOFINO series projectors

NEKO / PORTOFINO Adjustable
Beam Angle Zooming Projector Light





11W | CRI80 | 3000K | 15°-60° Zooming | IP65 | IK07 | EDISON 50,000h@L80B10 | CE | Body: Aluminum Color: Dark-Grey

LED Power	System Power	Input	CRI	CCT	Beam	System Output	Model	Code
9 W	11 W	220-240 VAC	80	3000K	15°-60°	Max.450lm	PORTOFINO A-830-Z	PORA-830ZM11F-DN


Remark: With internal Non-Dimmable LED driver




Cable in 1.5 meters

Light Distribution

3000K

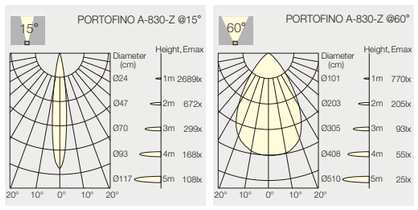

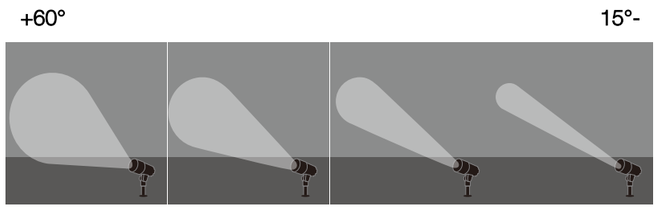




NEKO / AFTER7 Mini
Projector Light



5.5W | CRI80 | 3000K | 30° 45° | **IP67** | **IK10** | CITIZEN 50,000h@L80B10 | CE | Body: Aluminum Color: Dark-Grey



LED Power	System Power	LED Voltage	CRI	CCT	Beam	System Output	Model	Code
5 W	5.5 W	24 V	80	3000K	30°	500lm	AFTER7 Mini-830-30°	AFMI-8303006F-DN
				3000K	45°	500lm	AFTER7 Mini-830-45°	AFMI-8304506F-DN

Remark: Remote 24VDC LED driver is required (Non-Dimmable)



Cable in 3 meters

LED Power	System Power	LED Voltage	CRI	CCT	Beam	System Output	Model	Code
5 W	5.5 W	24 V	80	3000K	30°	500lm	AFTER7 Mini-830-30°-H	AFMI-8303006F-DN-H
				3000K	45°	500lm	AFTER7 Mini-830-45°-H	AFMI-8304506F-DN-H

Remark: Remote 24VDC LED driver is required (Non-Dimmable)




Cable in 3 meters

Accessory: Stake for AFTER7 series projectors



Light Distribution


3000K

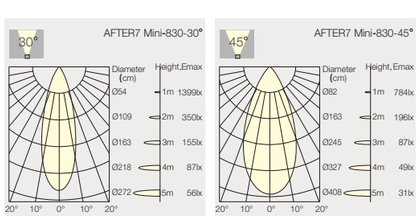

NEKO / AFTER7 Maxi
Projector Light



10W | CRI80 | 3000K | 20° 30° 50° | **IP67** | **IK10** | bridgelux 50,000h@L80B10 | CE | Body: Aluminum Color: Dark-Grey



LED Power	System Power	LED Voltage	CRI	CCT	Beam	System Output	Model	Code
9 W	10 W	24 V	80	3000K	20°	850lm	AFTER7 Maxi-830-20°	AFMA-8302010F-DN
				3000K	30°	850lm	AFTER7 Maxi-830-30°	AFMA-8303010F-DN
				3000K	50°	850lm	AFTER7 Maxi-830-50°	AFMA-8305010F-DN

Remark: Remote 24VDC LED driver is required (Non-Dimmable)



Cable in 3 meters

LED Power	System Power	LED Voltage	CRI	CCT	Beam	System Output	Model	Code
9 W	10 W	24 V	80	3000K	20°	850lm	AFTER7 Maxi-830-20°-H	AFMA-8302010F-DN-H
				3000K	30°	850lm	AFTER7 Maxi-830-30°-H	AFMA-8303010F-DN-H
				3000K	50°	850lm	AFTER7 Maxi-830-50°-H	AFMA-8305010F-DN-H

Remark: Remote 24VDC LED driver is required (Non-Dimmable)




Cable in 3 meters

Accessory: Stake for AFTER7 series projectors



Light Distribution

3000K

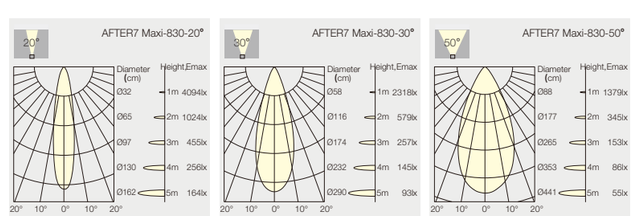


NEKO / TERARACE Micro


Recessed Ground Light



1.5W | CRI80 | 3000K | 18° 40° 65° | IP67 | IK10 | OSRAM 50,000h@L80B10 | CE | 3 YEARS

Top Cover: Stainless Steel
Body: Aluminum
Color: Dark-Grey






Cable in 3 meters

LED Power	System Power	LED Voltage	CRI	CCT	Beam	System Output	Model	Code
1 W	1.5 W	24 V	80	3000K	18°	100lm	TERARACE Micro-830-18°	TEMI-8301802F-DN
				3000K	40°	100lm	TERARACE Micro-830-40°	TEMI-8304002F-DN
				3000K	65°	100lm	TERARACE Micro-830-65°	TEMI-8306502F-DN

Remark: Remote 24VDC LED driver is required (Non-Dimmable)


Accessory: Pre-embedded Tube





Light Distribution

3000K

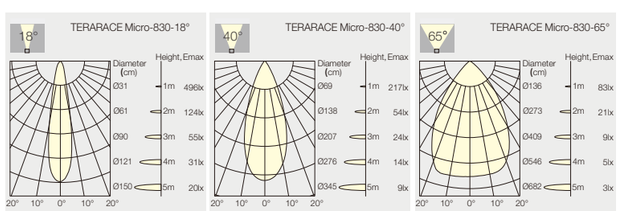


NEKO / TERARACE Nano


Recessed Ground Light



2W | CRI80 | 3000K | 18° 35° 60° | IP67 | IK10 | OSRAM 50,000h@L80B10 | CE | 3 YEARS

Top Cover: Stainless Steel
Body: Aluminum
Color: Dark-Grey






Cable in 3 meters

LED Power	System Power	LED Voltage	CRI	CCT	Beam	System Output	Model	Code
1.6 W	2 W	24 V	80	3000K	18°	120lm	TERARACE Nano-830-18°	TENA-8301802F-DN
				3000K	35°	120lm	TERARACE Nano-830-35°	TENA-8303502F-DN
				3000K	60°	120lm	TERARACE Nano-830-60°	TENA-8306002F-DN

Remark: Remote 24VDC LED driver is required (Non-Dimmable)


Accessory: Pre-embedded Tube





Light Distribution


3000K

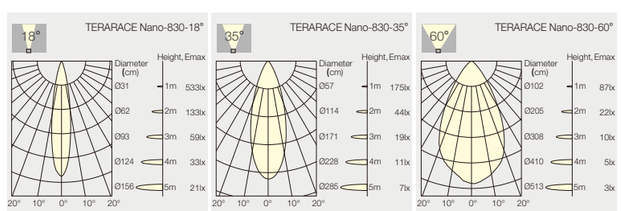

NEKO / TERARACE Mini
Recessed Ground Light



5.5W | CRI80 | 3000K | 30° 45° | **IP67** | **IK10** | CITIZEN 50,000h@L80B10 | CE | 3 YEARS | Top Cover: Stainless Steel
Body: Aluminum
Color: Dark-Grey




LED Power	System Power	LED Voltage	CRI	CCT	Beam	System Output	Model	Code
5 W	5.5 W	24 V	80	3000K	30°	500lm	TERARACE Mini-830-30°	TEMI-8303006F-DN
				3000K	45°	500lm	TERARACE Mini-830-45°	TEMI-8304506F-DN

Remark: Remote 24VDC LED driver is required (Non-Dimmable)




Cable in 3 meters

Accessory: Pre-embedded Tube



Light Distribution


3000K

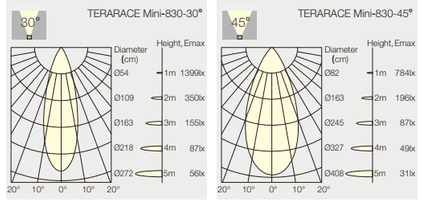

NEKO / TERARACE Maxi
Recessed Ground Light



10W | CRI80 | 3000K | 20° 30° 50° | **IP67** | **IK10** | bridgelux 50,000h@L80B10 | CE | 3 YEARS | Top Cover: Stainless Steel
Body: Aluminum
Color: Dark-Grey




LED Power	System Power	LED Voltage	CRI	CCT	Beam	System Output	Model	Code
9 W	10 W	24 V	80	3000K	20°	850lm	TERARACE Maxi-830-20°	TEMA-8302010F-DN
				3000K	30°	850lm	TERARACE Maxi-830-30°	TEMA-8303010F-DN
				3000K	50°	850lm	TERARACE Maxi-830-50°	TEMA-8305010F-DN

Remark: Remote 24VDC LED driver is required (Non-Dimmable)




Cable in 3 meters

Accessory: Pre-embedded Tube




Light Distribution

3000K

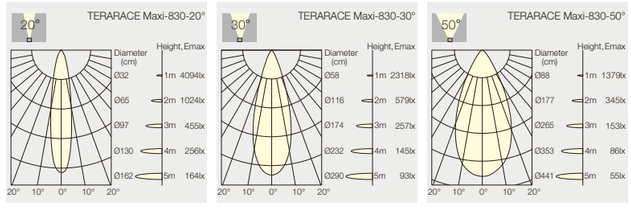

Partnerschaft/ Partnership

- Headquarters
- Factory
- German Office / Warehouse
- N. America
- UK Office
- France Office
- Beijing Office
- Shanghai Office
- Distributor

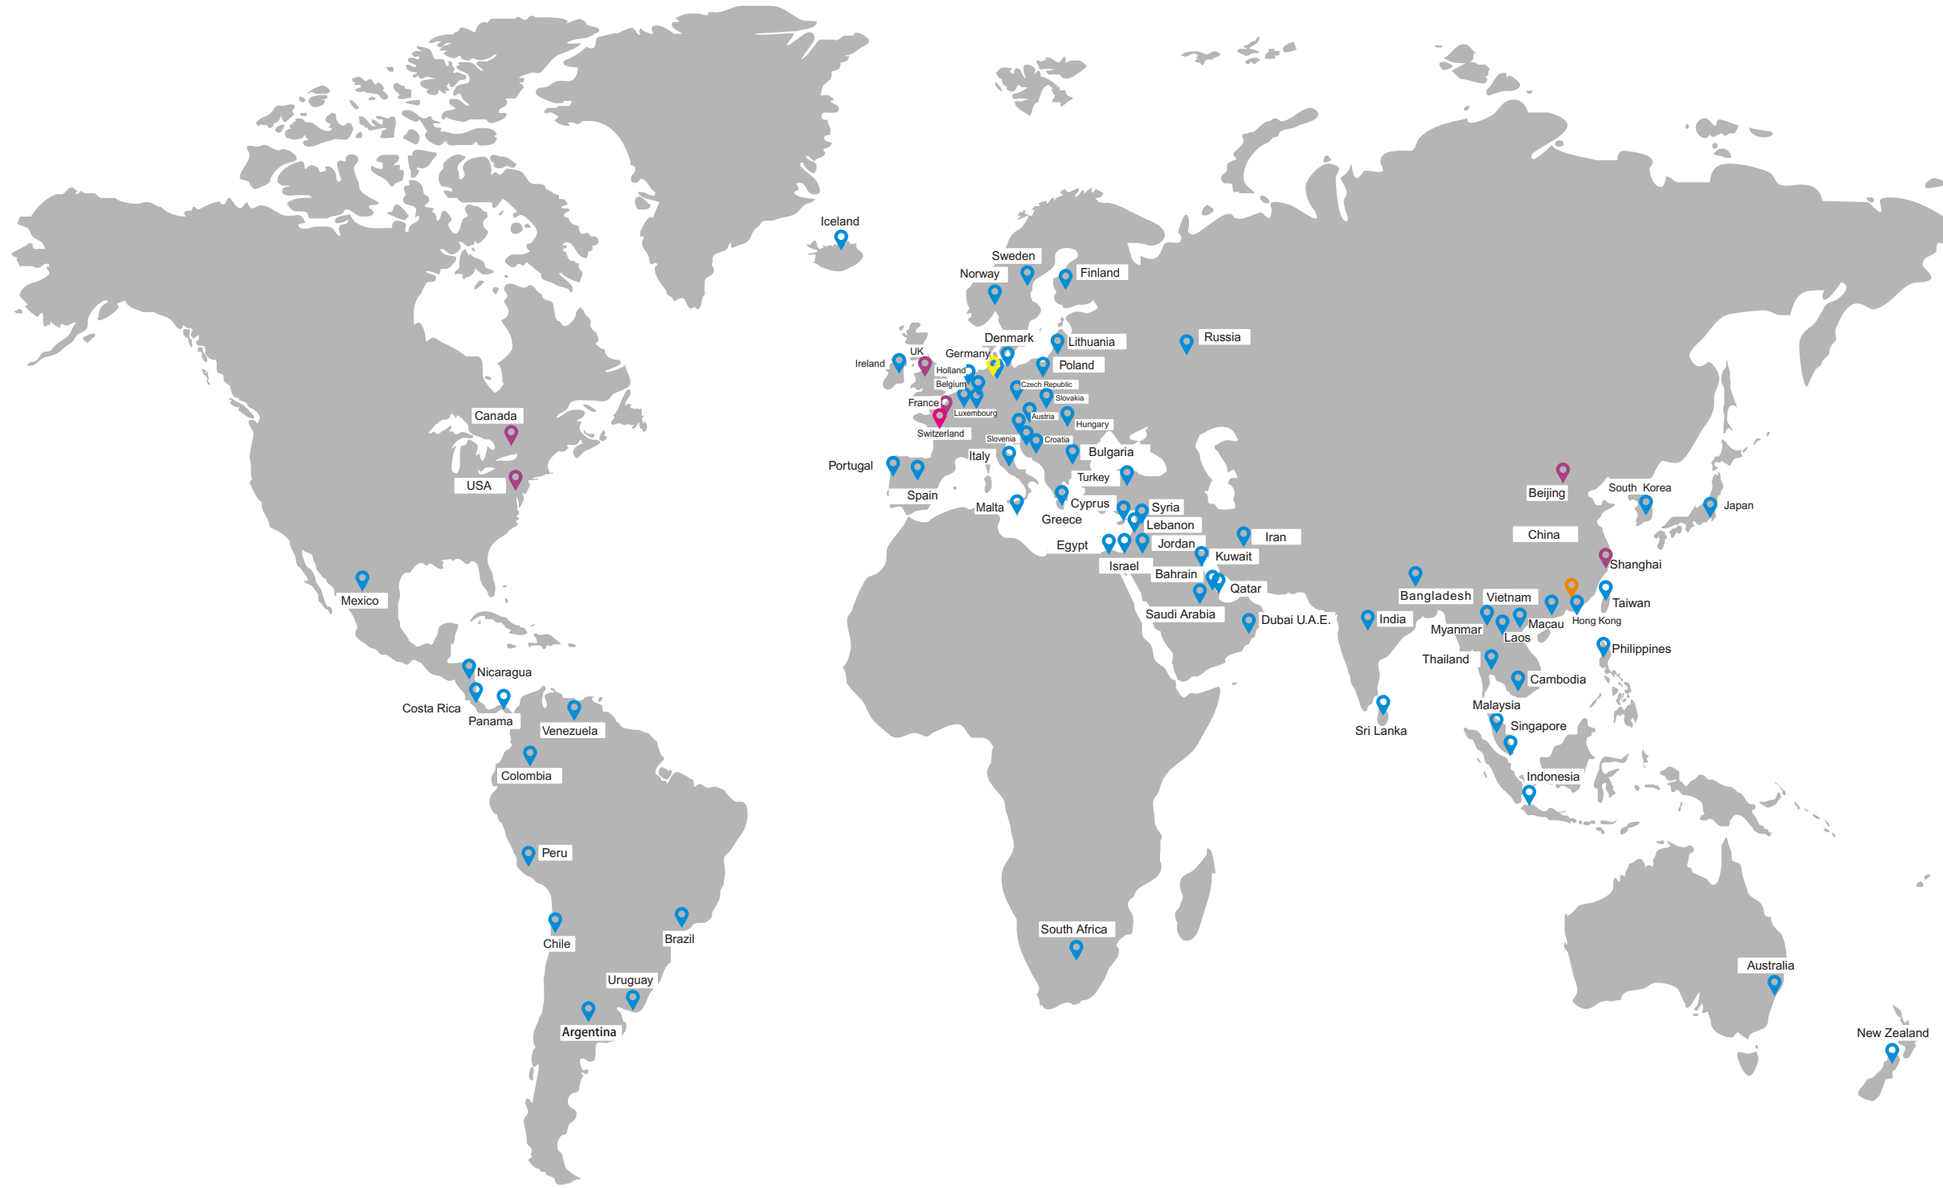

NEKO LIGHTING AG

Switzerland Headquarters

Kreuzstrasse 2, CH-8008 Zürich, Switzerland
Tel: +41 44 451 80 15
sales@nekolighting.com
www.nekolighting.com

NEKO LIGHTING LTD.

China Factory

Huizhou, P.R.China | P.C.: 516057
Tel: +86 755 3669 7712
sales@nekolighting.com
www.nekolighting.com

NEKO LIGHTING GmbH

German Office / Warehouse

Lange Reihe 170, 59071 Hamm, Germany
Tel: +49 2381 8770960
sales@nekolighting.de
www.nekolighting.de

NEKO LIGHTING INC.

Canada Office

3025 Bates Road, Montreal, QC H3S 2W8, Canada

USA Office

132 32nd Street, Suite 313, Brooklyn, NY 11232, USA
Tel: +1 855 LED NEKO (533 6356)
sales@nekolighting.com

NEKO Lighting Ltd.

UK Office

6C Calderdale Business Park, Club Lane,
Ovenden, Halifax, Hx2 8DB
andy@nekolightinguk.com
www.nekolighting.com

NEKO Lighting

France Office

8 rue du Sentier, 75002, Paris, France
+33 1 44 50 20 30
sales@nekolighting.fr
www.nekolighting.com

NEKO Beijing Office

Room 218, Huaxi Loft, 5th Da Yang Fang Road,
Chaoyang District, Beijing, P.R.China
Tel: +86 173 2681 1100
sales@nekolighting.com

NEKO Shanghai Office

Haiyang Building Room 2811, No. 550, Yan'an East Road,
Huangfu District, Shanghai, P.R.China
Tel: +86 189 2602 8927
jonson@nekolighting.com