




RONDO PERFORMANCE

A fluorescent architectural luminaire
offering exceptional performance

RONDO PERFORMANCE



VK55 VK56 VK56

Features:

- Decorative luminaire, 120-joule resistance
- Die-cast marine-grade aluminium base
- Colour: white
- Electronic ballast $\lambda \geq 0.95$
- High-efficiency satin clear polycarbonate diffuser
- Tamperproof stainless fastenings
- Plug-in gear tray (fluorescent)

○ RAL9003



Easy-Sensor® Pro
and Compact Sensor specifications
see pages 16-17



Dimming specifications
Corridor and Extinction warning functions
see pages 18-21





EB: electronic ballast
Not dimmable EEI = A2
Dimmable EEI = A1 / $\lambda \geq 0.95$

Options available (please enquire):

Dual-powered (separate circuit)
Twilight switch (preset to 70 lux)

● Standard CHC screws: add -VST to the product code.

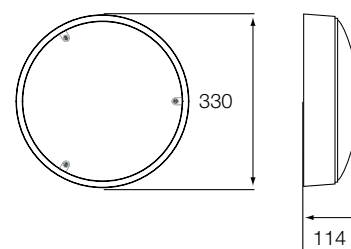

Flush-mounting option
(chargeable):
add suffix -LSE to the product code.

Recessing dimensions:
 \varnothing 340 mm x 75 mm
Index: VK56

FLUORESCENT E.B.

220-240 V AC / 50-60 Hz RoHS

LAMP			Not dimmable	Not dimmable + standby 1 W *	DALI dimmable + Corridor function(1)	+ Extinction warning(1)
1 x 26 W TC-TE	GX24q-3	LR4700	LR4700-CLV	LR4700-BHD	LR4700-OPE	
1 x 32 W TC-TE	GX24q-3	LR4702	LR4702-CLV	LR4702-BHD	LR4702-OPE	
1 x 42 W TC-TE	GX24q-4	LR4704	LR4704-CLV	LR4704-BHD	LR4704-OPE	
2 x 18 W TC-DE	G24q-2	LR4706	LR4706-CLV	LR4706-BHD	LR4706-OPE	
2 x 18 W TC-L	2G11	LR4708	LR4708-CLV	LR4708-BHD	LR4708-OPE	

(1) Requires external control (remote presence detector or other master luminaire, etc.) to activate the Corridor and Extinction warning functions.

* Standby light: LED 1 W, 350 mA, 87 lm, 4000 K, IRC > 80

FLUORESCENT E.B. + DETECTION

220-240 V AC / 50-60 Hz RoHS

LAMP			Detection only	Detection + standby LED 1 W *	Detection + Corridor function	Detection + Extinction warning
1 x 26 W TC-TE + Easy-Sensor® Pro detection	GX24q-3	LR4710	LR4710-CLV	LR4710-BHD	LR4710-OPE	
1 x 32 W TC-TE + Easy-Sensor® Pro detection	GX24q-3	LR4712	LR4712-CLV	LR4712-BHD	LR4712-OPE	
1 x 42 W TC-TE + Easy-Sensor® Pro detection	GX24q-4	LR4714	LR4714-CLV	LR4714-BHD	LR4714-OPE	
2 x 18 W TC-DE + Easy-Sensor® Pro detection	G24q-2	LR4716	LR4716-CLV	LR4716-BHD	LR4716-OPE	
2 x 18 W TC-L + Easy-Sensor® Pro detection	2G11	LR4718	LR4718-CLV	LR4718-BHD	LR4718-OPE	

* Standby light: LED 1 W, 350 mA, 87 lm, 4000 K, IRC > 80

Anti-vandal tool see pages 208-209.