

# BORGO

A compact, rip-out-resistant,  
wall-mounting luminaire.



BVCert. 6037554








## FEATURES:

- Very compact wall-mounting luminaire
- Body in ZP 10/10 steel
- Frame in ZP 20/10 steel
- CCT 4000 K, CRI min. 80
- Polyester powder-coated finish
- Opalescent polycarbonate diffuser
- Stainless steel vandal-resistant screws
- Supplied c/w cable seal
- RAL 7016 ●

## OPTIONS AVAILABLE ON REQUEST:

- 3000 K LEDs
- Standby LED
- Opalescent polycarbonate flat diffuser (IK11+ 80J)

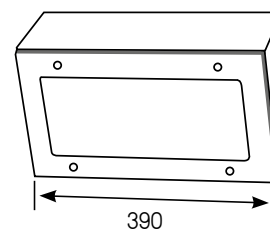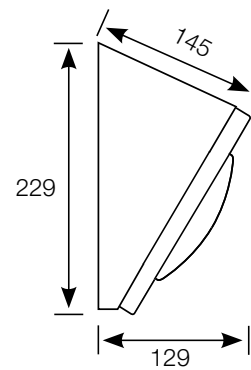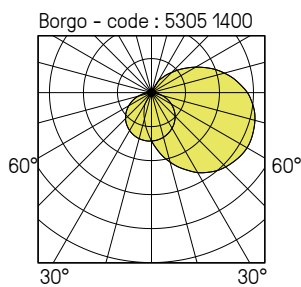


Power (W)	Luminaire light output (lm)	Luminaire efficacy (lm/W)	Code
8	725	91	5304 14--
17*	1700	100	5305 14--

**Lumen maintenance:** L80B10 / over 72,000 h  
L90B50 / 52,000 h

**Coding colour temperature 3000 K :** example 4000K : 5304 1400  
replace 4 with 3  
3000K : 5304 1300

**Codification** (\*Codification only for power 17 W) :  
rempalce the two dashes (..) by the corresponding figures:  
example 5305 14--

- 00 NO DETECTION
- 21 DALI DIMMABLE + SWITCH DIMMING + STANDBY WARNING

 Vandal-resistant tool (bit) to be ordered separately  
code : 9800 0004

### Additional options BORGO

**Coding:**  
add the corresponding suffix to the product code

- example : 5304 1400 ----
- 9413 FLAT DUROFLAM® DIFFUSER
  - 9415 FLAT OPALESCENT PC DIFFUSER
  - 9601 ANTI-GRAFFITI PROTECTION
  - 9702 STAINLESS STEEL CROSSPOINT SCREWS (VK44)

### DETAILS



