




HYBRID SPOT 7x

Surface Mounted Luminaire

- Very narrow focus light distribution
- High efficiency
- Lowest luminance in the periphery
- Tool-free optical assembly without gluing
- Optics replaceable without damage



| | |
|--------------------------------|--|
| Lamp | Luxeon M |
| Lumen output LED, (System) | 5600 lm @ 700 mA = 56 W, 3000 K, CRI 80 |
| Reflector, Lens | aluminium coated polycarbonate, coated polycarbonate |
| Electrical ballast | LED gear external |
| Dimming (options) | DALI, 1–10 V, Push |
| Luminaire type, assembly | surface-mounted |
| Dimensions, weight | Ø = 220 mm |
| Cast, heat sink | aluminium profile, protective screen |
| Colour / finish | powder coated, RAL 9016 (other RAL colors optional) |
| Protection marking, compliance | IP65, CE |
| Specials | customized versions on request |

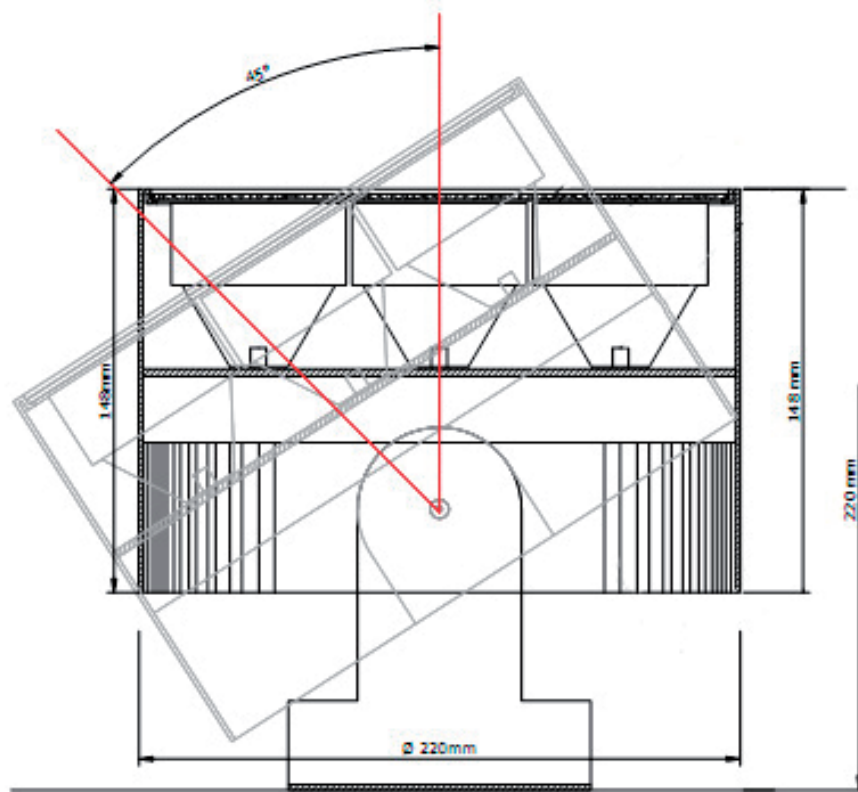

on/off = EV

1-10 V = AV

Dali = DA

Push = PH

Please replace the item number placeholder XX with the listed operating device options:

| Light distribution | Light colour | Colour rendering | Control gear | Order No. | +RAL |
|--------------------|--------------|------------------|--------------------|--------------------|------------------|
| | 2700 K | CRI 80 | 1-10 V, DALI, Push | I 7RR1 C 2780 XX | 9016 |
| | | CRI 90 | 1-10 V, DALI, Push | I 7RR1 C 2790 XX | 9016 |
| | 3000 K | CRI 80 | 1-10 V, DALI, Push | I 7RR1 C 3080 XX | 9016 |
| | | CRI 90 | 1-10 V, DALI, Push | I 7RR1 C 3090 XX | 9016 |
| | 4000 K | CRI 80 | 1-10 V, DALI, Push | I 7RR1 C 4080 XX | 9016 |
| | | 2700 K | CRI 80 | 1-10 V, DALI, Push | I 7RR1 I 2780 XX |
| CRI 90 | | | 1-10 V, DALI, Push | I 7RR1 I 2790 XX | 9016 |
| 3000 K | | CRI 80 | 1-10 V, DALI, Push | I 7RR1 I 3080 XX | 9016 |
| | | CRI 90 | 1-10 V, DALI, Push | I 7RR1 I 3090 XX | 9016 |
| 4000 K | | CRI 80 | 1-10 V, DALI, Push | I 7RR1 I 4080 XX | 9016 |