




## FRAME

code 2802.AC

AirCoral® wall lamp.

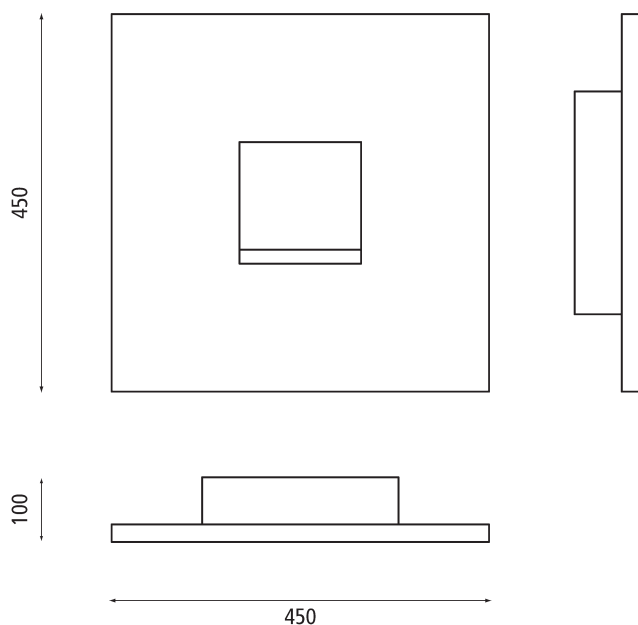

## TECHNICAL FEATURES

Type	Wall lamp
Material	AC: AirCoral®
Absorption capacity*	21.23 m <sup>2</sup>
Weight	-
Mounting	Wall mounting
IP rating	IP20
Control gear	-
Lamp type	QT-DE 12
Lamp wattage	150W max
Luminous efficacy	-
Light distribution	-
Fitting	R7s
Voltage connection	220-240V · 50-60Hz
Emergency	-
Energy efficiency class	A



FOR FURTHER INFORMATION PLEASE CONSULT THE GENERAL CATALOGUE BUZZI & BUZZI

*\*The absorption capacity per m<sup>3</sup> calculated by the American organization TCNA is parametrized for an average room of 2,7m in height and therefore expressed in m<sup>2</sup>*


Buzzi & Buzzi reserves itself the faculty to change or to modify, without advance notice, the dimensions and the technical characteristics of the products indicated in this catalogue, due to operative necessities to improve the functionality or updating with law regulations.



## FRAME

code 2804.AC

AirCoral® wall lamp.

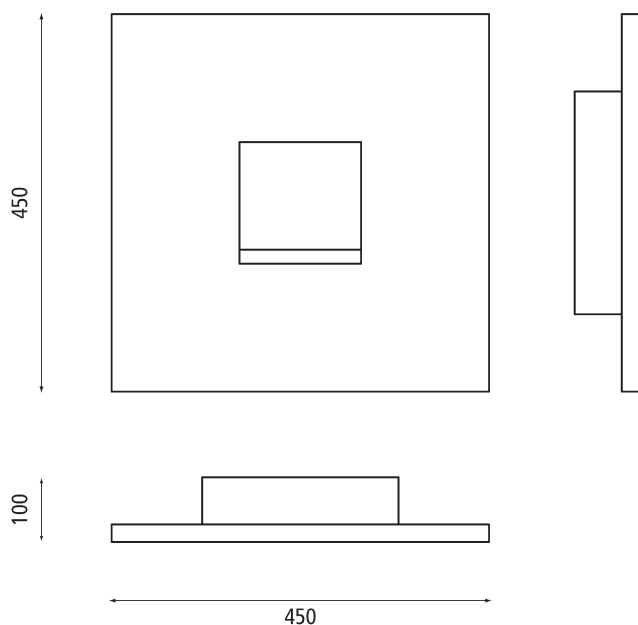

## TECHNICAL FEATURES

Type	Wall lamp
Material	AC: AirCoral®
Absorption capacity*	21.23 m <sup>2</sup>
Weight	-
Mounting	Wall mounting
IP rating	IP20
Control gear	Electronic ballast
Lamp type	TC-DEL
Lamp wattage	26W
Luminous efficacy	-
Light distribution	-
Fitting	G24q-3
Voltage connection	220-240V · 50-60Hz
Emergency	-
Energy efficiency class	A



FOR FURTHER INFORMATION PLEASE CONSULT THE GENERAL CATALOGUE BUZZI & BUZZI

*\*The absorption capacity per m<sup>3</sup> calculated by the American organization TCNA is parametrized for an average room of 2,7m in height and therefore expressed in m<sup>2</sup>*


Buzzi & Buzzi reserves itself the faculty to change or to modify, without advance notice, the dimensions and the technical characteristics of the products indicated in this catalogue, due to operative necessities to improve the functionality or updating with law regulations.



## FRAME

code 2805.P.AC

AirCoral® wall lamp.

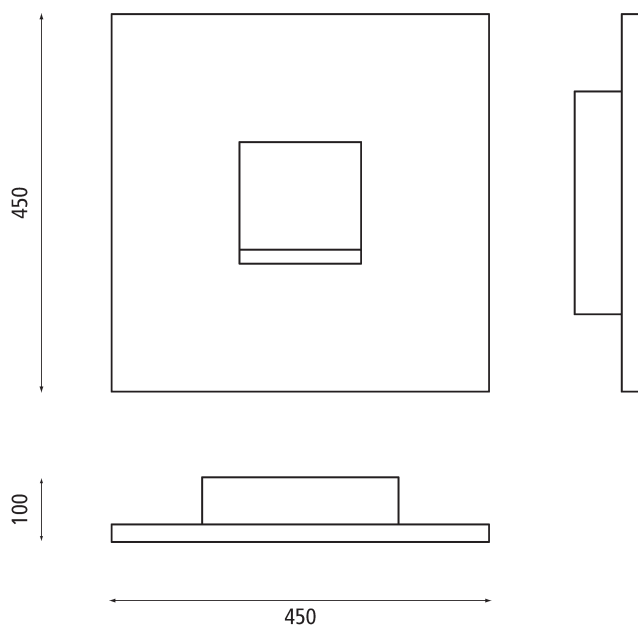

## TECHNICAL FEATURES

Type	Wall lamp
Material	AC: AirCoral®
Absorption capacity*	21.23 m <sup>2</sup>
Weight	-
Mounting	Wall mounting
IP rating	IP20
Control gear	Dimmable electronic ballast
Dimming method	Standard: dimmable switch dim. / push (on request: dimmable 1-10V o DALI)
Lamp type	TC-DEL
Lamp wattage	26W
Luminous efficacy	-
Light distribution	-
Fitting	G24q-3
Voltage connection	220-240V · 50-60Hz
Emergency	-
Energy efficiency class	A



FOR FURTHER INFORMATION PLEASE CONSULT THE GENERAL CATALOGUE BUZZI & BUZZI

*\*The absorption capacity per m3 calculated by the American organization TCNA is parametrized for an average room of 2,7m in height and therefore expressed in m2*


Buzzi & Buzzi reserves itself the faculty to change or to modify, without advance notice, the dimensions and the technical characteristics of the products indicated in this catalogue, due to operative necessities to improve the functionality or updating with law regulations.



## FRAME

code 2808.AC

AirCoral® wall lamp.

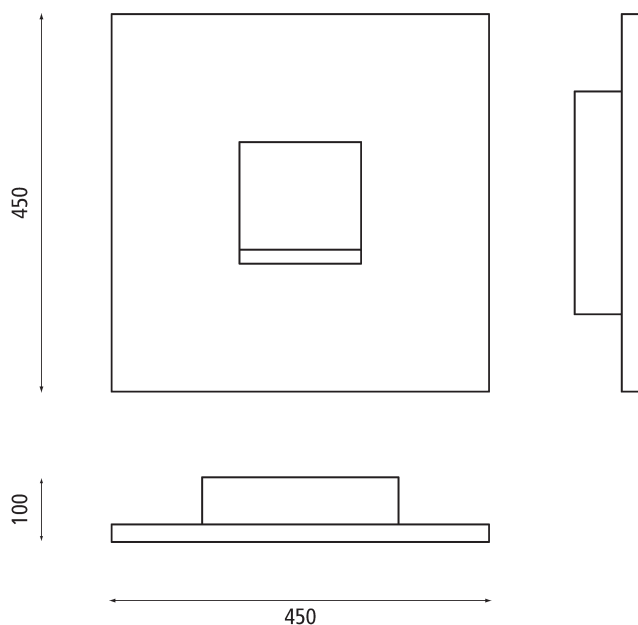

## TECHNICAL FEATURES

Type	Wall lamp
Material	AC: AirCoral®
Absorption capacity*	21.23 m <sup>2</sup>
Weight	-
Mounting	Wall mounting
IP rating	IP20
Control gear	Dimmable constant current driver
Dimming method	Trailing-edge and leading-edge dimming (20 - 100%)
Lamp type	LED 350mA
Lamp wattage	6W
Luminous efficacy	810 lm - 3000K
Light distribution	Wide beam 120°
Fitting	-
Light Colour	White 3000K
Light Colour	White 2700K - 4000K (on request)
Voltage connection	220-240V · 50-60Hz
CRI	>80
Emergency	-
Energy efficiency class	A+



FOR FURTHER INFORMATION PLEASE CONSULT THE GENERAL CATALOGUE BUZZI & BUZZI

\*The absorption capacity per m<sup>3</sup> calculated by the American organization TCNA is parametrized for an average room of 2,7m in height and therefore expressed in m<sup>2</sup>


Buzzi & Buzzi reserves itself the faculty to change or to modify, without advance notice, the dimensions and the technical characteristics of the products indicated in this catalogue, due to operative necessities to improve the functionality or updating with law regulations.



## FRAME

code 2804.ARTUSI

Coral® wall lamp.

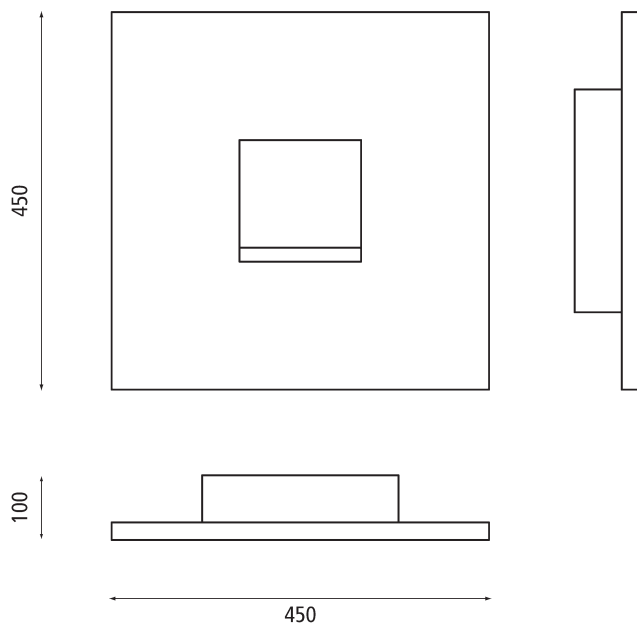

## TECHNICAL FEATURES

Type	Wall lamp
Finish	Acrylic
Weight	-
Mounting	Wall mounting
IP rating	IP20
Control gear	Electronic ballast
Lamp type	TC-DEL
Lamp wattage	26W
Luminous efficacy	-
Light distribution	-
Fitting	G24q-3
Voltage connection	220-240V · 50-60Hz
Emergency	-
Energy efficiency class	A



FOR FURTHER INFORMATION PLEASE CONSULT THE GENERAL CATALOGUE BUZZI & BUZZI

*\*The absorption capacity per m3 calculated by the American organization TCNA is parametrized for an average room of 2,7m in height and therefore expressed in m2*


Buzzi & Buzzi reserves itself the faculty to change or to modify, without advance notice, the dimensions and the technical characteristics of the products indicated in this catalogue, due to operative necessities to improve the functionality or updating with law regulations.



## FRAME

code 2804.JUNG

Coral® wall lamp.

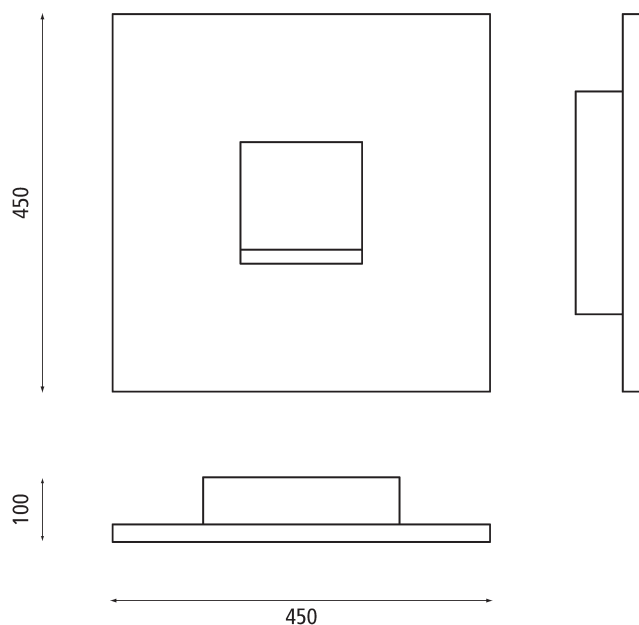

## TECHNICAL FEATURES

Type	Wall lamp
Finish	Printed on plexiglass
Weight	-
Mounting	Wall mounting
IP rating	IP20
Control gear	Electronic ballast
Lamp type	TC-DEL
Lamp wattage	26W
Luminous efficacy	-
Light distribution	-
Fitting	G24q-3
Voltage connection	220-240V · 50-60Hz
Emergency	-
Energy efficiency class	A



FOR FURTHER INFORMATION PLEASE CONSULT THE GENERAL CATALOGUE BUZZI & BUZZI

*\*The absorption capacity per m3 calculated by the American organization TCNA is parametrized for an average room of 2,7m in height and therefore expressed in m2*


Buzzi & Buzzi reserves itself the faculty to change or to modify, without advance notice, the dimensions and the technical characteristics of the products indicated in this catalogue, due to operative necessities to improve the functionality or updating with law regulations.



## FRAME

code 2804.MESKINI

Coral® wall lamp.

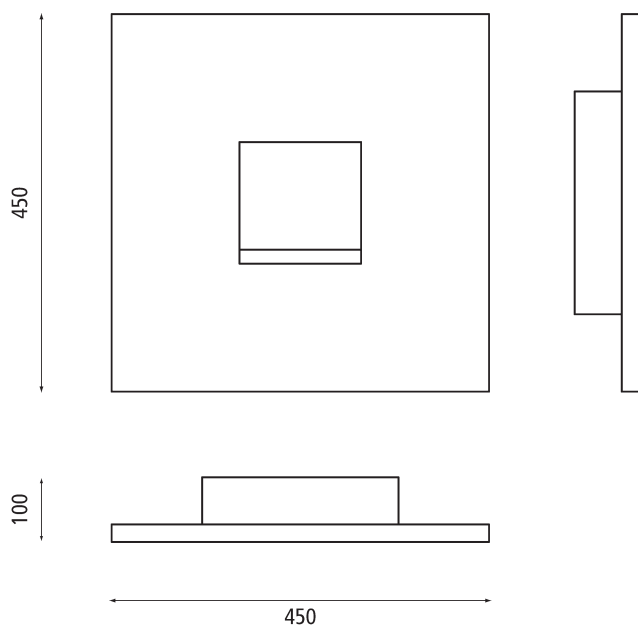

## TECHNICAL FEATURES

Type	Wall lamp
Finish	Acrylic and steel
Weight	-
Mounting	Wall mounting
IP rating	IP20
Control gear	Electronic ballast
Lamp type	TC-DEL
Lamp wattage	26W
Luminous efficacy	-
Light distribution	-
Fitting	G24q-3
Voltage connection	220-240V · 50-60Hz
Emergency	-
Energy efficiency class	A



FOR FURTHER INFORMATION PLEASE CONSULT THE GENERAL CATALOGUE BUZZI & BUZZI

*\*The absorption capacity per m3 calculated by the American organization TCNA is parametrized for an average room of 2,7m in height and therefore expressed in m2*

Buzzi & Buzzi reserves itself the faculty to change or to modify, without advance notice, the dimensions and the technical characteristics of the products indicated in this catalogue, due to operative necessities to improve the functionality or updating with law regulations.






## FRAME

code 2804.LONGONI

Coral® wall lamp.

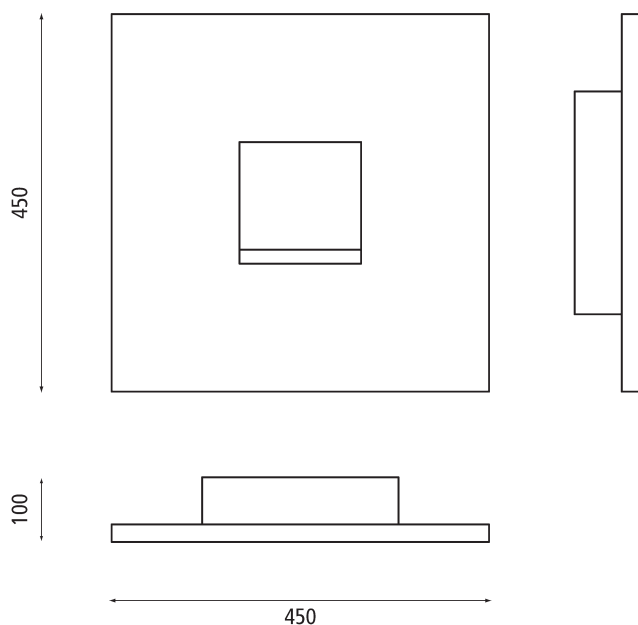

## TECHNICAL FEATURES

Type	Wall lamp
Finish	Printed picture
Weight	-
Mounting	Wall mounting
IP rating	IP20
Control gear	Electronic ballast
Lamp type	TC-DEL
Lamp wattage	26W
Luminous efficacy	-
Light distribution	-
Fitting	G24q-3
Voltage connection	220-240V · 50-60Hz
Emergency	-
Energy efficiency class	A



FOR FURTHER INFORMATION PLEASE CONSULT THE GENERAL CATALOGUE BUZZI & BUZZI

*\*The absorption capacity per m3 calculated by the American organization TCNA is parametrized for an average room of 2,7m in height and therefore expressed in m2*

Buzzi & Buzzi reserves itself the faculty to change or to modify, without advance notice, the dimensions and the technical characteristics of the products indicated in this catalogue, due to operative necessities to improve the functionality or updating with law regulations.






## FRAME

code 2804.GIAGNACOVO

Coral® wall lamp.

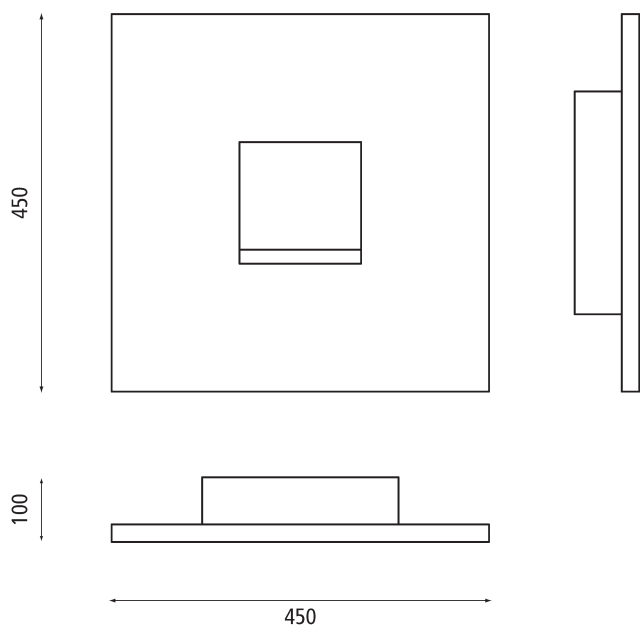

## TECHNICAL FEATURES

Type	Wall lamp
Finish	Acrylic
Weight	-
Mounting	Wall mounting
IP rating	IP20
Control gear	Electronic ballast
Lamp type	TC-DEL
Lamp wattage	26W
Luminous efficacy	-
Light distribution	-
Fitting	G24q-3
Voltage connection	220-240V · 50-60Hz
Emergency	-
Energy efficiency class	A



FOR FURTHER INFORMATION PLEASE CONSULT THE GENERAL CATALOGUE BUZZI & BUZZI

*\*The absorption capacity per m<sup>3</sup> calculated by the American organization TCNA is parametrized for an average room of 2,7m in height and therefore expressed in m<sup>2</sup>*


Buzzi & Buzzi reserves itself the faculty to change or to modify, without advance notice, the dimensions and the technical characteristics of the products indicated in this catalogue, due to operative necessities to improve the functionality or updating with law regulations.



## FRAME

code 2804.BENVENUTO

Coral® wall lamp.

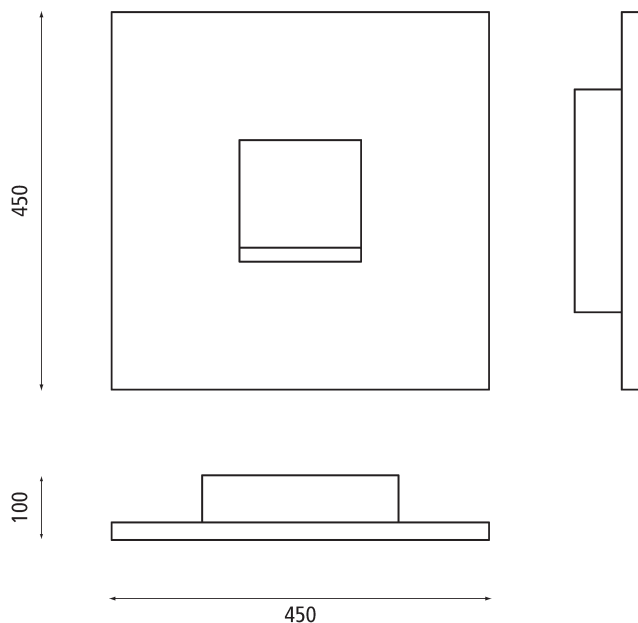

## TECHNICAL FEATURES

Type	Wall lamp
Finish	Acrylic
Weight	-
Mounting	Wall mounting
IP rating	IP20
Control gear	Electronic ballast
Lamp type	TC-DEL
Lamp wattage	26W
Luminous efficacy	-
Light distribution	-
Fitting	G24q-3
Voltage connection	220-240V · 50-60Hz
Emergency	-
Energy efficiency class	A



FOR FURTHER INFORMATION PLEASE CONSULT THE GENERAL CATALOGUE BUZZI & BUZZI

*\*The absorption capacity per m3 calculated by the American organization TCNA is parametrized for an average room of 2,7m in height and therefore expressed in m2*


Buzzi & Buzzi reserves itself the faculty to change or to modify, without advance notice, the dimensions and the technical characteristics of the products indicated in this catalogue, due to operative necessities to improve the functionality or updating with law regulations.



## FRAME

code 2804.MARINONI

Coral® wall lamp.

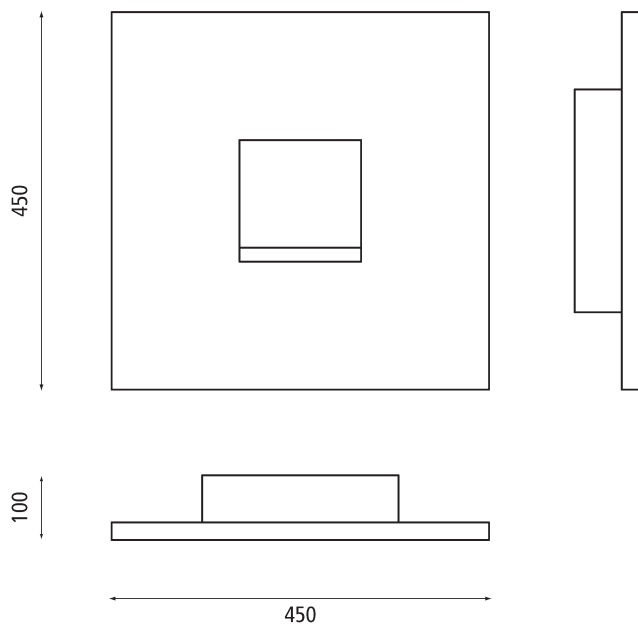

## TECHNICAL FEATURES

Type	Wall lamp
Finish	Cotton, gold leaf
Weight	-
Mounting	Wall mounting
IP rating	IP20
Control gear	Electronic ballast
Lamp type	TC-DEL
Lamp wattage	26W
Luminous efficacy	-
Light distribution	-
Fitting	G24q-3
Voltage connection	220-240V · 50-60Hz
Emergency	-
Energy efficiency class	A



FOR FURTHER INFORMATION PLEASE CONSULT THE GENERAL CATALOGUE BUZZI & BUZZI

*\*The absorption capacity per m3 calculated by the American organization TCNA is parametrized for an average room of 2,7m in height and therefore expressed in m2*


Buzzi & Buzzi reserves itself the faculty to change or to modify, without advance notice, the dimensions and the technical characteristics of the products indicated in this catalogue, due to operative necessities to improve the functionality or updating with law regulations.



## FRAME

code 2804.FORLINI

Coral® wall lamp.

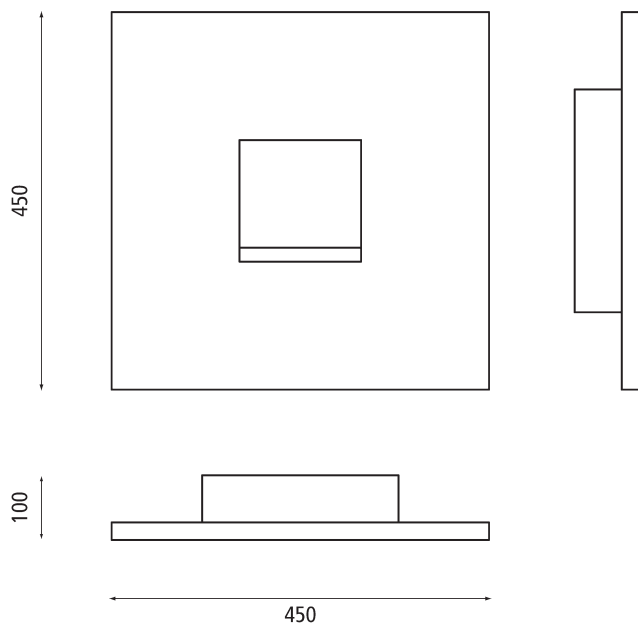

## TECHNICAL FEATURES

Type	Wall lamp
Finish	Acrylic
Weight	-
Mounting	Wall mounting
IP rating	IP20
Control gear	Electronic ballast
Lamp type	TC-DEL
Lamp wattage	26W
Luminous efficacy	-
Light distribution	-
Fitting	G24q-3
Voltage connection	220-240V · 50-60Hz
Emergency	-
Energy efficiency class	A



FOR FURTHER INFORMATION PLEASE CONSULT THE GENERAL CATALOGUE BUZZI & BUZZI

*\*The absorption capacity per m3 calculated by the American organization TCNA is parametrized for an average room of 2,7m in height and therefore expressed in m2*

Buzzi & Buzzi reserves itself the faculty to change or to modify, without advance notice, the dimensions and the technical characteristics of the products indicated in this catalogue, due to operative necessities to improve the functionality or updating with law regulations.