

## LEDIA LL UW

LEDIA LL UW EL Lichtlinie  
12.35700.1V001 84 LED 8W 12V - BLAU

Illuminating strip LEDIA-LL UW EL 910  
For underwater use (also sea water)  
Housing and cable vault of rust-proof stainless steel  
Length: 910 mm, height: 120 mm (including cable vault)  
Width of luminaire: 28 mm , width of base plate: 32 mm  
Single-pane, tempered safety glass strip thickness 19 mm  
With underside diffusing coat  
Elec. equip.: 84 LED's = approx.8W power consumption  
Colour LED's: blue  
Operation voltage: 12V DC  
Ingress protection IP68 , protection rating III  
With cable in mm: (customer-specific, > 10000 mm with extra charge)

### Technical values

ULOR	98%
Ingress protection	IP68

LED lifetime:  
L80 B10 / 85.000h - TA ≤ 25°C  
L70 B10 / 50.000h - TA >25 - ≤50°C  
CE

### Advantages

- Maintenance-free LED illuminating strip available in various lengths and sizes
- Installation dummy as replacement during the paving
- Floor, wall, and underwater installation

### Downloads

Drawings:	<a href="#">Ledia_LL_UW_WL.png</a>
Installation instructions:	<a href="#">HessMA_LEDIA_LF_LL_UW_12V.pdf</a>
Photometric data:	<a href="#">LEDIA</a> <a href="#">LL_effect_lighting_ULD.zip</a>




## LEDIA LL UW

### Drawings




### Projects

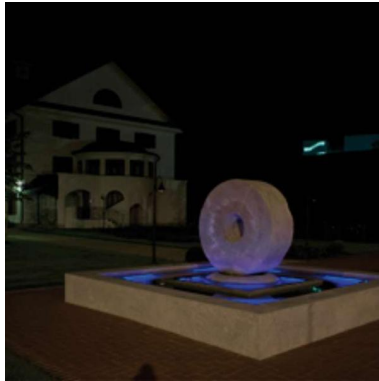

Gieseke und Devrient  
DE - Gmund



Gieseke und Devrient  
DE - Gmund

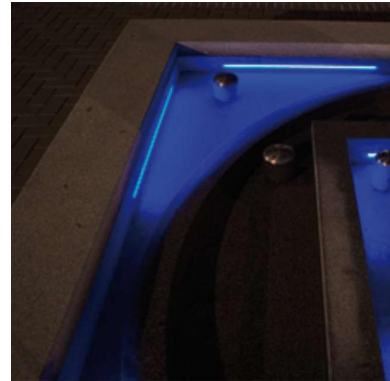

Gieseke und Devrient  
DE - Gmund