


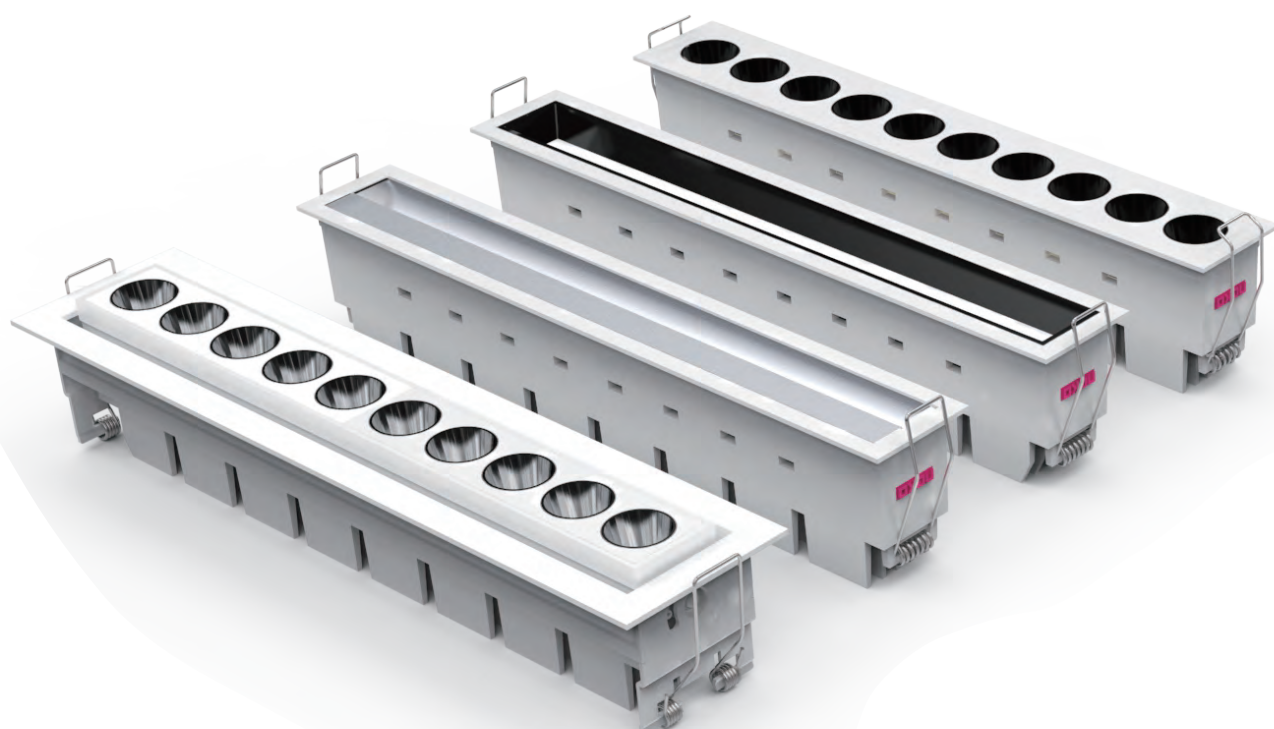

NEKO / FUSION

Linear LED Downlight Series

- Hohe Lichtplanungsflexibilität mit verschiedenen Grössen von Lichtmodulen
- Schmale LED-Downlights für reinen Minimalismus
- Bester Blendschutz mit hoher Leistung und gutem Sehkomfort
- Fix und schwenkbar, Wall Washer, Allgemeinbeleuchtung, Spot und rahmenlose Version verfügbar
- 5 Jahre Garantie

- Create a circle of light from a line of LED Downlights
- A narrow line of nano LED Downlights for pure minimalism
- Superior glare control for high performance and visual comfort
- Fixed, Adjustable, Wall Washer, General light, Spotlight and trimless versions for choice
- Five-year guarantee



NEKO / FUSION
Linear Downlight Series

FIXED

ADJUSTABLE

WALL WASHER



FF1 / 1 LED / 2W / 170 lm



FA5 / 5 LED / 11W / 900 lm



FW5 / 5 LED / 11W / 600 lm



FF2 / 2 LED / 4W / 350 lm



FA10 / 10 LED / 22W / 1800 lm



FW10 / 10 LED / 22W / 1200 lm



FF3 / 3 LED / 7W / 550 lm



FF5 / 5 LED / 11W / 900 lm



FF10 / 10 LED / 22W / 1800 lm

Secondary Reflector


Beam



BLACK



SPECULAR



Medium 24°




Wide 40°

GENERAL LIGHT



SPOTLIGHT

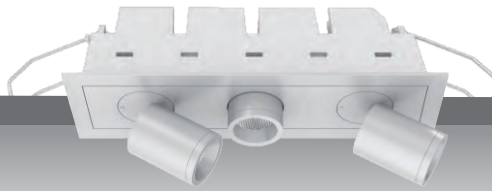

TRIMLESS



FG5 / 5 LED / 11W / 400 lm
144X37



FS1 / 1 LED / 2W / 170 lm
62X37



FFT5 / 5 LED / 11W / 900 lm
152X44




FG10 / 10 LED / 22W / 950 lm
282X37



FS2 / 2 LED / 4W / 350 lm
90X37



FFT10 / 10 LED / 22W / 1800 lm
290X44



FS3 / 3 LED / 7W / 550 lm
144X37



FWT5 / 5 LED / 11W / 600 lm
152X44



FF3-FS1 / 4 LED / 9W / 700 lm
144X37




FWT10 / 10 LED / 22W / 1200 lm
290X44



FS6 / 6 LED / 14W / 1050 lm
282X37



FGT5 / 5 LED / 11W / 400 lm
152X44



FF6-FS2 / 8 LED / 18W / 1400 lm
282X37




FGT10 / 10 LED / 22W / 950 lm
290X44




FS3 / 3 LED / 7W / 550 lm
152X44



FS6 / 6 LED / 14W / 1050 lm
290X44

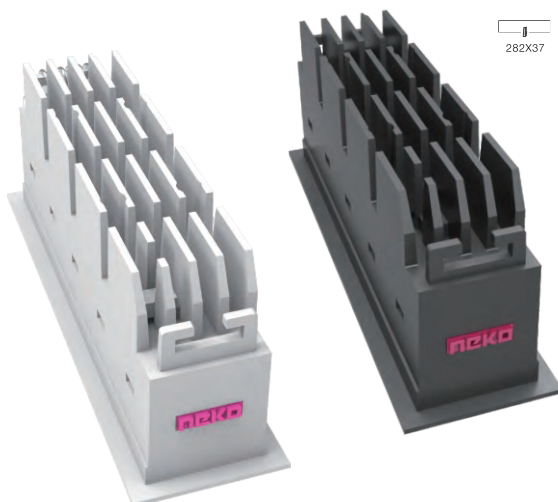

NEKO / FUSION
Fixed Series LED Downlight

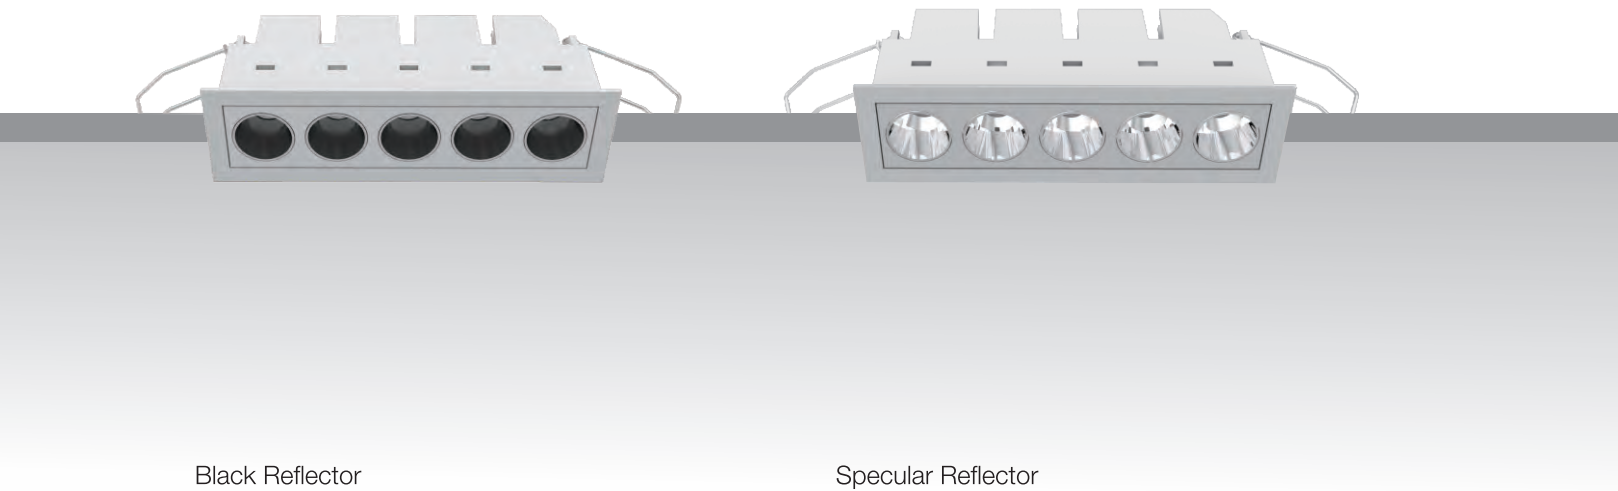

Black Reflector

Specular Reflector



1 LED / 2W / 170lm



2 LED / 4W / 350lm



3 LED / 7W / 550lm



5 LED / 11W / 900lm



10 LED / 22W / 1800lm



1 LED / 2W / 200lm



2 LED / 4W / 400lm



3 LED / 7W / 600lm



5 LED / 11W / 1050lm



10 LED / 22W / 2100lm

Secondary Reflector


Beam



Black










Specular



Medium 24°





Wide 40°

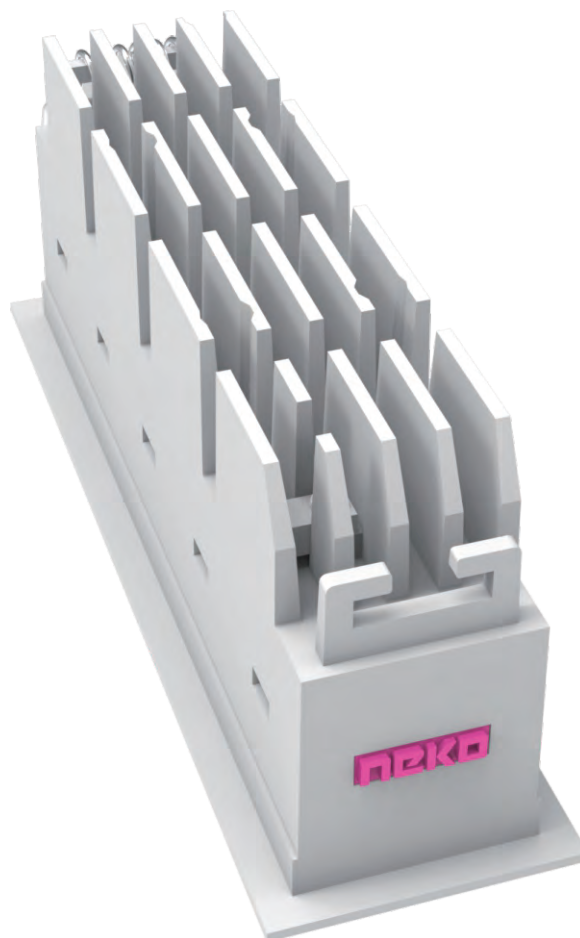

NEKO / FUSION / FF1
Fixed LED Downlight




2W	CRI90 CRI80	2700K 3000K 4000K	24° 40°	CREE  UGR 50,000h@L80B10 < 10	IP20	 CB CE 
----	----------------	-------------------------	------------	--	------	---

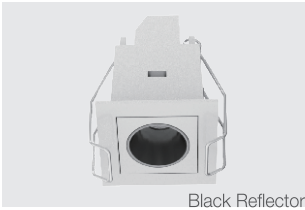


Black Reflector

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
2 W	3 W	3.5 V	700 mA	80	2700K	24°	220lm	160lm	FF1-8272402X-WB
						40°	220lm	160lm	FF1-8274002X-WB
					3000K	24°	250lm	170lm	FF1-8302402X-WB
						40°	250lm	170lm	FF1-8304002X-WB
					4000K	24°	280lm	180lm	FF1-8402402X-WB
						40°	280lm	180lm	FF1-8404002X-WB




Black Reflector

2 W	3 W	3.5 V	700 mA	80	2700K	24°	220lm	160lm	FF1-8272402X-BB
						40°	220lm	160lm	FF1-8274002X-BB
					3000K	24°	250lm	170lm	FF1-8302402X-BB
						40°	250lm	170lm	FF1-8304002X-BB
					4000K	24°	280lm	180lm	FF1-8402402X-BB
						40°	280lm	180lm	FF1-8404002X-BB



Specular Reflector

2 W	3 W	3.5 V	700 mA	80	2700K	24°	220lm	180lm	FF1-8272402X-WS
						40°	220lm	180lm	FF1-8274002X-WS
					3000K	24°	250lm	200lm	FF1-8302402X-WS
						40°	250lm	200lm	FF1-8304002X-WS
					4000K	24°	280lm	220lm	FF1-8402402X-WS
						40°	280lm	220lm	FF1-8404002X-WS



Specular Reflector

2 W	3 W	3.5 V	700 mA	80	2700K	24°	220lm	180lm	FF1-8272402X-BS
						40°	220lm	180lm	FF1-8274002X-BS
					3000K	24°	250lm	200lm	FF1-8302402X-BS
						40°	250lm	200lm	FF1-8304002X-BS
					4000K	24°	280lm	220lm	FF1-8402402X-BS
						40°	280lm	220lm	FF1-8404002X-BS


Code Remark: X=F(ON-OFF) X=P(Phase Dim) X=A(1-10V Dim) X=D(DALI Dim)



NEKO / FUSION / FF2
Fixed LED Downlight




4W CRI90 2700K CRI80 3000K 4000K 24° 40° CREE 50,000h@L80B10 UGR < 10 IP20 5 YEARS GUARANTEE CB CE UL LISTED



Black Reflector

LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
4 W	6 W	6.5 V	700 mA	80	2700K	24°	450lm	330lm	FF2-8272404X-WB	
						40°	450lm	330lm	FF2-8274004X-WB	
					3000K	24°	500lm	350lm	FF2-8302404X-WB	
						40°	500lm	350lm	FF2-8304004X-WB	
					4000K	24°	550lm	380lm	FF2-8402404X-WB	
						40°	550lm	380lm	FF2-8404004X-WB	




Black Reflector

4 W	6 W	6.5 V	700 mA	80	2700K	24°	450lm	330lm	FF2-8272404X-BB
						40°	450lm	330lm	FF2-8274004X-BB
					3000K	24°	500lm	350lm	FF2-8302404X-BB
						40°	500lm	350lm	FF2-8304004X-BB
					4000K	24°	550lm	380lm	FF2-8402404X-BB
						40°	550lm	380lm	FF2-8404004X-BB



Specular Reflector

4 W	6 W	6.5 V	700 mA	80	2700K	24°	450lm	380lm	FF2-8272404X-WS
						40°	450lm	380lm	FF2-8274004X-WS
					3000K	24°	500lm	400lm	FF2-8302404X-WS
						40°	500lm	400lm	FF2-8304004X-WS
					4000K	24°	550lm	440lm	FF2-8402404X-WS
						40°	550lm	440lm	FF2-8404004X-WS



Specular Reflector

4 W	6 W	6.5 V	700 mA	80	2700K	24°	450lm	380lm	FF2-8272404X-BS
						40°	450lm	380lm	FF2-8274004X-BS
					3000K	24°	500lm	400lm	FF2-8302404X-BS
						40°	500lm	400lm	FF2-8304004X-BS
					4000K	24°	550lm	440lm	FF2-8402404X-BS
						40°	550lm	440lm	FF2-8404004X-BS

Code Remark: X=F(ON-OFF) X=P(Phase Dim) X=A(1-10V Dim) X=D(DALI Dim)



NEKO / FUSION / FF3
Fixed LED Downlight




7W CRI90 2700K 24° CREE 50,000h@L80B10 UGR < 10 IP20 5 YEARS GUARANTEE CB CE C UL US LISTED



Black Reflector

LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
7 W	9 W	10 V	700 mA	80	2700K	24°	700lm	500lm	FF3-8272407X-WB	
						40°	700lm	500lm	FF3-8274007X-WB	
					3000K	24°	750lm	550lm	FF3-8302407X-WB	
						40°	750lm	550lm	FF3-8304007X-WB	
					4000K	24°	800lm	600lm	FF3-8402407X-WB	
						40°	800lm	600lm	FF3-8404007X-WB	




Black Reflector

7 W	9 W	10 V	700 mA	80	2700K	24°	700lm	500lm	FF3-8272407X-BB
						40°	700lm	500lm	FF3-8274007X-BB
					3000K	24°	750lm	550lm	FF3-8302407X-BB
						40°	750lm	550lm	FF3-8304007X-BB
					4000K	24°	800lm	600lm	FF3-8402407X-BB
						40°	800lm	600lm	FF3-8404007X-BB



Specular Reflector


7 W	9 W	10 V	700 mA	80	2700K	24°	700lm	550lm	FF3-8272407X-WS
						40°	700lm	550lm	FF3-8274007X-WS
					3000K	24°	750lm	600lm	FF3-8302407X-WS
						40°	750lm	600lm	FF3-8304007X-WS
					4000K	24°	800lm	650lm	FF3-8402407X-WS
						40°	800lm	650lm	FF3-8404007X-WS



Specular Reflector

7 W	9 W	10 V	700 mA	80	2700K	24°	700lm	550lm	FF3-8272407X-BS
						40°	700lm	550lm	FF3-8274007X-BS
					3000K	24°	750lm	600lm	FF3-8302407X-BS
						40°	750lm	600lm	FF3-8304007X-BS
					4000K	24°	800lm	650lm	FF3-8402407X-BS
						40°	800lm	650lm	FF3-8404007X-BS

Code Remark: X=F(ON-OFF) X=P(Phase Dim) X=A(1-10V Dim) X=D(DALI Dim)

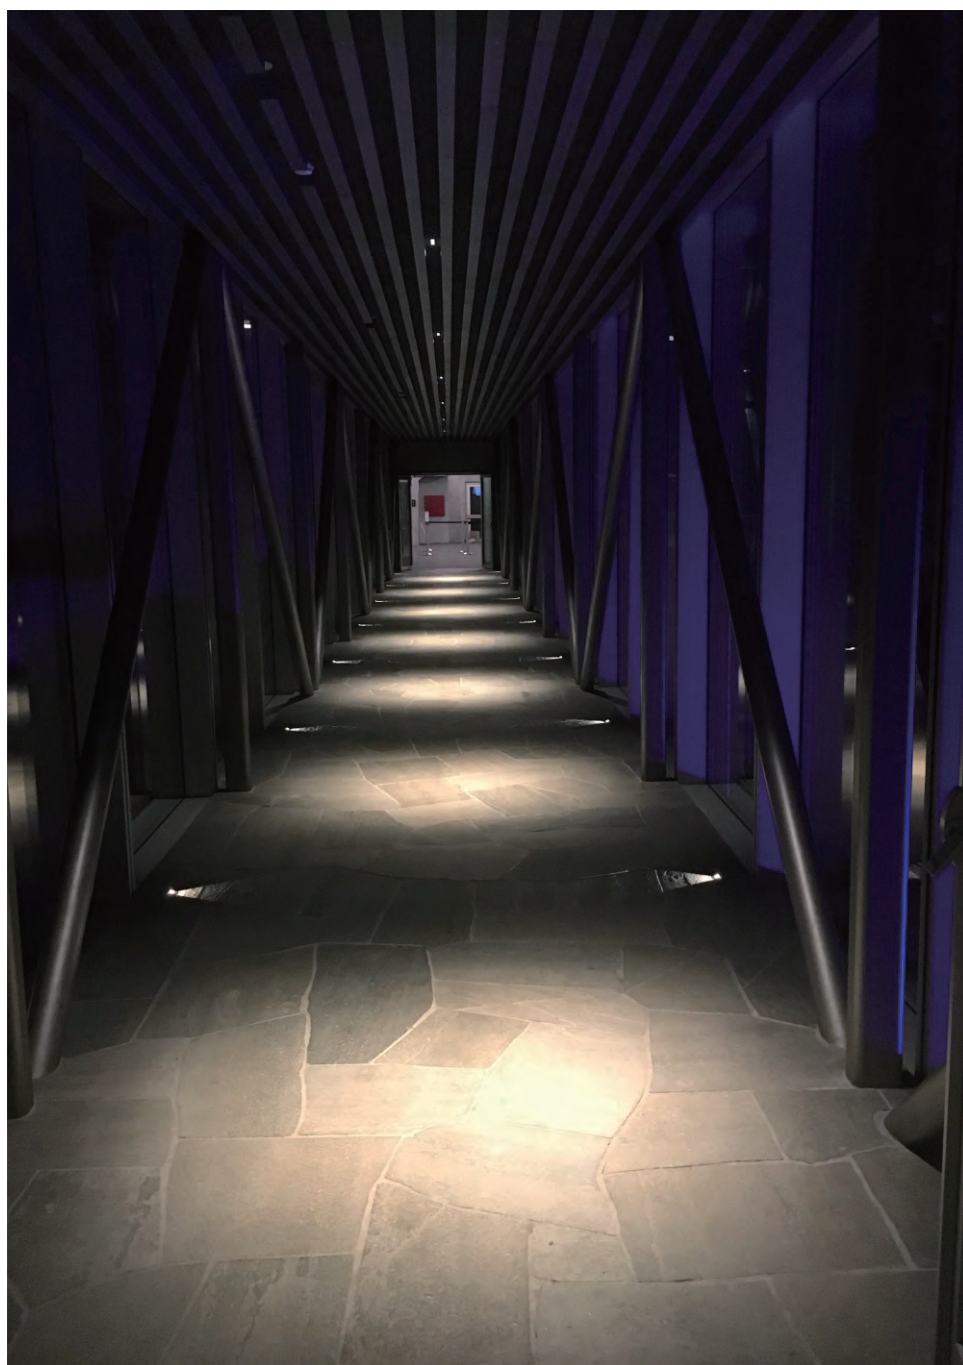

NEKO / FUSION / FF5

Fixed LED Downlight



11W CRI90 2700K 24° CREE 50,000h@L80B10 UGR < 10 IP20 5 YEARS GUARANTEE CB CE C UL US LISTED



LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
11 W	13 W	16 V	700 mA	80	2700K	24°	1200lm	850lm	FF5-8272411X-WB	
						40°	1200lm	850lm	FF5-8274011X-WB	
					3000K	24°	1300lm	900lm	FF5-8302411X-WB	
						40°	1300lm	900lm	FF5-8304011X-WB	
					4000K	24°	1400lm	950lm	FF5-8402411X-WB	
						40°	1400lm	950lm	FF5-8404011X-WB	



11 W	13 W	16 V	700 mA	80	2700K	24°	1200lm	850lm	FF5-8272411X-BB
						40°	1200lm	850lm	FF5-8274011X-BB
					3000K	24°	1300lm	900lm	FF5-8302411X-BB
						40°	1300lm	900lm	FF5-8304011X-BB
					4000K	24°	1400lm	950lm	FF5-8402411X-BB
						40°	1400lm	950lm	FF5-8404011X-BB



11 W	13 W	16 V	700 mA	80	2700K	24°	1200lm	950lm	FF5-8272411X-WS
						40°	1200lm	950lm	FF5-8274011X-WS
					3000K	24°	1300lm	1000lm	FF5-8302411X-WS
						40°	1300lm	1000lm	FF5-8304011X-WS
					4000K	24°	1400lm	1100lm	FF5-8402411X-WS
						40°	1400lm	1100lm	FF5-8404011X-WS



11 W	13 W	16 V	700 mA	80	2700K	24°	1200lm	950lm	FF5-8272411X-BS
						40°	1200lm	950lm	FF5-8274011X-BS
					3000K	24°	1300lm	1000lm	FF5-8302411X-BS
						40°	1300lm	1000lm	FF5-8304011X-BS
					4000K	24°	1400lm	1100lm	FF5-8402411X-BS
						40°	1400lm	1100lm	FF5-8404011X-BS

Code Remark: X=F(ON-OFF) X=P(Phase Dim) X=A(1-10V Dim) X=D(DALI Dim)





NEKO / FUSION / FF10


Fixed LED Downlight



22W	CRI90 CRI80	2700K 3000K 4000K	24° 40°	CREE  UGR 50,000h@L80B10 < 10	IP20	 CB CE 
-----	----------------	-------------------------	------------	--	------	---




LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
22 W	24 W	31 V	700 mA	80	2700K	24°	2400lm	1600lm	FF10-8272422X-WB	
						40°	2400lm	1600lm	FF10-8274022X-WB	
					3000K	24°	2600lm	1800lm	FF10-8302422X-WB	
						40°	2600lm	1800lm	FF10-8304022X-WB	
					4000K	24°	2800lm	2000lm	FF10-8402422X-WB	
						40°	2800lm	2000lm	FF10-8404022X-WB	



22 W	24 W	31 V	700 mA	80	2700K	24° 40°	2400lm 2400lm	1600lm 1600lm	FF10-8272422X-BB FF10-8274022X-BB
					3000K	24° 40°	2600lm 2600lm	1800lm 1800lm	FF10-8302422X-BB FF10-8304022X-BB
					4000K	24° 40°	2800lm 2800lm	2000lm 2000lm	FF10-8402422X-BB FF10-8404022X-BB




22 W	24 W	31 V	700 mA	80	2700K	24° 40°	2400lm 2400lm	2000lm 2000lm	FF10-8272422X-WS FF10-8274022X-WS
					3000K	24° 40°	2600lm 2600lm	2100lm 2100lm	FF10-8302422X-WS FF10-8304022X-WS
					4000K	24° 40°	2800lm 2800lm	2300lm 2300lm	FF10-8402422X-WS FF10-8404022X-WS




22 W	24 W	31 V	700 mA	80	2700K	24° 40°	2400lm 2400lm	2000lm 2000lm	FF10-8272422X-BS FF10-8274022X-BS
					3000K	24° 40°	2600lm 2600lm	2100lm 2100lm	FF10-8302422X-BS FF10-8304022X-BS
					4000K	24° 40°	2800lm 2800lm	2300lm 2300lm	FF10-8402422X-BS FF10-8404022X-BS



Code Remark: X=F(ON-OFF) X=P(Phase Dim) X=A(1-10V Dim) X=D(DALI Dim)

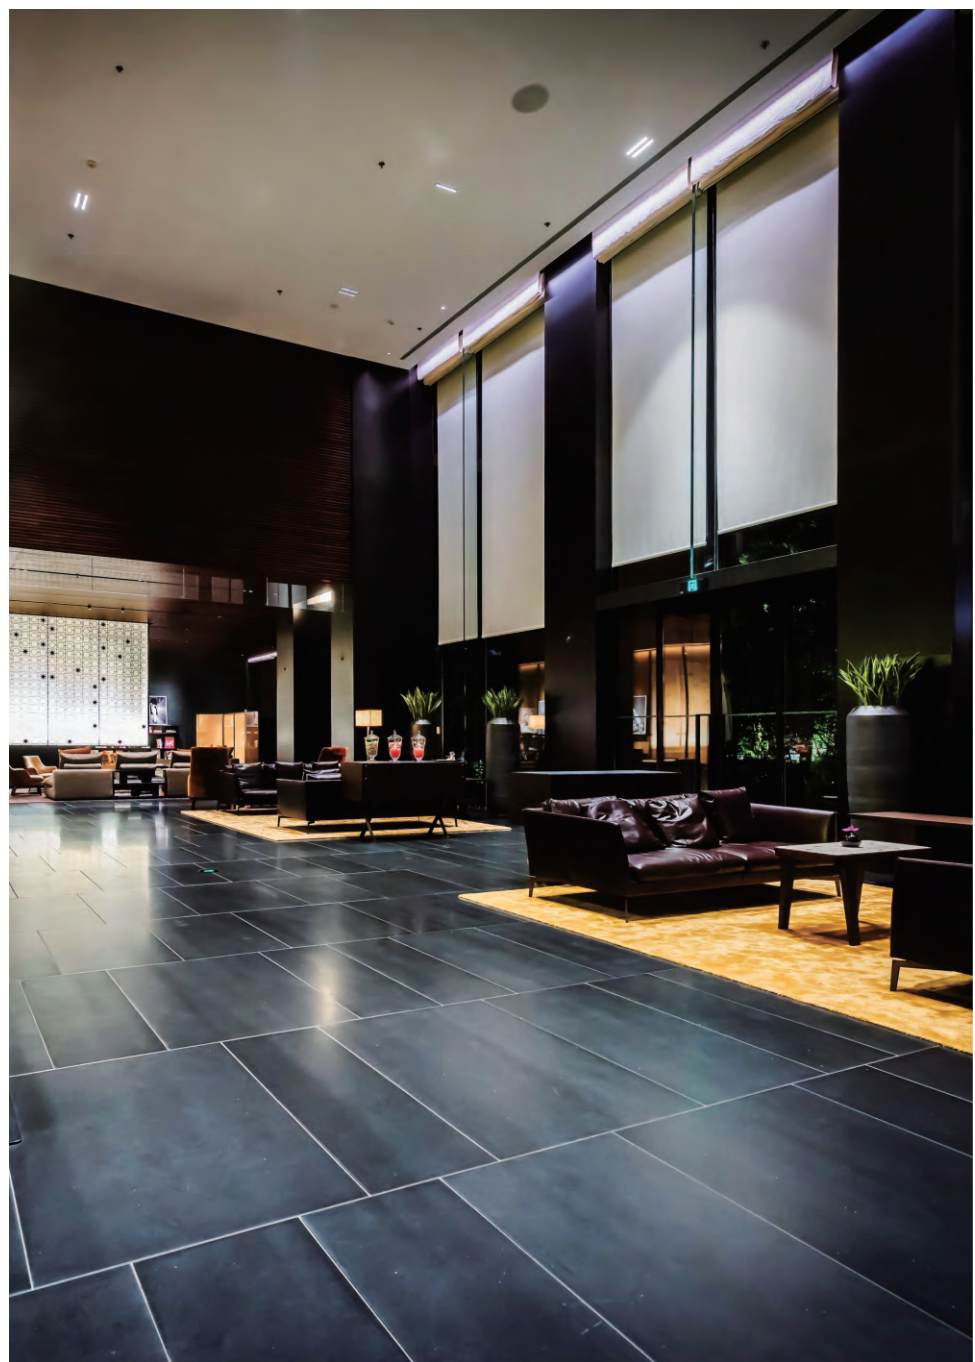

NEKO / FUSION/FFT5
Fixed Trimless Downlight



11W	CRI90 CRI80	2700K 3000K 4000K	24° 40°	CREE  50,000h@L80B10	UGR < 10	IP20	 5 YEARS GUARANTEE	CB	CE	 UL LISTED
-----	----------------	-------------------------	------------	---	--------------------	-------------	--	-----------	-----------	---



Black Reflector

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
11 W	13 W	16 V	700 mA	80	2700K	24° 40°	1200lm 1200lm	850lm 850lm	FFT5-8272411X-WB FFT5-8274011X-WB
					3000K	24° 40°	1300lm 1300lm	900lm 900lm	FFT5-8302411X-WB FFT5-8304011X-WB
					4000K	24° 40°	1400lm 1400lm	950lm 950lm	FFT5-8402411X-WB FFT5-8404011X-WB




Black Reflector

11 W	13 W	16 V	700 mA	80	2700K	24° 40°	1200lm 1200lm	850lm 850lm	FFT5-8272411X-BB FFT5-8274011X-BB
					3000K	24° 40°	1300lm 1300lm	900lm 900lm	FFT5-8302411X-BB FFT5-8304011X-BB
					4000K	24° 40°	1400lm 1400lm	950lm 950lm	FFT5-8402411X-BB FFT5-8404011X-BB



Specular Reflector

11 W	13 W	16 V	700 mA	80	2700K	24° 40°	1200lm 1200lm	950lm 950lm	FFT5-8272411X-WS FFT5-8274011X-WS
					3000K	24° 40°	1300lm 1300lm	1000lm 1000lm	FFT5-8302411X-WS FFT5-8304011X-WS
					4000K	24° 40°	1400lm 1400lm	1100lm 1100lm	FFT5-8402411X-WS FFT5-8404011X-WS



Specular Reflector

11 W	13 W	16 V	700 mA	80	2700K	24° 40°	1200lm 1200lm	950lm 950lm	FFT5-8272411X-BS FFT5-8274011X-BS
					3000K	24° 40°	1300lm 1300lm	1000lm 1000lm	FFT5-8302411X-BS FFT5-8304011X-BS
					4000K	24° 40°	1400lm 1400lm	1100lm 1100lm	FFT5-8402411X-BS FFT5-8404011X-BS


Code Remark: X=F(ON-OFF) X=P(Phase Dim) X=A(1-10V Dim) X=D(DALI Dim)





NEKO / FUSION/FFT10
Fixed Trimless Downlight



22W	CRI90 CRI80	2700K 3000K 4000K	24° 40°	CREE  50,000h@L80B10	UGR < 10	IP20	 5 YEARS GUARANTEE	CB	CE	 UL US LISTED
-----	----------------	-------------------------	------------	---	--------------------	-------------	---	-----------	-----------	--




	LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
 Black Reflector	22 W	24 W	31 V	700 mA	80	2700K	24° 40°	2400lm 2400lm	1600lm 1600lm	FFT10-8272422X-WB FFT10-8274022X-WB
						3000K	24° 40°	2600lm 2600lm	1800lm 1800lm	FFT10-8302422X-WB FFT10-8304022X-WB
						4000K	24° 40°	2800lm 2800lm	2000lm 2000lm	FFT10-8402422X-WB FFT10-8404022X-WB
 Black Reflector	22 W	24 W	31 V	700 mA	80	2700K	24° 40°	2400lm 2400lm	1600lm 1600lm	FFT10-8272422X-BB FFT10-8274022X-BB
						3000K	24° 40°	2600lm 2600lm	1800lm 1800lm	FFT10-8302422X-BB FFT10-8304022X-BB
						4000K	24° 40°	2800lm 2800lm	2000lm 2000lm	FFT10-8402422X-BB FFT10-8404022X-BB
 Specular Reflector	22 W	24 W	31 V	700 mA	80	2700K	24° 40°	2400lm 2400lm	2000lm 2000lm	FFT10-8272422X-WS FFT10-8274022X-WS
						3000K	24° 40°	2600lm 2600lm	2100lm 2100lm	FFT10-8302422X-WS FFT10-8304022X-WS
						4000K	24° 40°	2800lm 2800lm	2300lm 2300lm	FFT10-8402422X-WS FFT10-8404022X-WS
 Specular Reflector	22 W	24 W	31 V	700 mA	80	2700K	24° 40°	2400lm 2400lm	2000lm 2000lm	FFT10-8272422X-BS FFT10-8274022X-BS
						3000K	24° 40°	2600lm 2600lm	2100lm 2100lm	FFT10-8302422X-BS FFT10-8304022X-BS
						4000K	24° 40°	2800lm 2800lm	2300lm 2300lm	FFT10-8402422X-BS FFT10-8404022X-BS
Code Remark: X=F(ON-OFF) X=P(Phase Dim) X=A(1-10V Dim) X=D(DALI Dim)										





NEKO / FUSION / FA5

Adjustable LED Downlight

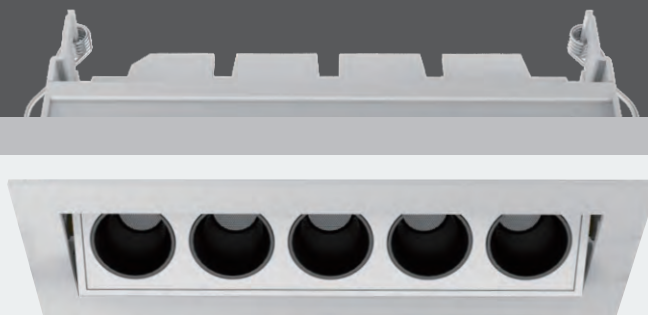

11W	CRI90 CRI80	2700K 3000K 4000K	24° 40°	CREE  UGR 50,000h@L80B10 < 10	IP20	 CB CE 
-----	----------------	-------------------------	------------	--	------	---

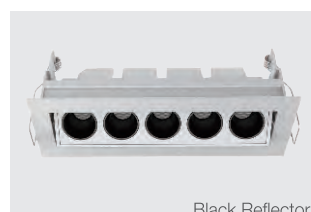

Black Reflector

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
11 W	13 W	16 V	700 mA	80	2700K	24° 40°	1200lm 1200lm	850lm 850lm	FA5-8272411X-WB FA5-8274011X-WB
					3000K	24° 40°	1300lm 1300lm	900lm 900lm	FA5-8302411X-WB FA5-8304011X-WB
					4000K	24° 40°	1400lm 1400lm	950lm 950lm	FA5-8402411X-WB FA5-8404011X-WB



Black Reflector

11 W	13 W	16 V	700 mA	80	2700K	24° 40°	1200lm 1200lm	850lm 850lm	FA5-8272411X-BB FA5-8274011X-BB
					3000K	24° 40°	1300lm 1300lm	900lm 900lm	FA5-8302411X-BB FA5-8304011X-BB
					4000K	24° 40°	1400lm 1400lm	950lm 950lm	FA5-8402411X-BB FA5-8404011X-BB



Specular Reflector

11 W	13 W	16 V	700 mA	80	2700K	24° 40°	1200lm 1200lm	850lm 850lm	FA5-8272411X-WS FA5-8274011X-WS
					3000K	24° 40°	1300lm 1300lm	900lm 900lm	FA5-8302411X-WS FA5-8304011X-WS
					4000K	24° 40°	1400lm 1400lm	950lm 950lm	FA5-8402411X-WS FA5-8404011X-WS




Specular Reflector


11 W	13 W	16 V	700 mA	80	2700K	24° 40°	1200lm 1200lm	850lm 850lm	FA5-8272411X-BS FA5-8274011X-BS
					3000K	24° 40°	1300lm 1300lm	900lm 900lm	FA5-8302411X-BS FA5-8304011X-BS
					4000K	24° 40°	1400lm 1400lm	950lm 950lm	FA5-8402411X-BS FA5-8404011X-BS

Code Remark: X=F(ON-OFF) X=P(Phase Dim) X=A(1-10V Dim) X=D(DALI Dim)



NEKO / FUSION
Adjustable series LED Downlight

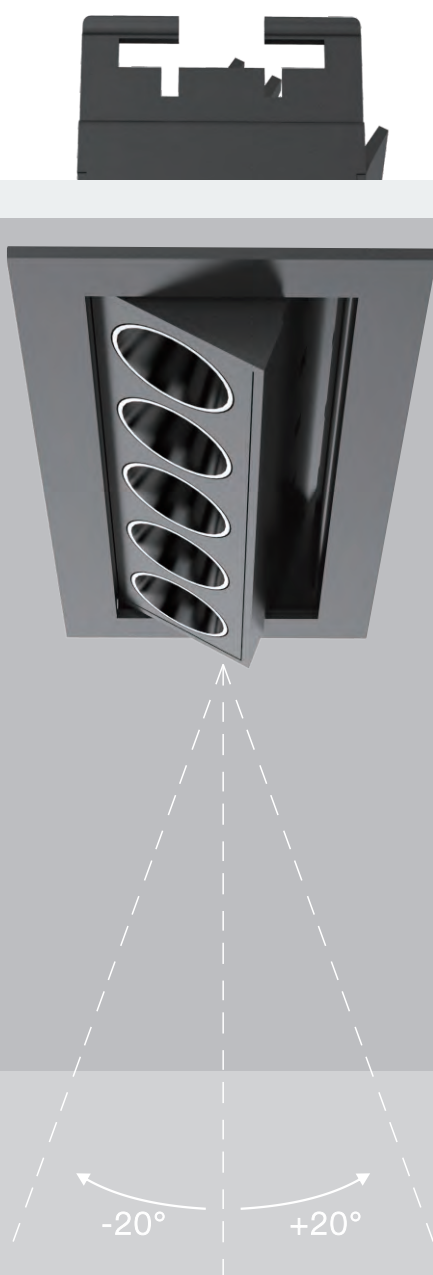

NEKO / FUSION / FA10
Adjustable LED Downlight

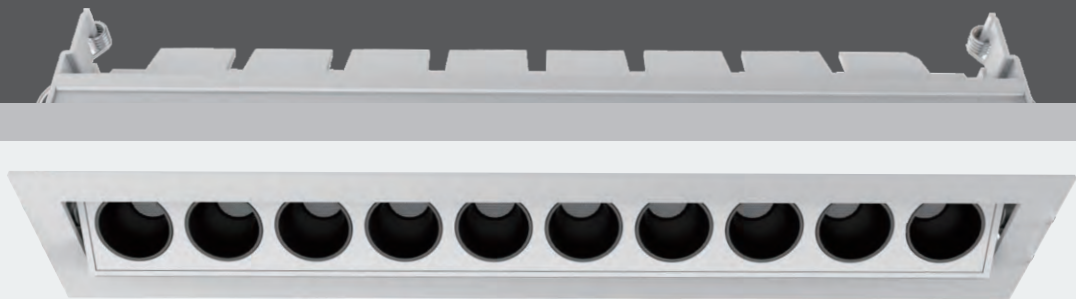

22W	CRI90 CRI80	2700K 3000K 4000K	24° 40°	CREE 50,000h@L80B10	UGR < 10	IP20	5 YEARS GUARANTEE	CB	CE	UL LISTED
-----	----------------	-------------------------	------------	------------------------	-------------	------	----------------------	----	----	--------------

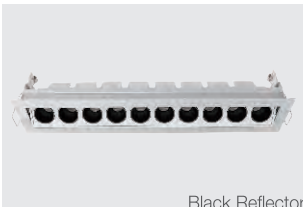

Black Reflector

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
22 W	24 W	31 V	700 mA	80	2700K	24° 40°	2400lm 2400lm	1600lm 1600lm	FA10-8272422X-WB FA10-8274022X-WB
					3000K	24° 40°	2600lm 2600lm	1800lm 1800lm	FA10-8302422X-WB FA10-8304022X-WB
					4000K	24° 40°	2800lm 2800lm	2000lm 2000lm	FA10-8402422X-WB FA10-8404022X-WB




Black Reflector

22 W	24 W	31 V	700 mA	80	2700K	24° 40°	2400lm 2400lm	1600lm 1600lm	FA10-8272422X-BB FA10-8274022X-BB
					3000K	24° 40°	2600lm 2600lm	1800lm 1800lm	FA10-8302422X-BB FA10-8304022X-BB
					4000K	24° 40°	2800lm 2800lm	2000lm 2000lm	FA10-8402422X-BB FA10-8404022X-BB



Specular Reflector

22 W	24 W	31 V	700 mA	80	2700K	24° 40°	2400lm 2400lm	1600lm 1600lm	FA10-8272422X-WS FA10-8274022X-WS
					3000K	24° 40°	2600lm 2600lm	1800lm 1800lm	FA10-8302422X-WS FA10-8304022X-WS
					4000K	24° 40°	2800lm 2800lm	2000lm 2000lm	FA10-8402422X-WS FA10-8404022X-WS




Specular Reflector

22 W	24 W	31 V	700 mA	80	2700K	24° 40°	2400lm 2400lm	1600lm 1600lm	FA10-8272422X-BS FA10-8274022X-BS
					3000K	24° 40°	2600lm 2600lm	1800lm 1800lm	FA10-8302422X-BS FA10-8304022X-BS
					4000K	24° 40°	2800lm 2800lm	2000lm 2000lm	FA10-8402422X-BS FA10-8404022X-BS

Code Remark: X=F(ON-OFF) X=P(Phase Dim) X=A(1-10V Dim) X=D(DALI Dim)



NEKO / FUSION / FW5
Wall Washer LED Downlight

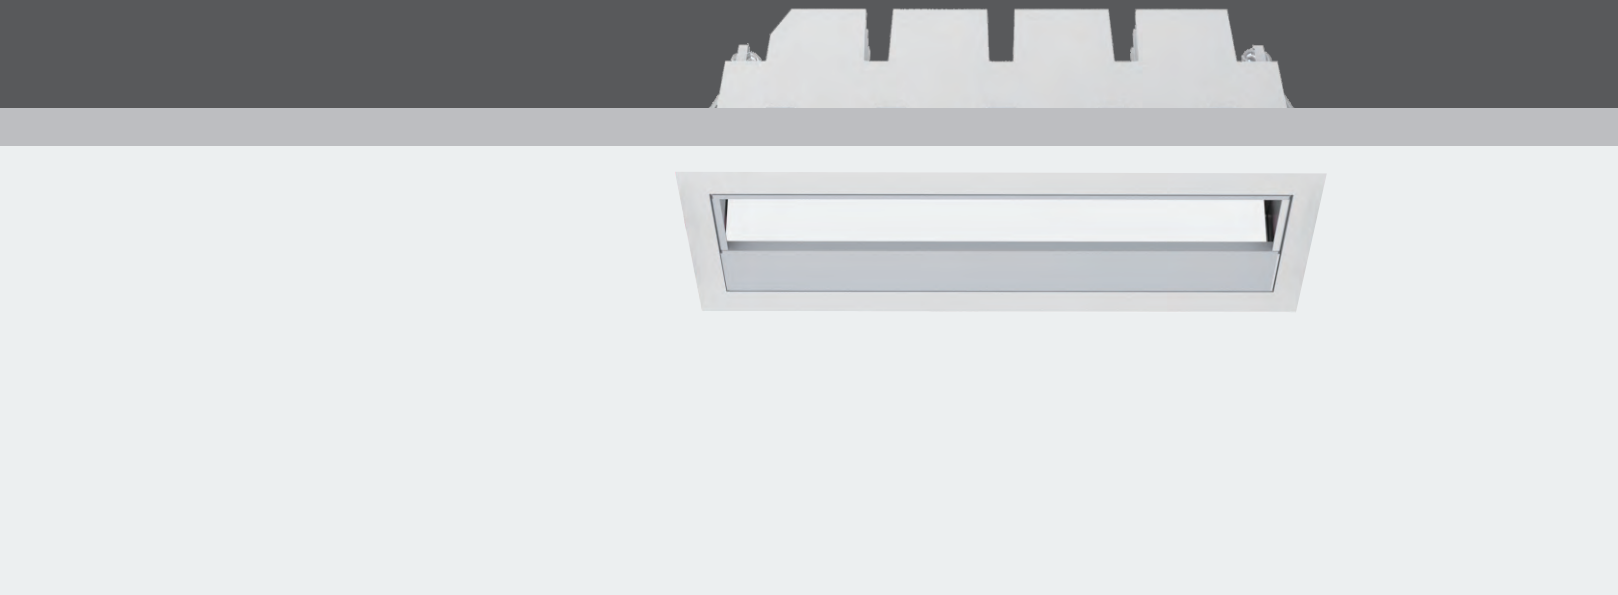

11W

CRI90
CRI80

2700K
3000K
4000K

 CREE
50,000h@L80B10



IP20

 5 YEARS
GUARANTEE


CB

CE

 UL
LISTED

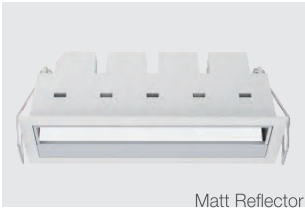

Matt Reflector



Matt Reflector

LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code			
11	W	13	W	16	V	700	mA	80	2700K	WW	1200lm	550lm	FW5-827WW11X-WM
									3000K	WW	1300lm	600lm	FW5-830WW11X-WM
									4000K	WW	1400lm	650lm	FW5-840WW11X-WM

11	W	13	W	16	V	700	mA	80	2700K	WW	1200lm	550lm	FW5-827WW11X-BM
									3000K	WW	1300lm	600lm	FW5-830WW11X-BM
									4000K	WW	1400lm	650lm	FW5-840WW11X-BM

Code Remark: X=F(ON-OFF) X=P(Phase Dim) X=A(1-10V Dim) X=D(DALI Dim)

Trimless available




Trimless code for FW5-830WW11X-WM
FWT5-830WW11X-WM





NEKO / FUSION / FW10
Wall Washer LED Downlight

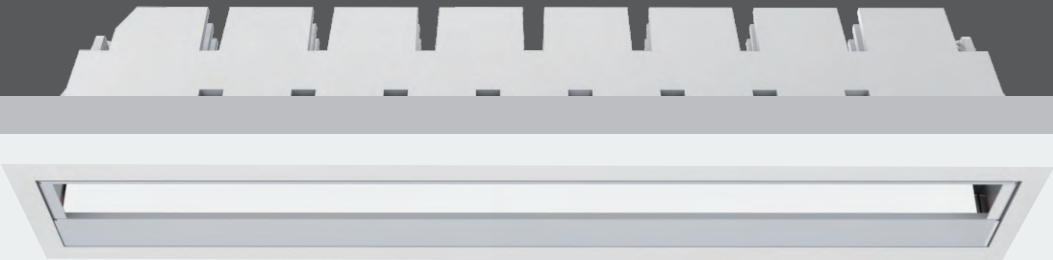

22W

CRI90
CRI80

2700K
3000K
4000K

 CREE
50,000h@L80B10


IP20

 5 YEARS
GUARANTEE


CB

CE

 UL
LISTED

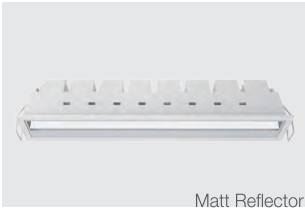

Matt Reflector

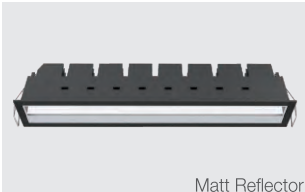

Matt Reflector

LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code			
22	W	24	W	31	V	700	mA	80	2700K	WW	2400lm	1100lm	FW10-827WW22X-WM
									3000K	WW	2600lm	1200lm	FW10-830WW22X-WM
									4000K	WW	2800lm	1300lm	FW10-840WW22X-WM


22	W	24	W	31	V	700	mA	80	2700K	WW	2400lm	1100lm	FW10-827WW22X-BM
									3000K	WW	2600lm	1200lm	FW10-830WW22X-BM
									4000K	WW	2800lm	1300lm	FW10-840WW22X-BM



Code Remark: X=F(ON-OFF) X=P(Phase Dim) X=A(1-10V Dim) X=D(DALI Dim)

Trimless available




Trimless code for FW10-830WW22X-WM
FW10-830WW22X-WM




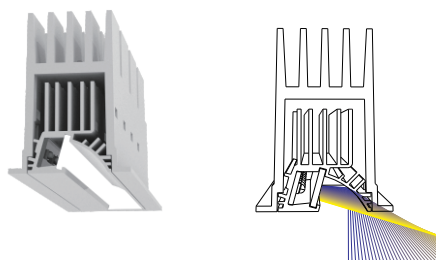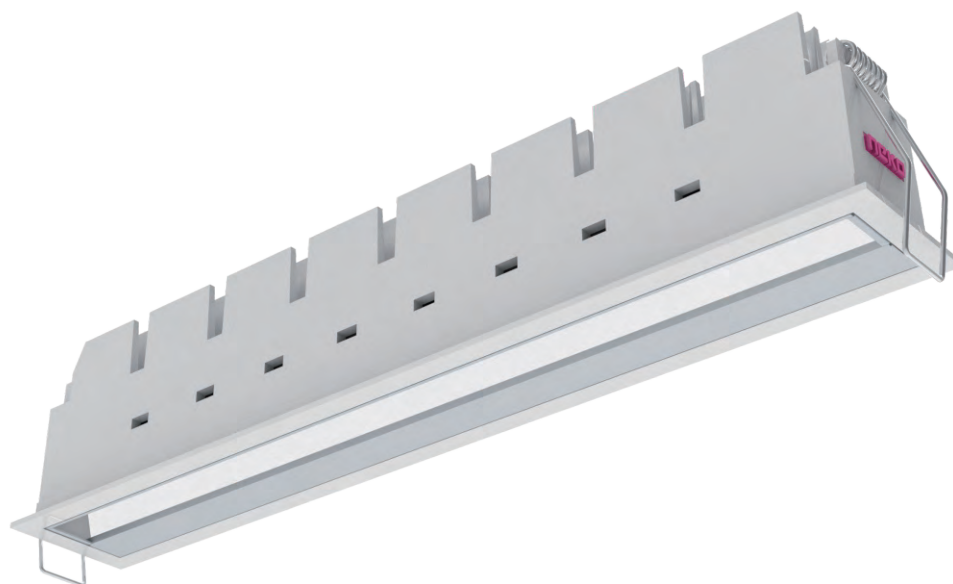

sehr gute Wall Washer Beleuchtungsqualität
High quality wall washer illumination

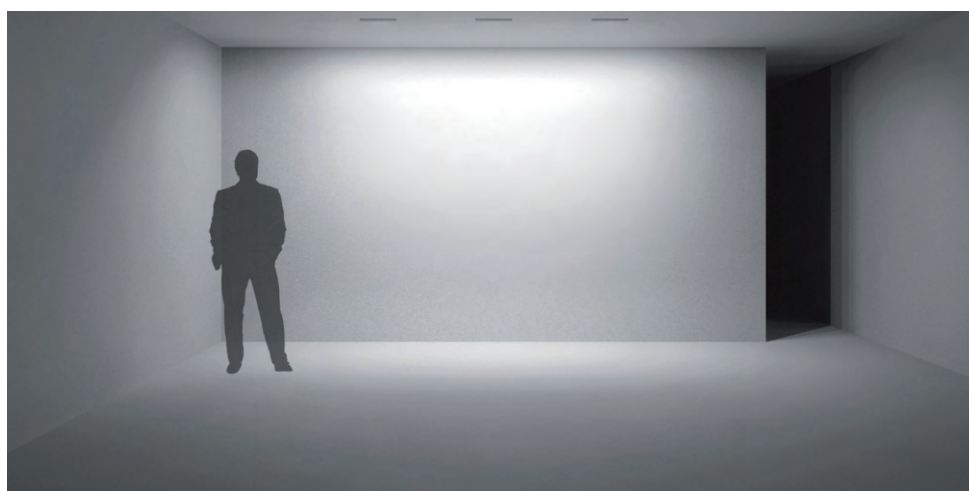

NEKO / FUSION / FG5
General LED Downlight

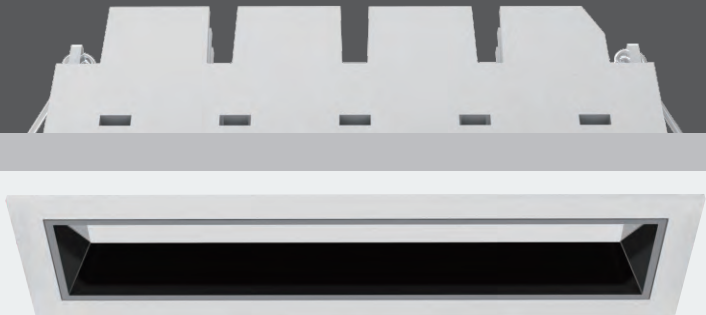

11W

CRI90
CRI80

2700K
3000K
4000K

 CREE
50,000h@L80B10


IP20

 5 YEARS
GUARANTEE

CB


CE

 LISTED



Black Reflector

LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code			
11	W	13	W	16	V	700	mA	80	2700K	75°	1200lm	380lm	FG5-8277511X-WB
									3000K	75°	1300lm	400lm	FG5-8307511X-WB
									4000K	75°	1400lm	450lm	FG5-8407511X-WB



Black Reflector

11 W	13 W	16 V	700 mA	80	2700K	75°	1200lm	350lm	FG5-8277511X-BB
					3000K	75°	1300lm	400lm	FG5-8307511X-BB
					4000K	75°	1400lm	450lm	FG5-8407511X-BB

Code Remark: X=F(ON-OFF) X=P(Phase Dim) X=A(1-10V Dim) X=D(DALI Dim)

Trimless available



Trimless code for FG5-8307511X-WB
FGT5-8307511X-WB



NEKO / FUSION/FG10
General LED Downlight



22W

CRI90
CRI80

2700K
3000K
4000K

 CREE
50,000h@L80B10


IP20

 5 YEAR
GUARANTEE


CB

CE

 UL
LISTED

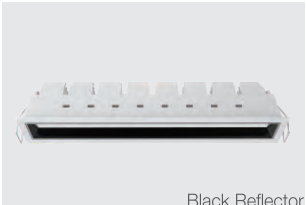

Black Reflector

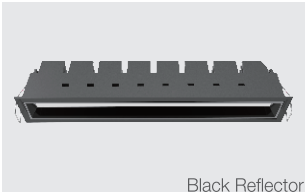

Black Reflector

LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
22 W	24 W	31 V	700 mA	80	2700K	75°	2400lm	850lm	FG10-8277522X-WB	
					3000K	75°	2600lm	900lm	FG10-8307522X-WB	
					4000K	75°	2800lm	950lm	FG10-8407522X-WB	
22 W	24 W	31 V	700 mA	80	2700K	75°	2400lm	850lm	FG10-8277522X-BB	
					3000K	75°	2600lm	900lm	FG10-8307522X-BB	
					4000K	75°	2800lm	950lm	FG10-8407522X-BB	
Code Remark: X=F(ON-OFF) X=P(Phase Dim) X=A(1-10V Dim) X=D(DALI Dim)										

Code Remark: X=F(ON-OFF) X=P(Phase Dim) X=A(1-10V Dim) X=D(DALI Dim)

Trimless available



Trimless code for FG10-8307522X-WB
FG10-8307522X-WB

