


NEKO
LIGHTING

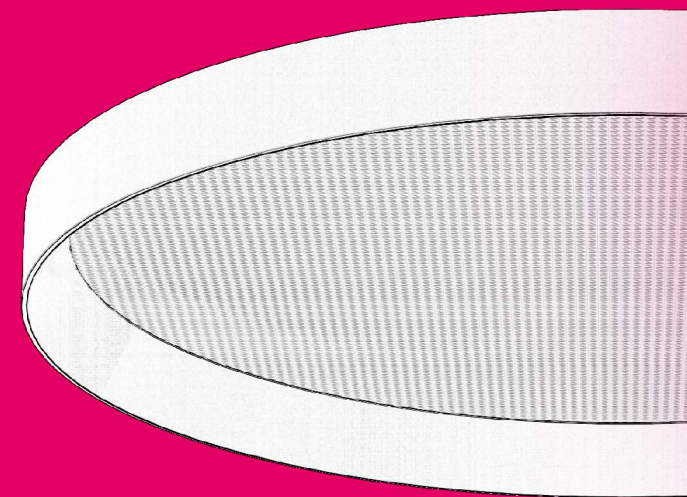

nekolighting.com
THINK DESIGN

Catalogue 2019

NEKO LIGHTING AG

📍 Kreuzstrasse 2, CH-8008 Zürich / Switzerland

☎ +41 44 451 80 15


✉ sales@nekolighting.com

🌐 www.nekolighting.com





NEKO
THINK DESIGN
Architectural Lighting
2019

Round aluminum housing ensures the optimal cooling of the LEDs
Available in standard version and decorative version
Suitable for ceiling-mounted, wall-mounted, suspended
4 diameters for options (350 mm, 450 mm, 600 mm, 900 mm)
Microprismatic cover for super eye comfort

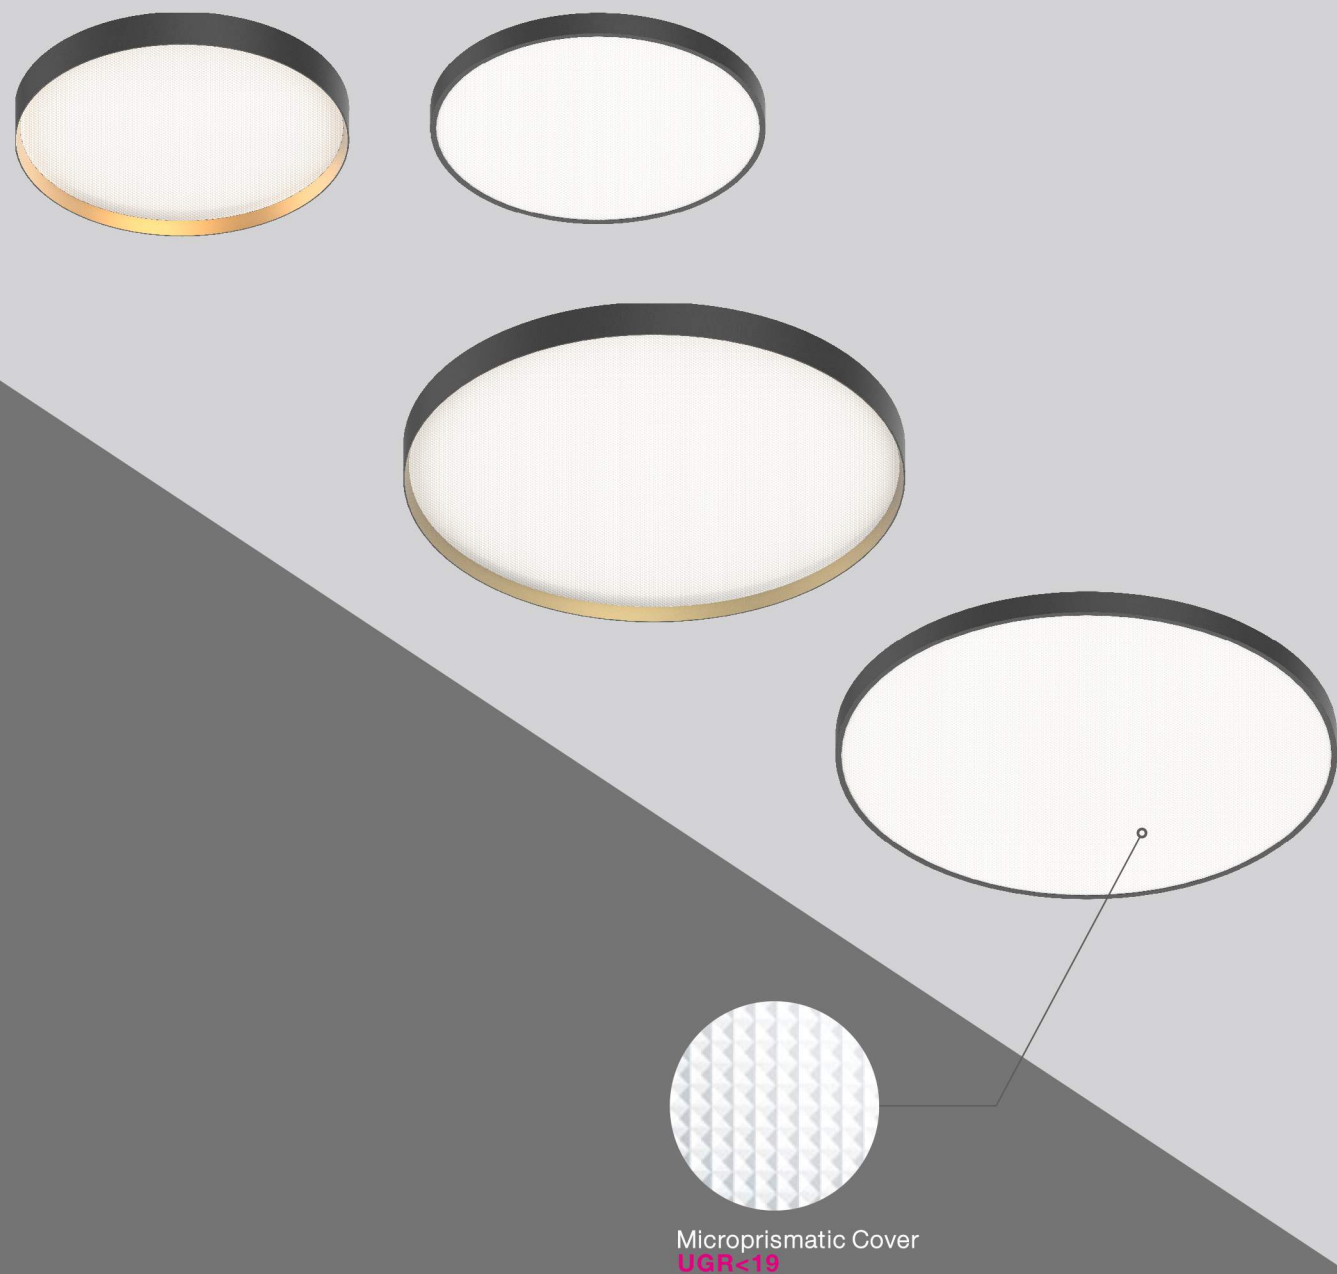




Installation:

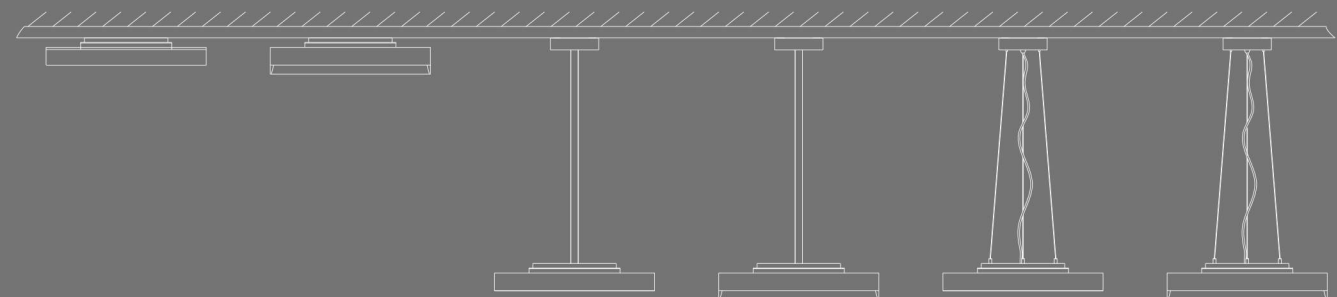

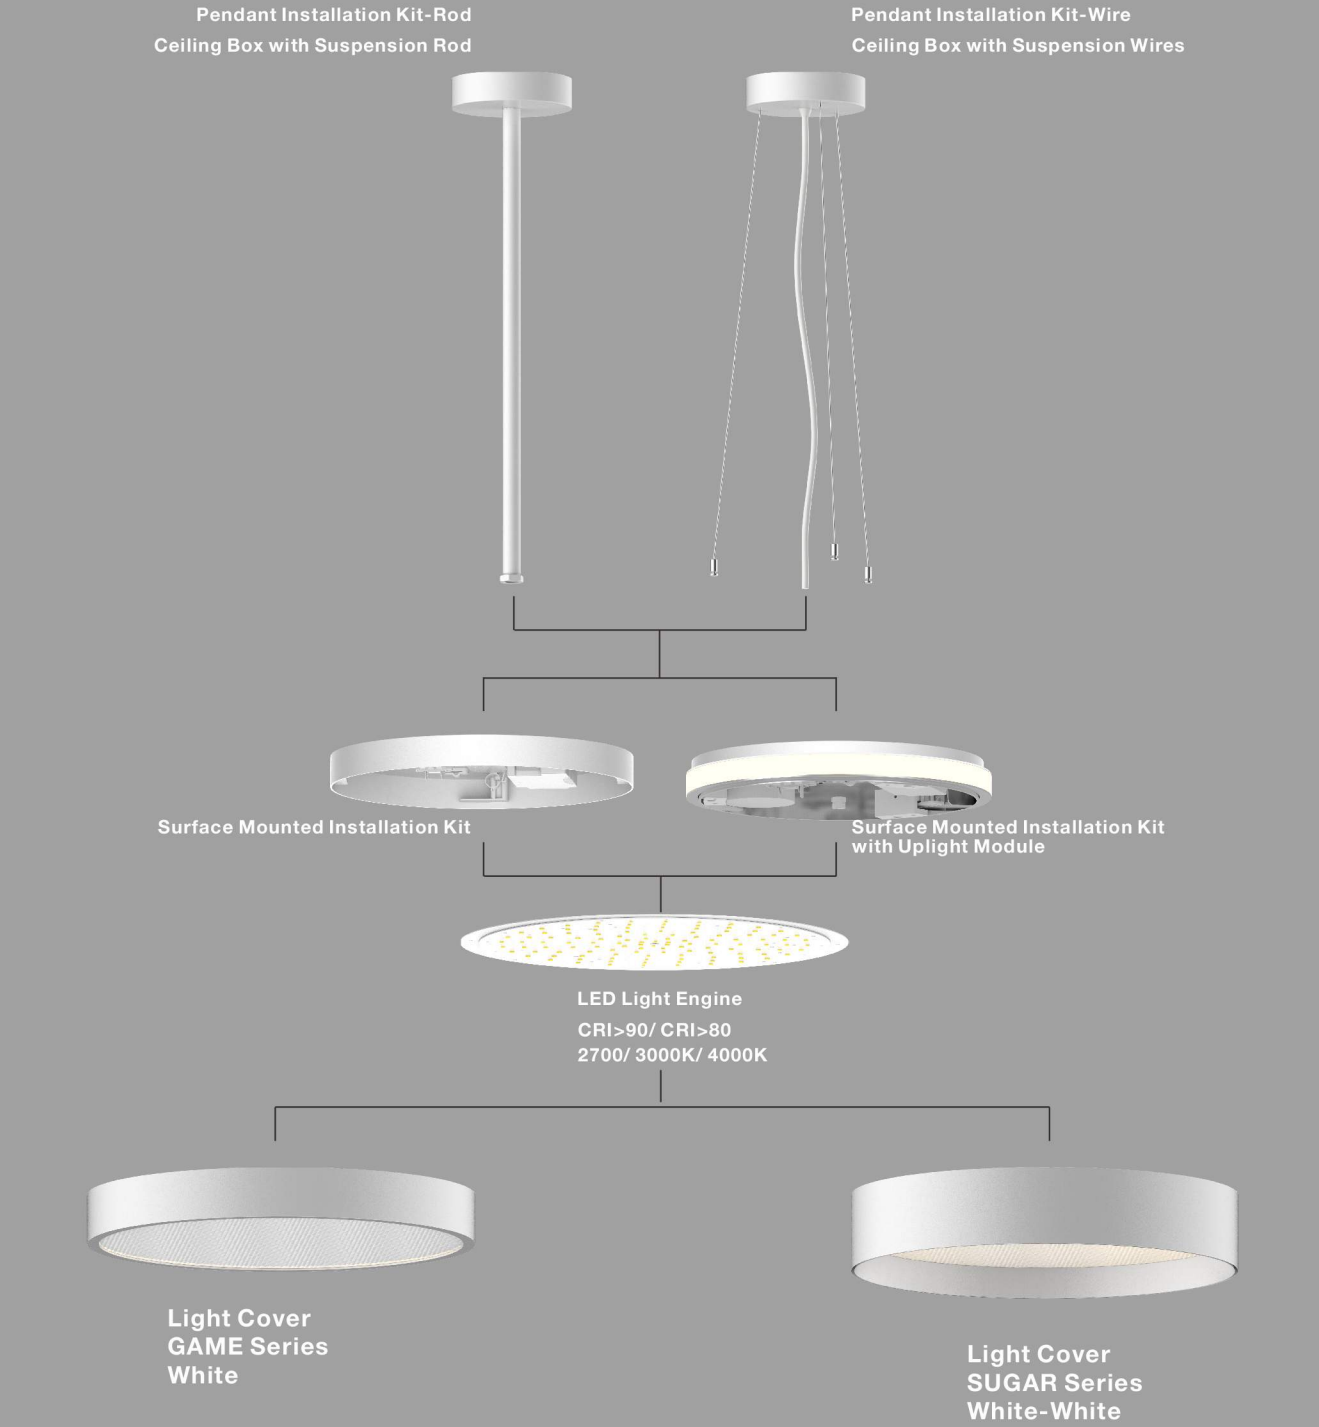


Installation :

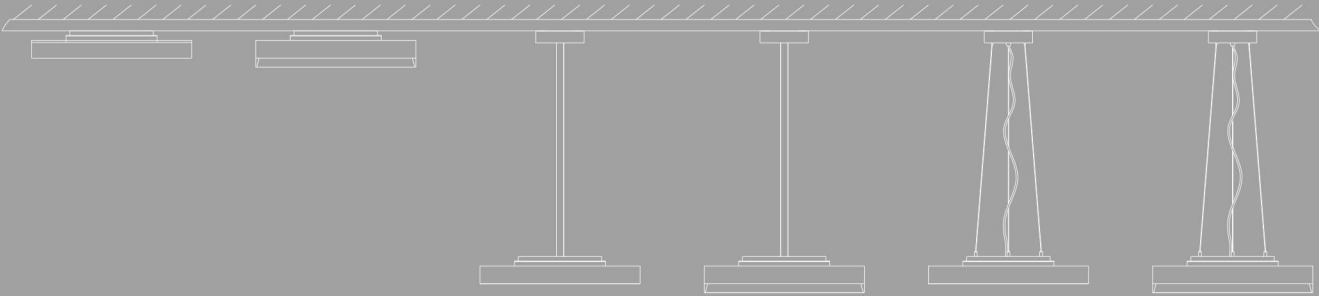


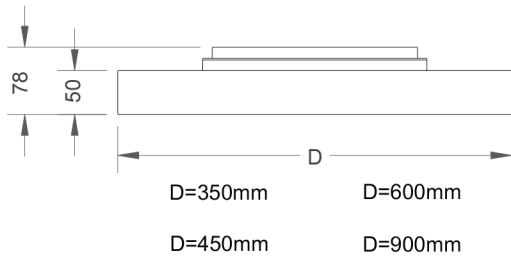


8W UP
12W DOWN(350mA) 1300Lm
18W DOWN(500mA) 1900Lm
ON-OFF/PHASE DIM/1-10V/DALI








8W UP
18W DOWN(500mA) 1900Lm
25W DOWN(700mA) 2600Lm
ON-OFF/PHASE DIM/1-10V/DALI

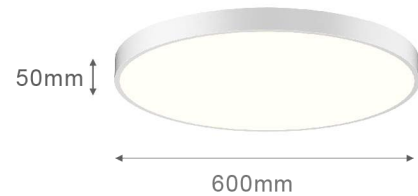

12W UP
25W DOWN(700mA) 2600Lm
38W DOWN(1050mA) 3800Lm
ON-OFF/PHASE DIM/1-10V/DALI

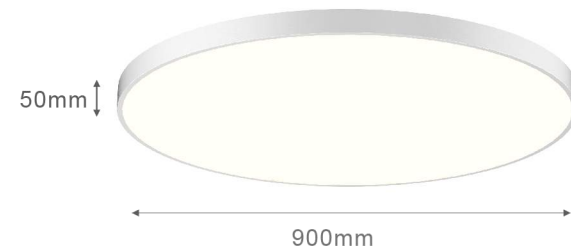

12W UP
65W DOWN(1350mA) 5800Lm
ON-OFF/1-10V/DALI

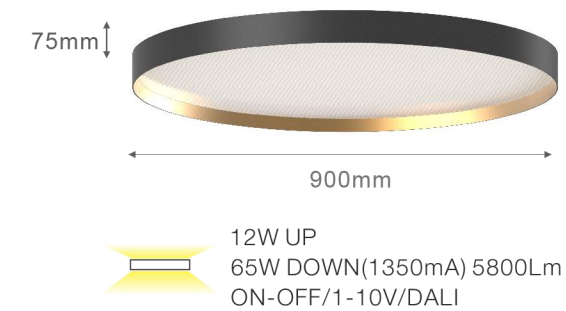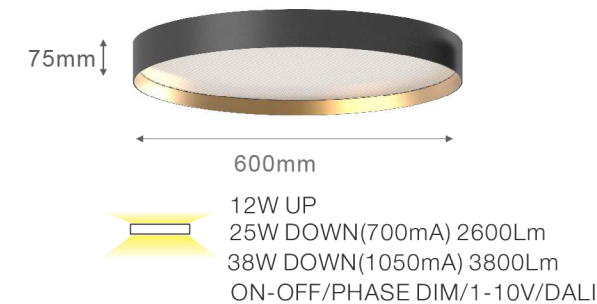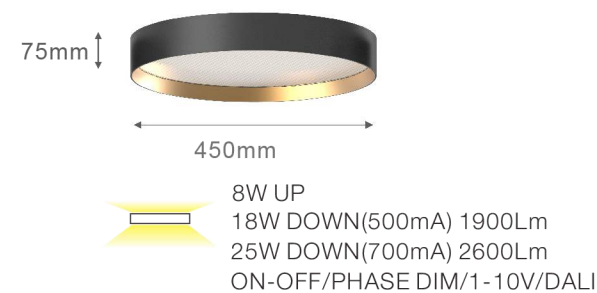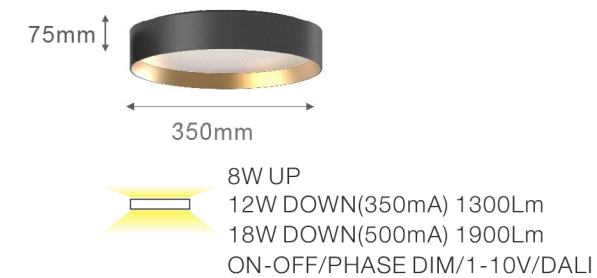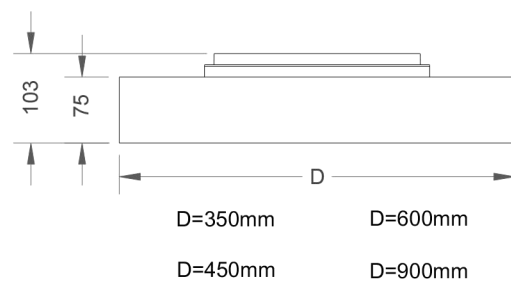

NEKO / GAME350
Ceiling Light System



12W
18W

CRI80
CRI90

2700K
3000K
4000K

90°

OSRAM

50,000h@L80B10

UGR < 19

IP40

5 YEAR GUARANTEE

CB

CE

	LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
 Black	12 W	14 W	36 V	350 mA	80	2700K	90°	1200lm	1100lm	GASM-8279012X-BN	
						3000K	90°	1300lm	1200lm	GASM-8309012X-BN	
						4000K	90°	1400lm	1300lm	GASM-8409012X-BN	
	18 W	20 W	36 V	500 mA	80	2700K	90°	1800lm	1600lm	GASM-8279018X-BN	
						3000K	90°	1900lm	1700lm	GASM-8309018X-BN	
						4000K	90°	2000lm	1800lm	GASM-8409018X-BN	
 White	12 W	14 W	36 V	350 mA	80	2700K	90°	1200lm	1100lm	GASM-8279012X-WN	
						3000K	90°	1300lm	1200lm	GASM-8309012X-WN	
						4000K	90°	1400lm	1300lm	GASM-8409012X-WN	
	18 W	20 W	36 V	500 mA	80	2700K	90°	1800lm	1600lm	GASM-8279018X-WN	
						3000K	90°	1900lm	1700lm	GASM-8309018X-WN	
						4000K	90°	2000lm	1800lm	GASM-8409018X-WN	

Code Remark: X=F(ON-OFF) X=P(Phase Dim) X=A(1-10V Dim) X=D(DALI Dim)



Black



White



Black



White

LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
12 W	14 W	36 V	350 mA	80	2700K	90°	90°	1200lm	1100lm	GAPW-8279012X-BN
							90°	1300lm	1200lm	GAPW-8309012X-BN
							90°	1400lm	1300lm	GAPW-8409012X-BN
18 W	20 W	36 V	500 mA	80	2700K	90°	90°	1800lm	1600lm	GAPW-8279018X-BN
							90°	1900lm	1700lm	GAPW-8309018X-BN
							90°	2000lm	1800lm	GAPW-8409018X-BN

12 W	14 W	36 V	350 mA	80	2700K	90°	90°	1200lm	1100lm	GAPW-8279012X-WN
							90°	1300lm	1200lm	GAPW-8309012X-WN
							90°	1400lm	1300lm	GAPW-8409012X-WN
18 W	20 W	36 V	500 mA	80	2700K	90°	90°	1800lm	1600lm	GAPW-8279018X-WN
							90°	1900lm	1700lm	GAPW-8309018X-WN
							90°	2000lm	1800lm	GAPW-8409018X-WN

12 W	14 W	36 V	350 mA	80	2700K	90°	90°	1200lm	1100lm	GAPR-8279012X-BN
							90°	1300lm	1200lm	GAPR-8309012X-BN
							90°	1400lm	1300lm	GAPR-8409012X-BN
18 W	20 W	36 V	500 mA	80	2700K	90°	90°	1800lm	1600lm	GAPR-8279018X-BN
							90°	1900lm	1700lm	GAPR-8309018X-BN
							90°	2000lm	1800lm	GAPR-8409018X-BN

12 W	14 W	36 V	350 mA	80	2700K	90°	90°	1200lm	1100lm	GAPR-8279012X-WN
							90°	1300lm	1200lm	GAPR-8309012X-WN
							90°	1400lm	1300lm	GAPR-8409012X-WN
18 W	20 W	36 V	500 mA	80	2700K	90°	90°	1800lm	1600lm	GAPR-8279018X-WN
							90°	1900lm	1700lm	GAPR-8309018X-WN
							90°	2000lm	1800lm	GAPR-8409018X-WN

Code Remark: X=F(ON-OFF) X=P(Phase Dim) X=A(1-10V Dim) X=D(DALI Dim)

NEKO / GAME450
Ceiling Light System



18W
25W

CRI80
CRI90

2700K
3000K
4000K

90°

OSRAM

50,000h@L80B10

UGR

< 19

IP40

5

YEARS

GUARANTEE

CB

CE

	LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
 Black	18 W	20 W	36 V	500 mA	80	2700K	90°	1800lm	1700lm	GBSM-8279018X-BN	
						3000K	90°	2000lm	1800lm	GBSM-8309018X-BN	
						4000K	90°	2200lm	1900lm	GBSM-8409018X-BN	
	25 W	28 W	36 V	700 mA	80	2700K	90°	2600lm	2300lm	GBSM-8279025X-BN	
						3000K	90°	2800lm	2500lm	GBSM-8309025X-BN	
						4000K	90°	3000lm	2700lm	GBSM-8409025X-BN	
 White	18 W	20 W	36 V	500 mA	80	2700K	90°	1800lm	1700lm	GBSM-8279018X-WN	
						3000K	90°	2000lm	1800lm	GBSM-8309018X-WN	
						4000K	90°	2200lm	1900lm	GBSM-8409018X-WN	
	25 W	28 W	36 V	700 mA	80	2700K	90°	2600lm	2300lm	GBSM-8279025X-WN	
						3000K	90°	2800lm	2500lm	GBSM-8309025X-WN	
						4000K	90°	3000lm	2700lm	GBSM-8409025X-WN	

Code Remark: X=F(ON-OFF) X=P(Phase Dim) X=A(1-10V Dim) X=D(DALI Dim)



Black



White



Black



White

LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
18 W	20 W	36 V	500 mA	80	2700K	90°	1800lm	1700lm	GBPW-8279018	X-BN
					3000K	90°	2000lm	1800lm	GBPW-8309018	X-BN
					4000K	90°	2200lm	1900lm	GBPW-8409018	X-BN
25 W	28 W	36 V	700 mA	80	2700K	90°	2600lm	2300lm	GBPW-8279025	X-BN
					3000K	90°	2800lm	2500lm	GBPW-8309025	X-BN
					4000K	90°	3000lm	2700lm	GBPW-8409025	X-BN

18 W	20 W	36 V	500 mA	80	2700K	90°	1800lm	1700lm	GBPW-8279018X-WN
					3000K	90°	2000lm	1800lm	GBPW-8309018X-WN
					4000K	90°	2200lm	1900lm	GBPW-8409018X-WN
25 W	28 W	36 V	700 mA	80	2700K	90°	2600lm	2300lm	GBPW-8279025X-WN
					3000K	90°	2800lm	2500lm	GBPW-8309025X-WN
					4000K	90°	3000lm	2700lm	GBPW-8409025X-WN

18 W	20 W	36 V	500 mA	80	2700K	90°	1800lm	1700lm	GBPR-8279018X-BN
					3000K	90°	2000lm	1800lm	GBPR-8309018X-BN
					4000K	90°	2200lm	1900lm	GBPR-8409018X-BN
25 W	28 W	36 V	700 mA	80	2700K	90°	2600lm	2300lm	GBPR-8279025X-BN
					3000K	90°	2800lm	2500lm	GBPR-8309025X-BN
					4000K	90°	3000lm	2700lm	GBPR-8409025X-BN

18 W	20 W	36 V	500 mA	80	2700K	90°	1800lm	1700lm	GBPR-8279018X-WN
					3000K	90°	2000lm	1800lm	GBPR-8309018X-WN
					4000K	90°	2200lm	1900lm	GBPR-8409018X-WN
25 W	28 W	36 V	700 mA	80	2700K	90°	2600lm	2300lm	GBPR-8279025X-WN
					3000K	90°	2800lm	2500lm	GBPR-8309025X-WN
					4000K	90°	3000lm	2700lm	GBPR-8409025X-WN

Code Remark: X=F(ON-OFF) X=P(Phase Dim) X=A(1-10V Dim) X=D(DALI Dim)

NEKO / GAME600
Ceiling Light System



25W	CRI80	2700K			UGR	IP40			
38W	CRI90	3000K		50,000h@L80B10	< 19				
50W		4000K							

	LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
 Black	25 W	28 W	36 V	700 mA	80	2700K	90°	2600lm	2300lm	GCSM-8279025X-BN	
						3000K	90°	2800lm	2500lm	GCSM-8309025X-BN	
						4000K	90°	3000lm	2700lm	GCSM-8409025X-BN	
	38 W	42 W	36 V	1050 mA	80	2700K	90°	4100lm	3600lm	GCSM-8279038X-BN	
						3000K	90°	4300lm	3800lm	GCSM-8309038X-BN	
						4000K	90°	4500lm	4000lm	GCSM-8409038X-BN	
	50 W	54 W	36 V	1400 mA	80	2700K	90°	5400lm	4800lm	GCSM-8279050X-BN	
						3000K	90°	5600lm	5000lm	GCSM-8309050X-BN	
						4000K	90°	5800lm	5200lm	GCSM-8409050X-BN	
 White	25 W	28 W	36 V	700 mA	80	2700K	90°	2600lm	2300lm	GCSM-8279025X-WN	
						3000K	90°	2800lm	2500lm	GCSM-8309025X-WN	
						4000K	90°	3000lm	2700lm	GCSM-8409025X-WN	
	38 W	42 W	36 V	1050 mA	80	2700K	90°	4100lm	3600lm	GCSM-8279038X-WN	
						3000K	90°	4300lm	3800lm	GCSM-8309038X-WN	
						4000K	90°	4500lm	4000lm	GCSM-8409038X-WN	
	50 W	54 W	36 V	1400 mA	80	2700K	90°	5400lm	4800lm	GCSM-8279050X-WN	
						3000K	90°	5600lm	5000lm	GCSM-8309050X-WN	
						4000K	90°	5800lm	5200lm	GCSM-8409050X-WN	

Code Remark: X=F(ON-OFF) X=P(Phase Dim) X=A(1-10V Dim) X=D(DALI Dim)



Black



White



Black



White

LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
25 W	28 W	36 V	700 mA	80	2700K	90°	90°	2600lm	2300lm	GCPW-8279025X-BN
					3000K	90°	90°	2800lm	2500lm	GCPW-8309025X-BN
					4000K	90°	90°	3000lm	2700lm	GCPW-8409025X-BN
38 W	42 W	36 V	1050 mA	80	2700K	90°	90°	4100lm	3600lm	GCPW-8279038X-BN
					3000K	90°	90°	4300lm	3800lm	GCPW-8309038X-BN
					4000K	90°	90°	4500lm	4000lm	GCPW-8409038X-BN
50 W	54 W	36 V	1400 mA	80	2700K	90°	90°	5400lm	4800lm	GCPW-8279050X-BN
					3000K	90°	90°	5600lm	5000lm	GCPW-8309050X-BN
					4000K	90°	90°	5800lm	5200lm	GCPW-8409050X-BN

25 W	28 W	36 V	700 mA	80	2700K	90°	90°	2600lm	2300lm	GCPW-8279025X-WN
					3000K	90°	90°	2800lm	2500lm	GCPW-8309025X-WN
					4000K	90°	90°	3000lm	2700lm	GCPW-8409025X-WN
38 W	42 W	36 V	1050 mA	80	2700K	90°	90°	4100lm	3600lm	GCPW-8279038X-WN
					3000K	90°	90°	4300lm	3800lm	GCPW-8309038X-WN
					4000K	90°	90°	4500lm	4000lm	GCPW-8409038X-WN
50 W	54 W	36 V	1400 mA	80	2700K	90°	90°	5400lm	4800lm	GCPW-8279050X-WN
					3000K	90°	90°	5600lm	5000lm	GCPW-8309050X-WN
					4000K	90°	90°	5800lm	5200lm	GCPW-8409050X-WN

25 W	28 W	36 V	700 mA	80	2700K	90°	90°	2600lm	2300lm	G CPR-8279025X-BN
					3000K	90°	90°	2800lm	2500lm	G CPR-8309025X-BN
					4000K	90°	90°	3000lm	2700lm	G CPR-8409025X-BN
38 W	42 W	36 V	1050 mA	80	2700K	90°	90°	4100lm	3600lm	G CPR-8279038X-BN
					3000K	90°	90°	4300lm	3800lm	G CPR-8309038X-BN
					4000K	90°	90°	4500lm	4000lm	G CPR-8409038X-BN
50 W	54 W	36 V	1400 mA	80	2700K	90°	90°	5400lm	4800lm	G CPR-8279050X-BN
					3000K	90°	90°	5600lm	5000lm	G CPR-8309050X-BN
					4000K	90°	90°	5800lm	5200lm	G CPR-8409050X-BN

25 W	28 W	36 V	700 mA	80	2700K	90°	90°	2600lm	2300lm	G CPR-8279025X-WN
					3000K	90°	90°	2800lm	2500lm	G CPR-8309025X-WN
					4000K	90°	90°	3000lm	2700lm	G CPR-8409025X-WN
38 W	42 W	36 V	1050 mA	80	2700K	90°	90°	4100lm	3600lm	G CPR-8279038X-WN
					3000K	90°	90°	4300lm	3800lm	G CPR-8309038X-WN
					4000K	90°	90°	4500lm	4000lm	G CPR-8409038X-WN
50 W	54 W	36 V	1400 mA	80	2700K	90°	90°	5400lm	4800lm	G CPR-8279050X-WN
					3000K	90°	90°	5600lm	5000lm	G CPR-8309050X-WN
					4000K	90°	90°	5800lm	5200lm	G CPR-8409050X-WN

Code Remark: X=F(ON-OFF) X=P(Phase Dim) X=A(1-10V Dim) X=D(DALI Dim)

NEKO / GAME900
Ceiling Light System



65W

CRI80
CRI90

2700K
3000K
4000K

90°

OSRAM
50,000h@L80B10

UGR
< 19

IP40

5
GUARANTEE

CB

CE



Black



White

LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
65 W	68 W	46 V	1400 mA	80	2700K	90°	5700lm	5000lm	GDSM-8279065X-BN	
					3000K	90°	6000lm	5200lm	GDSM-8309065X-BN	
					4000K	90°	6300lm	5500lm	GDSM-8409065X-BN	

65 W	68 W	46 V	1400 mA	80	2700K	90°	5700lm	5000lm	GDSM-8279065X-WN
					3000K	90°	6000lm	5200lm	GDSM-8309065X-WN
					4000K	90°	6300lm	5500lm	GDSM-8409065X-WN

Code Remark: X=F(ON-OFF) X=P(Phase Dim) X=A(1-10V Dim) X=D(DALI Dim)



Black



White



Black



White

LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
65 W	68 W	46 V	1400 mA	80	2700K	90°	5700lm	5000lm	GDPW-8279065X-BN	
					3000K	90°	6000lm	5200lm	GDPW-8309065X-BN	
					4000K	90°	6300lm	5500lm	GDPW-8409065X-BN	

65 W	68 W	46 V	1400 mA	80	2700K	90°	5700lm	5000lm	GDPW-8279065X-WN
					3000K	90°	6000lm	5200lm	GDPW-8309065X-WN
					4000K	90°	6300lm	5500lm	GDPW-8409065X-WN

65 W	68 W	46 V	1400 mA	80	2700K	90°	5700lm	5000lm	GDPR-8279065X-BN
					3000K	90°	6000lm	5200lm	GDPR-8309065X-BN
					4000K	90°	6300lm	5500lm	GDPR-8409065X-BN

65 W	68 W	46 V	1400 mA	80	2700K	90°	5700lm	5000lm	GDPR-8279065X-WN
					3000K	90°	6000lm	5200lm	GDPR-8309065X-WN
					4000K	90°	6300lm	5500lm	GDPR-8409065X-WN

Code Remark: X=F(ON-OFF) X=P(Phase Dim) X=A(1-10V Dim) X=D(DALI Dim)

NEKO / SUGAR350
Ceiling Light System



12W	CRI80	2700K	90°	OSRAM	UGR	IP40	5 YEAR	CB	CE
18W	CRI90	3000K		50,000h@L80B10	< 19		GUARANTEE		
		4000K							

	LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
 Black	12 W	14 W	36 V	350 mA	80	2700K	90°	1200lm	1100lm	SASM-8279012X-BB	
						3000K	90°	1300lm	1200lm	SASM-8309012X-BB	
						4000K	90°	1400lm	1300lm	SASM-8409012X-BB	
	18 W	20 W	36 V	500 mA	80	2700K	90°	1800lm	1600lm	SASM-8279018X-BB	
						3000K	90°	1900lm	1700lm	SASM-8309018X-BB	
						4000K	90°	2000lm	1800lm	SASM-8409018X-BB	
 Black-Gold	12 W	14 W	36 V	350 mA	80	2700K	90°	1200lm	1100lm	SASM-8279012X-BG	
						3000K	90°	1300lm	1200lm	SASM-8309012X-BG	
						4000K	90°	1400lm	1300lm	SASM-8409012X-BG	
	18 W	20 W	36 V	500 mA	80	2700K	90°	1800lm	1600lm	SASM-8279018X-BG	
						3000K	90°	1900lm	1700lm	SASM-8309018X-BG	
						4000K	90°	2000lm	1800lm	SASM-8409018X-BG	
 White	12 W	14 W	36 V	350 mA	80	2700K	90°	1200lm	1100lm	SASM-8279012X-WW	
						3000K	90°	1300lm	1200lm	SASM-8309012X-WW	
						4000K	90°	1400lm	1300lm	SASM-8409012X-WW	
	18 W	20 W	36 V	500 mA	80	2700K	90°	1800lm	1600lm	SASM-8279018X-WW	
						3000K	90°	1900lm	1700lm	SASM-8309018X-WW	
						4000K	90°	2000lm	1800lm	SASM-8409018X-WW	

Code Remark: X=F(ON-OFF) X=P(Phase Dim) X=A(1-10V Dim) X=D(DALI Dim)



Black



Black-Gold



White

LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
12 W	14 W	36 V	350 mA	80	2700K	90°	1200lm	1100lm	SAPW-8279012X-BB	
					3000K	90°	1300lm	1200lm	SAPW-8309012X-BB	
					4000K	90°	1400lm	1300lm	SAPW-8409012X-BB	
18 W	20 W	36 V	500 mA	80	2700K	90°	1800lm	1600lm	SAPW-8279018X-BB	
					3000K	90°	1900lm	1700lm	SAPW-8309018X-BB	
					4000K	90°	2000lm	1800lm	SAPW-8409018X-BB	

12 W	14 W	36 V	350 mA	80	2700K	90°	1200lm	1100lm	SAPW-8279012X-BG
					3000K	90°	1300lm	1200lm	SAPW-8309012X-BG
					4000K	90°	1400lm	1300lm	SAPW-8409012X-BG
18 W	20 W	36 V	500 mA	80	2700K	90°	1800lm	1600lm	SAPW-8279018X-BG
					3000K	90°	1900lm	1700lm	SAPW-8309018X-BG
					4000K	90°	2000lm	1800lm	SAPW-8409018X-BG

12 W	14 W	36 V	350 mA	80	2700K	90°	1200lm	1100lm	SAPW-8279012X-WW
					3000K	90°	1300lm	1200lm	SAPW-8309012X-WW
					4000K	90°	1400lm	1300lm	SAPW-8409012X-WW
18 W	20 W	36 V	500 mA	80	2700K	90°	1800lm	1600lm	SAPW-8279018X-WW
					3000K	90°	1900lm	1700lm	SAPW-8309018X-WW
					4000K	90°	2000lm	1800lm	SAPW-8409018X-WW

Code Remark: X=F(ON-OFF) X=P(Phase Dim) X=A(1-10V Dim) X=D(DALI Dim)



Black



Black-Gold




White

LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
12 W	14 W	36 V	350 mA	80	2700K	90°	1200lm	1100lm	SAPR-8279012	X-BB
					3000K	90°	1300lm	1200lm	SAPR-8309012	X-BB
					4000K	90°	1400lm	1300lm	SAPR-8409012	X-BB
18 W	20 W	36 V	500 mA	80	2700K	90°	1800lm	1600lm	SAPR-8279018	X-BB
					3000K	90°	1900lm	1700lm	SAPR-8309018	X-BB
					4000K	90°	2000lm	1800lm	SAPR-8409018	X-BB

12 W	14 W	36 V	350 mA	80	2700K	90°	1200lm	1100lm	SAPR-8279012X-BG
18 W	20 W	36 V	500 mA	80	2700K	90°	1800lm	1600lm	SAPR-8279018X-BG

12 W	14 W	36 V	350 mA	80	2700K	90°	1200lm	1100lm	SAPR-8279012X-WW
18 W	20 W	36 V	500 mA	80	2700K	90°	1800lm	1600lm	SAPR-8279018X-WW

Code Remark: X=F(ON-OFF) X=P(Phase Dim) X=A(1-10V Dim) X=D(DALI Dim)

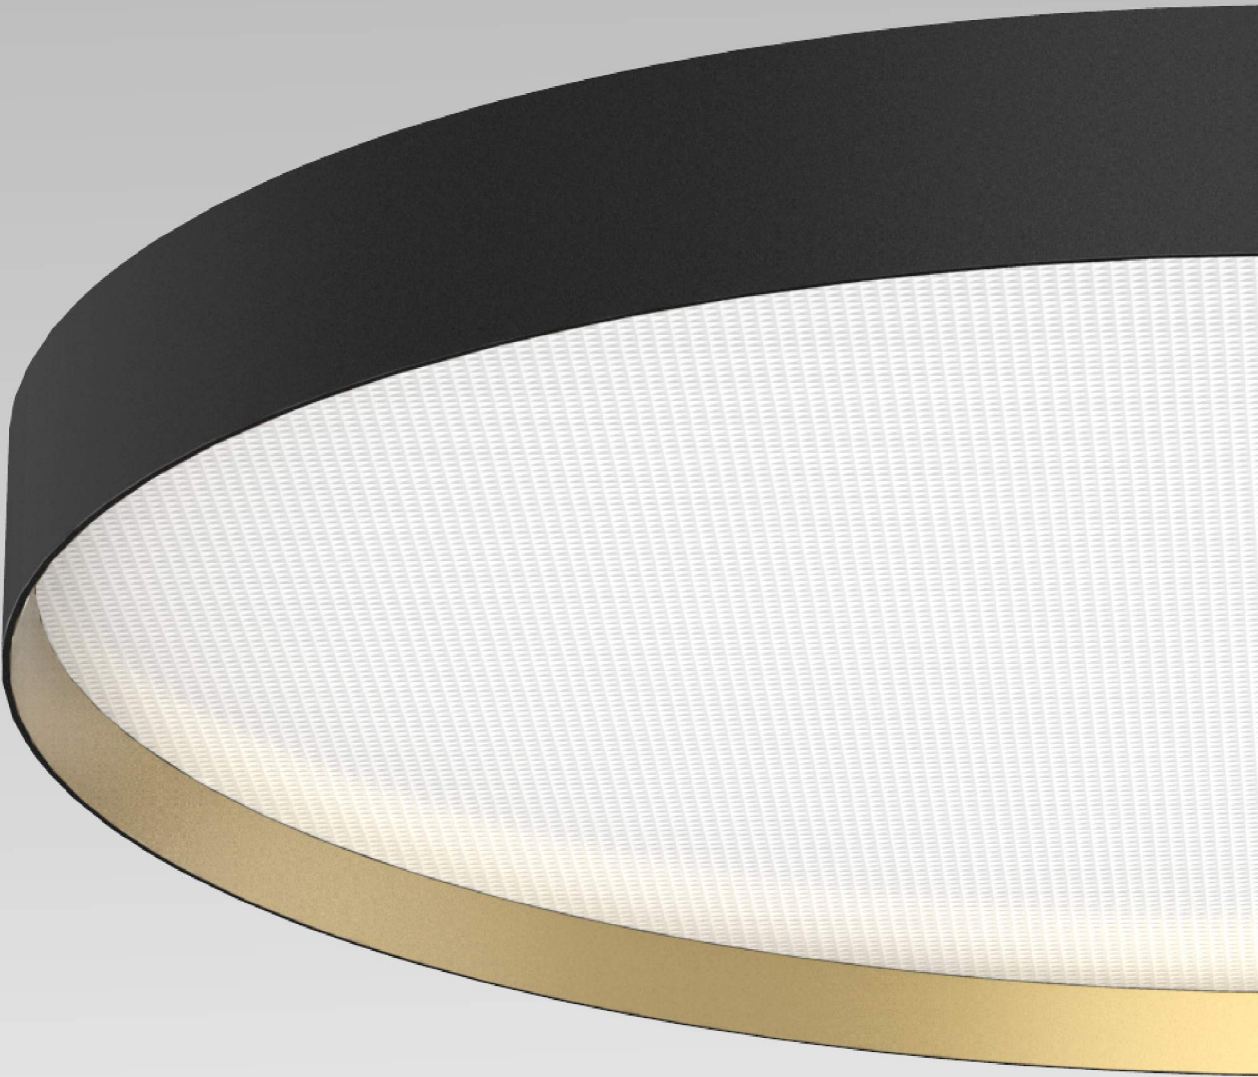

NEKO / SUGAR450
Ceiling Light System

18W 25W CRI80 CRI90 2700K 3000K 4000K 90° OSRAM 50,000h@L80B10 UGR < 19 IP40 5 YEARS GUARANTEE CB CE

	LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
 Black	18 W	20 W	36 V	500 mA	80	2700K	90°	1800lm	1700lm	SBSM-8279018X-BB	
						3000K	90°	2000lm	1800lm	SBSM-8309018X-BB	
						4000K	90°	2200lm	1900lm	SBSM-8409018X-BB	
	25 W	28 W	36 V	700 mA	80	2700K	90°	2600lm	2300lm	SBSM-8279025X-BB	
						3000K	90°	2800lm	2500lm	SBSM-8309025X-BB	
						4000K	90°	3000lm	2700lm	SBSM-8409025X-BB	
	 Black-Gold	18 W	20 W	36 V	500 mA	80	2700K	90°	1800lm	1700lm	SBSM-8279018X-BG
							3000K	90°	2000lm	1800lm	SBSM-8309018X-BG
							4000K	90°	2200lm	1900lm	SBSM-8409018X-BG
25 W		28 W	36 V	700 mA	80	2700K	90°	2600lm	2300lm	SBSM-8279025X-BG	
						3000K	90°	2800lm	2500lm	SBSM-8309025X-BG	
						4000K	90°	3000lm	2700lm	SBSM-8409025X-BG	
 White		18 W	20 W	36 V	500 mA	80	2700K	90°	1800lm	1700lm	SBSM-8279018X-WW
							3000K	90°	2000lm	1800lm	SBSM-8309018X-WW
							4000K	90°	2200lm	1900lm	SBSM-8409018X-WW
	25 W	28 W	36 V	700 mA	80	2700K	90°	2600lm	2300lm	SBSM-8279025X-WW	
						3000K	90°	2800lm	2500lm	SBSM-8309025X-WW	
						4000K	90°	3000lm	2700lm	SBSM-8409025X-WW	

Code Remark: X=F(ON-OFF) X=P(Phase Dim) X=A(1-10V Dim) X=D(DALI Dim)



Black



Black-Gold



White

LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
18 W	20 W	36 V	500 mA	80	2700K	90°	1800lm	1700lm	SBPW-8279018X-BB	
					3000K	90°	2000lm	1800lm	SBPW-8309018X-BB	
					4000K	90°	2200lm	1900lm	SBPW-8409018X-BB	
25 W	28 W	36 V	700 mA	80	2700K	90°	2600lm	2300lm	SBPW-8279025X-BB	
					3000K	90°	2800lm	2500lm	SBPW-8309025X-BB	
					4000K	90°	3000lm	2700lm	SBPW-8409025X-BB	

18 W	20 W	36 V	500 mA	80	2700K	90°	1800lm	1700lm	SBPW-8279018X-BG
							3000K 90°	1800lm	SBPW-8309018X-BG
							4000K 90°	1900lm	SBPW-8409018X-BG
25 W	28 W	36 V	700 mA	80	2700K	90°	2600lm	2300lm	SBPW-8279025X-BG
							3000K 90°	2500lm	SBPW-8309025X-BG
							4000K 90°	2700lm	SBPW-8409025X-BG

18 W	20 W	36 V	500 mA	80	2700K	90°	1800lm	1700lm	SBPW-8279018X-WW
							3000K 90°	1800lm	SBPW-8309018X-WW
							4000K 90°	1900lm	SBPW-8409018X-WW
25 W	28 W	36 V	700 mA	80	2700K	90°	2600lm	2300lm	SBPW-8279025X-WW
							3000K 90°	2500lm	SBPW-8309025X-WW
							4000K 90°	2700lm	SBPW-8409025X-WW

Code Remark: X=F(ON-OFF) X=P(Phase Dim) X=A(1-10V Dim) X=D(DALI Dim)



Black



Black-Gold



White

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
18 W	20 W	36 V	500 mA	80	2700K	90°	1800lm	1700lm	SBPR-8279018X-BB
					3000K	90°	2000lm	1800lm	SBPR-8309018X-BB
					4000K	90°	2200lm	1900lm	SBPR-8409018X-BB
25 W	28 W	36 V	700 mA	80	2700K	90°	2600lm	2300lm	SBPR-8279025X-BB
					3000K	90°	2800lm	2500lm	SBPR-8309025X-BB
					4000K	90°	3000lm	2700lm	SBPR-8409025X-BB

18 W	20 W	36 V	500 mA	80	2700K	90°	1800lm	1700lm	SBPR-8279018X-BG
					3000K	90°	2000lm	1800lm	SBPR-8309018X-BG
					4000K	90°	2200lm	1900lm	SBPR-8409018X-BG
25 W	28 W	36 V	700 mA	80	2700K	90°	2600lm	2300lm	SBPR-8279025X-BG
					3000K	90°	2800lm	2500lm	SBPR-8309025X-BG
					4000K	90°	3000lm	2700lm	SBPR-8409025X-BG

18 W	20 W	36 V	500 mA	80	2700K	90°	1800lm	1700lm	SBPR-8279018X-WW
					3000K	90°	2000lm	1800lm	SBPR-8309018X-WW
					4000K	90°	2200lm	1900lm	SBPR-8409018X-WW
25 W	28 W	36 V	700 mA	80	2700K	90°	2600lm	2300lm	SBPR-8279025X-WW
					3000K	90°	2800lm	2500lm	SBPR-8309025X-WW
					4000K	90°	3000lm	2700lm	SBPR-8409025X-WW

Code Remark: X=F(ON-OFF) X=P(Phase Dim) X=A(1-10V Dim) X=D(DALI Dim)



NEKO / SUGAR600
Ceiling Light System



25W	CRI80	2700K			UGR	IP		CB	CE
38W	CRI90	3000K		50,000h@L80B10	< 19	40			
50W		4000K							

	LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
 Black	25 W	28 W	36 V	700 mA	80	2700K	90°	2600lm	2300lm	SCSM-8279025X-BB	
						3000K	90°	2800lm	2500lm	SCSM-8309025X-BB	
						4000K	90°	3000lm	2700lm	SCSM-8409025X-BB	
	38 W	42 W	36 V	1050 mA	80	2700K	90°	4100lm	3600lm	SCSM-8279038X-BB	
						3000K	90°	4300lm	3800lm	SCSM-8309038X-BB	
						4000K	90°	4500lm	4000lm	SCSM-8409038X-BB	
	50 W	54 W	36 V	1400 mA	80	2700K	90°	5400lm	4800lm	SCSM-8279050X-BB	
						3000K	90°	5600lm	5000lm	SCSM-8309050X-BB	
						4000K	90°	5800lm	5200lm	SCSM-8409050X-BB	
 Black-Gold	25 W	28 W	36 V	700 mA	80	2700K	90°	2600lm	2300lm	SCSM-8279025X-BG	
						3000K	90°	2800lm	2500lm	SCSM-8309025X-BG	
						4000K	90°	3000lm	2700lm	SCSM-8409025X-BG	
	38 W	42 W	36 V	1050 mA	80	2700K	90°	4100lm	3600lm	SCSM-8279038X-BG	
						3000K	90°	4300lm	3800lm	SCSM-8309038X-BG	
						4000K	90°	4500lm	4000lm	SCSM-8409038X-BG	
	50 W	54 W	36 V	1400 mA	80	2700K	90°	5400lm	4800lm	SCSM-8279050X-BG	
						3000K	90°	5600lm	5000lm	SCSM-8309050X-BG	
						4000K	90°	5800lm	5200lm	SCSM-8409050X-BG	
 White	25 W	28 W	36 V	700 mA	80	2700K	90°	2600lm	2300lm	SCSM-8279025X-WW	
						3000K	90°	2800lm	2500lm	SCSM-8309025X-WW	
						4000K	90°	3000lm	2700lm	SCSM-8409025X-WW	
	38 W	42 W	36 V	1050 mA	80	2700K	90°	4100lm	3600lm	SCSM-8279038X-WW	
						3000K	90°	4300lm	3800lm	SCSM-8309038X-WW	
						4000K	90°	4500lm	4000lm	SCSM-8409038X-WW	
	50 W	54 W	36 V	1400 mA	80	2700K	90°	5400lm	4800lm	SCSM-8279050X-WW	
						3000K	90°	5600lm	5000lm	SCSM-8309050X-WW	
						4000K	90°	5800lm	5200lm	SCSM-8409050X-WW	

Code Remark: X=F(ON-OFF) X=P(Phase Dim) X=A(1-10V Dim) X=D(DALI Dim)



Black



Black-Gold



White

LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
25 W	28 W	36 V	700 mA	80	2700K	90°	2600lm	2300lm	SCPW-8279025X-BB	
					3000K	90°	2800lm	2500lm	SCPW-8309025X-BB	
					4000K	90°	3000lm	2700lm	SCPW-8409025X-BB	
38 W	42 W	36 V	1050 mA	80	2700K	90°	4100lm	3600lm	SCPW-8279038X-BB	
					3000K	90°	4300lm	3800lm	SCPW-8309038X-BB	
					4000K	90°	4500lm	4000lm	SCPW-8409038X-BB	
50 W	54 W	36 V	1400 mA	80	2700K	90°	5400lm	4800lm	SCPW-8279050X-BB	
					3000K	90°	5600lm	5000lm	SCPW-8309050X-BB	
					4000K	90°	5800lm	5200lm	SCPW-8409050X-BB	

25 W	28 W	36 V	700 mA	80	2700K	90°	2600lm	2300lm	SCPW-8279025X-BG
38 W	42 W	36 V	1050 mA	80	2700K	90°	2800lm	2500lm	SCPW-8309025X-BG
50 W	54 W	36 V	1400 mA	80	2700K	90°	3000lm	2700lm	SCPW-8409025X-BG

25 W	28 W	36 V	700 mA	80	2700K	90°	2600lm	2300lm	SCPW-8279025X-WW
38 W	42 W	36 V	1050 mA	80	2700K	90°	2800lm	2500lm	SCPW-8309025X-WW
50 W	54 W	36 V	1400 mA	80	2700K	90°	3000lm	2700lm	SCPW-8409025X-WW

Code Remark: X=F(ON-OFF) X=P(Phase Dim) X=A(1-10V Dim) X=D(DALI Dim)



Black

LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
25 W	28 W	36 V	700 mA	80	2700K	90°		2600lm	2300lm	SCPR-8279025X-BB
					3000K	90°		2800lm	2500lm	SCPR-8309025X-BB
					4000K	90°		3000lm	2700lm	SCPR-8409025X-BB
38 W	42 W	36 V	1050 mA	80	2700K	90°		4100lm	3600lm	SCPR-8279038X-BB
					3000K	90°		4300lm	3800lm	SCPR-8309038X-BB
					4000K	90°		4500lm	4000lm	SCPR-8409038X-BB
50 W	54 W	36 V	1400 mA	80	2700K	90°		5400lm	4800lm	SCPR-8279050X-BB
					3000K	90°		5600lm	5000lm	SCPR-8309050X-BB
					4000K	90°		5800lm	5200lm	SCPR-8409050X-BB



Black-Gold

25 W	28 W	36 V	700 mA	80	2700K	90°		2600lm	2300lm	SCPR-8279025X-BG
					3000K	90°		2800lm	2500lm	SCPR-8309025X-BG
					4000K	90°		3000lm	2700lm	SCPR-8409025X-BG
38 W	42 W	36 V	1050 mA	80	2700K	90°		4100lm	3600lm	SCPR-8279038X-BG
					3000K	90°		4300lm	3800lm	SCPR-8309038X-BG
					4000K	90°		4500lm	4000lm	SCPR-8409038X-BG
50 W	54 W	36 V	1400 mA	80	2700K	90°		5400lm	4800lm	SCPR-8279050X-BG
					3000K	90°		5600lm	5000lm	SCPR-8309050X-BG
					4000K	90°		5800lm	5200lm	SCPR-8409050X-BG



White

25 W	28 W	36 V	700 mA	80	2700K	90°		2600lm	2300lm	SCPR-8279025X-WW
					3000K	90°		2800lm	2500lm	SCPR-8309025X-WW
					4000K	90°		3000lm	2700lm	SCPR-8409025X-WW
38 W	42 W	36 V	1050 mA	80	2700K	90°		4100lm	3600lm	SCPR-8279038X-WW
					3000K	90°		4300lm	3800lm	SCPR-8309038X-WW
					4000K	90°		4500lm	4000lm	SCPR-8409038X-WW
50 W	54 W	36 V	1400 mA	80	2700K	90°		5400lm	4800lm	SCPR-8279050X-WW
					3000K	90°		5600lm	5000lm	SCPR-8309050X-WW
					4000K	90°		5800lm	5200lm	SCPR-8409050X-WW

Code Remark: X=F(ON-OFF) X=P(Phase Dim) X=A(1-10V Dim) X=D(DALI Dim)



NEKO / SUGAR900
Ceiling Light System



65W

CRI80
CRI90

2700K
3000K
4000K

90°

OSRAM

50,000h@L80B10

UGR < 19

IP40

5 YEARS GUARANTEE

CB

CE

	LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
	65 W	68 W	46 V	1400 mA	80	2700K	90°	5700lm	5000lm	SDSM-8279065X-BB	
						3000K	90°	6000lm	5200lm	SDSM-8309065X-BB	
						4000K	90°	6300lm	5500lm	SDSM-8409065X-BB	
	65 W	68 W	46 V	1400 mA	80	2700K	90°	5700lm	5000lm	SDSM-8279065X-BG	
						3000K	90°	6000lm	5200lm	SDSM-8309065X-BG	
						4000K	90°	6300lm	5500lm	SDSM-8409065X-BG	
	65 W	68 W	46 V	1400 mA	80	2700K	90°	5700lm	5000lm	SDSM-8279065X-WW	
						3000K	90°	6000lm	5200lm	SDSM-8309065X-WW	
						4000K	90°	6300lm	5500lm	SDSM-8409065X-WW	
Code Remark: X=F(ON-OFF) X=P(Phase Dim) X=A(1-10V Dim) X=D(DALI Dim)											

	LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
	65 W	68 W	46 V	1400 mA	80	2700K	90°	5700lm	5000lm	SDPW-8279065X-BB	
						3000K	90°	6000lm	5200lm	SDPW-8309065X-BB	
						4000K	90°	6300lm	5500lm	SDPW-8409065X-BB	

	65 W	68 W	46 V	1400 mA	80	2700K	90°	5700lm	5000lm	SDPW-8279065X-BG		
							3000K	90°	6000lm	5200lm	SDPW-8309065X-BG	
								4000K	90°	6300lm	5500lm	SDPW-8409065X-BG

	65 W	68 W	46 V	1400 mA	80	2700K	90°	5700lm	5000lm	SDPW-8279065X-WW	
							3000K	90°	6000lm	5200lm	SDPW-8309065X-WW
							4000K	90°	6300lm	5500lm	SDPW-8409065X-WW

Code Remark: X=F(ON-OFF) X=P(Phase Dim) X=A(1-10V Dim) X=D(DALI Dim)



Black



Black-Gold



White

LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
65 W	68 W	46 V	1400 mA	80	2700K	90°		5700lm	5000lm	SDPR-8279065X-BB
					3000K	90°		6000lm	5200lm	SDPR-8309065X-BB
					4000K	90°		6300lm	5500lm	SDPR-8409065X-BB

65 W	68 W	46 V	1400 mA	80	2700K	90°		5700lm	5000lm	SDPR-8279065X-BG
					3000K	90°		6000lm	5200lm	SDPR-8309065X-BG
					4000K	90°		6300lm	5500lm	SDPR-8409065X-BG

65 W	68 W	46 V	1400 mA	80	2700K	90°		5700lm	5000lm	SDPR-8279065X-WW
					3000K	90°		6000lm	5200lm	SDPR-8309065X-WW
					4000K	90°		6300lm	5500lm	SDPR-8409065X-WW

Code Remark: X=F(ON-OFF) X=P(Phase Dim) X=A(1-10V Dim) X=D(DALI Dim)

NEW

