





## MULTI2 tiltable

recessed luminaire

Tiltable spotlight for general and accent lighting. Ideal as an energetic replacement of conventional lighting systems.



Lamp	Bridgelux Vero 29
Lumen output	5130 lm @ 1050 mA – 34,2 W
	5435 lm @ 1150 mA – 38,8 W
	9510 lm @ 2100 mA – 72,6 W
Light technology	Plastic, aluminum evaporated
Control gear	LED Treiber external
Dimming (options)	1–10 V , DALI, Push
Luminaire type, assembly	Ceiling mounting, mounting bracket
Dimensions	D 190 mm, CO 165 mm, H 180 mm, ET 205 mm
Cast, heat sink	Steel plate, aluminum extruded profile black anodized
Colour / finish	Powder coating, RAL 9016 (optional RAL color as required)
Protection marking, compliance	IP20, <b>CE</b>
Specials	Special version or additional light colors / CRI optional

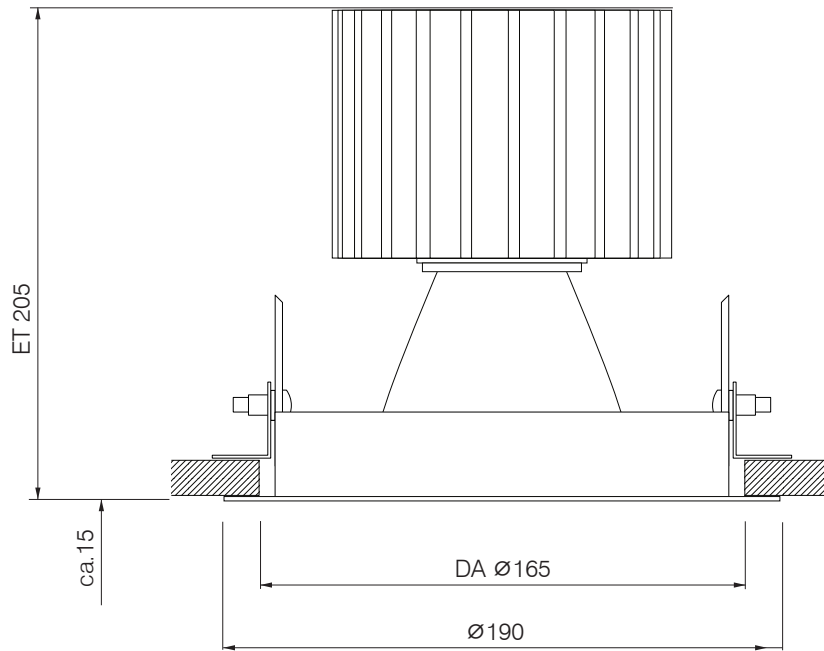

EVG on/off = EV

1–10 V = AV

Dali = DA

Push = PH

Please replace the item number placeholder XX with the listed operating device options:

Light distribution	Light colour	Color rendering	Control gear	Color rendering	+RAL
	2700 K	CRI 80	1–10 V, DALI, Push	A 337R G 2780 XX	9016
	3000 K	CRI 80	1–10 V, DALI, Push	A 337R G 3080 XX	9016
		CRI 90	1–10 V, DALI, Push	A 337R G 3090 XX	9016
	4000 K	CRI 80	1–10 V, DALI, Push	A 337R G 4080 XX	9016
	5000 K	CRI 75	1–10 V, DALI, Push	A 337R G 5075 XX	9016
	2700 K	CRI 80	1–10 V, DALI, Push	A 337R K 2780 XX	9016
	3000 K	CRI 80	1–10 V, DALI, Push	A 337R K 3080 XX	9016
		CRI 90	1–10 V, DALI, Push	A 337R K 3090 XX	9016
	4000 K	CRI 80	1–10 V, DALI, Push	A 337R K 4080 XX	9016
	5000 K	CRI 75	1–10 V, DALI, Push	A 337R K 5075 XX	9016
	2700 K	CRI 80	1–10 V, DALI, Push	A 337R P 2780 XX	9016
	3000 K	CRI 80	1–10 V, DALI, Push	A 337R P 3080 XX	9016
		CRI 90	1–10 V, DALI, Push	A 337R P 3090 XX	9016
	4000 K	CRI 80	1–10 V, DALI, Push	A 337R P 4080 XX	9016
	5000 K	CRI 75	1–10 V, DALI, Push	A 337R P 5075 XX	9016