



## MULTI tiltable

## Recessed spotlight

Adjustable spotlight tiltable up to 20 ° and rotatable through 360°. Available with different light characteristics. Suitable for general and accent lighting, as well as an energy-saving exchange of conventional spots.



Lamp	Bridgelux Vero 18
LED lumen output	1200 lm @ 350 mA – 9,5 W
	1697 lm @ 500 mA – 12,5 W
	2300 lm @ 700 mA – 19,9 W
The reference values based on 3000 K with CRI 80	3280 lm @ 1050 mA – 31 W
Reflector	Aluminium coated polycarbonate
Control gear	LED gear external
Dimming (Options)	1–10 V , DALI, Push
Luminaire type, assembly	Ceiling built-in, mounting brackets
Dimensions	D 190 mm, CO 165 mm, H 130 mm, MD 155 mm
Cast, heat sink	Sheet steel powder coated, extruded aluminium profile anodized black
Colour / finish	Powder coated, RAL 9016 (other RAL colors optional)
Protection marking, compliance	IP20, <b>CE</b>
Specials	Customized versions, more light colours or color renderings on request

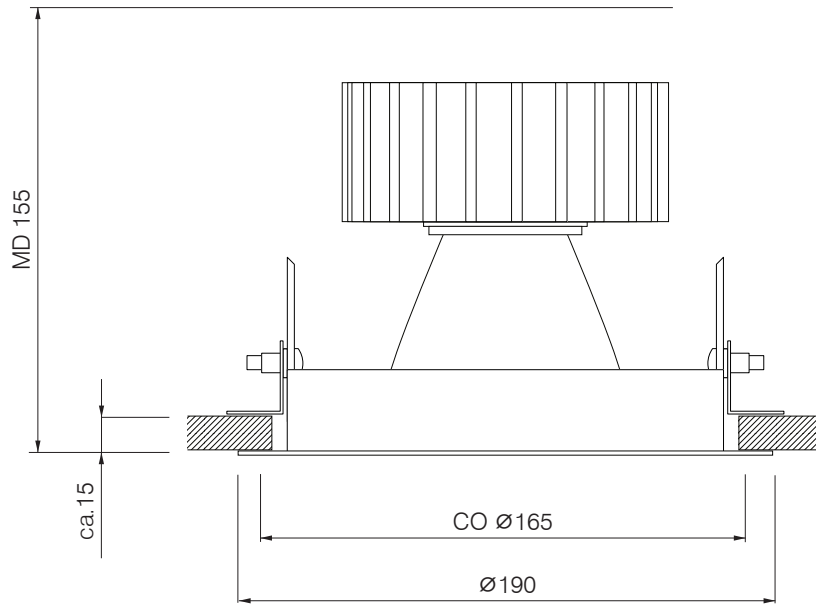

EVG on/off = EV

1-10 V = AV

Dali = DA

Push = PH

Please replace the item number placeholder XX with the listed operating device options:

Light distribution	Light colour	Color rendering	Control gear	Order No.	+RAL
	2700 K	CRI 80	1-10 V, DALI, Push	A 339R G 2780 XX	9016
	3000 K	CRI 80	1-10 V, DALI, Push	A 339R G 3080 XX	9016
		CRI 90	1-10 V, DALI, Push	A 339R G 3090 XX	9016
	4000 K	CRI 80	1-10 V, DALI, Push	A 339R G 4080 XX	9016
	5000 K	CRI 75	1-10 V, DALI, Push	A 339R G 5075 XX	9016
	2700 K	CRI 80	1-10 V, DALI, Push	A 339R K 2780 XX	9016
	3000 K	CRI 80	1-10 V, DALI, Push	A 339R K 3080 XX	9016
		CRI 90	1-10 V, DALI, Push	A 339R K 3090 XX	9016
	4000 K	CRI 80	1-10 V, DALI, Push	A 339R K 4080 XX	9016
	5000 K	CRI 75	1-10 V, DALI, Push	A 339R K 5075 XX	9016
	2700 K	CRI 80	1-10 V, DALI, Push	A 339R P 2780 XX	9016
	3000 K	CRI 80	1-10 V, DALI, Push	A 339R P 3080 XX	9016
		CRI 90	1-10 V, DALI, Push	A 339R P 3090 XX	9016
	4000 K	CRI 80	1-10 V, DALI, Push	A 339R P 4080 XX	9016
	5000 K	CRI 75	1-10 V, DALI, Push	A 339R P 5075 XX	9016