




RMJ-Downlight

Recessed Mounted

Recessed downlight with different beam angles as downlight or wallwasher. Very High efficiency and homogenous light distribution with very low glare effect.

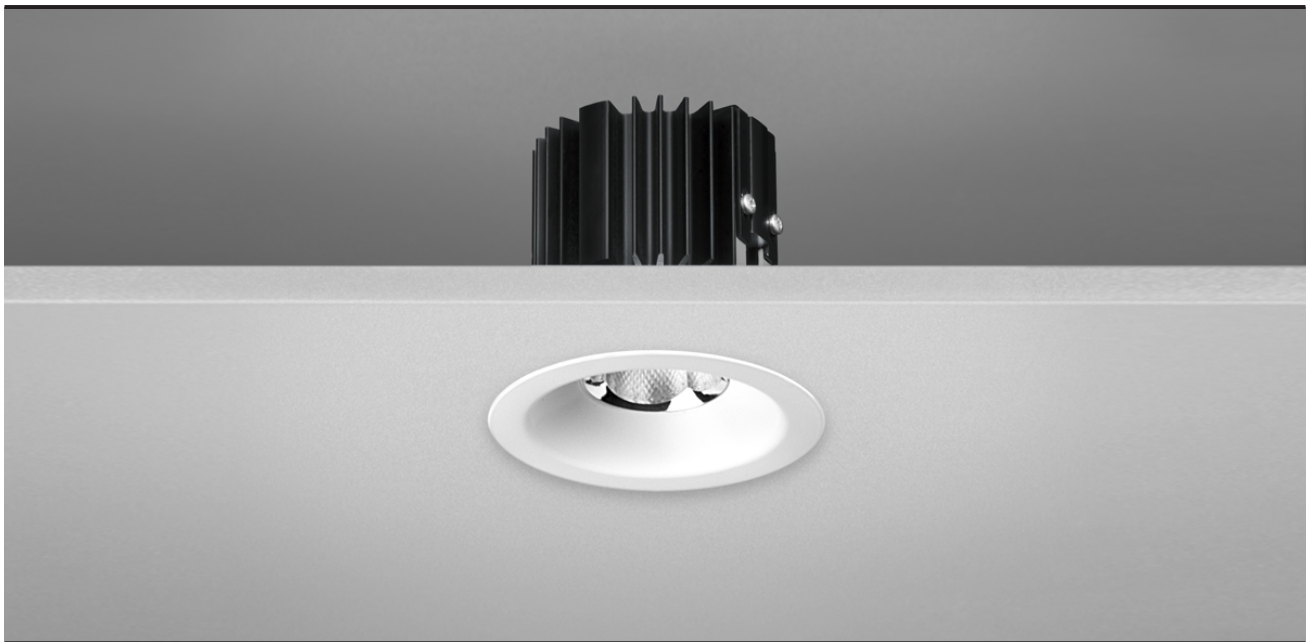

RMJ-reflector 2x25°




RMJ-reflector 2x35°



RMJ-reflector 2x45°




RMJ-reflector asymmetric
Version with flat cover



Light source	Mono: LUXEON 1202 HD COB
	Tuneable White: 2200K – 6500K NICHIA NCS...E17AT
Light output (COB bei 500mA) ⁽¹⁾	max. 1980lm
Lighting technology	RMJ-reflector: plastic, aluminum-coated
Drivers / dimming	LED driver required externally, DALI (others on request), Amplituden Dimmung: LowFlicker/NoNoise
Luminaire type, assembly	Recessed Mounted
Dimensions, weight	D=90mm, DA=80mm, H=85mm
Casing, cooler, protection class	Sheet steel, extruded aluminum profile, IP20
Surface / color	High-gloss aluminum or powder coating (optional RAL color as desired)
Optional	Polycarbonate Glass for IP 54

⁽¹⁾at 3000K, CRI80

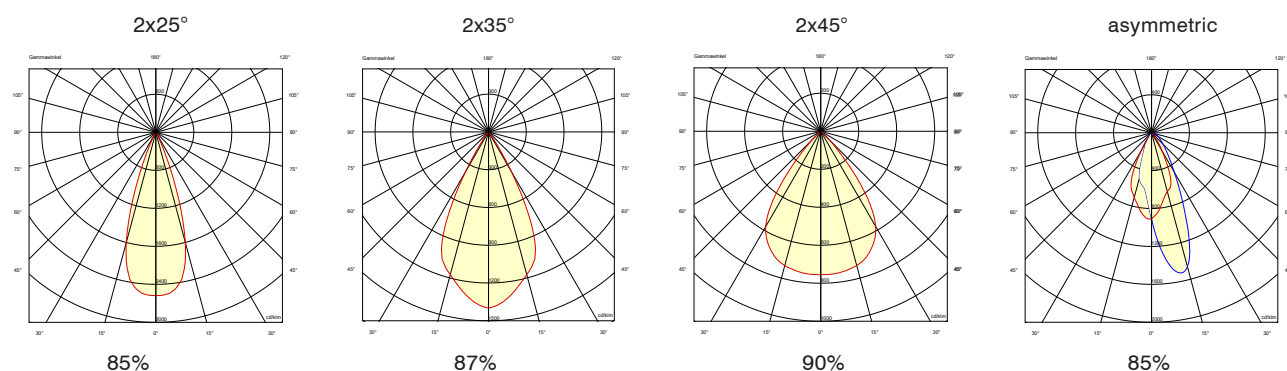

Luminaire type	Product ID	Beam angle / Reflector	Color temperature ⁽¹⁾	CRI	Driver	Color
A = Einbau	4040	A = asymmetric	27 = 2700K	80	00 = Ohne	9016 (white)
		K = 2x25°	30 = 3000K	90	DA = DALI	9005 (black)
		P = 2x35°	40 = 4000K		D8 = DALI (DT8)	9006 (AluSilver)
		T = 2x45°	50 = 5000K			AHGL (High-gloss)
			57 = 5700K			
			91 = 2200 - 3000K			
			87 = 2200 - 4500K			
			99 = 2700 - 5000K			

RMJ-Downlight		Recessed Mounted	2/2	Technical and design changes reserved! Errors excepted!		19-01-30
Projektleuchten GmbH	Kammerstück 41	44357 Dortmund	T +49 231 35670-0	F +49 231 35670-44	info@projektleuchten.de	