


ROUND 1/2E

Half recessed luminaire

Half recessed luminaire with mid-power LEDs optimized for a flat and glare-free illumination as general lighting.

Lamp & Lumen Output	At Ø 260mm (Mid-Power LED, 8W, 450mA, 1500lm)
	At Ø 360mm (Mid-Power LED, 14W, 450mA, 1950lm)
	At Ø 460mm (Mid-Power LED, 18,3W, 450mA, 2740lm)
	At Ø 660mm (Mid-Power LED, 32,8W, 450mA, 4240lm)
	At Ø 960mm (Mid-Power LED, 76,8W, 450mA, 9880lm)
Reflector	Diffuse plastic disc
Control gear	LED driver internal
Dimming (options)	1-10V, DALI, Push
Luminaire type, mounting	Recessed
Dimensions	DxH (260-960mm)x170 mm
Cast, heat sink	Steelsheet
Colour /finish	Powder coated, RAL 9016 (other RAL colours optional)
Protection marking, compliance	IP20, CE
Specials	Customized versions, more light colours or colour renderings on request

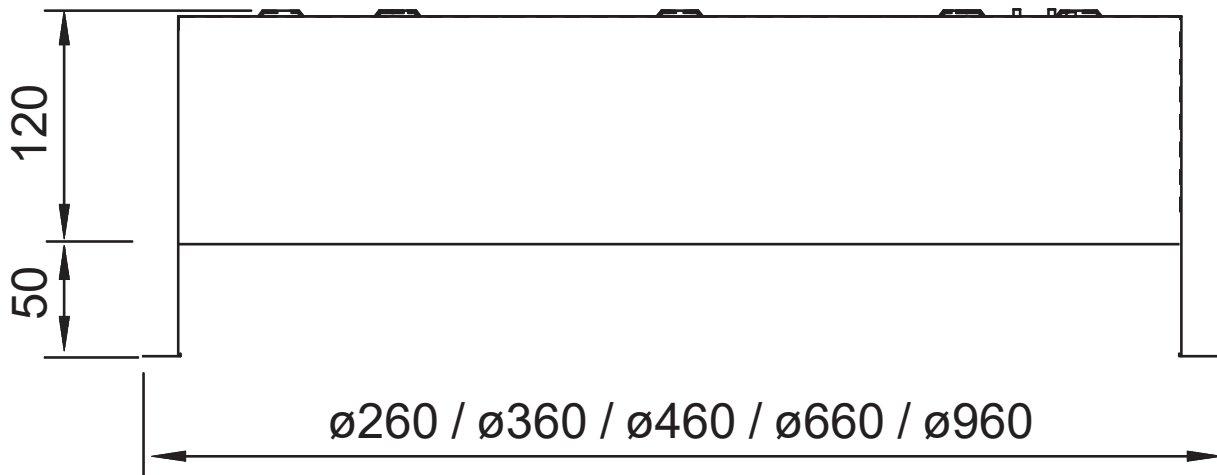

Article number: _ _ _ _ _

Luminaire type	Identification	Reflector / Beam angle	Color temperature	CRI	Driver	RAL
E = Half recessed	3070 = $\varnothing 260$	Z = Diffuse	30 = 3000 K	80	EV = On/Off	0000 = None
	3071 = $\varnothing 360$		40 = 4000 K	90	AV = 1-10V	1000 - 9018 = RAL
	3072 = $\varnothing 460$				DA = Dali	
	3073 = $\varnothing 660$				PH = Push	
	3074 = $\varnothing 960$					