

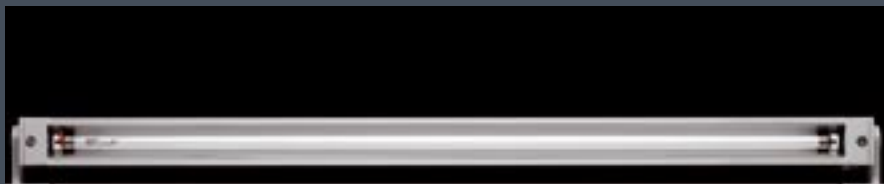


Ecoline is a linear wall washer luminaire with LEDs or for T16 fluorescent lamps and comes in various different lengths. In addition to stand alone luminaires, there is also a modular system for creating continuous lines with hardly any shadow between the modules. A combination of innovative light sources and precise optical systems brought together to form an economical and low-maintenance lighting system.



Despite having integral control gear, the cross section of these luminaires is extremely small. This enables them to be used very discretely in any architectural situation.

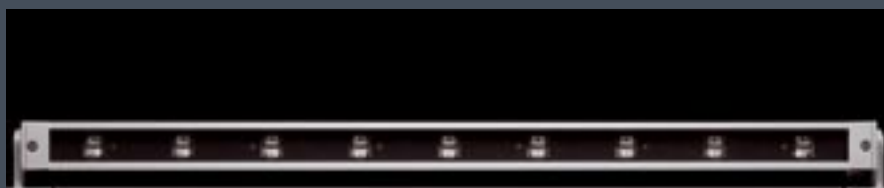


This series is available with LEDs or for T16 fluorescent lamps.

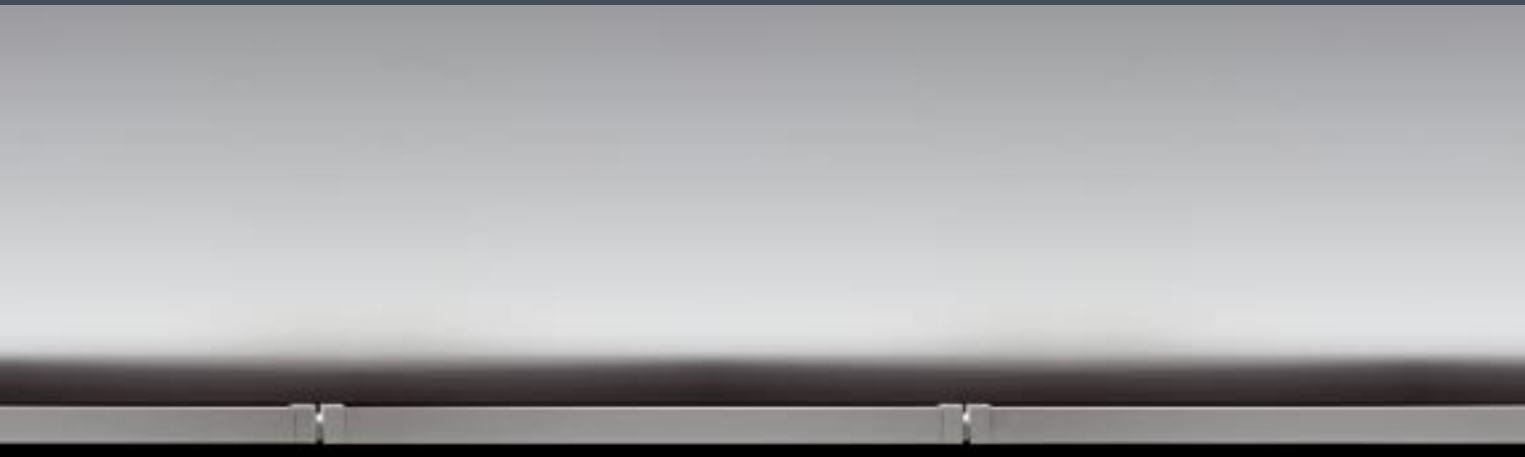

Design: Roy Fleetwood

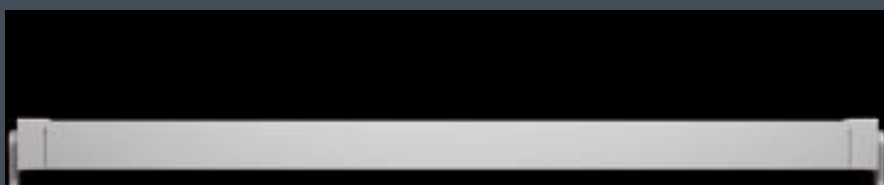

The versions with LEDs have a wall washer light distribution, i.e. wide beam horizontally but narrow beam in the vertical plane.


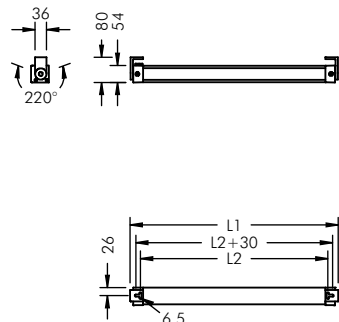


Ecoline

For T16 fluorescent lamps with high gloss aluminium reflector or with high performance LEDs, with thermal monitoring device, wall washer light distribution, protection class I, IP65 , IK10 housing made of extruded aluminium and die cast aluminium, polyester powder coated, all exterior steel parts are stainless steel, polycarbonate cover, silicon gasket, closure by 2 stainless steel screws, mounting flanges: 2 drilled holes Ø 6.5 mm, spacing L2, tilt range 220°, M20 cable gland, integral control gear or converter



Ecoline, wall washer, L1 = 342 mm, L2 = 315 mm

Part number	Colour	Light source	Weight	Beam angle !	
				C 0 – 180	C 90 – 270
8 792 946 009	black	3 x LED 3 W warm white	1.7 kg	10°	97°
8 792 966 009	white				
8 792 956 009	silver grey				

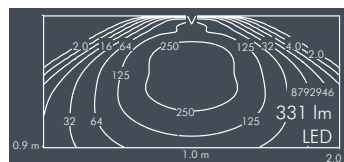



Ecoline, L1 = 642 mm, L2 = 615 mm

Part number	Colour	Light source	Lampholder	Weight	Beam angle !	
					C 0 – 180	C 90 – 270
8 790 044 009	black	T16 14/24 W	G5	2.4 kg	82°	109°
8 790 064 009	white					
8 790 054 009	silver grey					

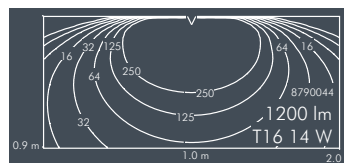



Ecoline, wall washer, L1 = 642 mm, L2 = 615 mm

Part number	Colour	Light source	Weight	Beam angle !	
				C 0 – 180	C 90 – 270
8 792 046 009	black	6 x LED 3 W warm white	2.3 kg	10°	97°
8 792 066 009	white				
8 792 056 009	silver grey				

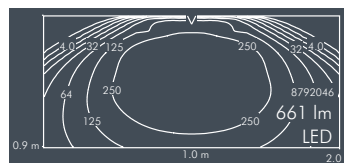



Ecoline, L1 = 942 mm, L2 = 915 mm

Part number	Colour	Light source	Lampholder	Weight	Beam angle !	
					C 0 – 180	C 90 – 270
8 790 141 009	black	T16 21/39 W	G5	3.0 kg	82°	109°
8 790 161 009	white					
8 790 151 009	silver grey					

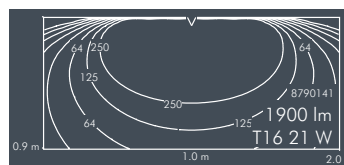

Ecoline, wall washer, L1 = 942 mm, L2 = 915 mm

Part number	Colour	Light source	Weight	Beam angle !	
				C 0 – 180	C 90 – 270
8 792 146 009	black	9 x LED 3 W warm white	3.1 kg	10°	97°
8 792 166 009	white				
8 792 156 009	silver grey				

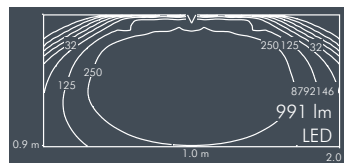

Ecoline, wall washer

Part number	Description
8 792 ... 109	Dimmable luminaire (DALI)



ADMINISTRATION & LAGER
 Torbenfeldvej 1
 2665 Vallensbæk Strand
 Tel.: +45 43 53 53 35
 Fax.: +45 43 53 53 59
 Mail: info@deluxdk.com
 www.deluxdk.com

SHOWROOM
 House of Dreams
 Vallensbækvej 63
 2625 Vallensbæk


Light source

T16




LEDs, replacement modules available




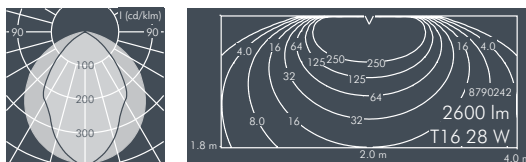


Ecoline, L1 = 1242 mm, L2 = 1215 mm						
Part number	Colour	Light source	Lampholder	Weight	Beam angle !	
8 790 242 009	black	T16 28/54 W	G5	3,5 kg	C 0 - 180	C 90 - 270
8 790 262 009	white				82°	109°
8 790 252 009	silver grey					

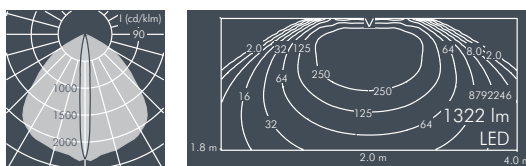

Ecoline, wall washer, L1 = 1242 mm, L2 = 1215 mm					
Part number	Colour	Light source	Weight	Beam angle !	
8 792 246 009	black	12 x LED 3 W warm white	3,6 kg	C 0 - 180	C 90 - 270
8 792 266 009	white			10°	97°
8 792 256 009	silver grey				

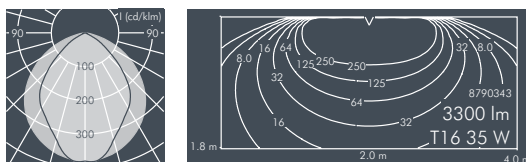

Ecoline, L1 = 1542 mm, L2 = 1515 mm						
Part number	Colour	Light source	Lampholder	Weight	Beam angle !	
8 790 343 009	black	T16 35/49/80 W	G5	4,1 kg	C 0 - 180	C 90 - 270
8 790 363 009	white				82°	109°
8 790 353 009	silver grey					

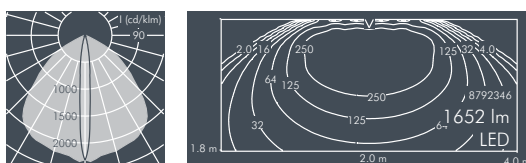

Ecoline, wall washer, L1 = 1542 mm, L2 = 1515 mm					
Part number	Colour	Light source	Weight	Beam angle !	
8 792 346 009	black	15 x LED 3 W warm white	4,2 kg	C 0 - 180	C 90 - 270
8 792 366 009	white			10°	97°
8 792 356 009	silver grey				

Ecoline, wall washer	
Part number	Description
8 792 . . . 109	Dimmable luminaire (DALI)



Special optical lenses give this LED luminaire wall washer light distribution.



ADMINISTRATION & LAGER
 Torbenfeldvej 1
 2665 Vallensbæk Strand
 Tel.: +45 43 53 53 35
 Fax.: +45 43 53 53 59
 Mail: info@deluxdk.com
 www.deluxdk.com


SHOWROOM
 House of Dreams
 Vallensbækvej 63
 2625 Vallensbæk

Light source

T16

LEDs, replacement modules available




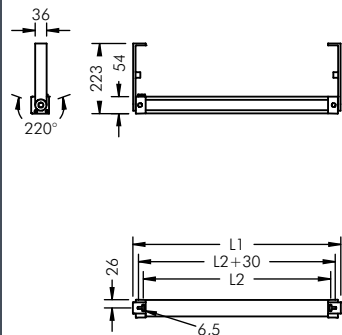


Ecoline with wall arm

For T16 fluorescent lamps with high gloss aluminium reflector or with high performance LEDs, with thermal monitoring device, wall washer light distribution, protection class I, IP65 \diamond \triangle \triangle , IK10 housing made of extruded aluminium and die cast aluminium, polyester powder coated, all exterior steel parts are stainless steel, polycarbonate cover, silicon gasket, closure by 2 stainless steel screws, wall arms: 2 drilled holes \varnothing 6.5 mm, spacing L2, tilt range 220°, M20 cable gland, integral control gear or converter



Ecoline with wall arm, wall washer, L1 = 342 mm, L2 = 315 mm

Part number	Colour	Light source	Weight	Beam angle !	
				C 0 - 180	C 90 - 270
8 793 946 009	black	3 x LED 3 W warm white	2.2 kg	10°	97°
8 793 966 009	white				
8 793 956 009	silver grey				

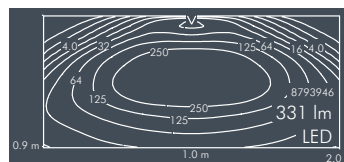



Ecoline with wall arm, L1 = 642 mm, L2 = 615 mm

Part number	Colour	Light source	Lampholder	Weight	Beam angle !	
					C 0 - 180	C 90 - 270
8 791 044 009	black	T16 14/24 W	G5	2.9 kg	82°	109°
8 791 064 009	white					
8 791 054 009	silver grey					

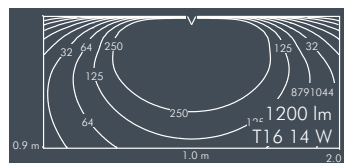



Ecoline with wall arm, wall washer, L1 = 642 mm, L2 = 615 mm

Part number	Colour	Light source	Weight	Beam angle !	
				C 0 - 180	C 90 - 270
8 793 046 009	black	6 x LED 3 W warm white	2.8 kg	10°	97°
8 793 066 009	white				
8 793 056 009	silver grey				

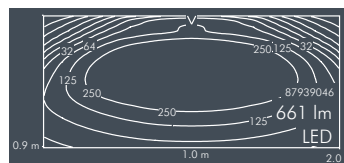



Ecoline with wall arm, L1 = 942 mm, L2 = 915 mm

Part number	Colour	Light source	Lampholder	Weight	Beam angle !	
					C 0 - 180	C 90 - 270
8 791 141 009	black	T16 21/39 W	G5	3.5 kg	82°	109°
8 791 161 009	white					
8 791 151 009	silver grey					

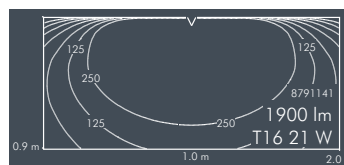

Ecoline with wall arm, wall washer, L1 = 942 mm, L2 = 915 mm

Part number	Colour	Light source	Weight	Beam angle !	
				C 0 - 180	C 90 - 270
8 793 146 009	black	9 x LED 3 W warm white	3.6 kg	10°	97°
8 793 166 009	white				
8 793 156 009	silver grey				

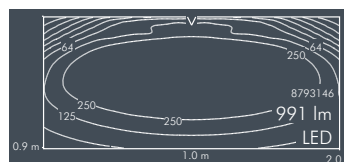

Ecoline with wall arm, wall washer

Part number	Description
8 793 . . . 109	Dimmable luminaire (DALI)



Light source

T16





LEDs, replacement modules available

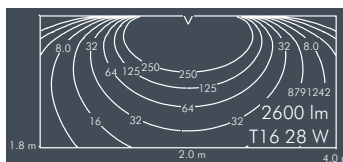




Ecoline with wall arm, L1 = 1242 mm, L2 = 1215 mm



Part number	Colour	Light source	Lampholder	Weight	Beam angle	!
8 791 242 009	black	T16 28/54 W	G5	4.0 kg	82°	C 0 - 180 C 90 - 270
8 791 262 009	white					
8 791 252 009	silver grey					

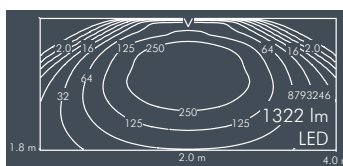
Ecoline with wall arm, wall washer, L1 = 1242 mm, L2 = 1215 mm

Part number	Colour	Light source	Lampholder	Weight	Beam angle	!
8 793 246 009	black	12 x LED 3 W warm white		4.1 kg	10°	C 0 - 180 C 90 - 270
8 793 266 009	white					
8 793 256 009	silver grey					

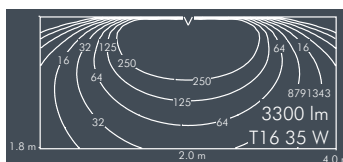
Ecoline with wall arm, L1 = 1542 mm, L2 = 1515 mm

Part number	Colour	Light source	Lampholder	Weight	Beam angle	!
8 791 343 009	black	T16 35/49/80 W	G5	4.6 kg	82°	C 0 - 180 C 90 - 270
8 791 363 009	white					
8 791 353 009	silver grey					

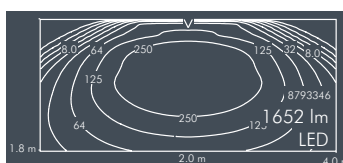
Ecoline with wall arm, wall washer, L1 = 1542 mm, L2 = 1515 mm

Part number	Colour	Light source	Lampholder	Weight	Beam angle	!
8 793 346 009	black	15 x LED 3 W warm white		4.7 kg	10°	C 0 - 180 C 90 - 270
8 793 366 009	white					
8 793 356 009	silver grey					

Ecoline with wall arm, wall washer

Part number	Description
8 793 . . . 109	Dimmable luminaire (DALI)



ADMINISTRATION & LAGER
Torbenfeldvej 1
2665 Vallensbæk Strand
Tel.: +45 43 53 53 35
Fax.: +45 43 53 53 59
Mail: info@deluxdk.com
www.deluxdk.com

SHOWROOM
House of Dreams
Vallensbækvej 63
2625 Vallensbæk

Light source

T16

LEDs, replacement modules available






Ecoline S Modular System

The luminaire modules are joined together in continuous runs. The luminaire system is installed using either wall flanges or wall arms. The wall arms increase the distance between the luminaire and the surface to be illuminated, thus increasing the uniformity of light distribution.

Regardless of the number of luminaires to be connected, just 1 wall flange set **or** 1 wall arm set is required to mount the outer left and right hand luminaires, SL and SR, to the surface.


Mounting components for Ecoline S Modular System

Part number	Colour	Description
127 0 299 940	black	Wall flange set,
127 0 299 960	white	(pair) for outer luminaires
127 0 299 950	silver grey	



Mounting components for Ecoline S Modular System


Part number	Colour	Description
127 0 300 940	black	Wall arm set,
127 0 300 960	white	(pair) for outer luminaires,
127 0 300 950	silver grey	length 196 mm



To connect two luminaires together, either one connection flange **or** one connection arm is required. The number of these connection parts required equals the total number of luminaires minus 1.


Mounting components for Ecoline S Modular System

Part number	Colour	Description
127 0 301 940	black	Connection flange,
127 0 301 960	white	for connection of 2 luminaires,
127 0 301 950	silver grey	c/w cable for through wiring



Mounting components for Ecoline S Modular System

Part number	Colour	Description
127 0 302 940	black	Connection arm,
127 0 302 960	white	for connection of 2 luminaires, c/w cable for through
127 0 302 950	silver grey	wiring, length 196 mm




ADMINISTRATION & LAGER
 Torbenfeldvej 1
 2665 Vallensbæk Strand
 Tel.: +45 43 53 53 35
 Fax.: +45 43 53 53 59
 Mail: info@deluxdk.com
 www.deluxdk.com

SHOWROOM
 House of Dreams
 Vallensbækvej 63
 2625 Vallensbæk

The Modular System

Luminaires of different lengths and wattages can be connected together. One left (SL) and one right (SR) luminaire are always required. In addition to these, middle luminaires (SM) can be added to the system.

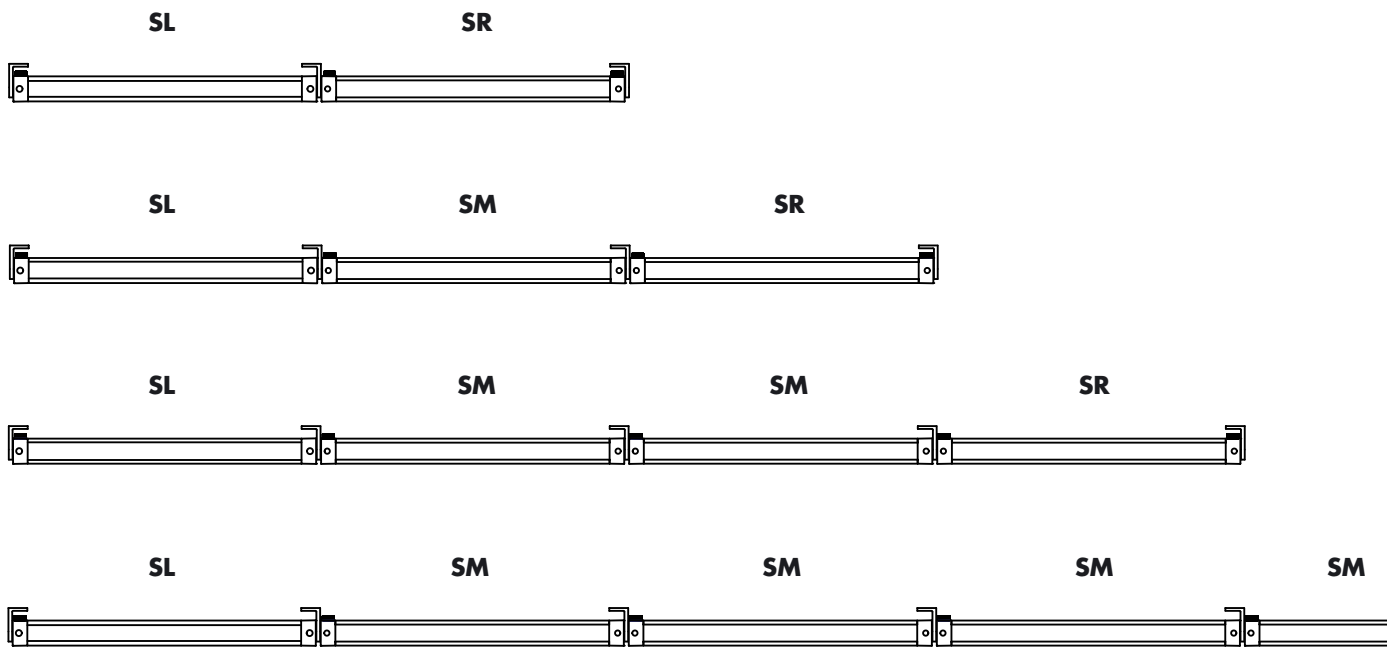



■ **Cable gland** (on rear side)

Examples

To calculate the overall length of the system, the lengths of the individual luminaire modules and the dimensions of the connection flanges or arms must be added together.

By combining luminaires of different lengths, the overall length of the system can be made to coincide with the dimensions of the surface to be illuminated.

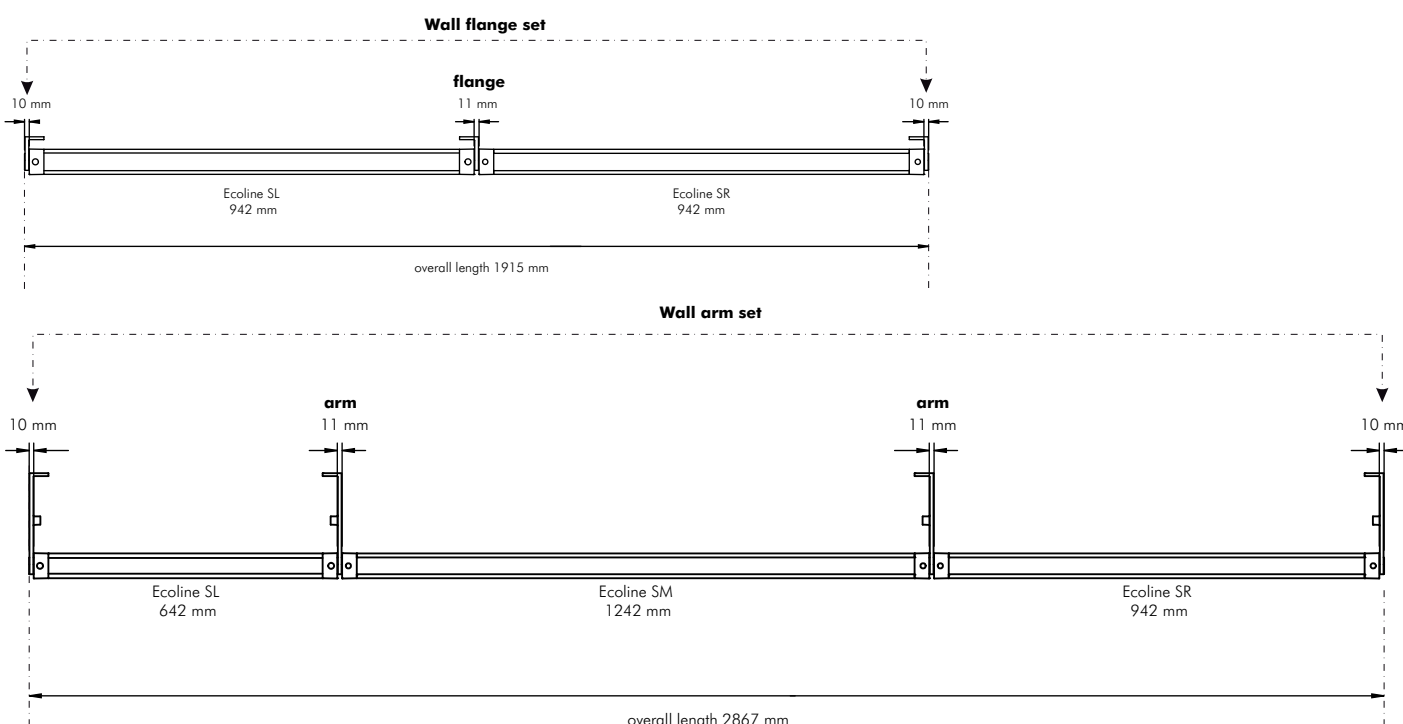

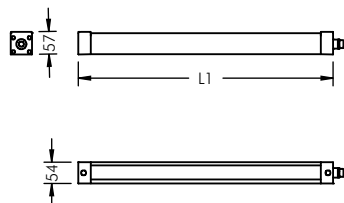


Ecoline SL Modular System (T16), left

For T16 fluorescent lamps
 protection class I, IP65 , IK10
 housing made of extruded aluminium and die cast aluminium, polyester powder coated,
 high gloss aluminium reflector,
 all exterior steel parts are stainless steel,
 polycarbonate cover, silicon gasket,
 closure by 2 stainless steel screws,
 with stainless steel coupling on right side,
 tilt range 220°, M20 cable gland,
 integral electronic ballast, supplied without lamp


Ecoline SL, left, L1 = 642 mm

Part number	Colour	Light source	Lampholder	Weight	Beam angle	!
8 794 044 009	black	T16 14/24 W	G5	2.2 kg	82°	C 0 – 180 C 90 – 270 109°
8 794 064 009	white					
8 794 054 009	silver grey					




Ecoline SL, left, L1 = 942 mm

Part number	Colour	Light source	Lampholder	Weight	Beam angle	!
8 794 141 009	black	T16 21/39 W	G5	2.8 kg	82°	C 0 – 180 C 90 – 270 109°
8 794 161 009	white					
8 794 151 009	silver grey					




Ecoline SL, left, L1 = 1242 mm

Part number	Colour	Light source	Lampholder	Weight	Beam angle	!
8 794 242 009	black	T16 28/54 W	G5	3.3 kg	82°	C 0 – 180 C 90 – 270 109°
8 794 262 009	white					
8 794 252 009	silver grey					



Ecoline SL, left, L1 = 1542 mm

Part number	Colour	Light source	Lampholder	Weight	Beam angle	!
8 794 343 009	black	T16 35/49/80 W	G5	3.9 kg	82°	C 0 – 180 C 90 – 270 109°
8 794 363 009	white					
8 794 353 009	silver grey					



ADMINISTRATION & LAGER
 Torbenfeldvej 1
 2665 Vallensbæk Strand
 Tel.: +45 43 53 53 35
 Fax.: +45 43 53 53 59
 Mail: info@deluxdk.com
 www.deluxdk.com


SHOWROOM
 House of Dreams
 Vallensbækvej 63
 2625 Vallensbæk



Light source

T16




Ecoline SM Modular System (T16), middle

For T16 fluorescent lamps
 protection class I, IP65 , IK10
 housing made of extruded aluminium and die cast aluminium, polyester powder coated,
 high gloss aluminium reflector,
 all exterior steel parts are stainless steel,
 polycarbonate cover, silicon gasket,
 closure by 2 stainless steel screws,
 with stainless steel couplings on left and right side,
 tilt range 220°, M20 cable gland,
 integral electronic ballast, supplied without lamp

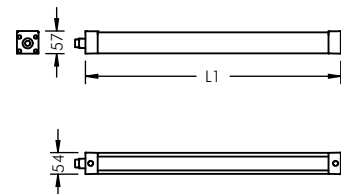


Ecoline SM, middle, L1 = 642 mm

Part number	Colour	Light source	Lampholder	Weight	Beam angle !	
					C 0 – 180	C 90 – 270
8 795 044 009	black	T16 14/24 W	G5	2.2 kg	82°	109°
8 795 064 009	white					
8 795 054 009	silver grey					




Ecoline SM, middle, L1 = 942 mm

Part number	Colour	Light source	Lampholder	Weight	Beam angle !	
					C 0 – 180	C 90 – 270
8 795 141 009	black	T16 21/39 W	G5	2.8 kg	82°	109°
8 795 161 009	white					
8 795 151 009	silver grey					



Ecoline SM, middle, L1 = 1242 mm

Part number	Colour	Light source	Lampholder	Weight	Beam angle !	
					C 0 – 180	C 90 – 270
8 795 242 009	black	T16 28/54 W	G5	3.3 kg	82°	109°
8 795 262 009	white					
8 795 252 009	silver grey					



Ecoline SM, middle, L1 = 1542 mm

Part number	Colour	Light source	Lampholder	Weight	Beam angle !	
					C 0 – 180	C 90 – 270
8 795 343 009	black	T16 35/49/80 W	G5	3.9 kg	82°	109°
8 795 363 009	white					
8 795 353 009	silver grey					




ADMINISTRATION & LAGER
 Torbenfeldvej 1
 2665 Vallensbæk Strand
 Tel.: +45 43 53 53 35
 Fax.: +45 43 53 53 59
 Mail: info@deluxdk.com
 www.deluxdk.com

SHOWROOM
 House of Dreams
 Vallensbækvej 63
 2625 Vallensbæk

Light source

T16



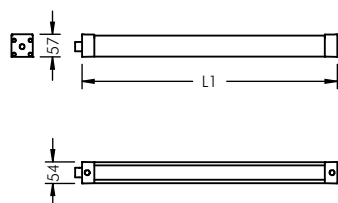


Ecoline SR Modular System (T16), right

For T16 fluorescent lamps
 protection class I, IP65 \diamond \triangle \triangle , IK10
 housing made of extruded aluminium and die cast aluminium, polyester powder coated, high gloss aluminium reflector, all exterior steel parts are stainless steel, polycarbonate cover, silicon gasket, closure by 2 stainless steel screws, with stainless steel coupling on left side, tilt range 220°, M20 cable gland, integral electronic ballast, supplied without lamp


Ecoline SR, right, L1 = 642 mm

Part number	Colour	Light source	Lampholder	Weight	Beam angle !	
					C 0 - 180	C 90 - 270
8 796 044 009	black	T16 14/24 W	G5	2.2 kg	82°	109°
8 796 064 009	white					
8 796 054 009	silver grey					



Ecoline SR, right, L1 = 942 mm

Part number	Colour	Light source	Lampholder	Weight	Beam angle !	
					C 0 - 180	C 90 - 270
8 796 141 009	black	T16 21/39 W	G5	2.8 kg	82°	109°
8 796 161 009	white					
8 796 151 009	silver grey					




Ecoline SR, right, L1 = 1242 mm

Part number	Colour	Light source	Lampholder	Weight	Beam angle !	
					C 0 - 180	C 90 - 270
8 796 242 009	black	T16 28/54 W	G5	3.3 kg	82°	109°
8 796 262 009	white					
8 796 252 009	silver grey					



Ecoline SR, right, L1 = 1542 mm

Part number	Colour	Light source	Lampholder	Weight	Beam angle !	
					C 0 - 180	C 90 - 270
8 796 343 009	black	T16 35/49/80 W	G5	3.9 kg	82°	109°
8 796 363 009	white					
8 796 353 009	silver grey					





ADMINISTRATION & LAGER
 Torbenfeldvej 1
 2665 Vallensbæk Strand
 Tel.: +45 43 53 53 35
 Fax.: +45 43 53 53 59
 Mail: info@deluxdk.com
 www.deluxdk.com



SHOWROOM
 House of Dreams
 Vallensbækvej 63
 2625 Vallensbæk

Light source
 T16




Ecoline SL Modular System (LED), left

With high performance LEDs, thermal monitoring device, wall washer light distribution, protection class I, IP65  , IK10 housing made of extruded aluminium and die cast aluminium, polyester powder coated, all exterior steel parts are stainless steel, polycarbonate cover, silicon gasket, closure by 2 stainless steel screws, with stainless steel coupling on right side, tilt range 220°, M20 cable gland, integral converter

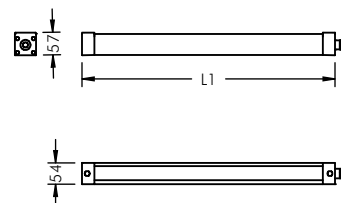


Ecoline SL, left, wall washer, L1 = 642 mm

Part number	Colour	Light source	Weight	Beam angle	!
8 797 046 009	black	6 x LED 3 W warm white	2.3 kg	10°	C 0 – 180 C 90 – 270
8 797 066 009	white				
8 797 056 009	silver grey				




Ecoline SL, left, wall washer, L1 = 942 mm

Part number	Colour	Light source	Weight	Beam angle	!
8 797 146 009	black	9 x LED 3 W warm white	2.9 kg	10°	C 0 – 180 C 90 – 270
8 797 166 009	white				
8 797 156 009	silver grey				



Ecoline SL, left, wall washer, L1 = 1242 mm

Part number	Colour	Light source	Weight	Beam angle	!
8 797 246 009	black	12 x LED 3 W warm white	3.4 kg	10°	C 0 – 180 C 90 – 270
8 797 266 009	white				
8 797 256 009	silver grey				



Ecoline SL, left, wall washer, L1 = 1542 mm

Part number	Colour	Light source	Weight	Beam angle	!
8 797 346 009	black	15 x LED 3 W warm white	4.0 kg	10°	C 0 – 180 C 90 – 270
8 797 366 009	white				
8 797 356 009	silver grey				

Part number	Description
8 797 . . . 109	Dimmable luminaire (DALI)





ADMINISTRATION & LAGER
Torbenfeldvej I
2665 Vallensbæk Strand
Tel.: +45 43 53 53 35
Fax.: +45 43 53 53 59
Mail: info@deluxdk.com
www.deluxdk.com

SHOWROOM
House of Dreams
Vallensbækvej 63
2625 Vallensbæk

Light source

LEDs, replacement modules available



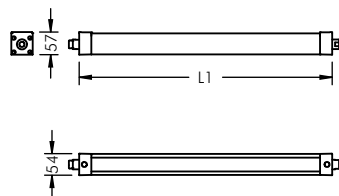


Ecoline SM Modular System (LED), middle

With high performance LEDs, thermal monitoring device, wall washer light distribution, protection class I, IP65 ⚡⚠⚠, IK10 housing made of extruded aluminium and die cast aluminium, polyester powder coated, all exterior steel parts are stainless steel, polycarbonate cover, silicon gasket, closure by 2 stainless steel screws, with stainless steel couplings on left and right side, tilt range 220°, M20 cable gland, integral converter


Ecoline SM, middle, wall washer, L1 = 642 mm

Part number	Colour	Light source	Weight	Beam angle !	
8 798 046 009	black	6 x LED 3 W warm white	2.3 kg	C 0 – 180	C 90 – 270
8 798 066 009	white			10°	97°
8 798 056 009	silver grey				




Ecoline SM, middle, wall washer, L1 = 942 mm

Part number	Colour	Light source	Weight	Beam angle !	
8 798 146 009	black	9 x LED 3 W warm white	2.9 kg	C 0 – 180	C 90 – 270
8 798 166 009	white			10°	97°
8 798 156 009	silver grey				




Ecoline SM, middle, wall washer, L1 = 1242 mm

Part number	Colour	Light source	Weight	Beam angle !	
8 798 246 009	black	12 x LED 3 W warm white	3.4 kg	C 0 – 180	C 90 – 270
8 798 266 009	white			10°	97°
8 798 256 009	silver grey				



Ecoline SM, middle, wall washer, L1 = 1542 mm

Part number	Colour	Light source	Weight	Beam angle !	
8 798 346 009	black	15 x LED 3 W warm white	4.0 kg	C 0 – 180	C 90 – 270
8 798 366 009	white			10°	97°
8 798 356 009	silver grey				



Part number	Description
8 798 . . . 109	Dimmable luminaire (DALI)




ADMINISTRATION & LAGER
 Torbenfeldvej 1
 2665 Vallensbæk Strand
 Tel.: +45 43 53 53 35
 Fax.: +45 43 53 53 59
 Mail: info@deluxdk.com
 www.deluxdk.com


SHOWROOM
 House of Dreams
 Vallensbækvej 63
 2625 Vallensbæk



Light source

LEDs, replacement modules available




Ecoline SR Modular System (LED), right

With high performance LEDs, thermal monitoring device, wall washer light distribution, protection class I, IP65 , IK10 housing made of extruded aluminium and die cast aluminium, polyester powder coated, all exterior steel parts are stainless steel, polycarbonate cover, silicon gasket, closure by 2 stainless steel screws, with stainless steel coupling on left side, tilt range 220°, M20 cable gland, integral converter

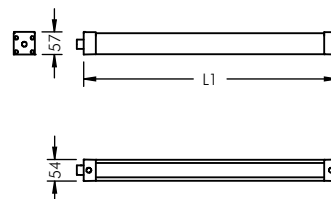


Ecoline SR, right, wall washer, L1 = 642 mm

Part number	Colour	Light source	Weight	Beam angle !	
				C 0 – 180	C 90 – 270
8 799 046 009	black	6 x LED 3 W warm white	2.3 kg	10°	97°
8 799 066 009	white				
8 799 056 009	silver grey				




Ecoline SR, right, wall washer, L1 = 942 mm

Part number	Colour	Light source	Weight	Beam angle !	
				C 0 – 180	C 90 – 270
8 799 146 009	black	9 x LED 3 W warm white	2.9 kg	10°	97°
8 799 166 009	white				
8 799 156 009	silver grey				



Ecoline SR, right, wall washer, L1 = 1242 mm

Part number	Colour	Light source	Weight	Beam angle !	
				C 0 – 180	C 90 – 270
8 799 246 009	black	12 x LED 3 W warm white	3.4 kg	10°	97°
8 799 266 009	white				
8 799 256 009	silver grey				



Ecoline SR, right, wall washer, L1 = 1542 mm

Part number	Colour	Light source	Weight	Beam angle !	
				C 0 – 180	C 90 – 270
8 799 346 009	black	15 x LED 3 W warm white	4.0 kg	10°	97°
8 799 366 009	white				
8 799 356 009	silver grey				

Part number	Description
8 799 . . . 109	Dimmable luminaire (DALI)



ADMINISTRATION & LAGER
 Torbenfeldvej 1
 2665 Vallensbæk Strand
 Tel.: +45 43 53 53 35
 Fax.: +45 43 53 53 59
 Mail: info@deluxdk.com
 www.deluxdk.com

SHOWROOM
 House of Dreams
 Vallensbækvej 63
 2625 Vallensbæk

Light source

LEDs, replacement modules available

