




PURE

PURE Art	PURE S	PURE M
15W 950-1000lm	15W 1200-1300lm 21W 1600-1700lm	28W 2700-2900lm


Narrow, medium and wide beam angles are available for different lighting applications

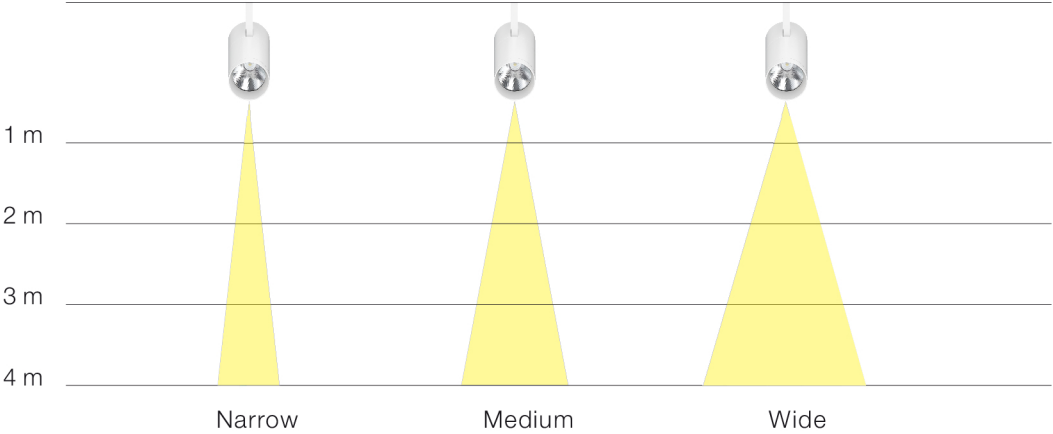

NEKO / **PURE Art**
LED Tracklight



15W	CRI90 CRI80	2700K 3000K 4000K	18° 24° 36°	CITIZEN Philips HumanTech	UGR < 19	IP 20		CB	CE
				50,000h@L80B10					



LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code					
13 W	15 W	36 V	350 mA	90	2700K	18°	1100lm	900lm	PUA2- 9271815X-WB					
						24°	1100lm	900lm	PUA2- 9272415X-WB					
						36°	1100lm	900lm	PUA2- 9273615X-WB					
					3000K	18°	1200lm	950lm	PUA2- 9301815X-WB					
						24°	1200lm	950lm	PUA2- 9302415X-WB					
						36°	1200lm	950lm	PUA2- 9303615X-WB					
					4000K	18°	1300lm	1000lm	PUA2- 9401815X-WB					
						24°	1300lm	1000lm	PUA2- 9402415X-WB					
						36°	1300lm	1000lm	PUA2- 9403615X-WB					
					13 W	15 W	36 V	350 mA	90	2700K	18°	1100lm	900lm	PUA2- 9271815X-BB
											24°	1100lm	900lm	PUA2- 9272415X-BB
36°	1100lm	900lm	PUA2- 9273615X-BB											
3000K	18°	1200lm	950lm	PUA2- 9301815X-BB										
	24°	1200lm	950lm	PUA2- 9302415X-BB										
	36°	1200lm	950lm	PUA2- 9303615X-BB										
4000K	18°	1300lm	1000lm	PUA2- 9401815X-BB										
	24°	1300lm	1000lm	PUA2- 9402415X-BB										
	36°	1300lm	1000lm	PUA2- 9403615X-BB										

Code Remark: X=F(ON-OFF) X=P(Phase Dim)

Optional accessory




Honeycomb

Code for PUA2-930 1815X-WB with Honeycomb
PUA2-930 1815X-WB-H



NEKO / PURES
LED Tracklight

21W	CRI90	2700K	15°	CITIZEN	UGR	IP20	5	CB	CE
15W	CRI80	3000K	25°	Micro Human Tech	< 19		GUARANTEED		
		4000K	30°	50,000h@L80B10					



LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
13 W	15 W	36 V	350 mA	90	2700K	15°	1400lm	1100lm	PUS1- 9271515X-WB
						25°	1400lm	1100lm	PUS1- 9272515X-WB
						30°	1400lm	1100lm	PUS1- 9273015X-WB
						3000K 15°	1500lm	1200lm	PUS1- 9301515X-WB
						25°	1500lm	1200lm	PUS1- 9302515X-WB
						30°	1500lm	1200lm	PUS1- 9303015X-WB
						3000K 15°	1600lm	1300lm	PUS1- 9401515X-WB
						25°	1600lm	1300lm	PUS1- 9402515X-WB
						30°	1600lm	1300lm	PUS1- 9403015X-WB
						18 W	21 W	36 V	500 mA
						90	2700K 15°	1900lm	1500lm
						25°	1900lm	1500lm	PUS2- 9271521X-WB
13 W	15 W	36 V	350 mA	90	2700K	25°	1400lm	1100lm	PUS1- 9272515X-BB
						30°	1400lm	1100lm	PUS1- 9273015X-BB
						3000K 15°	1500lm	1200lm	PUS1- 9301515X-BB
						25°	1500lm	1200lm	PUS1- 9302515X-BB
						30°	1500lm	1200lm	PUS1- 9303015X-BB
						4000K 15°	1600lm	1300lm	PUS1- 9401515X-BB
						25°	1600lm	1300lm	PUS1- 9402515X-BB
						30°	1600lm	1300lm	PUS1- 9403015X-BB
						18 W	21 W	36 V	500 mA
						90	2700K 15°	1900lm	1500lm
						25°	1900lm	1500lm	PUS2- 9271521X-BB
						30°	1900lm	1500lm	PUS2- 9272521X-BB
18 W	21 W	36 V	500 mA	90	2700K	30°	1900lm	1500lm	PUS2- 9273021X-BB
						3000K 15°	2000lm	1600lm	PUS2- 9301521X-BB
						25°	2000lm	1600lm	PUS2- 9302521X-BB
						30°	2000lm	1600lm	PUS2- 9303021X-BB
						4000K 15°	2100lm	1700lm	PUS2- 9401521X-BB
						25°	2100lm	1700lm	PUS2- 9402521X-BB
						30°	2100lm	1700lm	PUS2- 9403021X-BB
						18 W	21 W	36 V	500 mA
						90	2700K 15°	1900lm	1500lm
						25°	1900lm	1500lm	PUS2- 9271521X-BB
						30°	1900lm	1500lm	PUS2- 9272521X-BB
						30°	1900lm	1500lm	PUS2- 9273021X-BB
18 W	21 W	36 V	500 mA	90	2700K	30°	1900lm	1500lm	PUS2- 9273021X-BB
						3000K 15°	2000lm	1600lm	PUS2- 9301521X-BB
						25°	2000lm	1600lm	PUS2- 9302521X-BB
						30°	2000lm	1600lm	PUS2- 9303021X-BB
						4000K 15°	2100lm	1700lm	PUS2- 9401521X-BB
						25°	2100lm	1700lm	PUS2- 9402521X-BB
						30°	2100lm	1700lm	PUS2- 9403021X-BB
						18 W	21 W	36 V	500 mA
						90	2700K 15°	1900lm	1500lm
						25°	1900lm	1500lm	PUS2- 9271521X-BB
						30°	1900lm	1500lm	PUS2- 9272521X-BB
						30°	1900lm	1500lm	PUS2- 9273021X-BB


Code Remark: X=F(ON-OFF) X=P(Phase Dim)

Optional accessory



Code for PUS1-930 1515X-WB with Honeycomb
PUS1-930 1515X-WB-H

21W	CRI90	2700K	15°	CITIZEN	UGR	IP20	DALI	5	CB	CE
15W	CRI80	3000K	25°	Micro Human Tech	< 19			GUARANTEED		
		4000K	30°	50,000h@L80B10						



LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
13 W	15 W	36 V	350 mA	90	2700K	15°	1400lm	1100lm	PUS1- 9271515D-WB
						25°	1400lm	1100lm	PUS1- 9272515D-WB
						30°	1400lm	1100lm	PUS1- 9273015D-WB
						3000K 15°	1500lm	1200lm	PUS1- 9301515D-WB
						25°	1500lm	1200lm	PUS1- 9302515D-WB
						30°	1500lm	1200lm	PUS1- 9303015D-WB
						4000K 15°	1600lm	1300lm	PUS1- 9401515D-WB
						25°	1600lm	1300lm	PUS1- 9402515D-WB
						30°	1600lm	1300lm	PUS1- 9403015D-WB
						18 W	21 W	36 V	500 mA
						90	2700K 15°	1900lm	1500lm
						25°	1900lm	1500lm	PUS2- 9271521D-WB
13 W	15 W	36 V	350 mA	90	2700K	25°	1400lm	1100lm	PUS1- 9272515D-BB
						30°	1400lm	1100lm	PUS1- 9273015D-BB
						3000K 15°	1500lm	1200lm	PUS1- 9301515D-BB
						25°	1500lm	1200lm	PUS1- 9302515D-BB
						30°	1500lm	1200lm	PUS1- 9303015D-BB
						4000K 15°	1600lm	1300lm	PUS1- 9401515D-BB
						25°	1600lm	1300lm	PUS1- 9402515D-BB
						30°	1600lm	1300lm	PUS1- 9403015D-BB
						18 W	21 W	36 V	500 mA
						90	2700K 15°	1900lm	1500lm
						25°	1900lm	1500lm	PUS2- 9271521D-BB
						30°	1900lm	1500lm	PUS2- 9272521D-BB
18 W	21 W	36 V	500 mA	90	2700K	30°	1900lm	1500lm	PUS2- 9273021D-BB
						3000K 15°	2000lm	1600lm	PUS2- 9301521D-BB
						25°	2000lm	1600lm	PUS2- 9302521D-BB
						30°	2000lm	1600lm	PUS2- 9303021D-BB
						4000K 15°	2100lm	1700lm	PUS2- 9401521D-BB
						25°	2100lm	1700lm	PUS2- 9402521D-BB
						30°	2100lm	1700lm	PUS2- 9403021D-BB
						18 W	21 W	36 V	500 mA
						90	2700K 15°	1900lm	1500lm
						25°	1900lm	1500lm	PUS2- 9271521D-BB
						30°	1900lm	1500lm	PUS2- 9272521D-BB
						30°	1900lm	1500lm	PUS2- 9273021D-BB

Code Remark: DALI Dim Version

Optional accessory




Code for PUS1-930 1515D-WB with Honeycomb
PUS1-930 1515D-WB-H

NEKO / PURE M
LED Tracklight



28W	CRI90 CRI80	2700K 3000K 4000K	18° 30° 45°	 Micro Illumination	UGR < 19	IP 20		CB	CE
-----	----------------	-------------------------	-------------------	--	-------------	-------	--	----	----



LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
25 W	28 W	36 V	700 mA	90	2700K	18°	3200lm	2500lm	PUM1- 9271828X-WB
						30°	3200lm	2500lm	PUM1- 9273028X-WB
						45°	3200lm	2500lm	PUM1- 9274528X-WB
					3000K	18°	3400lm	2700lm	PUM1- 9301828X-WB
						30°	3400lm	2700lm	PUM1- 9303028X-WB
						45°	3400lm	2700lm	PUM1- 9304528X-WB
					4000K	18°	3600lm	2900lm	PUM1- 9401828X-WB
						30°	3600lm	2900lm	PUM1- 9403028X-WB
						45°	3600lm	2900lm	PUM1- 9404528X-WB

25 W	28 W	36 V	700 mA	90	2700K	18°	3200lm	2500lm	PUM1- 9271828X-WB
						30°	3200lm	2500lm	PUM1- 9273028X-WB
						45°	3200lm	2500lm	PUM1- 9274528X-WB
					3000K	18°	3400lm	2700lm	PUM1- 9301828X-WB
						30°	3400lm	2700lm	PUM1- 9303028X-WB
						45°	3400lm	2700lm	PUM1- 9304528X-WB
					4000K	18°	3600lm	2900lm	PUM1- 9401828X-WB
						30°	3600lm	2900lm	PUM1- 9403028X-WB
						45°	3600lm	2900lm	PUM1- 9404528X-WB


Code Remark: X=(ON-OFF) X=P(Phase Dim)

Optional accessory



Code for PUM1-930 1828X-WB with Honeycomb
PUM1-930 1828X-WB-H

28W	CRI90 CRI80	2700K 3000K 4000K	18° 30° 45°	 Micro Illumination	GLOBAL	UGR < 19	IP 20	DALI		CB	CE
-----	----------------	-------------------------	-------------------	---	--------	-------------	-------	------	---	----	----



LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
25 W	28 W	36 V	700 mA	90	2700K	18°	3200lm	2500lm	PUM1- 9271828D-WB
						30°	3200lm	2500lm	PUM1- 9273028D-WB
						45°	3200lm	2500lm	PUM1- 9274528D-WB
					3000K	18°	3400lm	2700lm	PUM1- 9301828D-WB
						30°	3400lm	2700lm	PUM1- 9303028D-WB
						45°	3400lm	2700lm	PUM1- 9304528D-WB
					4000K	18°	3600lm	2900lm	PUM1- 9401828D-WB
						30°	3600lm	2900lm	PUM1- 9403028D-WB
						45°	3600lm	2900lm	PUM1- 9404528D-WB

25 W	28 W	36 V	700 mA	90	2700K	18°	3200lm	2500lm	PUM1- 9271828D-WB
						30°	3200lm	2500lm	PUM1- 9273028D-WB
						45°	3200lm	2500lm	PUM1- 9274528D-WB
					3000K	18°	3400lm	2700lm	PUM1- 9301828D-WB
						30°	3400lm	2700lm	PUM1- 9303028D-WB
						45°	3400lm	2700lm	PUM1- 9304528D-WB
					4000K	18°	3600lm	2900lm	PUM1- 9401828D-WB
						30°	3600lm	2900lm	PUM1- 9403028D-WB
						45°	3600lm	2900lm	PUM1- 9404528D-WB

Code Remark: DALI Dim Version

Optional accessory



Code for PUM1-930 1828D-WB with Honeycomb
PUM1-930 1828D-WB-H

