



## LED Lamp

LEDioc Lamp G

- ▶ Two color temperature variations available: white daylight (5000K) and warm incandescent (2700K)
- ▶ High colour rendering ensures vivid illumination
- ▶ Highly efficient output of up to 131.8 lm/W
- ▶ 40000 hours long life

# LED Lamp

## LEDioc Lamp G



- ▶ Quickly reaches full brightness
- ▶ Two color temperature variations available: white daylight (5000K) and warm incandescent (2700K)
- ▶ Existing E27 base luminaire is maintained by changing lamps and gears
- ▶ Uniformity of light distribution equivalent to an HID lamp
- ▶ High colour rendering ensures vivid illumination
- ▶ Highly efficient output of up to 131.8 lm/W
- ▶ Long life: 40,000 hours
- ▶ Compact and light weight, compatible with wide variety of street/landscape lighting fixtures



### Product Series

Model Number	Lamp Wattage	CCT	CRI	Luminous Flux	Lamp Efficacy
LDS12N-G/GC	12W	5,000K	65	1,400lm	116.7 lm/W
LDS12L-G/GC	12W	2,700K	82	1,100lm	91.7 lm/W
LDS22N-G/G	22W	5,000K	65	2,900lm	131.8 lm/W
LDS22L-G/G	22W	2,700K	80	2,200lm	100.0 lm/W

### Ratings:

- Operating Temperature Range: -20 to +40°C
- Certification: CE
- Burning position: Universal

### Mechanical:

- Body: Glass

### Electrical:

- Separate LED driver is required.
- Contact authorized EYE distributors for recommended LED drivers.


### Dimensions / Weight:

#### LDS12N (L)-G/GC

- $\phi 70 \times 155$ mm
- 105g
- Base: E27

#### LDS22N (L)-G/G

- $\phi 90 \times 200$ mm
- 170g
- Base: E27

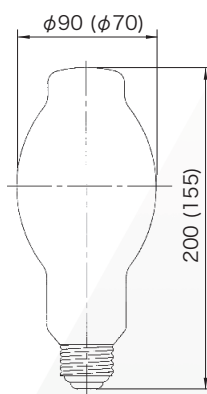

**EYE IWASAKI**

**IWASAKI ELECTRIC CO., LTD.**

Bakurocho-Daiichi Building, 1-4-16, Nihonbashi-Bakurocho,  
Chuo-ku, Tokyo 103-0002, Japan

Tel: +81-3-5847-8630 Fax: +81-3-5847-8647

www.eye.co.jp

Copyright ©2015, IWASAKI ELECTRIC CO., LTD. All Rights Reserved.

