







LFO SPOT recessed

Recessed luminaire

Free targetable recessed ceiling luminaire with a high-power LED optimized for scale and glare-free illumination.

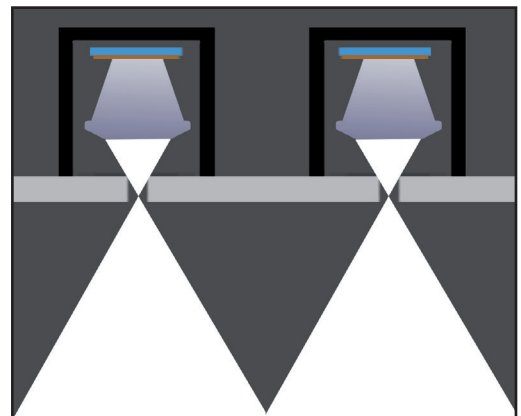

Lamp	High power LED, 4W at 350mA
Lumen output	approx. 440lm @ 2700K / 3000K (CRI 80), ca. 380lm @ 4000k (CRI 90)
Lighting technology	Polycarbonate
Control gear	LED driver external
Dimming (options)	1–10 V, DALI, Push
Luminaire type, assembly	Recessed ceiling, without tools with torsion springs
Dimensions	W= 90mm, H= 30mm, ET= 50mm, DA= 70mm
Cast, heat sink	Steel
Colour / finish	Powder coating, RAL 9016 (optional RAL color as desired)
Protection marking, compliance	IP20, CE
Specials	Customized versions, more light colours or color renderings on request

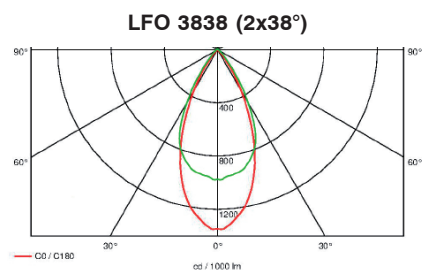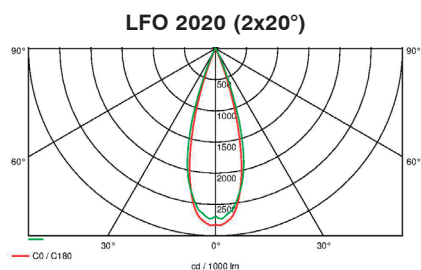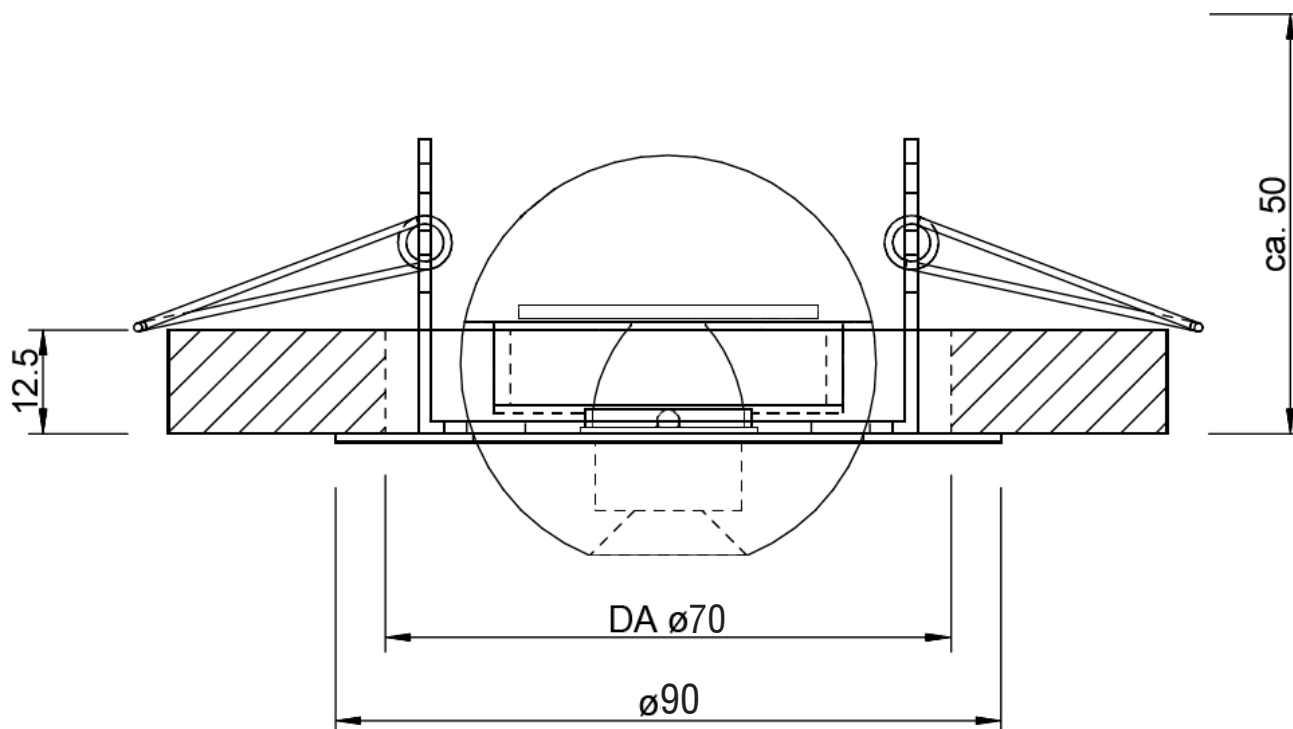

Article number: _ _ _ _ _

Luminaire type	Identification	Reflector / Beam angle	Color temperature	CRI	Driver	RAL
A = Recessed	5600	I = 2x20°	27 = 2700 K	70	EV = On/Off	0000 = None
		Q = 2x38°	30 = 3000 K	80	AV = 1-10V	1000 - 9018 = RAL
			40 = 4000 K	90	DA = Dali	
			57 = 5700 K	8H = HighFlux	PH = Push	
			98 = 2200 K - 5000 K	9H = HighFlux		
			99 = 2700 K - 5700 K			