




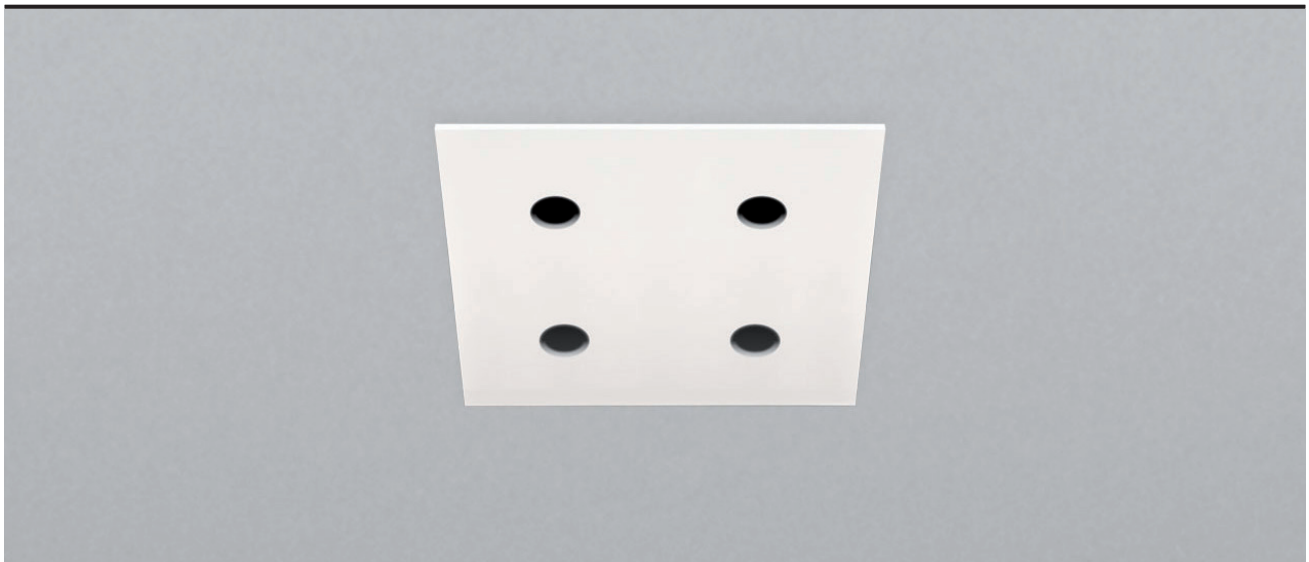


LFO 2x2

Recessed luminaire

Linear recessed ceiling luminaire with High-Power LEDs optimized for a uniform and glare-free illumination. Perfect as an energy-saving replacement of conventional lighting systems.

Lamp	High power LEDs, light point spacing 50 mm
Lumen output	approx. 100 lm/W
Lighting technology	optic pmma
Control gear	LED driver external
Dimming (options)	1–10 V, DALI, Push
Luminaire type, assembly	Ceiling built-in, tool-free with tension springs
Dimensions	L x W x H 90 x 90 x 40 mm
Cast, heat sink	Sheet steel, extruded aluminium profile anodized
Colour / finish	Powder coated, RAL 9016 (other RAL colors optional)
Protection marking, compliance	IP20, CE
Specials	Customized versions, more light colours or color renderings on request

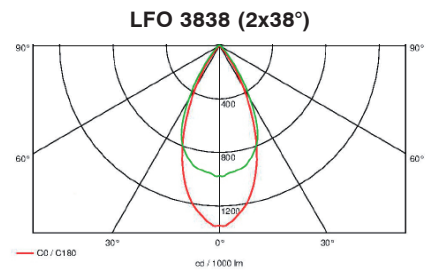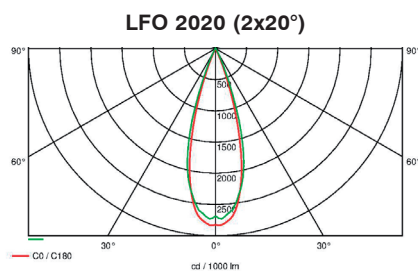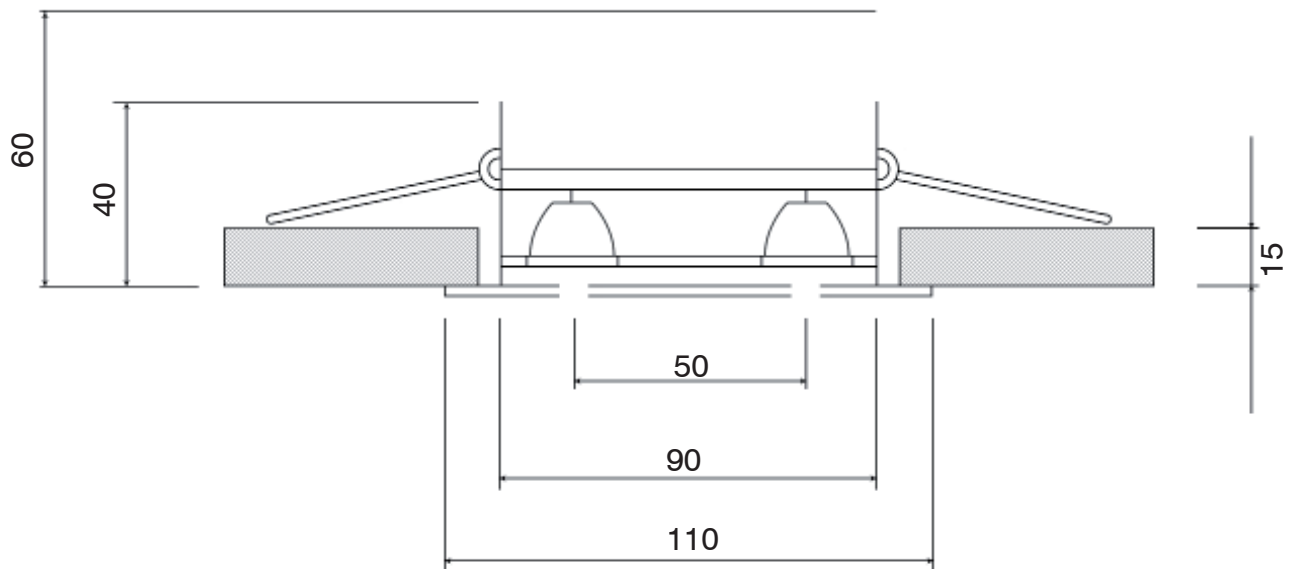

Article number: _ _ _ _ _

Luminaire type	Identification	Reflector / Beam angle	Color temperature	CRI	Driver	RAL
A = Recessed	5820	I = 2x20°	27 = 2700 K	70	EV = On/Off	0000 = None
		Q = 2x38°	30 = 3000 K	80	AV = 1-10V	1000 - 9018 = RAL
			40 = 4000 K	90	DA = Dali	
			57 = 5700 K		PH = Push	
			98 = 2200 K - 5000 K			
			99 = 2700 K - 5700 K			