



PRAEZISA 2x3

Outdoor luminaire

Outdoor luminaire with power LEDs. The luminaire is optimized for a zonal and glare-free illumination of sidewalks, streets and facades. The 6 LED modules have a precise light distribution



Lamp	Power LEDs, 6x 2 W, light point spacing 45 mm
LED lumen output	2700 K, CRI 80, 1250 lm
	3000 K, CRI 80, 1370 lm
Light technology	Optik PMMA,
Control gear	LED driver external
Dimming (options)	1–10 V , DALI, Push
Luminaire type, assembly	Surface-mounted or pole mounting
Dimensions	TxBxH 120x210x80 mm
Cast, heat sink	Sheet steel, aluminium
Colour / finish	Powder coated, DB 703, 9006 FS, 9010 (other RAL colors optional)
Protection marking, compliance	IP67, CE
Specials	Customized versions, more light colours or colour renderings on request

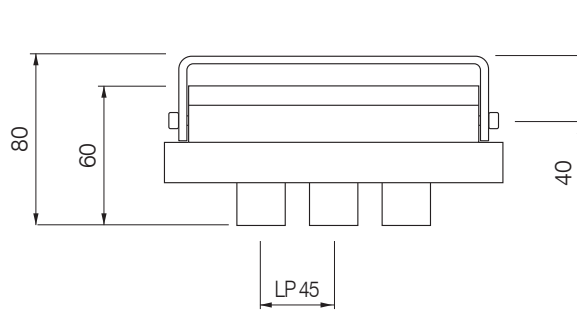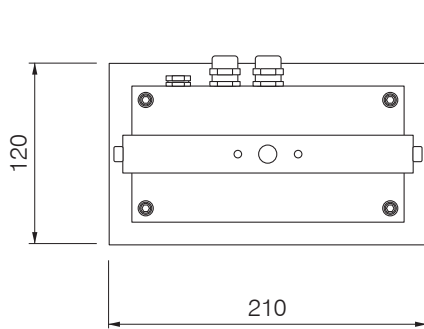

EVG on/off = EV

1–10 V = AV

Dali = DA

Push = PH

Please replace the item number placeholder XX with the listed operating device options:

Light distribution	Light colour	Color rendering	Control gear	Order No.	+RAL
	2700 K	CRI 80	1–10 V, DALI, Push	J 8306 D 2780 XX B703	
				J 8306 D 2780 XX 9006	
				J 8306 D 2780 XX 9010	
	3000 K	CRI 80	1–10 V, DALI, Push	J 8306 D 3080 XX B703	
	2700 K	CRI 80	1–10 V, DALI, Push	J 8306 1 2780 XX B703	
				J 8306 1 2780 XX 9006	
				J 8306 1 2780 XX 9010	
	3000 K	CRI 80	1–10 V, DALI, Push	J 8306 1 3080 XX B703	
			J 8306 1 3080 XX 9006		
			J 8306 1 3080 XX 9010		