





Pollari FFF


Bollard luminaire

Bollard luminaire with power LEDs. The luminaire is optimized for a zonal illumination of sidewalks and open spaces.



Lamp	LED Cree XHP35, 3x8W
LED lumen output	ca. 100lm/W
Light technology	Optik PMMA,
Control gear	LED Treiber internal
Dimming (options)	1–10 V , DALI, Push
Luminaire type, assembly	Bollard luminaire, floor-mounted with base plate
Dimensions	TxBxH 250x180x1000 mm
Cast, heat sink	Sheet steel, aluminium
Colour/finish	Powder coated, DB 703,RAL 9006 FS,RAL 9010 (other RAL colors optional)
Protection marking, compliance	IP67, CE
Specials	Customized versions, more light colours or colour renderings on request

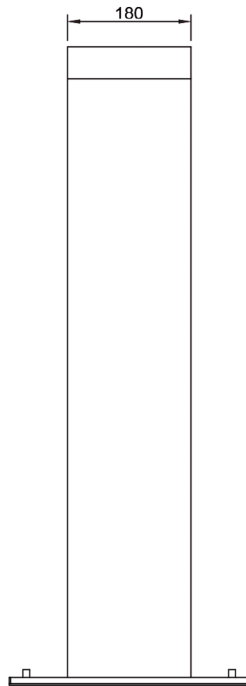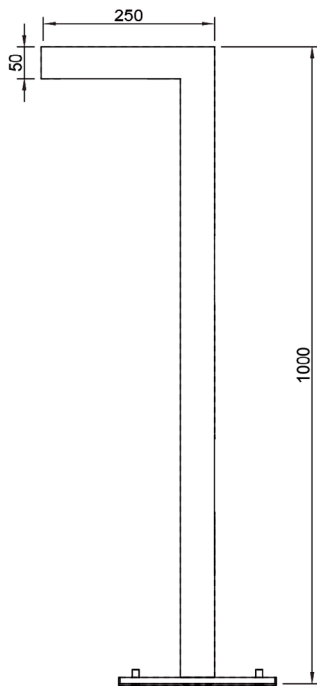

3x = 8703



2x = 8702

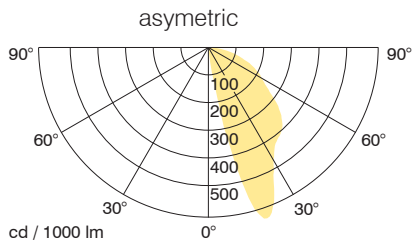

Article number: _ _ _ _ _

Luminaire type	Identification	Reflector / Beam angle	Color temperature	CRI	Driver	RAL
U = Bollard luminaire	8702 = 2 light sources	A = asymetric	27 = 2700 K	70	EV = On/Off	0000 = None
	8703 = 3 light sources		30 = 3000 K	80	AV = 1-10V	1000 - 9018 = RAL
			40 = 4000 K	90	DA = Dali	
			57 = 5700 K		PH = Push	