




RONDO LED

RONDO LED




VK55 VK56 VK56


Features:

- Architectural luminaire, 120-joule resistance
- Die-cast marine-grade aluminium base
- Opal polycarbonate diffuser
- Tamperproof stainless fastenings
- Plug-in gear tray
- 1 LED module
- Class I

- RAL9005
- RAL9006
- RAL9003



 LED module specifications
see pages 10-15

 Easy-Sensor® Pro
and Compact Sensor specifications
see pages 16-17

 Dimming specifications
Corridor and Extinction warning functions
see pages 18-21

Options available (please enquire):

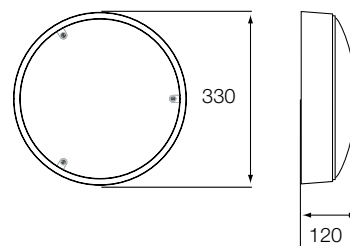

- Standard CHC screws: add -VST to the product code.






Flush-mounting option (chargeable):
add suffix -LSE to the product code.
Recessing dimensions:
ø 340 mm x 75 mm
Indice: VK56

LED
2400



LED




220-240 V AC / 50 Hz   RoHS

Designation	CCT (K)	Power (W)	Luminaire output (lm)	Luminaire efficacy (lm/W)			
Rondo	3000	29	1625	56	LR4918	LR4918-C02	LR4918-C03
Rondo	4000	29	1625	56	LR4919	LR4919-C02	LR4919-C03
Rondo + Easy-Sensor® Pro detection	3000	30	1625	54	LR4948	LR4948-C02	LR4948-C03
Rondo + Easy-Sensor® Pro detection	4000	30	1625	54	LR4949	LR4949-C02	LR4949-C03

LED
2400

LED + CORRIDOR FUNCTION




220-240 V AC / 50 Hz   RoHS


Designation	CCT (K)	Power (W)	Luminaire output (lm)	Luminaire efficacy (lm/W)			
Rondo + Corridor function	3000	30	1600	53	LR4938	LR4938-C02	LR4938-C03
Rondo + Corridor function	4000	30	1600	53	LR4939	LR4939-C02	LR4939-C03
Rondo + Corridor function + Easy-Sensor® Pro detection	3000	31	1600	52	LR4968	LR4968-C02	LR4968-C03
Rondo + Corridor function + Easy-Sensor® Pro detection	4000	31	1600	52	LR4969	LR4969-C02	LR4969-C03

LED
2400

LED + EXTINCTION WARNING FUNCTION

220-240 V AC / 50 Hz   RoHS

Designation	CCT (K)	Power (W)	Luminaire output (lm)	Luminaire efficacy (lm/W)			
Rondo + Extinction warning	3000	30	1600	53	LR4928	LR4928-C02	LR4928-C03
Rondo + Extinction warning	4000	30	1600	53	LR4929	LR4929-C02	LR4929-C03
Rondo + Extinction warning + Easy-Sensor® Pro detection	3000	31	1600	52	LR4958	LR4958-C02	LR4958-C03
Rondo + Extinction warning + Easy-Sensor® Pro detection	4000	31	1600	52	LR4959	LR4959-C02	LR4959-C03

 Anti-vandal tool see pages 208-209.

