

### Quality is the best investment over time.

# **GILBERTO CASON**Founder and CEO of Teclumen Ltd.

Teclumen started in 1978 as a company specialising in the assembly of theatre lighting. With the passing of time and experience gained in the lighting sector the company was encouraged to create its own trademark and to offer a line of theatre products made in Italy and branded Teclumen. In 2003 the new head office and production plant was opened, concentrating into a single building the facilities for design, assembly, sales and after sales service. Today the company's production can satisfy the demands of various sectors such as: lighting for theatres, architecture, gardens, stages and shows, indoors, swimming pools and fountains.

In order to guarantee high quality, Teclumen carries out the main production stages in-house using the best in 3D design technology. Rapid flexible production is possible thanks to the highly technological machines (laser cutting) used. As regards the choice of components, Teclumen counts on reliable partners that are internationally acclaimed leaders; the final assembly, entirely inhouse, makes it possible to achieve high quality. Teclumen has a well-organised, functional and well-stocked warehouse of products. These aspects facilitate prompt delivery all over the world






# THE MOST BEAUTIFUL EMOTIONS ARE EXPERIENCED IN WATER.

**Per Aquam** is our division dedicated to crafting emotions within the pool. Submersible lighting is our passion. That's why, for years, we have been at the forefront of designing and producing lights that are meant to remain in contact with water for an extended period and capable of creating highly impactful lighting effects.

Today, we create various ranges of lights with different sizes and features, all aimed at making every corner of the pool truly magical.

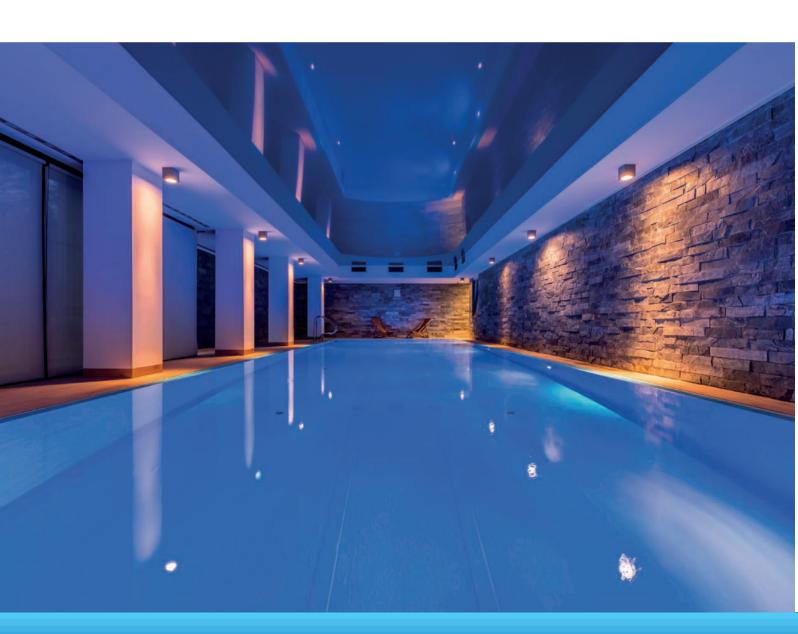



# BEAUTY DESERVES TO BE ILLUMINATED TO PERFECTION.

We began experimenting with LED technology in the early 2000s. This experience, gained through the development of our other business divisions as well, allows us today to create products capable of generating any type of atmosphere with light, producing highly technological lamps that are incredibly weather-resistant and resistant to the erosive effects of water.

The **know-how** derived from our experience in the entertainment industry has contributed to the growth of our expertise in underwater lighting design. This makes us the ideal partners not only in product supply but also in the realization of full-fledged lighting projects that maximize the features and potential of our lamps, taking into consideration the specific structures they need to operate in.





# ALL THE REASONS TO CHOOSE TECLUMEN POOL LIGHTS.



### STEEL BODY FOR LONG-LASTING DURABILITY.

Teclumen pool lights are constructed from AISI 316L stainless steel, ensuring greater longevity and improved heat dissipation.



### **GLASS FOR BETTER LIGHT DISTRIBUTION.**

Unlike plastic materials, our glass cover remains transparent with regular cleaning, ensuring that light is not diffused or dampened, allowing the luminous beam to shine at its best.



# MECHANICAL SEAL. SIMPLER, FASTER, SAFER.

Teclumen lamps feature a mechanical seal that eliminates the need for silicone, resulting in faster product delivery times. Moreover, any necessary repairs can be easily performed in a short time.



### **ANTI-OXIDATION TREATMENTS.**

Special treatments are applied to all our products to prevent oxidation in water.



### NO MORE SHADOW CONES.

Thanks to our special filter that widens the light beam from 120 to 180 degrees, light is evenly distributed across the entire pool surface, creating a diffuse lighting effect without shadow cones.



### WAVE-CONDUCTED TECHNOLOGY.

Wave-conducted technology allows for control signal transmission to the lamps through the power cable. This simplifies installation as a 2-wire cable can be used, even for color-changing lamps. This type of system eliminates the need for external drivers and multipolar cables. One of the advantages of this technology is the easy replacement of traditional lamps in existing pools.



### **EVEN THE CABLE MATTERS.**

All Teclumen products come with a special immersion-resistant cable that ensures long-lasting durability without deterioration.



# RGBW TECHNOLOGY. THEATRICAL WATER ATMOSPHERES.

Thanks to this technology, it's possible to achieve different shades of white and captivating color nuances quickly and easily, creating the ideal pool atmosphere for any occasion.




### **TEMPERATURE CONTROL.**

Teclumen underwater lights include a special temperature control protection system. Unusual temperature increases activate the system to safeguard the electronics and LEDs.

### THE TECHNOLOGIES INSIDE OUR LIGHTS.

### 12 V AC - FIX

The technology of LED lamps with two-wire cable and fixed white (W) color. The ideal solution for replacing traditional halogen lamps.

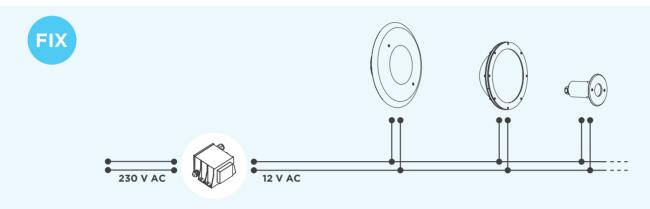


### **12V AC - PLC**

### POWER LINE COMUNICATION TECHNOLOGY.

### THE SIMPLE SYSTEM WITHOUT EXTERNAL DRIVERS AND POWER SUPPLIES.

The technology of RGBW color-changing LED lamps with a 2-wire cable compatible with existing systems. These lamps are controlled by a wave-conducted system, using either a remote control or external buttons, allowing you to set 13 fixed colors and 10 automatic sequences. This is the ideal solution for both new installations, as you only need to prepare a two-conductor cable to power the lamps, and for existing installations, as there is no need to change the cables.

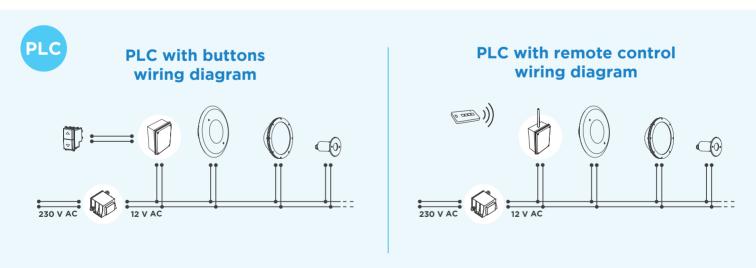


### INTEGRATION WITH DMX AND DALI.

In recent years, home and hospitality automation systems for managing electrical devices have become increasingly common. By using wave-conducted technology, integration with DMX and DALI systems is possible. For this purpose, there are two converters that enable lamp control directly from the pool's home automation system.

### 24 V DC - DIM

The technology of LED lamps with two-wire cable and dimmable white color. The ideal solution for dinamic and controlled lamps with 24V dimmer and push putton or remote control.

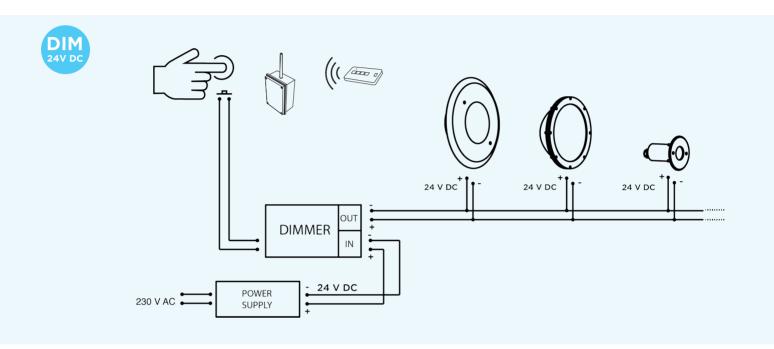

### **12V AC Series**





PERLAPOWER
NICHE AND INOX
FLANGE
p. 16



PERLAPOWERIN NICHE AND INOX FLANGE p. 18



PERLA
NICHE AND INOX
FLANGE
p. 20



PERLAIN NICHE AND INOX FLANGE p. 22



MINIPERLA
NICHE AND INOX
FLANGE
p. 24



MINIPERLAIN NICHE AND INOX FLANGE p. 26



microPERLA NICHE AND INOX FLANGE p. 28



microPERLAIN NICHE AND INOX FLANGE p. 30





LINEA

NICHE AND INOX

**FLANGE** 

p. 34



LINEAN

NICHE AND INOX

**FLANGE** 

p. 36



MINI **LINEA**NICHE AND INOX
FLANGE

p. 38



MINILINEAIN
NICHE AND INOX
FLANGE
p. 40



MAGICSUB NICHE AND INOX FLANGE p. 42



MAGICSUBIN NICHE AND INOX FLANGE p. 44





PAR56POWER
EX 300W
REPLACEMENT
p. 48



PAR56
EX 300W
REPLACEMENT
p. 50



PAR56 ECO EX 300W REPLACEMENT p. 52



WIBRE REPLACEMENT p. 54



STW
WIBRE
REPLACEMENT
p. 56

# PERLA

# **24V DC Series**



PERLA
NICHE AND INOX
FLANGE
p. 59



PERLAIN NICHE AND INOX FLANGE p. 60



MINIPERLA
NICHE AND INOX
FLANGE
p. 61



MINIPERLAIN NICHE AND INOX FLANGE p. 62



MICHE AND INOX FLANGE p. 63



microPERLAIN NICHE AND INOX FLANGE p. 64









NICHE AND INOX FLANGE p. 65

LINEAIN
NICHE AND INOX
FLANGE
p. 66

MINILINEA
NICHE AND INOX
FLANGE
p. 67

MINILINEAIN
NICHE AND INOX
FLANGE
p. 68



MAGICSUB NICHE AND INOX FLANGE p. 69



MAGICSUBIN NICHE AND INOX FLANGE p. 70





# **CONTROLLERS**





PLC TRANSMITTER

REMOTE CONTROL FOR PLC

p. 73

p. 74









STICK KE2

STICK DE3

DINA

STICK GU2

p. 75

p. 75

p. 76

p. 76

### **ACCESSORIES**













SPECIAL CABLES

TRANSFORMER IP 65

5-PIN IP68 JOINT

5-PIN "Y" IP68 JOINT

**IP68 CONNECTORS** 

TWO-COMPONENT RESIN

p. 79

p. 79

p. 80

p. 80

p. 81

p. 81













PROJECTOR EX

PROJECTOR EX 100 W

PERLA NICHE

WATERTIGHT MINI PERLA NICHE

MICRO PERLA NICHE WITH HOUSING FOR

**COLLECTING CABLE** 

MAGIC SUB NICHE

p. 82

p. 82

p. 83

p. 83

p. 84

p. 84













LINEA NICHE

LINEA NICHE

MINI LINEA NICHE

NICHE

MINI LINEA IN

STAINLESS STILL PERLA NICHE

STAINLESS STILL MINI PERLA NICHE

p. 85

p. 85

p. 86

p. 86

p. 87

p. 88















STAINLESS STILL MAGIC SUB NICHE

p. 89

**DIFFUSER** p. 90

LINEA OPTICAL

ROUND OPTICAL **DIFFUSERS** 

p. 90

PERLA FLANGES

p. 91

PAINTED PERLA **FLANGES** 

p. 91

MINI PERLA **FLANGES** 

p. 92













PAINTED MINI PERLA FLANGES

MICRO PERLA FLANGES

PAINTED MICRO PERLA FLANGES LINEA FLANGES

PAINTED LINEA FLANGES MINI LINEA FLANGES

p. 92

p. 93

p. 93

p. 94

p. 94

p. 95





MAGIC SUB

FLANGES







PAINTED MINI LINEA FLANGES

> p. 95 p. 96

PAINTED MAGIC SUB FLANGES

p. 96



PAR 56 FLANGE

p. 97



MINI FLANGES

p. 97

GENERIC ACCESSORIES

p. 98-p. 101



### The Lamp that transforms the pool.

Perla is the line of underwater lamps made of stainless steel and glass designed to create emotions in the pool. A series of products capable of crafting luminous scenes and enhancing shapes and materials in every corner of the pool.

High performance combined with compact dimensions ensure uniform lighting without shadow cones, both in white and colored light. Perla, with its clean and elegant shapes, is a jewel that embellishes the pool and is a powerful light source with extremely compact dimensions. The perfect solution for achieving quality light with the best design.

Perla is available in various versions and sizes: With fixed co or technology FIX, RGBW OC, and RGBW DMX to suit project requirements.








# **PERLA**POWER

NICHE AND INOX FLANGE


LED lamp designed for optimum illumination of large pools. The included niche contains the necessary cable for poolside maintenance.

Pool type: panel / concrete / with tiles or liner.





- 1 NICHE
- 2 LAMP
- 3 OPTICAL DIFFUSER
- 4 FRONT FLANGE
- 5 SANDWICH GASKET
- 6 LINER FLANGE
- 7 PLEXY SPACER
- 8 PANEL
- 9 POOL LINER

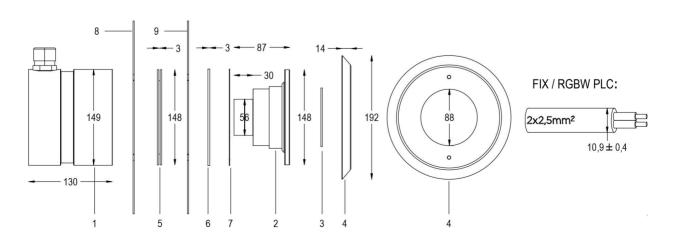









52W / 64VA 16 m 25 - 30



Other LED colors are available upon request

	Code	LED color	Total luminous flu	Beam angle	€			
LAMP WITH STAINLESS STEEL FLANGE, NICHE, DIFFUSER and 4m CABLE								
	2115342993	5000K	5770 lm	120°	-			
(3)	2115342990	3000K	5000 lm	120°	-			
LAMP WITH S	TAINLESS STEEL FLANG	E, DIFFUSER	and 4m CABLE					
(3)	2115342993L	5000K	5770 lm	120°	-			
	2115342990L	3000K	5000 lm	120°	-			



**RGBW VARIABLE COLOR, DIMMABLE VERSION** WITH PLC CONTROL















POWER LINE COMUNICATION 25 - 30





	Code	LED color	Total luminous flu	Beam angle	€
LAMP WITH STA	INLESS STEEL FLAN	GE, NICHE, DIF	FUSER and 4m	CABLE	
	2115512994	RGBW	3173 lm	120°	-
LAMP WITH STA	INLESS STEEL FLAN	GE, DIFFUSER	and 4m CABLE		
	2115512994L	RGBW	3174 lm	120°	-

### **ACCESSORIES**



100 VA IP65 TRANSF.



TRANSF. IP65 300 VA



STAINLESS STEEL FLANGE



OPTICAL DIFFUSER



**CABLE 2 X 2.5** 



WATERSTOP JOINT IP68





PERLA NICHE Cod. 5500000002



SANDWICH GASKET Cod. 1600001100

### **ACCESSORIES PLC**









PLC TRANS. BUTTONS Cod. 4493000064

PLC TRANS. REMOTE Cod. 4493000004

**CONVERT. DMX - PLC**Cod. 4493000042

DALI - PLC CONV.
Cod. 4493000001






## **PERLA<sub>POWERIN</sub>**

NICHE AND INOX FLANGE


LED lamp designed for optimum illumination of large pools. The included niche contains the necessary cable for poolside maintenance.

Pool type: recessed in concrete / with tiles.





- 1 NICHE
- 2 LAMP
- 3 OPTICAL DIFFUSER
- 4 FRONT FLANGE
- 5 STAINLESS STEEL SPACER
- 6 PLEXY SPACER

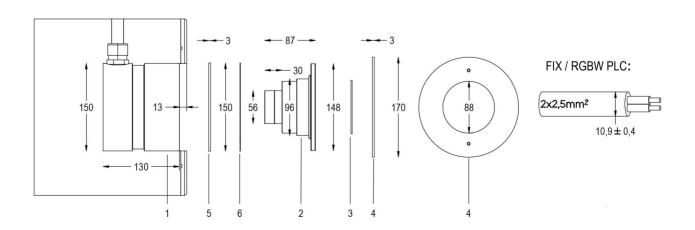









52W / 64VA MAX 16 m 25 - 30



Other LED colors are available upon request

	Code	LED color	Total luminous flu	Beam angle	€			
LAMP WITH STAINLESS STEEL FLANGE, NICHE, DIFFUSER and 4m CABLE								
(10)	2115343193	5000K	5770 lm	120°	-			
	2115343190	3000K	5000 lm	120°	-			
LAMP WITH S	TAINLESS STEEL FLANC	E, DIFFUSER	and 4m CABLE					
69)	2115343193L	5000K	5770 lm	120°	-			
	2115343190L	3000K	5000 lm	120°	-			



**RGBW VARIABLE COLOR, DIMMABLE VERSION** WITH PLC CONTROL















POWER LINE COMUNICATION 25 - 30



	Code	LED color	Total luminous flu	Beam angle	€
LAMP WITH ST	TAINLESS STEEL FLAN	GE, NICHE, DIF	FUSER and 4m	CABLE	
	2115513194	RGBW	3173 lm	120°	-
LAMP WITH ST	TAINLESS STEEL FLAN	GE, DIFFUSER	and 4m CABLE		
	2115513194L	RGBW	3173 lm	120°	-

### **ACCESSORIES**











OPTICAL DIFFUSER



**CABLE 2 X 2.5** Cod. 9003079010



WATERSTOP JOINT IP68





SPACERS KIT



TEMPLATE FOR CONCRETE



PERLA NICHE Cod. 5500000002

### **ACCESSORIES PLC**



PLC TRANS. BUTTONS

Cod. 4493000064







**CONVERT. DMX - PLC**Cod. 4493000042

DALI - PLC CONV.
Cod. 4493000001








# **PERLA**

NICHE AND INOX FLANGE


LED lamp designed to best illuminate medium-sized pools. The included recess contains the necessary cable for poolside maintenance.

Pool type: panel  $\slash$  concrete  $\slash$  with tiles or sheet.





- 1 NICHE
- 2 LAMP
- 3 OPTICAL DIFFUSER
- 4 FRONT FLANGE
- 5 SANDWICH GASKET
- 6 LINER FLANGE
- 7 PLEXY SPACER
- 8 PANEL
- 9 POOL LINER

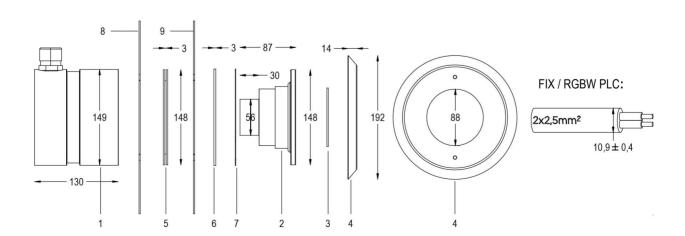









40W / 50VA 19 m 20 - 25





Other LED colors are available upon request

	Code	LED color	Total luminous flu	Beam angle	€			
LAMP WITH STAINLESS STEEL FLANGE, NICHE, DIFFUSER and 4m CABLE								
	2112342993	5000K	4330 lm	120°	-			
	2112342990	3000K	3750 lm	120°	-			
LAMP WITH S	TAINLESS STEEL FLANG	E, DIFFUSER	and 4m CABLE					
63	2112342993L	5000K	4330 lm	120°	-			
	2112342990L	3000K	3750 lm	120°	-			



**RGBW VARIABLE COLOR, DIMMABLE VERSION** WITH PLC CONTROL















POWER LINE COMUNICATION 20 - 25



DIMMER

	Code	LED color	Total luminous flu	Beam angle	€
LAMP WITH ST	TAINLESS STEEL FLAN	GE, NICHE, DIF	FUSER and 4m	CABLE	
	2112512994	RGBW	2556 lm	120°	-
LAMP WITH ST	TAINLESS STEEL FLAN	GE, DIFFUSER	and 4m CABLE		
	2112512994L	RGBW	2170 lm	120°	-

### **ACCESSORIES**



100 VA IP65 TRANSF.



TRANSF. IP65 300 VA



STAINLESS STEEL FLANGE



OPTICAL DIFFUSER



**CABLE 2 X 2.5** Cod. 9003079010



WATERSTOP JOINT IP68









PERLA NICHE Cod. 5500000002

### **ACCESSORIES PLC**



PLC TRANS. BUTTONS

Cod. 4493000064



PLC TRANS. REMOTE

Cod. 4493000004









**CONVERT. DMX - PLC**Cod. 4493000042

DALI - PLC CONV.
Cod. 4493000001







# PERLAIN NICHE AND INOX FLANGE

LED lamp designed to best illuminate mediumsized pools. The included recess contains the necessary cable for poolside maintenance. Pool type: recessed in concrete / with tiles.





- 1 NICHE
- 2 LAMP
- 3 OPTICAL DIFFUSER
- 4 FRONT FLANGE
- 5 STAINLESS STEEL SPACER
- 6 PLEXY SPACER

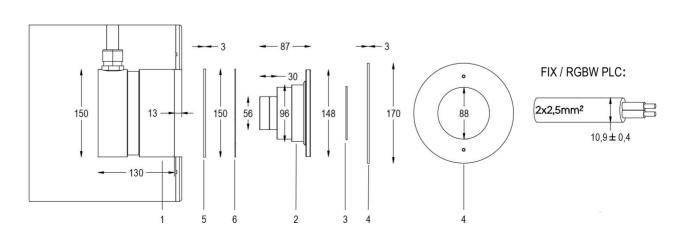







40W / 50VA 19 m 20 - 25



Other LED colors are available upon request

	Code	LED color	Total luminous flu	Beam angle	€			
LAMP WITH STAINLESS STEEL FLANGE, NICHE, DIFFUSER and 4m CABLE								
(10)	2112343193	5000K	4330 lm	120°	-			
	2112343190	3000K	3750 lm	120°	-			
LAMP WITH S	TAINLESS STEEL FLANG	GE, DIFFUSER	and 4m CABLE					
(2)	2112343193L	5000K	4330 lm	120°	-			
	2112343190L	3000K	3750 lm	120°	-			



**RGBW VARIABLE COLOR, DIMMABLE VERSION** WITH PLC CONTROL















POWER LINE COMUNICATION 20 - 25





	Code	LED color	Total luminous flu	Beam angle	€
LAMP WITH ST	TAINLESS STEEL FLANG	GE, NICHE, DIF	FUSER and 4m	CABLE	
	2112513194	RGBW	2556 lm	120°	-
LAMP WITH ST	TAINLESS STEEL FLANG	GE, DIFFUSER	and 4m CABLE		
	2112513194L	RGBW	2170 lm	120°	-

### **ACCESSORIES**



100 VA IP65 TRANSF.



STAINLESS STEEL FLANGE



OPTICAL DIFFUSER



**CABLE 2 X 2.5** Cod. 9003079010



WATERSTOP JOINT **IP68** Cod. 5300788701



TWO-COMPONENT RESIN



SPACERS KIT



TEMPLATE FOR CONCRETE



PERLA NICHE

### **ACCESSORIES PLC**



PLC TRANS. BUTTONS

Cod. 4493000064












**CONVERT. DMX - PLC**Cod. 4493000042

DALI - PLC CONV.
Cod. 4493000001



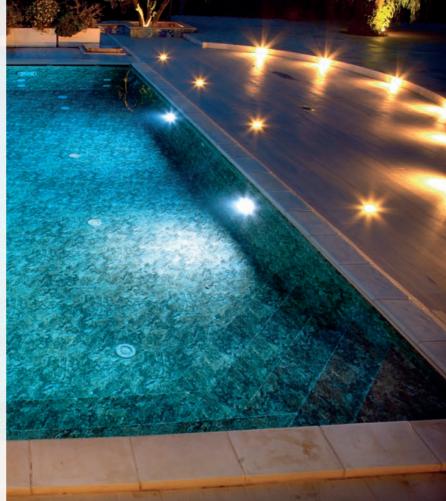

# **MINIPERLA**

NICHE AND INOX FLANGE


LED lamp designed to best illuminate medium and small pools. The included recess contains the necessary cable for poolside maintenance.

Pool type: panel / concrete / with tiles or sheet.



# 8 9 6 7

- 1 NICHE
- 2 LAMP
- 3 OPTICAL DIFFUSER
- 4 FRONT FLANGE
- 5 SANDWICH GASKET
- 6 LINER FLANGE
- 7 PLEXY SPACER
- 8 PANEL
- 9 POOL LINER

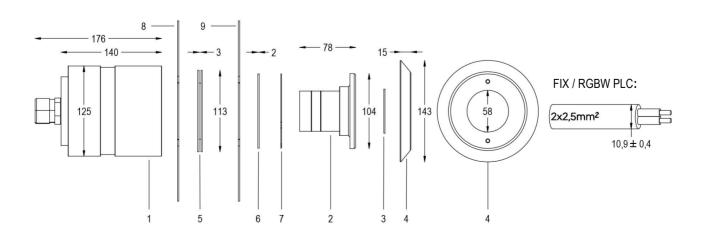









24W / 31VA 🎬 30 m 🧥 15 - 20





Other LED colors are available upon request

	Code	LED color	Total luminous flu	Beam angle	€
LAMP WITH S	TAINLESS STEEL FLANG	E, NICHE, DIF	FUSER and 4m	CABLE	
(6)	2108340191	5000K	2795 lm	120°	930
	2108340190	3000K	2510 lm	120°	930
LAMP WITH S	TAINLESS STEEL FLANG	E, DIFFUSER	and 4m CABLE		
6	2108340191L	5000K	2795 lm	120°	730
	2108340190L	3000K	2510 lm	120°	730



**RGBW VARIABLE COLOR, DIMMABLE VERSION** WITH PLC CONTROL





















	Code	LED color	Total luminous flu	Beam angle	€
LAMP WITH S	TAINLESS STEEL FLANG	E, NICHE, DIF	FUSER and 4m	CABLE	
	2112340194	RGBW	1130 lm	120°	1.118
LAMP WITH S	TAINLESS STEEL FLANG	E, DIFFUSER	and 4m CABLE		
(3)	2112340194L	RGBW	1130 lm	120°	930

### **ACCESSORIES**







TRANSF. IP65 300 VA



STAINLESS STEEL FLANGE Cod. 4930001326



OPTICAL DIFFUSER



**CABLE 2 X 2.5** Cod. 9003079010













NICHE TIGHTENING WRENCH



SANDWICH GASKET

### **ACCESSORIES PLC**



PLC TRANS. BUTTONS

Cod. 4493000064





Cod. 4493000004











# **MINIPERLA**IN


NICHE AND INOX FLANGE

LED lamp designed to best illuminate medium and small pools. The included recess contains the necessary cable for poolside maintenance.


Pool type: recessed in concrete / with tiles.







- 1 NICHE
- 2 LAMP
- 3 OPTICAL DIFFUSER
- 4 FRONT FLANGE
- 5 STAINLESS STEEL SPACER
- 6 PLEXY SPACER

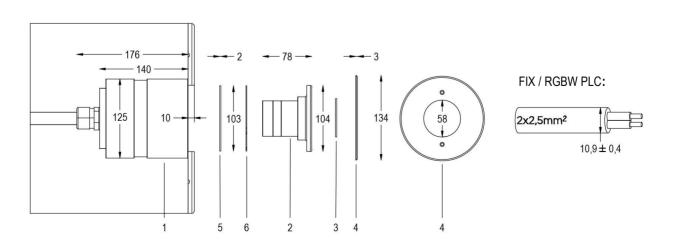









24W / 31VA 30 m 15 - 20



Other LED colors are available upon request

	Code	LED color	Total luminous flu	Beam angle	€			
LAMP WITH STAINLESS STEEL FLANGE, NICHE, DIFFUSER and 4m CABLE								
	2108827391	5000K	2795 lm	120°	-			
(8)	2108827390	3000K	2510 lm	120°	-			
LAMP WITH S	TAINLESS STEEL FLANG	E, DIFFUSER	and 4m CABLE					
	2108827391L	5000K	2795 lm	120°	-			
	2108827390L	3000K	2510 lm	120°	-			



**RGBW VARIABLE COLOR, DIMMABLE VERSION** WITH PLC CONTROL

















POWER LINE COMUNICATION 📠 15 - 20





	Code	LED color	Total luminous flu	Beam angle	€
LAMP WITH S	TAINLESS STEEL FLANG	GE, NICHE, DIF	FUSER and 4m	CABLE	
	2111827394	RGBW	1130 lm	120°	-
LAMP WITH S	TAINLESS STEEL FLANG	GE, DIFFUSER	and 4m CABLE		
(3)	2111827394L	RGBW	1130 lm	120°	-

### **ACCESSORIES**











OPTICAL DIFFUSER



**CABLE 2 X 2.5** Cod. 9003079010



WATERSTOP JOINT IP68



TWO-COMPONENT RESIN



SPACERS KIT



NICHE TIGHTENING WRENCH



TEMPLATE FOR CONCRETE WATERTIGHT NICHE



Cod. 5521018700

### **ACCESSORIES PLC**











PLC TRANS. BUTTONS PLC TRANS. REMOTE Cod. 4493000064 Cod. 4493000004

**CONVERT. DMX - PLC**Cod. 4493000042

DALI - PLC CONV.
Cod. 4493000001






# micro PERLA

NICHE AND INOX FLANGE


LED lamp designed to best illuminate small pools, whirlpool areas and stairways. The included niche contains the necessary cable for poolside maintenance.

Pool type: panel / concrete / with tiles or sheet.





- 1 NICHE
- 2 LAMP
- 3 FRONT FLANGE
- 4 GASKET
- 5 LINER FLANGE
- 6 PLEXY SPACER

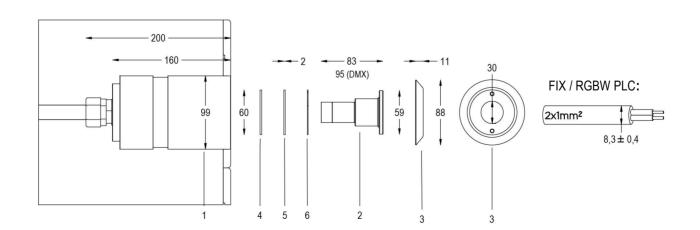













Other LED colors are available upon request

	Code	LED color	Total luminous flu	Beam angle	€	
LAMP WITH STAINLESS STEEL FLANGE, NICHE, DIFFUSER and 4m CABLE						
	2101340191	5000K	286 lm	120°	-	
0	2101340190	3000K	256 lm	120°	-	
LAMP WITH STAINLESS STEEL FLANGE, DIFFUSER and 4m CABLE						
0	2101340191L	5000K	286 lm	120°	-	
	2101340190L	3000K	256 lm	120°	-	



**RGBW VARIABLE COLOR, DIMMABLE VERSION** WITH PLC CONTROL















POWER LINE COMUNICATION



FINO A 5 DIMMER

	Code	LED color	Total luminous flu	Beam angle	€	
LAMP WITH STAINLESS STEEL FLANGE, NICHE, DIFFUSER and 4m CABLE						
0	2103340194	RGBW	353 lm	120°	-	
LAMP WITH STAINLESS STEEL FLANGE, DIFFUSER and 4m CABLE						
0	2103340194L	RGBW	353 lm	120°	-	

### **ACCESSORIES**











CABLE 2 X 1 Cod. 9003049010



WATERSTOP JOINT IP68



TWO-COMPONENT RESIN Cod. 4000370521





WATERTIGHT NICHE

TIGHTENING WRENCH

### **ACCESSORIES PLC**










PLC TRANS. BUTTONS Cod. 4493000064

PLC TRANS. REMOTE Cod. 4493000004

**CONVERT. DMX - PLC**Cod. 4493000042

DALI - PLC CONV.
Cod. 4493000001



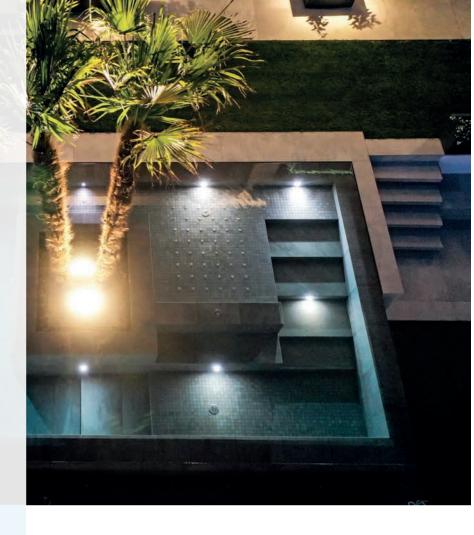

# micro PERLA IN

NICHE AND INOX FLANGE

LED lamp designed to best illuminate small pools, whirlpool areas and stairways. The included niche contains the necessary cable for poolside maintenance.


Pool type: recessed in concrete / with tiles.





# 1 4 5 6 2 3

- 1 NICHE
- 2 LAMP
- 3 FRONT FLANGE
- 4 GASKET
- 5 STAINLESS STEEL SPACER
- 6 PLEXY SPACER

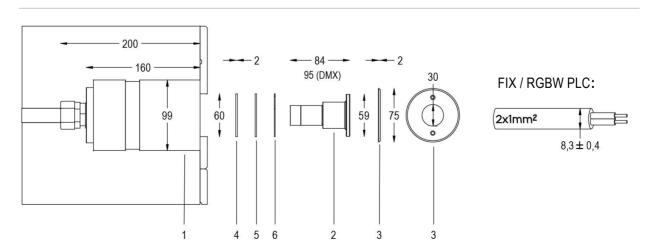













Other LED colors are available upon request

	Code	LED color	Total luminous flu	Beam angle	€	
LAMP WITH STAINLESS STEEL FLANGE, NICHE, DIFFUSER and 4m CABLE						
	2101827391	5000K	286 lm	120°	-	
0	2101827390	3000K	256 lm	120°	-	
LAMP WITH STAINLESS STEEL FLANGE, DIFFUSER and 4m CABLE						
<u></u>	2101827391L	5000K	286 lm	120°	-	
	2101827390L	3000K	256 lm	120°	-	



RGBW VARIABLE COLOR, DIMMABLE VERSION WITH PLC CONTROL



















	Code	LED color	Total Iuminous flu	Beam angle	€		
LAMP WITH STAINLESS STEEL FLANGE, NICHE, DIFFUSER and 4m CABLE							
	2102827394	RGBW	353 lm	120°	-		
LAMP WITH STAINLESS STEEL FLANGE, DIFFUSER and 4m CABLE							
<b>O</b>	2102827394L	RGBW	353 lm	120°	-		

### **ACCESSORIES**



100 VA IP65 TRANSF.



STAINLESS STEEL FLANGE Cod. 4940000926



CABLE 2 X 1 Cod. 9003049010



WATERSTOP JOINT IP68



TIGHTENING WRENCH Cod. 1700770400



WATERTIGHT NICHE Cod. 5521008700



TEMPLATE FOR CONCRETE



SPACERS KIT Cod. 1700530000



TWO-COMPONENT RESIN Cod. 4000370521

### **ACCESSORIES PLC**



PLC TRANS. BUTTONS

Cod. 4493000064



PLC TRANS. REMOTE Cod. 4493000004



CONVERT. DMX - PLC Cod. 4493000042



**DALI - PLC CONV.** Cod. 4493000001



### **MAGICLINEA**

The lamp that offers all the elegance of rectangular shapes with a small round niche. A captivating blade of light that enhances the pool without the need for a bulky rectangular niche. Thanks to its alignment mechanism, it can be adjusted horizontally even after installation, ensuring all the necessary micro-adjustments for precise installation.

### **MAGICSUB**

The lamp that guarantees perfect lighting even in small spaces. Its smart nature allows for two different types of installation: inside a return inlet body or in a niche containing the necessary cable for on-deck maintenance.






### LINEA

### NICHE AND INOX FLANGE


LED lamp designed to best illuminate medium-sized pools. The included recess contains the necessary cable for poolside maintenance.

Pool type: panel / concrete / with tiles or sheet.





- 1 NICHE
- 2 LAMP
- 3 OPTICAL DIFFUSER
- 4 FRONT FLANGE
- 5 GASKET
- 6 FIXING RING
- 7 LINER FLANGE
- 8 PANEL
- 9 POOL LINER

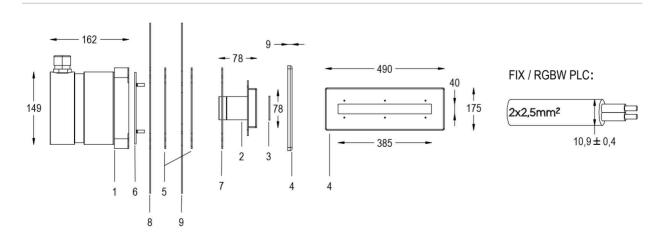









25W / 30VA 🎬 32 m 👛 20 - 25





Other LED colors are available upon request

	Code	LED color	Total luminous flu	Beam angle	€	
LAMP WITH STAINLESS STEEL FLANGE, NICHE, DIFFUSER and 4m CABLE						
	3107000019	5000K	3850 lm	120°	-	
	3107000020	3000K	3500 lm	120°	-	
LAMP WITH STAINLESS STEEL FLANGE, DIFFUSER and 4m CABLE						
	3107000008	5000K	3850 lm	120°	-	
	3107000009	3000K	3500 lm	120°	-	



**RGBW VARIABLE COLOR, DIMMABLE VERSION** WITH PLC CONTROL















POWER LINE COMUNICATION 20 - 25





	Code	LED color	Total luminous flu	Beam angle	€	
LAMP WITH STAINLESS STEEL FLANGE, NICHE, DIFFUSER and 4m CABLE						
	3107000021	RGBW	2600 lm	120°	-	
LAMP WITH STAINLESS STEEL FLANGE, DIFFUSER and 4m CABLE						
	3107000010	RGBW	2600 lm	120°	-	

### **ACCESSORIES**







TRANSF. IP65 300 VA



STAINLESS STEEL FLANGE



OPTICAL DIFFUSER



**CABLE 2 X 2.5** Cod. 9003079010







MAGIC LINEA NICHE

### **ACCESSORIES PLC**










PLC TRANS. BUTTONS Cod. 4493000064

PLC TRANS. REMOTE Cod. 4493000004

**CONVERT. DMX - PLC**Cod. 4493000042

DALI - PLC CONV.
Cod. 4493000001

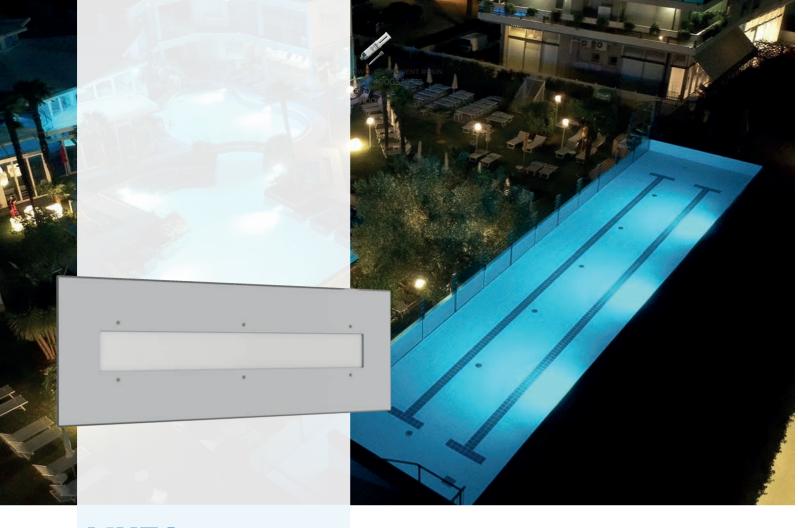


# LINEAIN


# NICHE AND INOX FLANGE

LED lamp designed to best illuminate mediumsized pools. The included recess contains the necessary cable for poolside maintenance. Pool type: recessed in concrete / with tiles.





- 1 NICHE
- 2 LAMP
- 3 OPTICAL DIFFUSER
- 4 FRONT FLANGE
- 5 GASKET
- 6 FIXING RING

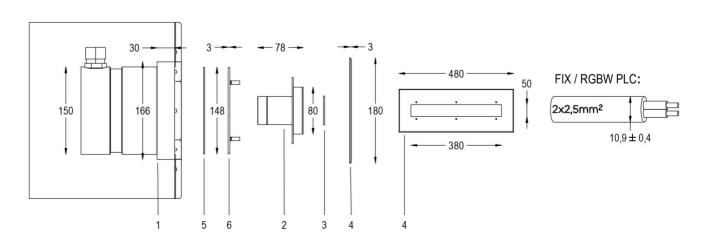



# FIXED COLOR VERSION







25W / 30VA





Other LED colors are available upon request

	Code	LED color	Total luminous flu	Beam angle	€		
LAMP WITH STAINLESS STEEL FLANGE, NICHE, DIFFUSER and 4m CABLE							
60	2111813193	5000K	3850 lm	120°	-		
	2106821290	3000K	3500 lm	120°	-		
LAMP WITH S	TAINLESS STEEL FLAN	GE, DIFFUSER	and 4m CABLE				
-	3107000013	5000K	3850 lm	120°	-		
	3107000014	3000K	3500 lm	120°	-		



**RGBW VARIABLE COLOR, DIMMABLE VERSION** WITH PLC CONTROL















POWER LINE COMUNICATION 20 - 25





	Code	LED color	Total luminous flu	Beam angle	€			
LAMP WITH STAINLESS STEEL FLANGE, NICHE, DIFFUSER and 4m CABLE								
-	2111821294	RGBW	2600 lm	120°	-			
LAMP WITH ST	LAMP WITH STAINLESS STEEL FLANGE, DIFFUSER and 4m CABLE							
-	3107000015	RGBW	2600 lm	120°	-			

#### **ACCESSORIES**



100 VA IP65 TRANSF.



OPTICAL DIFFUSER



STAINLESS STEEL FLANGE Cod. 4920002326



**CABLE 2 X 2.5** Cod. 9003079010





WATERSTOP JOINT IP68 TWO-COMPONENT RESIN



SPACERS KIT



MAGIC LINEA NICHE



TEMPLATE FOR CONCRETE

#### **ACCESSORIES PLC**



PLC TRANS. BUTTONS

Cod. 4493000064





Cod. 4493000004









# **MINILINEA**

# NICHE AND INOX FLANGE

LED lamp designed to best illuminate small pools, whirlpool areas and stairways. The included niche contains the necessary cable for poolside maintenance.

Pool type: panel / concrete / with tiles or sheet.











AISI316L STEEL // GLASS





- 1 NICHE
- 2 LAMP
- 3 FRONT FLANGE
- 4 GASKET
- 5 LINER FLANGE
- 6 PANEL
- 7 POOL LINER

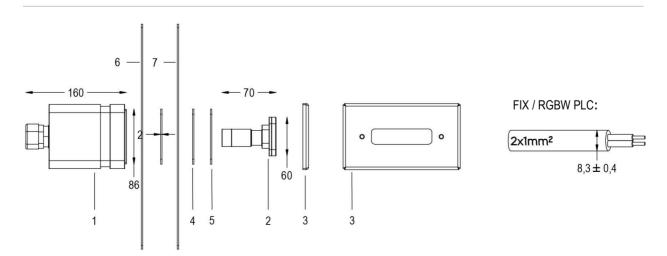



Other LED colors are available upon request

	Code	LED color	Total lumi- nous flu	Beam angle	€		
LAMP WITH STAINLESS STEEL FLANGE, NICHE and 4m CABLE							
	2104801293	5000K	1138	120°	-		
	2104801290	3000K	1080	120°	-		
LAMP WITH S	TAINLESS STEEL	FLANGE and	4m CABLE				
	2104801293L	5000K	1138	120°	-		
	2104801290L	3000K	1080	120°	-		

**RGBW VARIABLE COLOR, DIMMABLE VERSION** WITH PLC CONTROL ₱ 10.5W / 13VA 🕍 30 m 🥸 RGBW POWER LINE COMUNICATION 📠 10 - 15 DIMMER

Total lumi-Beam Code LED color nous flu angle LAMP WITH STAINLESS STEEL FLANGE, NICHE AND 4m CABLE 2104800094 RGBW 600 120° LAMP WITH STAINLESS STEEL FLANGE and 4m CABLE 2104800094L RGBW 600 120°

#### **ACCESSORIES**















100 VA IP65 TRANSF. Cod. 0316170011

TRANSF. IP65 300 VA

STAINLESS STEEL FLANGE Cod. 4900010023

CABLE 2 X 1 Cod. 9003049010

MINI MAGIC LINEA NICHE Cod. 5500004300

#### **ACCESSORIES PLC**









PLC TRANS. BUTTONS Cod. 4493000064

PLC TRANS, REMOTE Cod. 4493000004 CONVERT. DMX - PLC Cod. 4493000042

**DALI - PLC CONV.** Cod. 4493000001






# **MINILINEA**IN

# NICHE AND INOX FLANGE


LED lamp designed to best illuminate small pools, whirlpool areas and stairways. Niche included with small dimensions.

Pool type: recessed in concrete / with tiles.





- 1 NICHE
- 2 LAMP
- 3 FRONT FLANGE

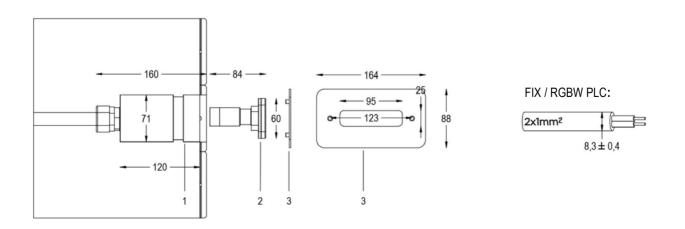



#### **FIXED COLOR VERSION**





8.8W / 11VA S 35 m 10 - 15



Other LED colors are available upon request

	Code	LED color	Total lumi- nous flu	Beam angle	€		
LAMP WITH STAINLESS STEEL FLANGE, NICHE and 4m CABLE							
	2104803193	5000K	1138	120°	-		
	2104803190	3000K	1080	120°	-		
LAMP WITH S	TAINLESS STEEL	FLANGE and	4m CABLE				
	2104803193L	5000K	1138	120°	-		
	2104803190L	3000K	1080	120°	-		



**RGBW VARIABLE COLOR, DIMMABLE VERSION** WITH PLC CONTROL







10.5W / 13VA MAX 30 m







POWER LINE COMUNICATION 10 - 15



DIMMER

RGBW	



2104803194

2104803194L

Code

RGBW

LED color

LAMP WITH STAINLESS STEEL FLANGE, NICHE AND 4m CABLE

600

Total lumi-

nous flu

Beam

angle

120°

LAMP WITH STAINLESS STEEL FLANGE and 4m CABLE



RGBW 600 120°

# **ACCESSORIES**



100 VA IP65 TRANSF. od. 0316170011 € 172



TRANSF. IP65 300 VA € 260



STAINLESS STEEL FLANGE Cod. 4900020023 € 96



CABLE 2 X 1 Cod. 9003049010 € 12



d. 5300788701 € 68



WATERSTOP JOINT IP68 TWO-COMPONENT RESIN € 14



MINI MAGIC LINEA IN NICHE Cod. 5500004400

#### **ACCESSORIES PLC**















PLC TRANS. BUTTONS Cod. 4493000064

PLC TRANS. REMOTE Cod. 4493000004

CONVERT. DMX - PLC Cod. 4493000042

**DALI - PLC CONV.** Cod. 4493000001

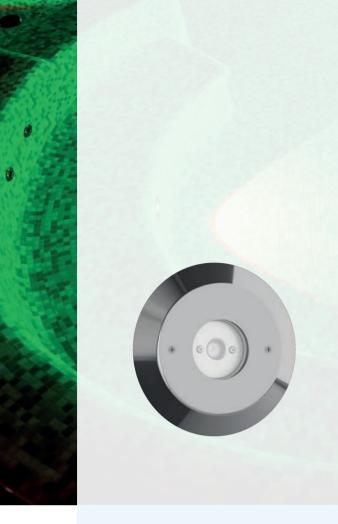

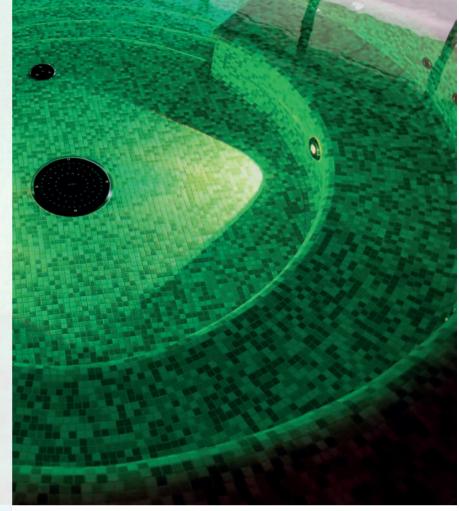

# **MAGICSUB**

NICHE AND INOX FLANGE


LED lamp designed to best illuminate small tubs, whirlpool areas and stairways. The included recess contains the necessary cable for poolside maintenance.

Pool type: panel / concrete / with tiles or sheet.



# 1 5 2 3 4

- 1 NICHE
- 2 LAMP
- 3 OPTICAL DIFFUSER
- 4 FRONT FLANGE
- 5 SANDWICH GASKET
- 6 LINER FLANGE
- 7 PLEXY SPACER
- 8 PANEL
- 9 POOL LINER

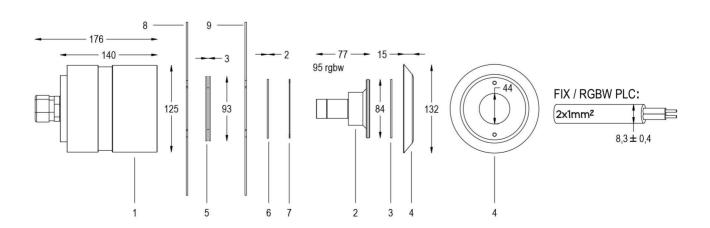



# FIXED COLOR VERSION











Other LED colors are available upon request

	Code	LED color	Total luminous flu	Beam angle	€			
LAMP WITH STAINLESS STEEL FLANGE, NICHE, DIFFUSER and 4m CABLE								
	7904797391	5000K	790 lm	16°	-			
	7904340191	5000K	790 lm	95°	-			
	7904797390	3000K	690 lm	16°	-			
	7903797390	3000K	690 lm	95°	-			
LAMP WITH S	STAINLESS STEEL FLANG	GE, DIFFUSER	and 4m CABLE					
6	7904797391L	5000K	790 lm	16°	-			
	7904340191L	5000K	790 lm	95°	-			
	7904797390L	3000K	690 lm	16°	-			
1100	7903797390L	3000K	690 lm	95°	-			



**RGBW VARIABLE COLOR, DIMMABLE VERSION** WITH PLC CONTROL

















POWER LINE COMUNICATION 5 - 10



	Code	LED color	Total luminous flu	Beam angle	€			
LAMP WITH STAINLESS STEEL FLANGE, NICHE, DIFFUSER and 4m CABLE								
	7905797394	RGBW	432 lm	16°	-			
0	7905340194	RGBW	432 lm	95°	-			
LAMP WITH S	TAINLESS STEEL FLANC	E, DIFFUSER	and 4m CABLE					
6	7905797394L	RGBW	432 lm	16°	-			
	7905340194L	RGBW	432 lm	95°	-			

#### **ACCESSORIES**



100 VA IP65 TRANSF.



TRANSF. IP65 300 VA



STAINLESS STEEL FLANGE NICHE Cod. 4900001326



OPTICAL DIFFUSER



CABLE 2 X 1 Cod. 9003049010



WATERSTOP JOINT IP68 Cod. 5300788701









SANDWICH GASKET Cod. 1600000090



NICHE TIGHTENING WRENCH Cod. 1700770500

#### **ACCESSORIES PLC**



PLC TRANS. BUTTONS

Cod. 4493000064











**DALI - PLC CONV.** Cod. 4493000001





# **MAGICSUB**<sub>IN</sub>

NICHE AND INOX FLANGE

LED lamp designed to best illuminate small pools, whirlpool areas and stairways. The included niche contains the necessary cable for poolside maintenance.

Pool type: recessed in concrete / with tiles.









AISI316L STEEL // GLASS





- 1 NICHE
- 2 LAMP
- 3 OPTICAL DIFFUSER
- 4 FRONT FLANGE
- 5 GASKET
- 6 STAINLESS STEEL SPACER

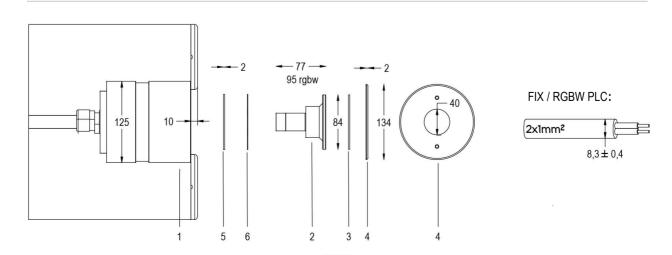



# FIXED COLOR VERSION











Other LED colors are available upon request

	Code	LED color	Total luminous flu	Beam angle	€			
LAMP WITH STAINLESS STEEL FLANGE, NICHE, DIFFUSER and 4m CABLE								
	7903797391	5000K	790 lm	16°	-			
	7902797391	5000K	790 lm	95°	-			
(.9)	7902797390	3000K	690 lm	16°	-			
	7903567390	3000K	690 lm	95°	-			
LAMP WITH S	TAINLESS STEEL FLAN	GE, NICHE, DIF	FUSER and 4m	CABLE				
( ) ·	7903797391L	5000K	790 lm	16°	-			
	7902797391L	5000K	790 lm	95°	-			
	7902797390L	3000K	690 lm	16°	-			
100	7903567390L	3000K	690 lm	95°	-			



**RGBW VARIABLE COLOR, DIMMABLE VERSION** WITH PLC CONTROL

















POWER LINE COMUNICATION 5 - 10



	Code	LED color	Total Iuminous flu	Beam angle	€			
LAMP WITH STAINLESS STEEL FLANGE, NICHE, DIFFUSER and 4m CABLE								
6	7906797394	RGBW	432 lm	16°	-			
(.9.	7904797394	RGBW	432 lm	95°	-			
LAMP WITH S	LAMP WITH STAINLESS STEEL FLANGE, DIFFUSER and 4m CABLE							
( ) ·	7906797394L	RGBW	432 lm	16°	-			
	7904797394L	RGBW	432 lm	95°	-			

#### **ACCESSORIES**











OPTICAL DIFFUSER



CABLE 2 X 1 Cod. 9003049010



WATERSTOP JOINT IP68



TWO-COMPONENT RESIN



SPACERS KIT Cod. 1700540000



MINI SUB NICHE



TEMPLATE FOR CONCRETE Cod. 1700540002



NICHE TIGHTENING WRENCH Cod. 1700770500

#### **ACCESSORIES PLC**



PLC TRANS. BUTTONS

Cod. 4493000064







CONVERT. DMX - PLC Cod. 449300004



**DALI - PLC CONV.** Cod. 4493000001



Teclumen has created a product line designed to replace the classic but outdated incandescent PAR56 lamps. A range of high-performance lamps with LED technology that enhances luminous output and reduces energy consumption without the need for any intervention on the pool's structure, utilizing the existing niches.

# PAR 56 WITH LED TECHNOLOGY

The classic standard for pool lights reimagined with the latest-generation technology. Ideal for relamping projects and new installations.

#### MINI

The LED technology lamp designed to replace traditional 100W halogen lamps in a simple and fast manner without the need for any structural modifications to the pool.







# PAR56power

EX 300W REPLACEMENT


LED lamp designed to best illuminate large pools. The standard PAR 56 size allows installation as a replacement for conventional 300 W halogen lamps.

Pool type: panel / reinforced concrete / with tiles or sheet.










- 1 NICHE
- 2 LAMP
- 3 OPTICAL DIFFUSER
- 4 FRONT FLANGE
- 5 LAMP HOLDER RING

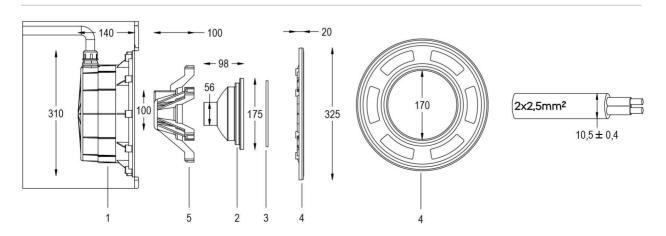



# FIXED COLOR VERSION













Other LED colors are available upon request

	Code	LED color	Total luminous flu	Beam angle	€			
Lamp without cable								
	4511671202	5000K	5160 lm	120°	-			
	4511671290	3000K	4520 lm	120°	-			
Lamp with 4M	l of CABLE							
	4511672402	5000K	5160 lm	120°	-			
	4512672490	3000K	4520 lm	120°	-			



**RGBW VARIABLE COLOR, DIMMABLE VERSION** WITH PLC CONTROL















POWER LINE COMUNICATION 25 - 30



300 W DIMMER

	Code	LED color	Total Iuminous flu	Beam angle	€			
Lamp without cable								
	4313173400	RGBW	2970 lm	120°	-			
Lamp with 4M	Lamp with 4M of CABLE							
	4313172400	RGBW	2970 lm	120°	-			

#### **ACCESSORIES**







TRANSF. IP65 300 VA



ST. STEEL FLANGE Cod. 48043723 31



NEOPRENE 2X2,5 CABLE



TWO-COMPONENT RESIN WATERSTOP JOINT IP68 Cod. 4000370521





OPTICAL DIFFUSER Cod. 2000590066



PROJECTOR EX 300 W

#### **ACCESSORIES PLC**



PLC TRANS. BUTTONS

Cod. 4493000064






Cod. 4493000004



**CONVERT. DMX - PLC**Cod. 4493000042

DALI - PLC CONV.
Cod. 4493000001



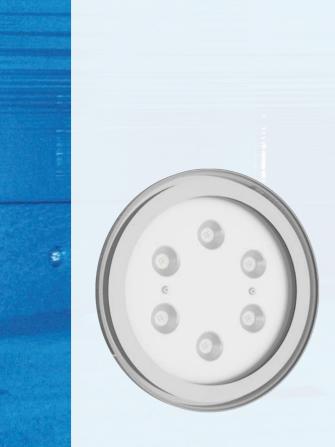




# **PAR56**

EX 300W REPLACEMENT


LED lamp designed to best illuminate medium-sized pools. The included recess contains the necessary cable for poolside maintenance.

Pool type: panel / concrete / with tiles or sheet.





- 1 NICHE
- 2 LAMP
- 3 OPTICAL DIFFUSER
- 4 FRONT FLANGE
- 5 LAMP HOLDER RING

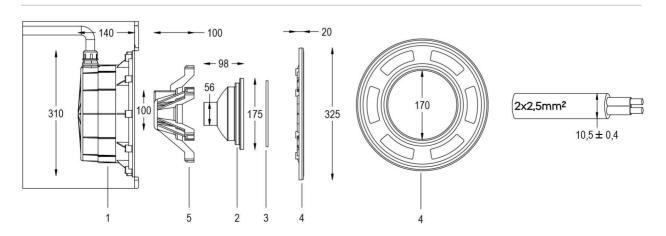



# FIXED COLOR VERSION













Other LED colors are available upon request

	Code	LED color	Total luminous flu	Beam angle	€			
Lamp without cable								
	4509171202	5000K	4060 lm	120°	-			
	4511171290	3000K	3680 lm	120°	-			
Lamp with 4M	l of CABLE							
	4509172402	5000K	4060 lm	120°	-			
	4509172490	3000K	3680 lm	120°	-			



**RGBW VARIABLE COLOR, DIMMABLE VERSION** WITH PLC CONTROL

























	Code	LED color	Total Iuminous flu	Beam angle	€			
Lamp without cable								
	4311175900	RGBW	1990 lm	120°	-			
Lamp with 4M	1 of CABLE							
	4311172400	RGBW	1990 lm	120°	-			

#### **ACCESSORIES**







TRANSF. IP65 300 VA



ST. STEEL FLANGE Cod. 48043723 31



NEOPRENE 2X2,5 CABLE



TWO-COMPONENT RESIN Cod. 4000370521



WATERSTOP JOINT IP68



OPTICAL DIFFUSER Cod. 2000590066



PROJECTOR EX 300 W

#### **ACCESSORIES PLC**



PLC TRANS. BUTTONS

Cod. 4493000064



PLC TRANS. REMOTE

Cod. 4493000004













# PAR56 ECO

EX 300W REPLACEMENT

LED lamp designed to best illuminate medium-sized pools. The standard size allows installation as a replacement for traditional 100 W halogen lamps.

Pool type: panel / concrete / with tiles or sheet.









AISI316L STEEL // GLASS





- 1 NICHE
- 2 LAMP
- 3 OPTICAL DIFFUSER
- 4 FRONT FLANGE
- 5 LAMP HOLDER RING

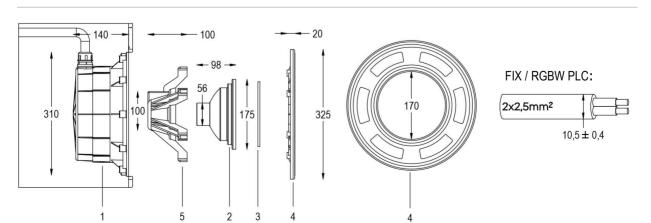



	Code	LED color	Total luminous flu	Beam angle	€
Lamp without	cable				
	4503171602	5000K	2840 lm	120°	-
	4503171690	3000K	2750 lm	120°	-
Lamp WITH 4	M OF CABLE				
	4503172402	5000K	2840 lm	120°	-
	4503172490	3000K	2750 lm	120°	-

**RGBW VARIABLE COLOR, DIMMABLE VERSION** WITH PLC CONTROL



Other LED colors are available upon request

	Code	LED color	Total luminous flu	Beam angle	€		
Lamp without cable							
	4306175900	RGBW	990 lm	120°	-		
Lamp WITH 4	M OF CABLE						
0	4306172400	RGBW	990 lm	120°	-		

#### **ACCESSORIES**















TRANSF. IP65 300 VA

ST. STEEL FLANGE Cod. 48045323 03 NEOPRENE 2X2,5 CABLE

TWO-COMPONENT RESIN Cod. 4000370521

WATERSTOP JOINT IP68

OPTICAL DIFFUSER Cod. 2000590066



PROJECTOR EX 300 W

#### **ACCESSORIES PLC**










PLC TRANS. BUTTONS Cod. 4493000064

PLC TRANS. REMOTE Cod. 4493000004

**CONVERT. DMX - PLC**Cod. 4493000042

DALI - PLC CONV.
Cod. 4493000001

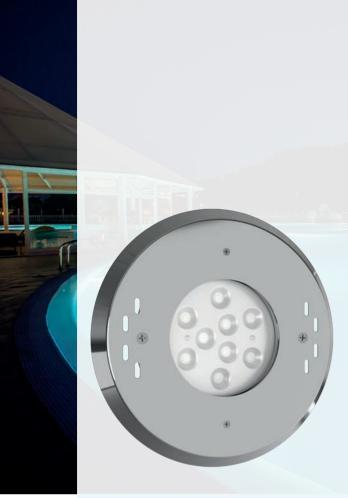




# **STW**POWER


REPLACEMENT

LED pool lamp, ideal for large pools. The dimensions and the supplied flange allow installation as a replacement for 300 W halogen Par-56 spotlights.





- 1 NICHE
- 2 LAMP
- 3 FRONT FLANGE
- 4 OPTICAL DIFFUSER

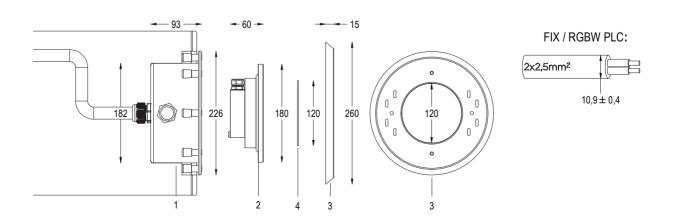

FIX

#### FIXED COLOR VERSION













Other LED colors are available upon request 24 V DC are available on request

	Code	LED color	Total Iuminous flu	Beam angle	€		
LAMP WITH STAINLESS STEEL FLANGE, DIFFUSER and 4m of CABLE							
	7413784100	5000K	5160 lm	120°	-		
	7413784190	3000K	4520 lm	120°	-		

**RGBW VARIABLE COLOR, DIMMABLE VERSION** WITH PLC CONTROL















POWER LINE COMUNICATION 25 - 30





Total Beam Code LED color luminous flu angle LAMP WITH STAINLESS STEEL FLANGE, DIFFUSER and 4m of CABLE 7414786494 RGBW 2970 lm 120°

#### **ACCESSORIES**











**CABLE 2 X 2.5** 

#### **ACCESSORIES PLC**










PLC TRANS. BUTTONS Cod. 4493000064

PLC TRANS. REMOTE Cod. 4493000004 **CONVERT. DMX - PLC**Cod. 4493000042

DALI - PLC CONV.
Cod. 4493000001



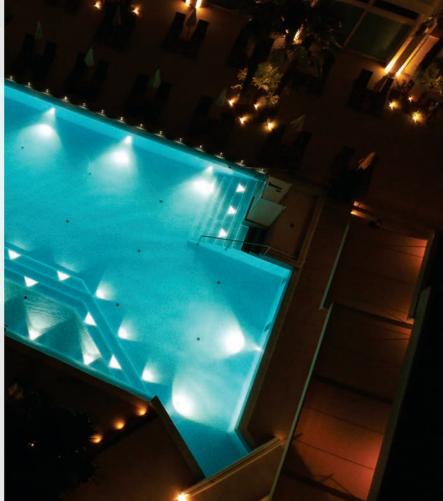


# STW


# REPLACEMENT

LED pool lamp, ideal for medium pools. The dimensions and the supplied flange allow installation as a replacement for 300 W halogen Par-56 spotlights.





- 1 NICHE
- 2 LAMP
- 3 FRONT FLANGE
- 4 OPTICAL DIFFUSER

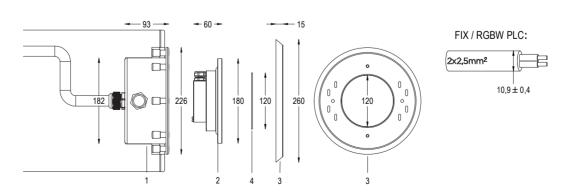

FIX

# FIXED COLOR VERSION













Other LED colors are available upon request 24 V DC are available on request

	Code	LED color	Total Iuminous flu	Beam angle	€		
LAMP WITH STAINLESS STEEL FLANGE, DIFFUSER and 4m of CABLE							
	7411784100	5000K	4060 lm	120°	-		
	7411784190	3000K	3680 lm	120°	-		

**RGBW VARIABLE COLOR, DIMMABLE VERSION** WITH PLC CONTROL



















300 W DIMMER





#### **ACCESSORIES**











**CABLE 2 X 2.5** 

#### **ACCESSORIES PLC**










PLC TRANS. BUTTONS Cod. 4493000064

PLC TRANS. REMOTE Cod. 4493000004

**CONVERT. DMX - PLC**Cod. 4493000042


DALI - PLC CONV.
Cod. 4493000001

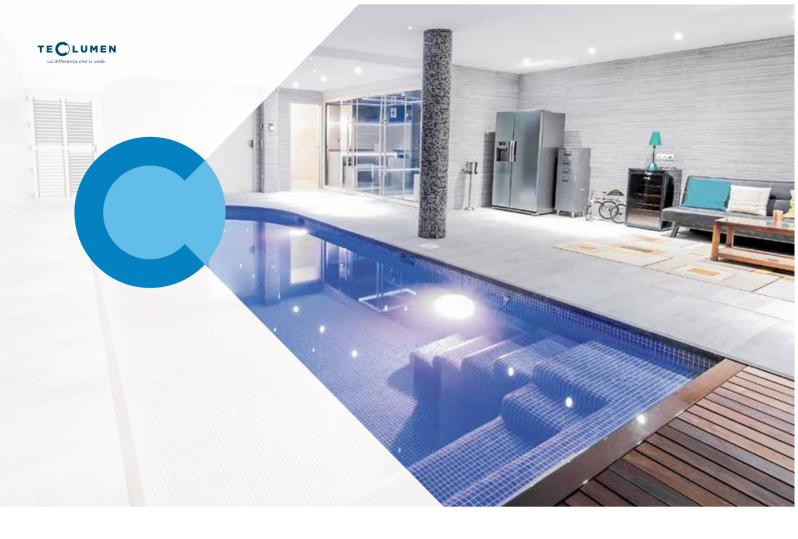



# W 2 wires 24 V DC DIMMABLE

Dimmable LED lamps with 2-wire cable controlled by DIMMMER 24V DC and push button or remote control.

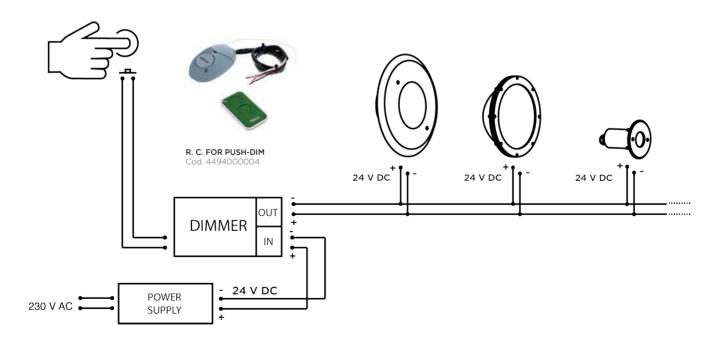



	Code	LED color	Total Iuminous flu	Beam angle	€				
LAMP WITH STAINLESS STEEL FLANGE, NICHE, DIFFUSER and 4m CABLE									
	2115347493	5000K	4330 lm	120°	-				
	2115347590	3000K	3750 lm	120°	-				
LAMP WITH S	TAINLESS STEEL FLANG	E, DIFFUSER							
	2905000026	5000K	4330 lm	120°	-				
	2905000027	3000K	3750 lm	120°	-				




NICHE AND INOX FLANGE




P 68 20 - 25 III DIMMER

Fixed colour LED lamps for pool, ideal for medium size pools. The niche included contains space to collect the cable for maintenance. For panel and reinforced concrete with tiles or pool liner



- 1 NICHE
- 2 LAMP
- 3 OPTICAL DIFFUSER
- 4 FRONT FLANGE
- 5 SANDWICH GASKET
- 6 LINER FLANGE
- 7 PLEXY SPACER
- 8 PANEL
- 9 POOL LINER

# Technical drawing (mm)

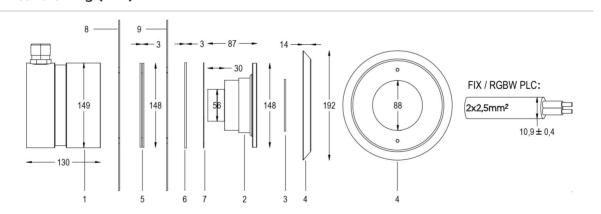



**24V DC POWER SUPPLY 320W**Cod. 0221210028



DRIVER PUSH-DIM DMX Cod. 00330053



DRIVER PUSH-DIM DALI Cod. 00330054



**R. C. FOR PUSH-DIM** Cod. 4494000004



OPTICAL DIFFUSER Cod. 2000001066



PERLA NICHE



SANDWICH GASKET Cod. 1600001100



CABLE 2 X 2.5 Cod. 9003079010



WATERSTOP JOINT IP68 Cod. 5300788701



NT IP68 TWO-COMPONENT RESIN Cod. 4000370521



	Code	LED color	Total luminous flu	Beam angle	€			
LAMP WITH STAINLESS STEEL FLANGE, NICHE, DIFFUSER and 4m CABLE								
(90)	2115347693	5000K	4330 lm	120°	-			
100	2115347790	3000K	3750 lm	120°	-			
LAMP WITH S	TAINLESS STEEL FLANG	GE, DIFFUSER						
	290500028	5000K	4330 lm	120°	-			
	290500029	3000K	3750 lm	120°	-			









P 68 20 - 25 III DIMMER

Fixed colour LED lamp for pool, ideal for medium size pools. The niche included contains space to collect the cable for maintenance. For recess installation in reinforced concrete.



- 1 NICHE
- 2 LAMP
- 3 OPTICAL DIFFUSER
- 4 FRONT FLANGE
- 5 STAINLESS STEEL SPACER
- 6 PLEXY SPACER

# Technical drawing (mm)

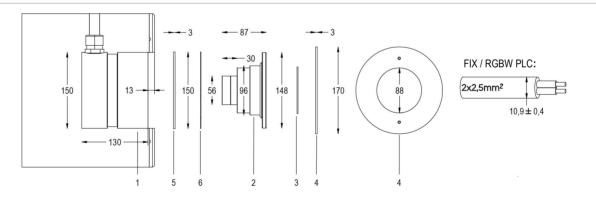



**24V DC POWER SUPPLY 320W**Cod. 0221210028



DRIVER PUSH-DIM DMX



DRIVER PUSH-DIM DALI Cod. 00330054



**R. C. FOR PUSH-DIM** Cod. 4494000004



OPTICAL DIFFUSER Cod. 2000001066



CABLE 2 X 2.5 Cod. 9003079010



SANDWICH GASKET



PERLA NICHE Cod. 5500000002



WATERSTOP JOINT IP68 Cod. 5300788701



TWO-COMPONENT RESIN Cod. 4000370521




	Code	LED color	Total Iuminous flu	Beam angle	€			
LAMP WITH STAINLESS STEEL FLANGE, NICHE, DIFFUSER and 4m CABLE								
(6)	2108347491	5000K	2795 lm	120°	-			
	2108347490	3000K	2510 lm	120°	-			
LAMP WITH S	TAINLESS STEEL FLANG	E, DIFFUSER						
(3)	2804000014	5000K	2795 lm	120°	-			
	2804000015	3000K	2510 lm	120°	-			






Fixed colour LED lamp for pool, ideal for medium and small pools. The niche included contains space to collect the cable for maintenance. For panel and reinforced concrete with tiles or pool liner



- NICHE
- OPTICAL DIFFUSER
- FRONT FLANGE
- SANDWICH GASKET
- 6 LINER FLANGE
- PLEXY SPACER
- 8 PANEL
- 9 POOL LINER

# Technical drawing (mm)

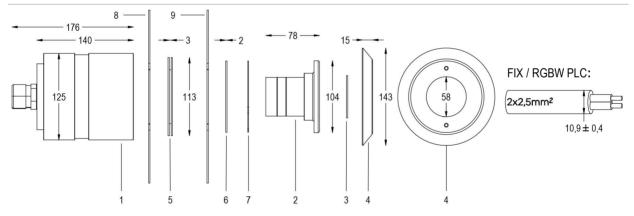

## **Accessories**



24V DC POWER SUPPLY **320W** Cod. 0221210028



DRIVER PUSH-DIM DMX



DRIVER PUSH-DIM DALL



R. C. FOR PUSH-**DIM** Cod. 449400000



**CABLE 2 X 2.5** Cod. 9003079010



Cod. 5300788701



WATERSTOP JOINT IP68 TWO-COMPONENT RESIN



WATERTIGHT NICHE Cod. 5521018700



TEMPLATE FOR CONCRETE SPACERS KIT Cod. 1700550002











OPTICAL DIFFUSER




	Code	LED color	Total Iuminous flu	Beam angle	€			
LAMP WITH STAINLESS STEEL FLANGE, NICHE, DIFFUSER and 4m CABLE								
	2108347591	5000K	2795 lm	120°	-			
()	2108347690	3000K	2510 lm	120°	-			
LAMP WITH STAINLESS STEEL FLANGE, DIFFUSER								
(3)	2804000019	5000K	2795 lm	120°	-			
	2804000020	3000K	2510 lm	120°	-			






Fixed colour LED lamp for pool, ideal for medium and small pools. The niche included contains space to collect the cable for maintenance. For recess installation in reinforced concrete.



- NICHE
- LAMP
- OPTICAL DIFFUSER
- 4 FRONT FLANGE
- STAINLESS STEEL SPACER
- 6 PLEXY SPACER

# Technical drawing (mm)

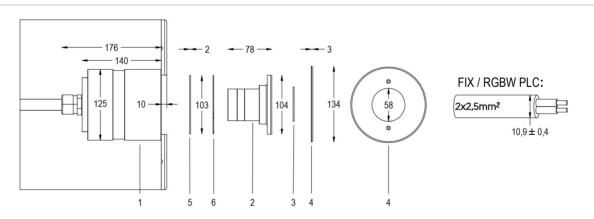



24V DC POWER SUPPLY **320W** Cod. 0221210028



DRIVER PUSH-DIM DMX Cod. 00330053



DRIVER PUSH-DIM DALI



R. C. FOR PUSH-DIM



**CABLE 2 X 2.5** 



WATERSTOP JOINT IP68 Cod. 5300788701 Cod. 4000370521





WATERTIGHT NICHE



TEMPLATE FOR CONCRETE SPACERS KIT



Cod. 1700550000





NICHE TIGHTENING WRENCH STAINLESS STEEL FLANGE Cod. 4930003826



OPTICAL DIFFUSER




	Code	LED color	Total luminous flu	Beam angle	€		
LAMP WITH STAINLESS STEEL FLANGE, NICHE, DIFFUSER and 4m CABLE							
-	2102340193	5000K	286 lm	120°	-		
	2102340190	3000K	256 lm	120°	-		
LAMP WITH S	TAINLESS STEEL FLANG	E, DIFFUSER					
0	2602000014	5000K	286 lm	120°	-		
	2602000015	3000K	256 lm	120°	_		






Fixed colour LED lamp for pool, ideal for small pools, jacuzzi areas and steps. The niche included contains space to collect the cable for maintenance. For panel and reinforced concrete with tiles or pool liner.



- NICHE
- LAMP
- FRONT FLANGE
- LINER FLANGE
- PLEXY SPACER
- POOL LINER

# Technical drawing (mm)

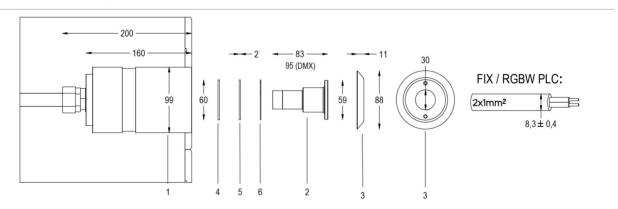



**24V DC POWER SUPPLY 120W** Cod. 0217210028



DRIVER PUSH-DIM DMX



DRIVER PUSH-DIM DALI



R. C. FOR PUSH-DIM Cod. 4494000004





WATERSTOP JOINT IP68 TWO-COMPONENT RESIN Cod. 4000370521



WATERTIGHT NICHE Cod. 5521008700



TEMPLATE FOR CONCRETE



SPACERS KIT Cod. 1700530000



TIGHTENING WRENCH



STAINLESS STEEL FLANGE Cod. 4940000926



CABLE 2 X 1 Cod. 9003049010




	Code	LED color	Total Iuminous flu	Beam angle	€			
LAMP WITH STAINLESS STEEL FLANGE, NICHE, DIFFUSER and 4m CABLE								
60	2102340293	5000K	286 lm	120°	-			
0	2102340290	3000K	256 lm	120°	-			
LAMP WITH S	TAINLESS STEEL FLANG	E, DIFFUSER						
	2602000019	5000K	286 lm	120°	-			
	2602000020	3000K	256 lm	120°	-			






Fixed colour LED lamp for pool, ideal for small pools, jacuzzi areas and steps. The niche included contains space to collect the cable for maintenance. For recess installation in reinforced concrete.



- NICHE
- LAMP
- 3 FRONT FLANGE
- 4 GASKET
- STAINLESS STEEL SPACER
- 6 PLEXY SPACER

#### Technical drawing (mm)

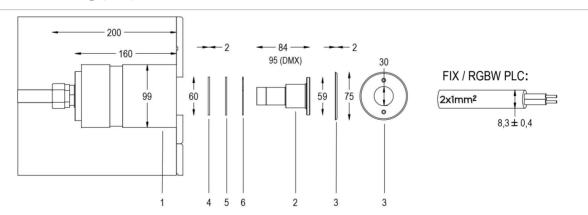



**24V DC POWER SUPPLY 120W** Cod. 0217210028



DRIVER PUSH-DIM DMX Cod. 00330053



DRIVER PUSH-DIM DALI Cod. 00330054



**R. C. FOR PUSH-DIM** Cod. 4494000004



WATERSTOP JOINT IP68 Cod. 5300788701



TWO-COMPONENT RESIN Cod. 4000370521



WATERTIGHT NICHE



TEMPLATE FOR CONCRETE



SPACERS KIT Cod. 1700530000



TIGHTENING WRENCH



STAINLESS STEEL FLANGE



**CABLE 2 X 1**Cod. 9003049010




	Code	LED color	Total Iuminous flu	Beam angle	€			
LAMP WITH STAINLESS STEEL FLANGE, NICHE, DIFFUSER and 4m CABLE								
	2106001393	5000K	3850 lm	120°	-			
	2106001390	3000K	3500 lm	120°	-			
LAMP WITH S	TAINLESS STEEL FLAN	GE, DIFFUSER						
	3107000011	5000K	3850 lm	120°	-			
	3107000012	3000K	3500 lm	120°	-			



# NICHE AND INOX FLANGE




Fixed colour LED lamp for pool, ideal for medium size pools. The niche included contains space to collect the cable for maintenance. For panel and reinforced concrete with tiles or pool liner.



- NICHE
- OPTICAL DIFFUSER
- FRONT FLANGE
- GASKET
- FIXING RING 6
- LINER FLANGE
- 8 PANEL
- POOL LINER

## Technical drawing (mm)

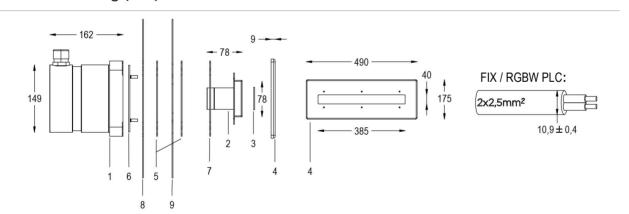

#### **Accessories**







DRIVER PUSH-DIM DMX



DRIVER PUSH-DIM DALI



R. C. FOR PUSH-DIM Cod. 4494000004



**CABLE 2 X 2.5** Cod. 9003079010



WATERSTOP JOINT IP68



TWO-COMPONENT RESIN Cod. 4000370521





SANDWICH GASKET



MAGIC LINEA NICHE








	Code	LED colour	Luminous Flux	Beam Angle	€	
LAMP WITH STAINLESS STEEL FLANGE, NICHE, DIFFUSER and 4m of CABLE						
-	2106001493	5000K	4060 lumen	120°	-	
	2106001493	3000K	3680 lumen	120°	-	
LAMP WITH STAINLESS STEEL FLANGE, DIFFUSER						
	3107000016	5000K	4060 lumen	120°	-	
	3107000017	3000K	3680 lumen	120°	-	




Fixed colour LED lamp for pool, ideal for medium size pools. The niche included contains space to collect the cable for maintenance. For recess installation in reinforced concrete.



- NICHE
- 2 LAMP
- OPTICAL DIFFUSER
- FRONT FLANGE
- GASKET
- 6 FIXING RING

#### Technical drawing (mm)

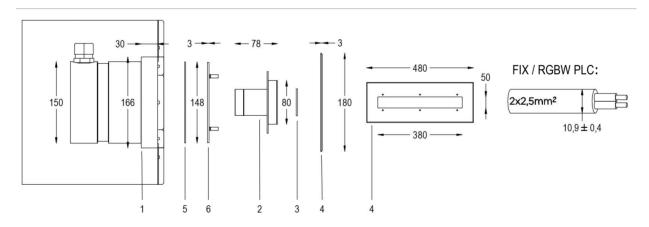



**24V DC POWER SUPPLY 120W** Cod. 0217210028



DRIVER PUSH-DIM DMX





DRIVER PUSH-DIM DALI R. C. FOR PUSH-DIM Cod. 4494000004



**CABLE 2 X 2.5** Cod. 9003079010



WATERSTOP JOINT IP68 Cod. 5300788701



TWO-COMPONENT RESIN Cod. 4000370521



MAGIC LINEA NICHE



TEMPLATE FOR CONCRETE



SPACERS KIT Cod. 1700570000



OPTICAL DIFFUSER



STAINLESS STEEL FLANGE




	Code	LED color	Total Iuminous flu	Beam angle	€	
LAMP WITH STAINLESS STEEL FLANGE, NICHE, DIFFUSER and 4m CABLE						
	2101340191	5000K	286 lm	120°	-	
	2101340190	3000K	256 lm	120°	-	
LAMP WITH STAINLESS STEEL FLANGE, DIFFUSER						
0 0	3006000015	5000K	286 lm	120°	-	
	3006000016	3000K	256 lm	120°	-	



# NICHE AND INOX FLANGE




Fixed colour LED lamp for pool, ideal for small pools, jacuzzi areas and steps. The niche included contains space to collect the cable for maintenance. For panel and reinforced concrete with tiles or pool liner.



- 1 NICHE
- 2 LAMP
- 3 FRONT FLANGE
- 4 GASKET
- 5 LINER FLANGE
- 6 PANEL
- 7 POOL LINER

# Technical drawing (mm)

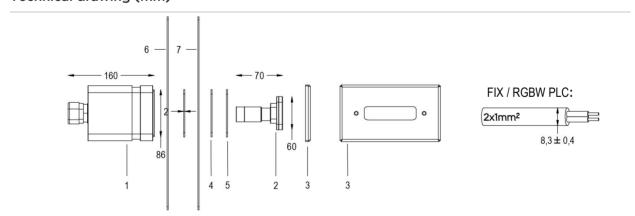







DRIVER PUSH-DIM DMX





DRIVER PUSH-DIM DALI R. C. FOR PUSH-DIM Cod. 4494000004



CABLE 2 X 1 Cod. 9003049010



WATERSTOP JOINT IP68





MINI MAGIC LINEA NICHE Cod. 5500004300



STAINLESS STEEL FLANGE






	Code	LED color	Total Iuminous flu	Beam angle	€	
LAMP WITH STAINLESS STEEL FLANGE, NICHE, DIFFUSER and 4m CABLE						
	2104801401	5000K	286 lm	120°	-	
	2104801402	3000K	256 lm	120°	-	
LAMP WITH STAINLESS STEEL FLANGE, DIFFUSER						
•	3006000017	5000K	286 lm	120°	-	
	3006000018	3000K	256 lm	120°	-	



# MINILINEAIN NICHE AND INOX FLANGE



Fixed colour LED lamp for pool, ideal for small pools, jacuzzi areas and steps. The niche included contains space to collect the cable for maintenance. For panel and reinforced concrete with tiles or pool liner.




1 NICHE

2 LAMP

3 FRONT FLANGE

# Technical drawing (mm)

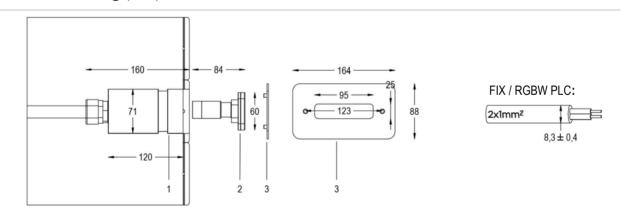

## **Accessories**



















**24V DC POWER SUPPLY 120W** Cod. 0217210028



DRIVER PUSH-DIM DALI R. C. FOR PUSH-DIM CABLE 2 X 1 Cod. 4494000004

Cod. 9003049010

WATERSTOP JOINT IP68

TWO-COMPONENT RESIN Cod. 4000370521







STAINLESS STEEL FLANGE

Cod. 4900020023




	Code	LED color	Total Iuminous flu	Beam angle	€		
LAMP WITH STAINLESS STEEL FLANGE, NICHE, DIFFUSER and 4m CABLE							
	7904795493	5000K	790 lm	16°	-		
	7904795193	5000K	790 lm	95°	-		
0	7904795593	3000K	690 lm	16°	-		
	7904795190	3000K	690 lm	95°	-		
LAMP WITH STAINLESS STEEL FLANGE, DIFFUSER							
6	2703000035	5000K	790 lm	16°	-		
	2703000033	5000K	790 lm	95°	-		
	2703000036	3000K	690 lm	16°	-		
	2703000034	3000K	690 lm	95°	-		






Fixed colour LED lamp for pool, ideal for small pools, jacuzzi areas and steps. The niche included contains space to collect the cable for maintenance. For panel and reinforced concrete with tiles or pool liner.



- 1 NICHE
- 2 LAMP
- 3 OPTICAL DIFFUSER
- 4 FRONT FLANGE
- 5 SANDWICH GASKET
- 6 LINER FLANGE
- 7 PLEXY SPACER
- 8 PANEL
- 9 POOL LINER

# Technical drawing (mm)

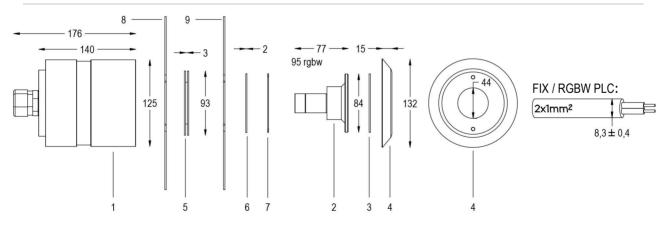

## **Accessories**









R. C. FOR PUSH-DIM



OPTICAL DIFFUSER



**CABLE 2 X 1** Cod. 9003049010

**120W**Cod. 0217210028













SANDWICH GASKET Cod. 1600000090



NICHE TIGHTENING WRENCH Cod. 1700770500

DRIVER PUSH-DIM DMX

Cod. 00330053

MINI SUB NICHE

DRIVER PUSH-DIM DALI

**WATERSTOP JOINT IP68**Cod. 5300788701 **TWO-COMPONENT RESIN**Cod. 4000370521

STAINLESS STEEL FLANGE NICHE











Fixed colour LED lamp for pool, ideal for small pools, jacuzzi areas and steps. The niche included contains space to collect the cable for maintenance. For recess installation in reinforced concrete.



- NICHE
- LAMP
- OPTICAL DIFFUSER
- FRONT FLANGE
- 5 GASKET
- STAINLESS STEEL SPACER

## Technical drawing (mm)

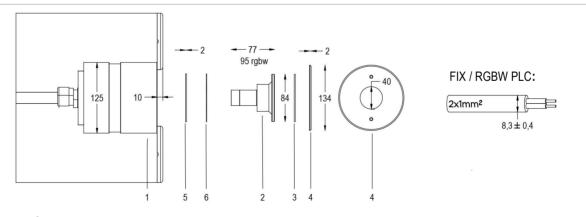



24V DC POWER SUPPLY 120W Cod. 0217210028



DRIVER PUSH-DIM DMX



DRIVER PUSH-DIM DALI Cod. 00330054



R. C. FOR PUSH-DIM Cod. 4494000004



STAINLESS STEEL FLANGE OPTICAL DIFFUSER Cod. 4900001226





CABLE 2 X 1 Cod. 9003049010



MAGIC SUB NICHE



TEMPLATE FOR CONCRETE



SPACERS KIT



NICHE TIGHTENING WRENCH



Cod. 5300788701



WATERSTOP JOINT IP68 TWO-COMPONENT RESIN Cod. 4000370521



The only limit is your imagination.



#### **Controllers**


A selection of lighting controllers from the best players in the market, that works with the standard DMX-512 and PLC technology. These systems allow users to exploit all the functions of the lamps. The combination of advance technology in these devices along with the creativity of the operators enables the creation of true water spectacles.



#### **PLC TRANSMITTER**








Transmitter box for PLC lamps. 13 fixed colors, 8 color sequences and intensity controllable via remote, external buttons, or DMX signal depending on the model.

Code	Types
4493000064	PLC TRANSMITTER WITH BUTTONS
4493000004	PLC TRANSMITTER WITH REMOTE CONTROL
4493000042	DMX - PLC CONVERTER
4493000001	DALI - PLC CONVERTER


### PLC with buttons wiring diagram

# 230 V AC 12 V AC


### PLC with remote control wiring diagram



#### PLC with DMX wiring diagram



#### PLC with DALI wiring diagram







#### REMOTE CONTROL FOR PLC




Remote control with 4 channels for PLC transmitter.

Code

4400000001

#### **Technical indication**



#### A BUTTON

8 automatic sequences + 2 Party effect

#### B BUTTON

12 fixed colours

#### C BUTTON Dimmer UP

**D BUTTON** Dimmer DOWN

#### PLC with buttons wiring diagram

Snap colours every 24 seconds



Azure

Orange Green Magenta



#### STICK KE2



**W** 106 x **D** 145 x **H** 10 mm

Software to control projectors with DMX512 signal, complete with CD, USB/ETHERNET/DMX interface, touch-sensitive control panel, mini SD card, standalone operation with 1024 DMX channels and 5 zones.

Code

29091306

#### **Accessories**



POWER SUPPLY STICK Cod. 0201150000



#### STICK DE3



**W** 106 x **D** 145 x **H** 10 mm

Software to control projectors with a DMX512 signal, complete with CD, USB/ETHERNET/DMX interface, touch-sensitive control panel, mini SD board, independent operation with 1024 DMX channels and 10 zones.

Code

29090306

#### Accessories



POWER SUPPLY STICK Cod. 0201150000



#### DINA





Types







Software to control projectors with DMX512 signal, complete with CD, USB / DMX interface, mini SD card. Stand Alone Operation.

Code

60001306 DINA-DR2 LITE

#### **Accessories**



12V DC POWER SUPPLY FOR DIN MOUNTING Cod. 0200190029

#### STICK GU2













Software to control projectors with DMX512 signal, complete with installation CD and USB/DMX interface, touch-sensitive control panel, with stand-alone operation.


Code

29090106

#### **Accessories**



POWER SUPPLY **STICK**Cod. 0201150000

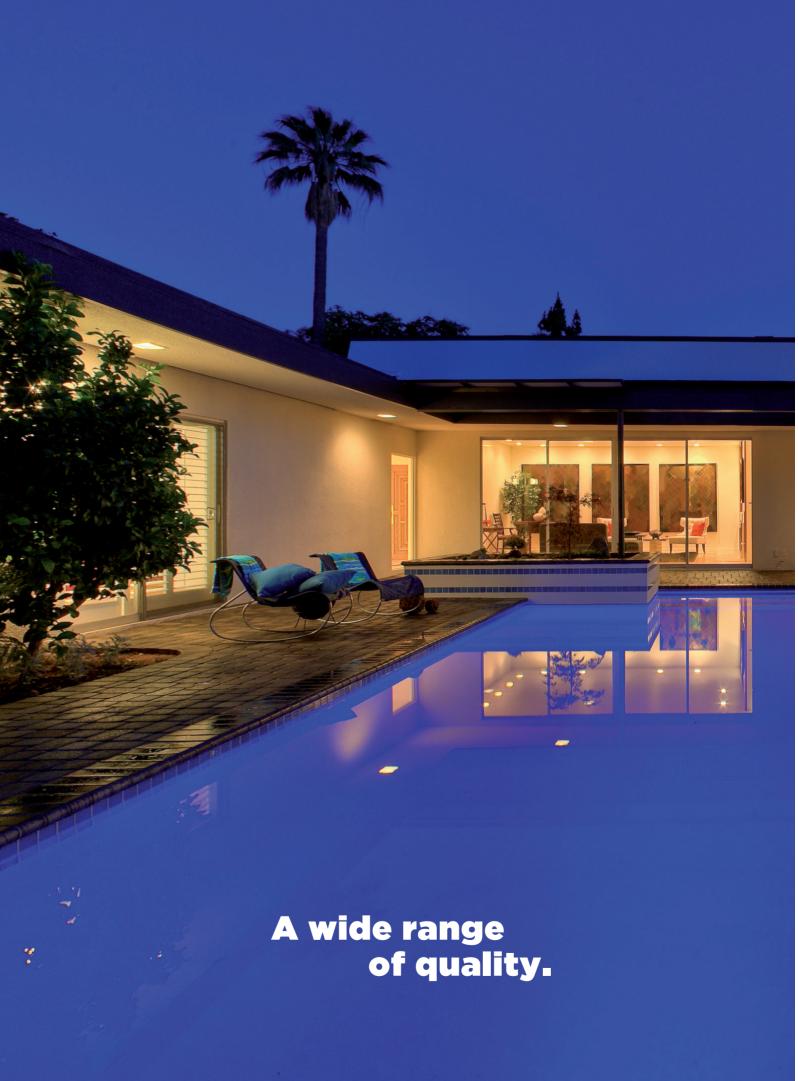



#### Accessories

The right accessory in a system can make the difference in terms of aesthetic and functional aspects.

A wide range of accessories selected with care complete the supply of material for installation in lamps in swimming pools and fountains.



#### **SPECIAL CABLES**

Special cables for electrical connection of lamps. You can order lamps by requesting the length of the installed cable with sizes of 4 m (standard), 8 m, 12 m, 16 m and 20 m. To find out the maximum allowed length according to the lamp model, so that there is no voltage drop, see the product page.

Code	Conductors	Types	Outer diameter	
9003070012	$2 \times 2.5 \text{ mm}^2$	А	11 mm	
9003079010	2 x 2.5 mm <sup>2</sup>	В	11 mm	
9003049010	2 x 1 mm <sup>2</sup>	В	8,5 mm	
9012029010	5 x 0.50 mm <sup>2</sup>	D	8,5 mm	
9003099010	2 x 4 mm <sup>2</sup> + 2 X 0.5 SCREENED	С	12,5 mm	
9003029912	2 x 0.5 mm <sup>2</sup> + SCREEN	Е	5.6 mm	

#### **Technical drawing**





#### **TRANSFORMER IP 65**

IP65 safety transformer 230 V AC - 12 V AC, 100 / 500 VA.

Code	٧	VA	IP	$\begin{array}{c} \textbf{Dimensions} \\ \textbf{L} \times \textbf{P} \times \textbf{H} \ \text{mm} \end{array}$	Weight
0316170011	230 V AC	100VA	IP65	125 × 160 × 90	2.5 kg
0321170011	230 V AC	300VA	IP65	140 x 160 x 90	4.1 kg
0323170000	230 V AC	500VA	IP65	175 x 190 x 110	8.4 kg

#### **Accessories**



3A MAINS FILTER FOR PLC TRANSMITTER Cod. 4493000005






#### 5-PIN IP68 JOINT

5-Pin watertight IP68 joint for cable with minimum external diameter 7 mm and maximum 13.5 mm.

Code

5395000000

#### **Technical drawing**






#### 5-PIN "Y" IP68 JOINT

3-Way "Y" 5-pin watertight IP68 joint for cable with minimum external diameter 7 mm and maximum 13.5 mm.

Code

5395410000






#### **IP68 WATERSTOP JOINT**

2-pin IP68 waterstop joint for underwater cable.

Code Description

**5300788701** IP68 WATERSTOP JOINT 2-PIN

#### **Technical drawing**





#### **TWO-COMPONENT RESIN**

Resin syringe with mixing nozzle for watertight insulation of lamp contacts.

Code Description
4000370521 TWO- COMPONENT RESIN

#### **Accessories**



KIT 10 MIXING SPOUT FOR TWO-COMPONENT RESIN SYRINGE

Cod. 4000370621






#### PAR 56 HOUSING

Complete underwater projector for reinforced concrete + PVC and prefabricated + PVC for PAR 56 lamps.

Code

0070000009

#### **Technical drawing**






#### **EX 100 W HOUSING**

Complete underwater projector for reinforced concrete + PVC and prefabricated + PVC for lamps in the MINI series.

Code

0001600009





#### **PERLA NICHE**

Complete watertight niche for reinforced concrete and prefabricated + PVC for PERLA lamps. With cable gland and space for collecting cable.

Code	Description		
5500000002	SIDE CABLE OUT		
5500008702	REAR CABLE OUTPUT		


#### **Accessories**







#### **Technical drawing**

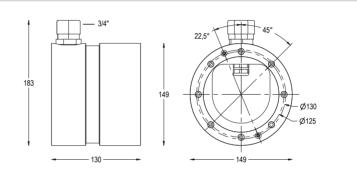



#### MINI PERLA NICHE

Complete watertight niche for reinforced concrete and prefabricated + PVC for MINI PERLA lamps. With cable gland and space for collecting cable.

Code


5521018700

#### **Accessories**







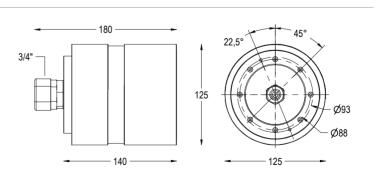



#### MICRO PERLA NICHE

Complete watertight niche for reinforced concrete and prefabricated + PVC for MICRO PERLA lamps. With cable gland and space for collecting cable.

Code


5521008700

#### **Accessories**





#### **Technical drawing**

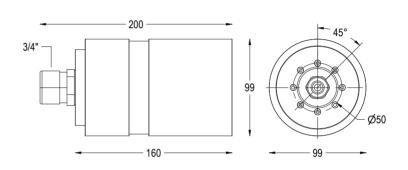



#### **MAGIC SUB NICHE**

Complete watertight niche for reinforced concrete and prefabricated + PVC for MINI SUB lamps. With cable gland and space for collecting cable.


Code


5596000000

#### **Accessories**





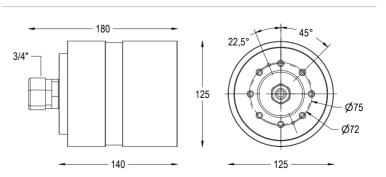



#### LINEA NICHE FOR PVC LINER

Complete watertight niche for reinforced concrete and prefabricated + PVC for LINEA lamps. With cable gland and space for collecting cable.


Code	Description	
5500004504	SIDE CABLE OUT	

#### **Accessories**



FIXING COLLAR FOR PERLA NICHE ON FORMWORK Cod. 3000718763

#### **Technical drawing**





#### **LINEA NICHE FOR TILES**


Complete watertight niche for reinforced concrete and prefabricated + TILES for LINEA lamps. With cable gland and space for collecting cable.

Code	Description		
5500004503	SIDE CABLE OUT		

#### Accessories



FIXING COLLAR FOR PERLA NICHE ON FORMWORK Cod. 3000718763





#### MINI LINEA NICHE FOR PVC LINER

Complete watertight niche for reinforced concrete and prefabricated + PVC for MINI LINEA lamps. With cable gland and space for collecting cable.

Code

5500004300


#### **Accessories**



FIXING COLLAR FOR MINI LINEA NICHE ON FORMWORK

Cod. 300718863

#### **Technical drawing**

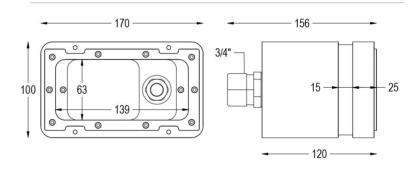

#### MINI LINEA IN NICHE FOR TILES



Complete watertight niche for reinforced concrete and prefabricated + TILES for MINI LINEA lamps. With cable gland and space for collecting cable.

Code


5500004400

#### **Accessories**



FIXING COLLAR FOR MINI LINEA NICHE ON FORMWORK

Cod. 300718863

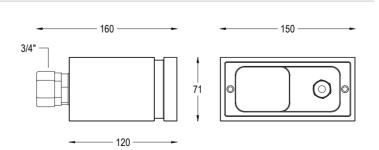



# STAINLESS STEEL PERLA NICHE FOR PVC LINER

Complete watertight niche for reinforced concrete and prefabricated + PVC for PERLA lamps. With cable gland and space for collecting cable.


Code

5500004508

#### **Accessories**

#### FIXING COLLAR FOR PERLA NICHE ON FORMWORK Cod. 3000708964

#### **Technical drawing**





# STAINLESS STEEL PERLA NICHE FOR PANEL WELDING


Complete watertight niche for reinforced for PERLA lamps designed for direct panel welding. With cable gland and space for collecting cable.

Code

5500004505

#### **Accessories**







### STAINLESS STEEL MINI PERLA NICHE FOR PVC LINER

Complete watertight niche for reinforced concrete and prefabricated + PVC for MINI PERLA lamps. With cable gland and space for collecting cable.


Code

5500004509

#### **Accessories**

#### FIXING COLLAR FOR MINI PERLA NICHE ON FORMWORK Cod. 3000708965

#### **Technical drawing**





# STAINLESS STEEL MINI PERLA NICHE FOR PANEL WELDING


Complete watertight niche for reinforced for MINI PERLA lamps designed for direct panel welding. With cable gland and space for collecting cable.

Code

5500004506

#### **Accessories**







# STAINLESS STEEL MAGIC SUB NICHE FOR PVC LINER

Complete watertight niche for reinforced concrete and prefabricated + PVC for MAGIC SUB lamps. With cable gland and space for collecting cable.


Code

5500004510

#### **Accessories**

# FIXING COLLAR FOR MAGIC SUB NICHE ON FORMWORK Cod. 3000708965

#### **Technical drawing**





# STAINLESS STEEL MAGIC SUB NICHE FOR PANEL WELDING


Complete watertight niche for reinforced for MAGIC SUB lamps designed for direct panel welding. With cable gland and space for collecting cable.

Code

5500004507

#### **Accessories**







#### LINEA OPTICAL DIFFUSER

Special diffuser that increases the light output angle of our headlights by eliminating shadow cones

Code	Dimensions L × P × H mm	Types	Thickness
2000010066	395 × 50	LINEA	3 mm
2000002667	100 × 25	MINI LINEA	3 mm

#### Optical diffuser



#### With optical diffuser



#### **ROUND OPTICAL DIFFUSERS**



Special diffuser that increases the light output angle of our headlights by eliminating shadow cones

Code	$\begin{array}{c} \textbf{Dimensions} \\ \textbf{L} \times \textbf{P} \times \textbf{H} \ \text{mm} \end{array}$	Types	Thickness	
2000590066	Ø 177	PAR 56	3 mm	
2000001066	Ø 91	PERLA	2 mm	
2000001366	Ø 148	MINI	3 mm	
2000002666	Ø 85	MAGIC SUB	3 mm	
2000000866	Ø 59	MINI PERLA	2 mm	_

#### **Optical diffuser**



#### With optical diffuser






#### **PERLA FLANGES**

Front flanges in polished AISI316L stainless steel and PVC for PERLA lamps, normal version and recessed version in different shapes (IN). \* On request also BLACK.

Code	$\begin{array}{c} \textbf{Dimensions} \\ \textbf{L} \times \textbf{P} \times \textbf{H} \ \text{mm} \end{array}$	Weight	Types	Thickness
4910001626	Ø 192	0.6 kg	А	14 mm
4910001526	Ø 170	0.8 kg	В	2 mm

#### Flange - Variants



#### **PAINTED PERLA FLANGES**



AISI316L stainless steel INOX front flanges painted in beige, light gray, anthracite gray, white and black for PERLA lamps.

Code	$\begin{array}{c} \textbf{Dimensions} \\ \textbf{L} \times \textbf{P} \times \textbf{H} \ \text{mm} \end{array}$	Weight	Types	Thickness
4910001627	Ø 192	0.6 kg	А	14 mm
4910001628	Ø 192	0.6 kg	В	14 mm
4910001629	Ø 192	0.6 kg	С	14 mm
4910001631	Ø 192	0.6 kg	D	14 mm
4910001630	Ø 192	0.6 kg	E	14 mm

#### Flange - Variants







#### **MINI PERLA FLANGES**

Front flanges in polished AISI316L stainless steel or PVC for MINI PERLA lamps, normal version and recessed version (IN). \* On request also BLACK.

Code	$\begin{array}{c} \textbf{Dimensions} \\ \textbf{L} \times \textbf{P} \times \textbf{H} \ \text{mm} \end{array}$	Weight	Types	Thickness	
4930001326	Ø 141	0.3 kg	А	15 mm	
4930003826	Ø 134	0.5 kg	В	2 mm	

#### Flange - Variants







В



#### **PAINTED MINI PERLA FLANGES**

AISI316L stainless steel front flanges painted in Beige, Light Gray, Anthracite Gray, White and Black for MINI PERLA lamps.

Code	$\begin{array}{c} \textbf{Dimensions} \\ \textbf{L} \times \textbf{P} \times \textbf{H} \ \text{mm} \end{array}$	Weight	Types	Thickness
4930001327	Ø 141	0.3 kg	А	15 mm
4930001328	Ø 141	0.3 kg	В	15 mm
4930001329	Ø 141	0.3 kg	С	15 mm
4930001331	Ø 141	0.3 kg	D	15 mm
4930001330	Ø 141	0.3 kg	Е	15 mm

#### Flange - Variants











Α

В

С

D

Е



#### **MICRO PERLA FLANGES**

Front flanges in polished AISI316L stainless steel or PVC for MICRO PERLA lamps, normal version and recessed version (IN). \* On request also BLACK.

Code	$\begin{array}{c} \textbf{Dimensions} \\ \textbf{L} \times \textbf{P} \times \textbf{H} \ \text{mm} \end{array}$	Weight	Types	Thickness	
4940001026	Ø 88	0.2 kg	А	11 mm	
4940000926	Ø 75	0.3 kg	В	2 mm	

#### Flange - Variants









#### **PAINTED MICRO PERLA FLANGES**

AISI316L stainless steel INOX front flanges painted in beige, light gray, anthracite gray, white and black for MICRO PERLA lamps.



Code	$\begin{array}{c} \textbf{Dimensions} \\ \textbf{L} \times \textbf{P} \times \textbf{H} \ \text{mm} \end{array}$	Weight	Types	Thickness
4940001027	Ø 88	0.2 kg	А	11 mm
4940001028	Ø 88	0.2 kg	В	11 mm
4940001029	Ø 88	0.2 kg	С	11 mm
4940001031	Ø 88	0.2 kg	D	11 mm
4940001030	Ø 88	0.2 kg	Е	11 mm

#### Flange - Variants











Α


В

С

D

Ε






#### **LINEA FLANGES**

Front flanges in polished AISI316L stainless steel (A and C) and in PVC (B) for LINEA lamps for normal version and recessed version (IN). \* On request also BLACK.

Code	$\begin{array}{c} \textbf{Dimensions} \\ \textbf{L} \times \textbf{P} \times \textbf{H} \ \text{mm} \end{array}$	Weight	Types	Thickness
4920002232	482 × 176	0.8 kg	А	24 mm
4920002326	476 × 180	1.6 kg	В	2 mm

#### Flange - Variants




#### **PAINTED LINEA FLANGES**




AISI316L stainless steel INOX front flanges painted in beige, light gray, anthracite gray, white and black for MICRO PERLA lamps.

Code	$\begin{array}{c} \textbf{Dimensions} \\ \textbf{L} \times \textbf{P} \times \textbf{H} \ \text{mm} \end{array}$	Weight	Types	Thickness
4920002227	482 × 176	1.6 kg	А	9 mm
4920002228	476 × 180	1.6 kg	В	9 mm
4920002229	482 x 176	1.6 kg	С	9 mm
4920002330	476 × 180	1.6 kg	D	9 mm
4920002231	476 x 180	1.6 kg	Е	9 mm

#### Flange - Variants



#### **MINI LINEA FLANGES**



Polished AISI316L stainless steel front flange for MINI LINEA lamps. Available in other colors on request.

Code	$\begin{array}{c} \textbf{Dimensions} \\ \textbf{L} \times \textbf{P} \times \textbf{H} \ \text{mm} \end{array}$	Types
4900010023	200 x 100	А
4900020023	160 x 75	В

#### Flange - Variants



#### **PAINTED MINI LINEA FLANGES**



AISI316L stainless steel INOX front flanges painted in beige, light gray, anthracite gray, white and black for MINI LINEA lamps.

Code	$\begin{array}{c} \textbf{Dimensions} \\ \textbf{L} \times \textbf{P} \times \textbf{H} \ \text{mm} \end{array}$	Weight	Types	Thickness	
4900010123	482 x 176	1.6 kg	А	9 mm	
4900010223	476 × 180	1.6 kg	В	9 mm	
4900010323	482 × 176	1.6 kg	С	9 mm	
4900020024	476 × 180	1.6 kg	D	9 mm	
4900010423	476 × 180	1.6 kg	Е	9 mm	

#### Flange - Variants







#### **MAGIC SUB FLANGES**

Front flanges in polished AISI316L stainless steel for MINI SUB spotlights for standard and recessed mountig.

Code	$\begin{array}{c} \textbf{Dimensions} \\ \textbf{L} \times \textbf{P} \times \textbf{H} \ \text{mm} \end{array}$	Weight	Types	Thickness	
4900001226	Ø 116	0.2 kg	А	3 mm	
4900001326	Ø 130	0.07 kg	В	15 mm	

#### Flange - Variants







В



#### **PAINTED MAGIC SUB FLANGES**

AISI316L stainless steel INOX front flanges painted in Beige, Light Gray, Anthracite Gray, White and Black for MAGIC SUB spotlights with different diameters for niche or nozzle installation.

Code	$\begin{array}{c} \textbf{Dimensions} \\ \textbf{L} \times \textbf{P} \times \textbf{H} \ \text{mm} \end{array}$	Weight	Types	Thickness	
4900001327	Ø 130	0.07 kg	А	15 mm	
4900001328	Ø 130	0.07 kg	В	15 mm	
4900001329	Ø 130	0.07 kg	С	15 mm	
4900004832	Ø 130	0.07 kg	D	15 mm	
4900001330	Ø 130	0.07 kg	Е	15 mm	

#### Flange - Variants














В









#### **PAR 56 FLANGE**

Front flanges in polished AISI316L stainless steel for Par56 underwater projector. Replaces the front flange in PVC.

Code

48043723 31



#### **MINI FLANGES**

Front flanges in polished AISI316L stainless steel for MINI underwater projector. Replaces the PVC front flange


Code	$\begin{array}{c} \textbf{Dimensions} \\ \textbf{L} \times \textbf{P} \times \textbf{H} \ \text{mm} \end{array}$	Weight	Thickness
48045323 03	Ø 242	0.3 kg	17 mm



#### **SANDWICH GASKETS**

Special gasket for mounting niches on steel panels. 1 piece in each package.

Code	Description	
1600001100	FOR PERLA AND MAGIC LINEA NICHE	
1600001000	FOR MINI PERLA NICHE	
160000090	FOR MAGIC SUB NICHE	



#### **TEMPLATE FOR CONCRETE**

Template for the recessed installation of the niches in reinforced concrete. Provided with markings in different sizes, to be used according to the type of finishing.

Code	Description	
1700570002	FOR PERLA IN AND MAGIC LINEA IN NICHE	
1700550002	FOR MINI PERLA IN NICHE	
1700380002	FOR MICRO PERLA IN NICHE	
1700540002	FOR MAGIC SUB IN NICHE	



# SPACERS KIT FOR IN TYPE INTSALLATION

Shims for use in concrete installations to bring Perla, Mini Perla, Micro Perla, Magic Linea and Magic Sub recessed lamps to the correct size. Each kit includes 4 discs with 5 mm thickness and 1 disc with 3 mm thickness.

Code	Description
1700570000	FOR PERLA IN AND MAGIC LINEA IN NICHE
1700550000	FOR MINI PERLA IN NICHE
1700530000	FOR MICRO PERLA IN NICHE
1700540000	FOR MAGIC SUB IN NICHE



# WRENCH FOR TIGHTENING INTERNAL GLAND OF THE NICHE

Wrench for tightening the internal sealing cable to the niches of Perla, Mini Perla, Micro Perla and Magic Sub.

Code

1700008763



#### NICHE TIGHTENING WRENCH

Wrench for opening and tightening the front part of Teclumen niches.

Code	Description
1700770500	FOR MINI PERLA NICHE
1700770400	FOR MICRO PERLA NICHE



#### **ANTI-SEEPAGE FRAME**

AISI 316L stainless steel frame for fixing the niche to the formwork, preventing water seepage.

Code	Description
370000001	FOR PERLA NICHE
370000003	FOR MINI PERLA NICHE
370000005	FOR MICRO PERLA NICHE
370000004	FOR MAGIC SUB NICHE



#### **GASKETS KIT**

Code	Description
1600001305	10 PEARL GASKETS
1600001105	10 MINI PEARL GASKETS
1600000805	10 MICRO PEARL GASKETS
1600001005	10 MAGIC SUB GASKETS

#### **NICHE CABLE GLANDS KIT**



Cable gland for inside niche with inserts in two sizes to be used depending on the cable size installed.

Code	Description
1600008700	1 Cable gland with 2 inserts





#### Junction box for connecting

Code

4800770002



#### **TUBO FLEX 25 X 20MM**

Code

Description

3000010500

50 m REEL



#### **FITTINGS KIT FOR GAS 20GG**

Code

Description

1600008600

KIT 10 FITTINGS

#### **FITTINGS KIT FOR PIPES**



Code

Description

1600000504

KIT 10 FITTINGS



#### FRONT FLANGE SCREW KIT

20 screws for 4 different sizes used to attach the front flanges to the lamps. The sizes are: 3x4, 3x6, 3x8, 3x10.

Code Description

1600778600 FLANGE SCREWS KIT WITH VARIOUS SIZE



#### **INSULATING TWO-COMPONENT GEL**

Code

1600008740



#### SPECIAL CABLES IN 100 m REEL

Code	
9003050002	100 M REEL OF CABLE 2 X 2.5 PBS-POOL BLUE
9003050001	100 M REEL OF CABLE 2 X 1 PBS-POOL BLUE
9003050003	100 M REEL OF CABLE 2 X 2.5 NEOPRENE H07RN8-F



Code

 0217210028
 IP67 24V DC 120W POWER SUPPLY

 0221210028
 IP67 24V DC 320W POWER SUPPLY



#### **Accessories**



PUSH-DIM DRIVER FOR DIN RAIL DALCNET DLD1248-1CV-DMX

00330053



PUSH-DIM DRIVER FOR DIN RAIL DALCNET DLD1248-1CV-DALI

00330054

# ALONG WITH OUR LIGHTS, WE PROVIDE YOU WITH ALL OUR EXPERIENCE.



#### **CUSTOMIZATION OF PRODUCTS.**

We offer personalized sizes and designs to meet specific requirements.



#### **36-MONTH WARRANTY.**

All our products are covered by a 36-month warranty, ensuring their quality and durability.



#### TRACEABILITY.

Each product is assigned a unique serial number for easy identification. In case of replacement or addition, Teclumen guarantees that the new products will have the same technical characteristics.



#### **FAST DELIVERY TIMES.**

Thanks to our well-stocked warehouse, we can ensure quick delivery of our products.

# SERVICE ABOVE ALL. EVEN AFTER THE SALE.

#### **PRE-SALES SERVICES:**



#### ILLUMINATION AND ELECTRICAL DESIGN SUPPORT.

Thanks to our design department, Teclumen provides customers with DIALux projects with renderings that allow them to immediately visualize the final installation result. This also provides installers with a tool to enhance their commercial offerings.

Our company can support customers during the electrical system design phase, providing precise calculations and guidance regarding cable sizing, junction box positions, and electrical panels.



#### **OUR SUPPORT ALWAYS AVAILABLE.**

Our representative and office are at the service of customers, providing clarifications and guidance on technical and commercial support during the purchase process.

#### **POST-SALES SERVICES:**



#### TOTAL AVAILABILITY.

A commercial representative is always available to assist with any type of request and provide information.



#### QR CODE.

All Teclumen product boxes are equipped with a QR code that allows users to access the product's technical specifications at any time.

This way, the most important installation information is readily available without having to contact customer support.

#### **GENERAL CONDITIONS OF SALE**

#### **ART. 1 GENERAL**

These conditions of sale, which supersede and replace previous conditions, are applicable to all the orders processed and are understood as accepted in their entirety by the buyer on verbal or written order confirmation. Collection of the goods constitutes an implicit order confirmation.

#### **ART. 2 PRODUCTS**

The products are shown in the relevant catalogues and price lists. Small changes in the production and presentation of the product, which do not change the features of the product's use, may be made by our Company without notice and may not be presented as grounds for cancellation of the order by the buyer.

#### ART, 3 PRICES

Orders less than € 300.00 (understood as net goods) will not be accepted. All the prices in our price lists are "Franco Casaloldo (MN) Italia", VAT excluded. Discounts: are applied in proportion to the quantities ordered annually and by each order.

#### **ART. 4 PACKING**

For standard packing a cost of 2% of the value of the goods will be charged.

#### **ART. 5 SHIPPING**

If the means of transport is not explicitly stated by the customer, the shipment will be sent y the method we consider most suitable and the buyer may not refuse payment of the shipping costs. Goods travel at the customer's risk and liability even if shipped carriage free. Insurance will be provided only at the specific request and cost of the buyer.

#### **ART. 6 DELIVERIES**

The delivery terms are not binding but only approximate. The buyer will release the seller from all and any liability for damages resulting from delays in delivering the goods. Delay in the delivery of special pieces specifically produced cannot be construed as grounds for cancellation of the order.

#### ART. 7 WARRANTY

Our products are covered by a warranty against defects in material or workmanship for which we are responsible, for a period of 36 months from the delivery date. The warranty lapses if:

a) the product has been used in conditions not indicated by us;

b) the goods have been modified or tampered with by persons not authorised by our Company.

The warranty covers only the repair o replacement of defective products with the absolute exclusion of any liability arising from damage caused by the use of our products.

N.B.: In the event of repair or replacement at our plant the goods will be shipped at the customer's cost.

#### **ART. 8 COMPLAINTS**

Any complaints must be made within 8 days of delivery of the goods.

#### **ART. 9 RETURNS**

Every return must be authorised beforehand by the sales department that made the sale, by filling out the relevant RMA form. An identity number will be assigned which must be attached to the goods when they are returned. Goods returned without an identity number will not be accepted. All returns must be shipped carriage free.

#### **ART. 10 PAYMENTS**

Payments must be made to Teclumen s.r.l. Discounts and rounding are not accepted and only the cost incurred will be charged back in the invoice. This amount is VAT exempt pursuant to art. 15/3 of Italian Presidential Decree 633/72. Any late payments will be subject to interest at 1.5% per month in addition to bank charges and any legal fees

#### **ART. 11 RETENTION CLAUSE**

The goods remain the property of the seller Teclumen s.r.l. Until complete payment for the same in addition to the sums due for shipment, insurance, etc.

#### **ART. 12 WITHDRAWAL FROM THE CONTRACT**

If the customer cancels the order entirely or partially for any reason, a payment of 20% will be required.

#### **ART. 13 DISPUTES**

For any dispute the court of Mantua will have jurisdiction.

#### **ART. 14 SPECIFICATIONS**

The data in this document may be subject to change without notice in order to improve the product or correct any errors.

# TEC LUMEN See the difference

#### **TECLUMEN srl**

Via Castel Goffredo, 35/1 - 46040 Casaloldo (MN) - Italy T +39.0376.778670 - F +39.0376.778660 www.teclumen.it - info@teclumen.it