






## PRAEZISA 1x3

Outdoor luminaire

Outdoor luminaire with power LEDs. The luminaire is optimized for a zonal illumination of sidewalks and facades. The 3 LED modules have a precise light distribution

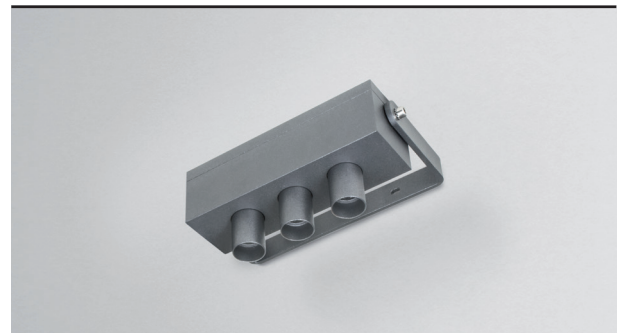

Lamp	Power LEDs, 3x 2 W, light point spacing 50 mm
LED lumen output	2700 K, CRI 80, 625 lm
	3000 K, CRI 80, 685 lm
Light technology	Optics PMMA,
Control gear	LED driver internal
Dimming (options)	1–10 V , DALI, Push
Luminaire type, assembly	Wall-mounted or pole mounting
Dimensions	TxBxH 100x225x90 mm (luminaire excluding fixture)
Cast, heat sink	Sheet steel, aluminium
Colour / finish	Powder coated, DB 703,RAL 9006 FS,RAL 9010 (other RAL colors optional)
Protection marking, compliance	IP67, <b>CE</b>
Specials	Customized versions, more light colours or colour renderings on request

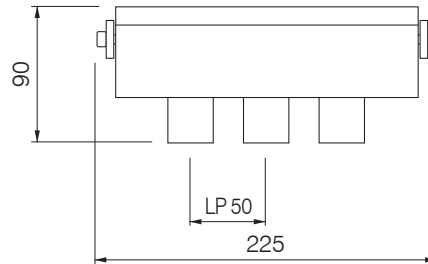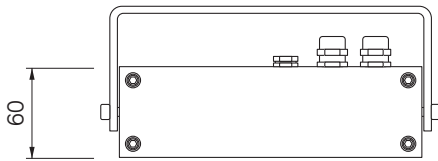

on/off = EV

1-10 V = AV

Dali = DA

Push = PH

Please replace the item number placeholder XX with the listed operating device options:

Light distribution	Light colour	Color rendering	Control gear	Order No.	+RAL
	2700 K	CRI 80	1-10 V, DALI, Push	J 8203 D 2780 XX B703	
				J 8203 D 2780 XX 9006	
				J 8203 D 2780 XX 9010	
	3000 K	CRI 80	1-10 V, DALI, Push	J 8203 D 3080 XX B703	
				J 8203 D 3080 XX 9006	
				J 8203 D 3080 XX 9010	